

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P881255

Luminaire Tested: **24CZ2-60VHE-UNV-B40**

Issue Date: 10/2/2024

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P881255
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P473819)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 10/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 24CZ2-60VHE-UNV-B40
Description: 2X4 6000 LUMEN CRUZE TROFFER WITH BIO UP LEDS AT 4000K CCT AND RIBBED LENS

Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5733.0 lumens
Efficiency: N/A
Efficacy: 122.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.26 / 1.36
Luminous Opening: Rectangular (W 1.92' x L: 3.98' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P881255
CATALOG NUMBER: 24CZ2-60VHE-UNV-B40

Luminous Intensity Polar Plot

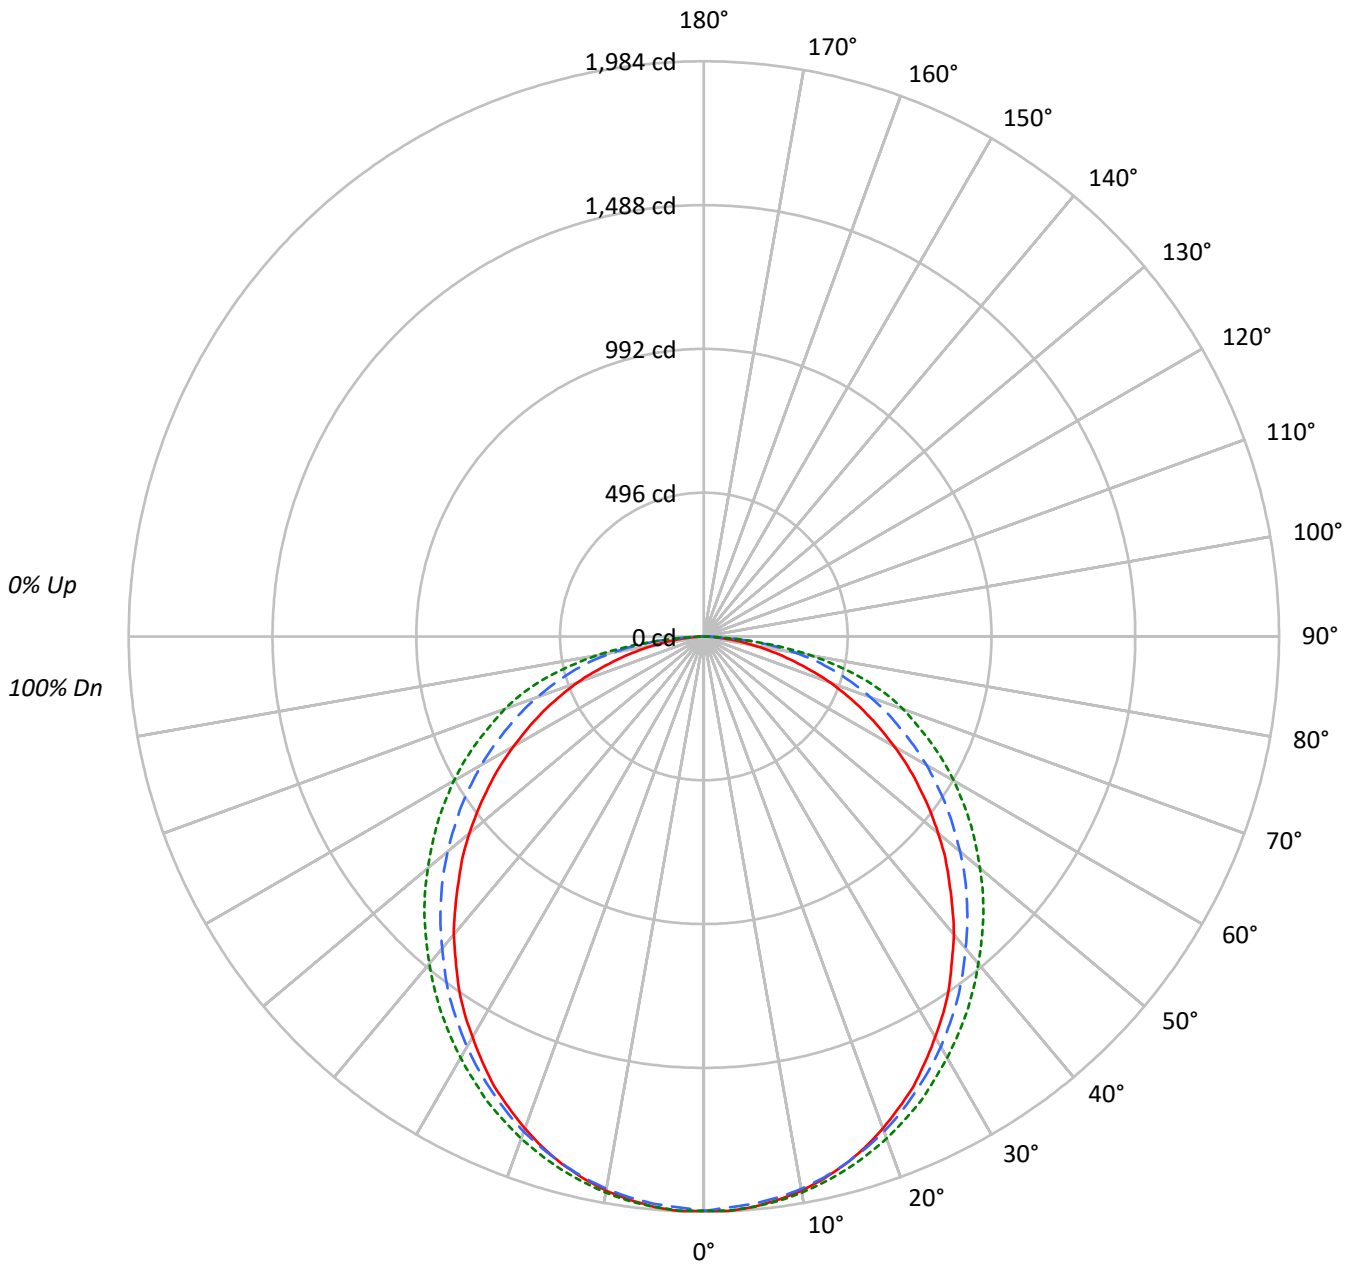



TEST NUMBER: P881255

CATALOG NUMBER: 24CZ2-60VHE-UNV-B40

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | | | | | | | | | | | |
| 1 | 108 | 103 | 99 | 95 | 105 | 101 | 97 | 93 | 97 | 93 | 90 | 93 | 90 | 87 | 89 | 87 | 85 | 83 | | | | | | | | | | | | | | | | | | | |
| 2 | 98 | 89 | 82 | 76 | 95 | 88 | 81 | 75 | 84 | 78 | 74 | 81 | 76 | 72 | 78 | 74 | 70 | 68 | | | | | | | | | | | | | | | | | | | |
| 3 | 89 | 78 | 70 | 63 | 87 | 77 | 69 | 63 | 74 | 67 | 61 | 71 | 65 | 60 | 68 | 63 | 59 | 57 | | | | | | | | | | | | | | | | | | | |
| 4 | 82 | 69 | 60 | 53 | 79 | 68 | 59 | 53 | 65 | 58 | 52 | 63 | 57 | 51 | 61 | 55 | 51 | 48 | | | | | | | | | | | | | | | | | | | |
| 5 | 75 | 62 | 53 | 46 | 73 | 61 | 52 | 46 | 58 | 51 | 45 | 56 | 50 | 44 | 55 | 49 | 44 | 42 | | | | | | | | | | | | | | | | | | | |
| 6 | 69 | 56 | 46 | 40 | 67 | 55 | 46 | 40 | 53 | 45 | 39 | 51 | 44 | 39 | 49 | 43 | 39 | 37 | | | | | | | | | | | | | | | | | | | |
| 7 | 64 | 50 | 41 | 35 | 62 | 50 | 41 | 35 | 48 | 40 | 35 | 47 | 40 | 35 | 45 | 39 | 34 | 32 | | | | | | | | | | | | | | | | | | | |
| 8 | 60 | 46 | 37 | 31 | 58 | 45 | 37 | 31 | 44 | 36 | 31 | 43 | 36 | 31 | 41 | 35 | 31 | 29 | | | | | | | | | | | | | | | | | | | |
| 9 | 56 | 42 | 34 | 28 | 54 | 42 | 34 | 28 | 40 | 33 | 28 | 39 | 33 | 28 | 38 | 32 | 28 | 26 | | | | | | | | | | | | | | | | | | | |
| 10 | 52 | 39 | 31 | 26 | 51 | 38 | 31 | 26 | 37 | 30 | 25 | 36 | 30 | 25 | 36 | 30 | 25 | 23 | | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):

| | 0° | 45° | 90° |
|-----|------|------|------|
| 0° | 2796 | 2796 | 2796 |
| 5° | 2797 | 2783 | 2797 |
| 10° | 2782 | 2773 | 2791 |
| 15° | 2754 | 2752 | 2780 |
| 20° | 2713 | 2729 | 2768 |
| 25° | 2665 | 2696 | 2755 |
| 30° | 2601 | 2664 | 2735 |
| 35° | 2542 | 2630 | 2724 |
| 40° | 2473 | 2587 | 2713 |
| 45° | 2388 | 2560 | 2721 |
| 50° | 2316 | 2532 | 2729 |
| 55° | 2231 | 2514 | 2760 |
| 60° | 2139 | 2502 | 2811 |
| 65° | 2038 | 2493 | 2883 |
| 70° | 1918 | 2518 | 3015 |
| 75° | 1687 | 2571 | 3137 |
| 80° | 1409 | 2590 | 3026 |
| 85° | 1006 | 2218 | 2249 |



TEST NUMBER: P881255

CATALOG NUMBER: 24CZ2-60VHE-UNV-B40

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 187.3 | 3.3 |
| 10°-20° | 533.4 | 9.3 |
| 20°-30° | 800.3 | 14.0 |
| 30°-40° | 955.4 | 16.7 |
| 40°-50° | 989.7 | 17.3 |
| 50°-60° | 911.1 | 15.9 |
| 60°-70° | 734.9 | 12.8 |
| 70°-80° | 480.2 | 8.4 |
| 80°-90° | 140.8 | 2.5 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1521.0 | 26.5 |
| 0°-40° | 2476.4 | 43.2 |
| 0°-60° | 4377.1 | 76.3 |
| 0°-90° | 5733.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 5733.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | 22.5° | 45° | 67.5° | 90° | Flux |
|-----|------|-------|------|-------|------|------|
| 0° | 1981 | 1981 | 1981 | 1981 | 1981 | |
| 5° | 1975 | 1973 | 1964 | 1976 | 1975 | 187 |
| 15° | 1885 | 1885 | 1884 | 1902 | 1902 | 531 |
| 25° | 1712 | 1715 | 1731 | 1762 | 1769 | 787 |
| 35° | 1475 | 1488 | 1526 | 1568 | 1581 | 922 |
| 45° | 1197 | 1226 | 1283 | 1340 | 1363 | 925 |
| 55° | 907 | 946 | 1022 | 1097 | 1122 | 811 |
| 65° | 610 | 652 | 747 | 832 | 863 | 604 |
| 75° | 309 | 368 | 471 | 553 | 575 | 330 |
| 85° | 62 | 107 | 137 | 145 | 139 | 77 |
| 90° | 0 | 0 | 0 | 0 | 0 | |



TEST NUMBER: P881255

CATALOG NUMBER: 24CZ2-60VHE-UNV-B40

CANDELA DISTRIBUTION (FULL):

| | 0° | 22.5° | 45° | 67.5° | 90° |
|-------|--------|--------|--------|--------|--------|
| 0° | 1981.1 | 1981.1 | 1981.1 | 1981.1 | 1981.1 |
| 2.5° | 1983.8 | 1981.1 | 1970.9 | 1982.9 | 1982.0 |
| 5° | 1974.6 | 1972.7 | 1964.4 | 1975.5 | 1974.6 |
| 7.5° | 1959.8 | 1958.9 | 1952.4 | 1964.4 | 1964.4 |
| 10° | 1941.3 | 1939.5 | 1934.8 | 1948.7 | 1947.8 |
| 12.5° | 1915.4 | 1914.5 | 1911.7 | 1928.4 | 1927.4 |
| 15° | 1884.7 | 1884.7 | 1883.8 | 1902.5 | 1902.5 |
| 17.5° | 1847.7 | 1848.7 | 1852.4 | 1873.6 | 1874.5 |
| 20° | 1806.1 | 1809.8 | 1817.2 | 1841.3 | 1843.1 |
| 22.5° | 1758.8 | 1766.2 | 1776.3 | 1803.3 | 1806.1 |
| 25° | 1711.6 | 1715.3 | 1731.0 | 1762.5 | 1768.9 |
| 27.5° | 1654.1 | 1663.5 | 1683.9 | 1716.2 | 1722.7 |
| 30° | 1595.8 | 1608.8 | 1634.7 | 1668.2 | 1678.3 |
| 32.5° | 1538.3 | 1549.6 | 1580.1 | 1618.0 | 1630.1 |
| 35° | 1475.4 | 1488.4 | 1526.3 | 1568.1 | 1581.0 |
| 37.5° | 1405.9 | 1426.3 | 1466.2 | 1514.3 | 1528.2 |
| 40° | 1342.1 | 1360.6 | 1404.1 | 1457.9 | 1472.7 |
| 42.5° | 1268.9 | 1292.0 | 1344.9 | 1399.4 | 1417.9 |
| 45° | 1196.6 | 1226.3 | 1282.7 | 1340.3 | 1363.4 |
| 47.5° | 1129.1 | 1153.1 | 1219.9 | 1284.6 | 1304.9 |
| 50° | 1054.9 | 1082.6 | 1153.1 | 1221.7 | 1243.0 |
| 52.5° | 981.8 | 1015.1 | 1086.3 | 1158.6 | 1181.8 |
| 55° | 906.8 | 945.6 | 1021.6 | 1096.7 | 1121.7 |
| 57.5° | 834.4 | 873.5 | 952.1 | 1031.8 | 1057.7 |
| 60° | 757.7 | 799.3 | 886.4 | 963.2 | 995.7 |
| 62.5° | 683.5 | 725.1 | 816.9 | 900.3 | 930.8 |
| 65° | 610.3 | 652.1 | 746.6 | 831.7 | 863.3 |
| 67.5° | 534.5 | 579.8 | 680.8 | 763.2 | 793.8 |
| 70° | 464.9 | 508.4 | 610.3 | 698.3 | 730.7 |
| 72.5° | 385.2 | 437.2 | 540.9 | 627.9 | 658.6 |
| 75° | 309.4 | 367.7 | 471.4 | 553.0 | 575.2 |
| 77.5° | 238.9 | 297.4 | 400.9 | 462.2 | 476.0 |
| 80° | 173.3 | 232.5 | 318.7 | 361.2 | 372.3 |
| 82.5° | 112.1 | 173.3 | 230.6 | 259.3 | 263.0 |
| 85° | 62.1 | 107.4 | 137.0 | 145.4 | 138.9 |
| 87.5° | 22.2 | 40.7 | 39.8 | 32.4 | 25.9 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)