

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P390439

Luminaire Tested: **22CZ2-50VHE-RDP-UNV-L950-CD1-SWPD1-U**

Issue Date: 2/28/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P390439
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-24)
Test Lab: INNOVATIONS CENTER(G3)
Issue Date: 2/28/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 22CZ2-50VHE-RDP-UNV-L950-CD1-SWPD1-U
Description: 2x2 CRUZE LED TROFFER WITH 5000K, 90 LEDS, AND RDP LENS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3068.5 lumens
Efficiency: N/A
Efficacy: 84.8 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.3 / 1.41
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')
CIE Type: Direct


Input Watts (W): 36.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P390439

CATALOG NUMBER: 22CZ2-50VHE-RDP-UNV-L950-CD1-SWPD1-U

Luminous Intensity Polar Plot

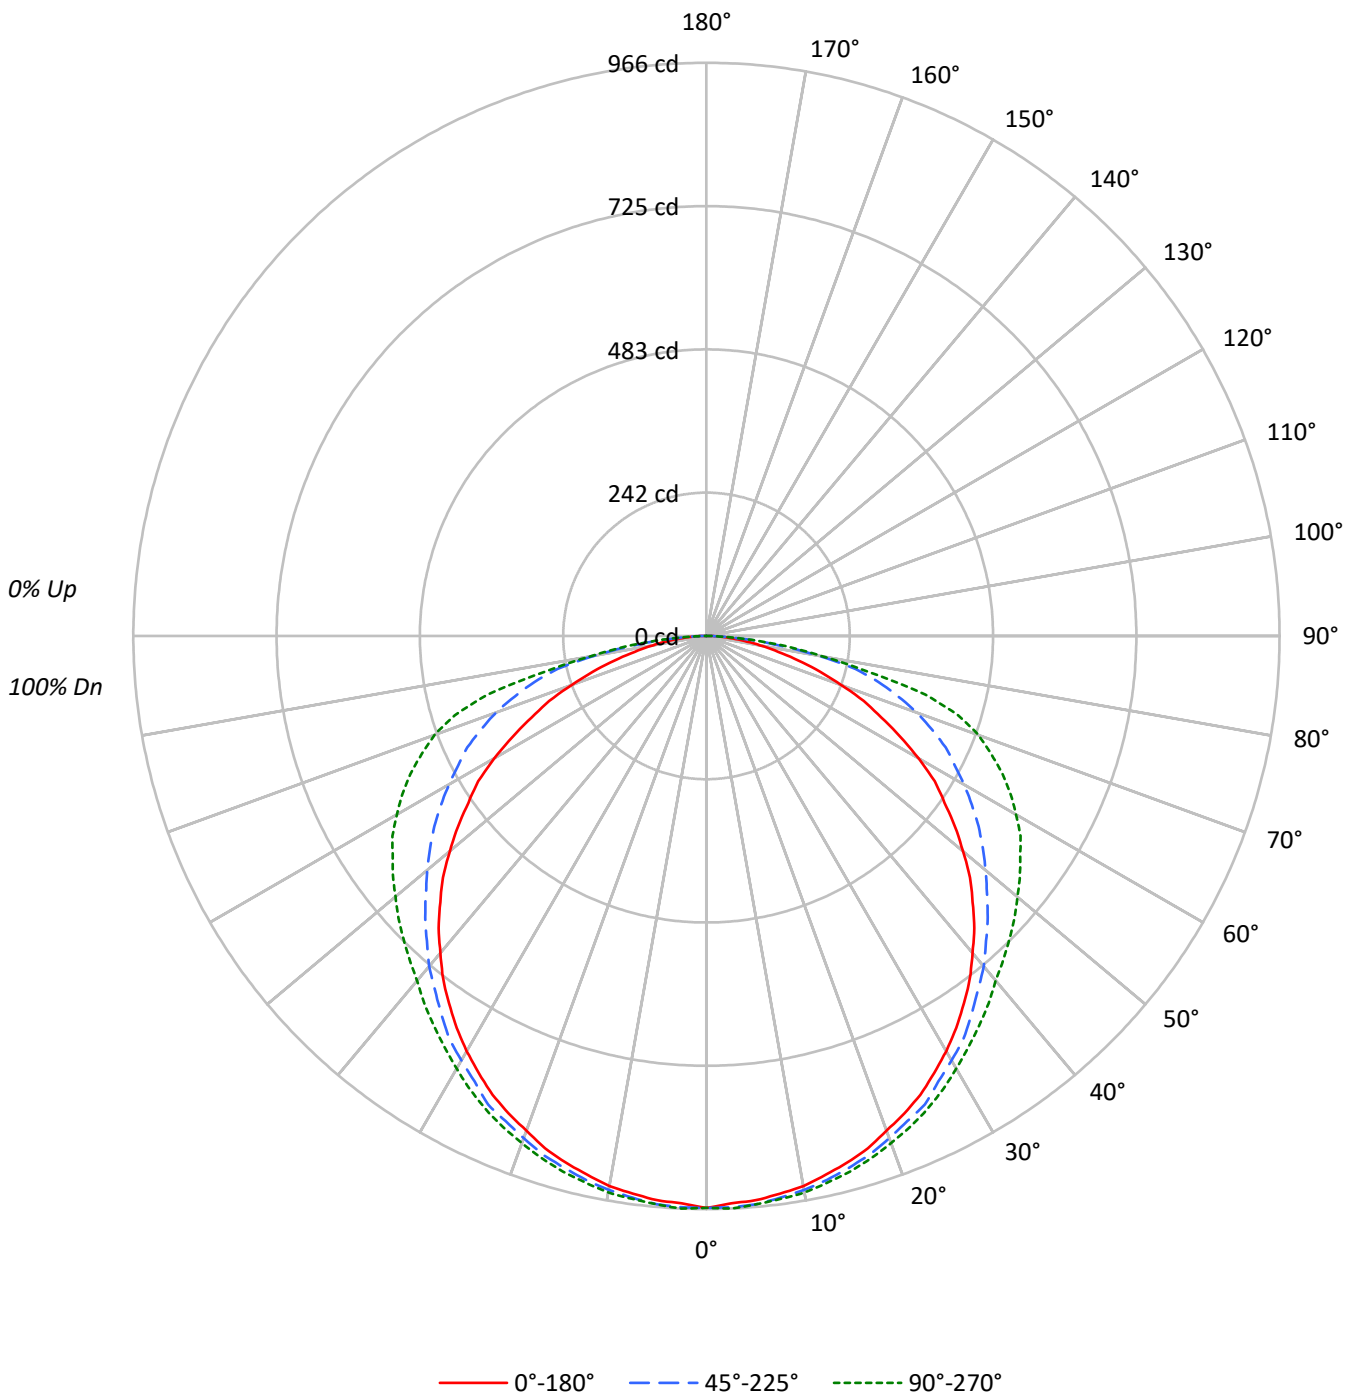



TEST NUMBER: P390439

CATALOG NUMBER: 22CZ2-50VHE-RDP-UNV-L950-CD1-SWPD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	108	103	98	94	105	100	96	92	96	92	89	92	89	86	88	86	84	82					82			
2	97	88	81	75	95	86	80	74	83	77	72	80	75	71	76	72	69	67					67			
3	88	77	68	61	86	75	67	61	72	65	60	70	64	59	67	62	58	55					55			
4	80	68	59	51	78	66	58	51	64	56	50	61	55	50	59	54	49	47					47			
5	74	60	51	44	72	59	50	44	57	49	43	55	48	43	53	47	42	40					40			
6	68	54	45	38	66	53	44	38	51	43	38	50	43	37	48	42	37	35					35			
7	63	49	40	33	61	48	39	33	47	39	33	45	38	33	44	37	33	31					31			
8	59	45	36	30	57	44	35	30	43	35	29	41	34	29	40	34	29	27					27			
9	55	41	32	27	53	40	32	27	39	32	26	38	31	26	37	31	26	24					24			
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22					22			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2594	2594	2594
5°	2579	2598	2598
10°	2572	2591	2603
15°	2559	2585	2603
20°	2540	2579	2605
25°	2534	2587	2614
30°	2511	2567	2616
35°	2484	2558	2632
40°	2450	2553	2664
45°	2414	2551	2749
50°	2362	2570	2864
55°	2298	2626	3029
60°	2223	2697	3244
65°	2070	2832	3507
70°	1900	2966	3836
75°	1667	3121	3967
80°	1433	2974	3113
85°	1254	2161	2368



TEST NUMBER: P390439

CATALOG NUMBER: 22CZ2-50VHE-RDP-UNV-L950-CD1-SWPD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.2	3.0
10°-20°	261.8	8.5
20°-30°	399.4	13.0
30°-40°	487.7	15.9
40°-50°	521.4	17.0
50°-60°	503.3	16.4
60°-70°	433.3	14.1
70°-80°	293.1	9.6
80°-90°	77.3	2.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	752.4	24.5
0°-40°	1240.0	40.4
0°-60°	2264.8	73.8
0°-90°	3068.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3068.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	964	964	964	964	964	
5°	955	957	962	962	962	91
15°	919	921	928	932	934	259
25°	853	858	871	876	880	393
35°	756	763	779	795	801	473
45°	634	646	670	704	722	490
55°	490	506	560	616	646	439
65°	325	357	445	515	551	323
75°	160	212	300	361	382	172
85°	41	56	70	72	77	46
90°	0	0	0	0	0	



TEST NUMBER: P390439

CATALOG NUMBER: 22CZ2-50VHE-RDP-UNV-L950-CD1-SWPD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	963.9	963.9	963.9	963.9	963.9
2.5°	957.1	959.4	963.9	963.9	966.1
5°	954.8	957.1	961.6	961.6	961.6
7.5°	948.1	950.3	954.8	957.1	957.1
10°	941.3	943.6	948.1	950.3	952.6
12.5°	930.0	932.3	939.0	943.6	943.6
15°	918.7	921.0	927.8	932.3	934.5
17.5°	905.2	909.7	916.5	921.0	923.2
20°	887.1	891.6	900.7	907.4	909.7
22.5°	871.3	875.8	884.9	891.6	896.2
25°	853.3	857.8	871.3	875.8	880.3
27.5°	830.7	835.2	846.5	855.5	862.3
30°	808.1	812.6	826.2	837.5	842.0
32.5°	783.3	790.1	805.9	814.9	821.7
35°	756.2	763.0	778.8	794.6	801.3
37.5°	729.1	735.9	751.7	772.0	781.0
40°	697.5	706.5	726.9	753.9	758.5
42.5°	668.2	679.4	697.5	729.1	740.4
45°	634.3	645.6	670.4	704.3	722.3
47.5°	602.7	614.0	641.1	681.7	704.3
50°	564.3	580.1	614.0	661.4	684.0
52.5°	528.2	541.8	586.9	638.8	665.9
55°	489.8	505.6	559.8	616.2	645.6
57.5°	456.0	469.5	530.5	593.7	627.5
60°	413.1	431.1	501.1	568.8	602.7
62.5°	367.9	395.0	471.8	541.8	577.9
65°	325.1	356.7	444.7	514.7	550.8
67.5°	286.7	320.5	410.8	485.3	519.2
70°	241.5	284.4	377.0	449.2	487.6
72.5°	200.9	248.3	338.6	410.8	444.7
75°	160.3	212.2	300.2	361.2	381.5
77.5°	124.2	173.8	257.3	275.4	277.6
80°	92.5	137.7	191.9	194.1	200.9
82.5°	63.2	97.1	124.2	135.4	137.7
85°	40.6	56.4	70.0	72.2	76.7
87.5°	18.1	20.3	24.8	22.6	22.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)