

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: METALUX

Report Number: P271994

Luminaire Tested: **22CZ2-39HE-UNV-L935-CD1-U**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P271994
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-27)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 22CZ2-39HE-UNV-L935-CD1-U
Description: 2'X2' TROFFER LED MODULE,RIBBED LENS, 90CRI
Light Source: (196) 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3323.0 lumens
Efficiency: N/A
Efficacy: 109.7 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.27 / 1.36
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')
CIE Type: Direct


Input Watts (W): 30.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P271994

CATALOG NUMBER: 22CZ2-39HE-UNV-L935-CD1-U

Luminous Intensity Polar Plot

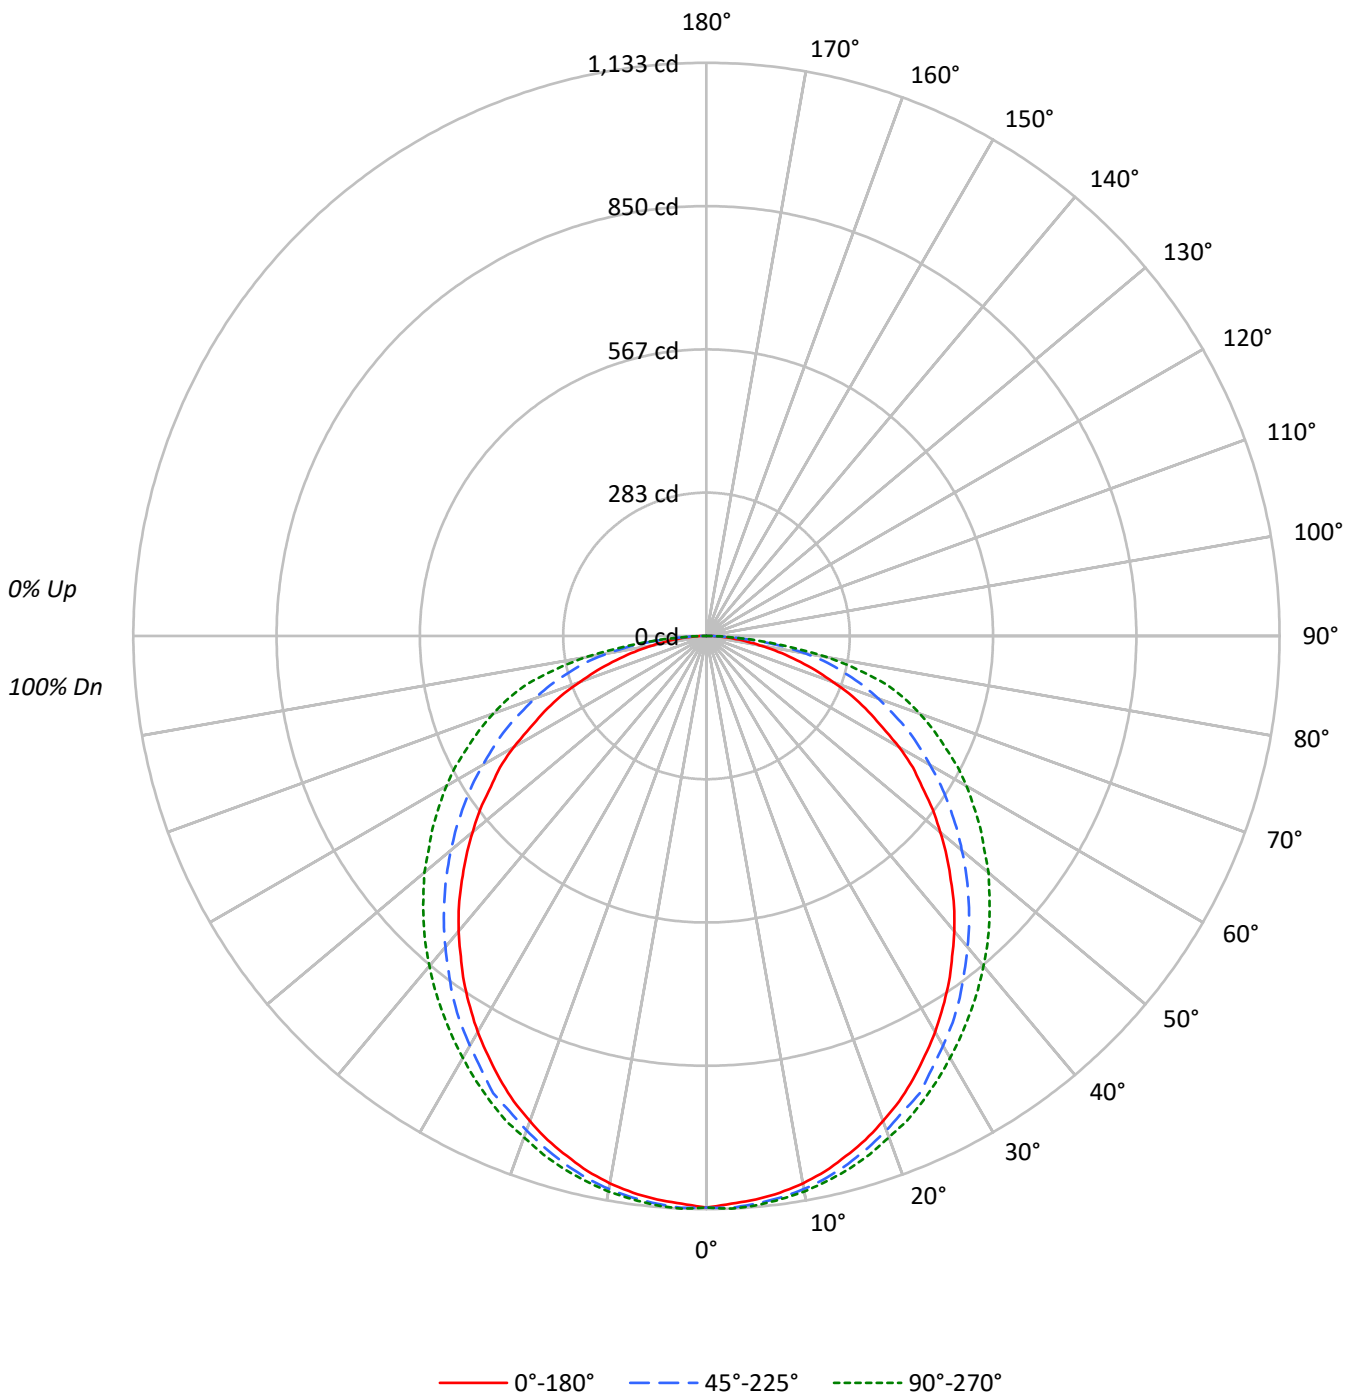



TEST NUMBER: P271994

CATALOG NUMBER: 22CZ2-39HE-UNV-L935-CD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	101	96	93	96	93	90	92	90	87	89	86	84	82
2	98	89	82	76	95	87	81	75	84	78	73	80	76	71	77	73	70	68
3	89	78	69	63	86	76	68	62	73	66	61	70	65	60	68	63	59	56
4	81	69	60	53	79	67	59	52	65	57	52	63	56	51	60	55	50	48
5	75	61	52	45	72	60	52	45	58	50	44	56	49	44	54	48	44	41
6	69	55	46	39	67	54	46	39	52	45	39	51	44	39	49	43	38	36
7	64	50	41	35	62	49	41	35	48	40	34	46	39	34	45	39	34	32
8	59	46	37	31	58	45	37	31	44	36	31	42	35	30	41	35	30	28
9	56	42	34	28	54	41	33	28	40	33	28	39	32	27	38	32	27	25
10	52	39	31	25	51	38	30	25	37	30	25	36	30	25	35	29	25	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3041	3041	3041
5°	3021	3043	3052
10°	3002	3034	3047
15°	2966	3011	3038
20°	2922	2978	3020
25°	2869	2961	3010
30°	2810	2906	2993
35°	2745	2869	2986
40°	2677	2820	2993
45°	2601	2788	3012
50°	2526	2759	3046
55°	2440	2746	3099
60°	2368	2746	3195
65°	2249	2790	3311
70°	2097	2843	3525
75°	1921	2941	3808
80°	1672	3067	3750
85°	1463	2726	2979



TEST NUMBER: P271994

CATALOG NUMBER: 22CZ2-39HE-UNV-L935-CD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.9	3.2
10°-20°	304.4	9.2
20°-30°	456.9	13.7
30°-40°	546.0	16.4
40°-50°	567.7	17.1
50°-60°	526.2	15.8
60°-70°	431.6	13.0
70°-80°	291.8	8.8
80°-90°	91.7	2.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	868.1	26.1
0°-40°	1414.1	42.6
0°-60°	2508.0	75.5
0°-90°	3323.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3323.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1130	1130	1130	1130	1130	
5°	1118	1120	1127	1128	1130	106
15°	1064	1069	1081	1087	1091	300
25°	966	974	997	1009	1014	445
35°	836	847	873	899	909	522
45°	684	697	732	775	791	528
55°	520	536	585	638	661	467
65°	353	373	438	495	520	349
75°	185	216	283	340	366	196
85°	47	65	88	98	96	54
90°	0	0	0	0	0	



TEST NUMBER: P271994

CATALOG NUMBER: 22CZ2-39HE-UNV-L935-CD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1129.9	1129.9	1129.9	1129.9	1129.9
2.5°	1123.3	1126.6	1131.5	1133.2	1133.2
5°	1118.4	1120.1	1126.6	1128.2	1129.9
7.5°	1110.3	1113.5	1120.1	1121.7	1123.3
10°	1098.8	1102.1	1110.3	1113.5	1115.2
12.5°	1084.1	1087.4	1097.2	1102.1	1103.7
15°	1064.5	1069.4	1080.8	1087.4	1090.6
17.5°	1044.9	1049.8	1061.2	1071.0	1074.3
20°	1020.3	1031.8	1039.9	1053.0	1054.7
22.5°	995.8	1002.3	1017.1	1030.1	1036.7
25°	966.4	974.5	997.4	1008.9	1013.8
27.5°	935.3	946.7	964.7	982.7	989.3
30°	904.2	912.4	935.3	956.6	963.1
32.5°	869.9	881.3	905.9	927.1	936.9
35°	835.6	847.0	873.2	899.3	909.1
37.5°	797.9	811.0	837.2	868.3	881.3
40°	762.0	771.8	802.9	840.5	851.9
42.5°	724.4	735.8	768.5	809.4	822.5
45°	683.5	696.6	732.5	775.1	791.4
47.5°	644.2	657.3	696.6	739.1	758.7
50°	603.4	619.7	659.0	708.0	727.6
52.5°	564.1	578.8	623.0	673.7	691.7
55°	520.0	536.3	585.4	637.7	660.6
57.5°	484.0	495.4	549.4	603.4	626.3
60°	439.9	454.6	510.2	567.4	593.6
62.5°	392.4	417.0	474.2	533.1	559.2
65°	353.2	372.8	438.2	495.4	520.0
67.5°	312.3	333.6	397.3	457.8	485.6
70°	266.5	294.3	361.4	421.9	448.0
72.5°	225.6	255.1	323.8	382.6	410.4
75°	184.8	215.8	282.9	340.1	366.3
77.5°	145.5	179.9	245.3	289.4	305.8
80°	107.9	140.6	197.9	228.9	242.0
82.5°	75.2	103.0	145.5	161.9	165.1
85°	47.4	65.4	88.3	98.1	96.5
87.5°	21.3	26.2	32.7	36.0	34.3
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)