

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P389232

Luminaire Tested: **22CZ2-39VHE-S-UNV-L935-CD1-SDWPD1-U**

Issue Date: 2/28/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P389232
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-23)
Test Lab: INNOVATIONS CENTER(G3)
Issue Date: 2/28/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 22CZ2-39VHE-S-UNV-L935-CD1-SDWPD1-U
Description: 2x2 CRUZE LED TROFFER WITH 3500K, 90 LEDS, AND SMOOTH LENS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3534.7 lumens
Efficiency: N/A
Efficacy: 123.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.26 / 1.34
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')
CIE Type: Direct


Input Watts (W): 28.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P389232

CATALOG NUMBER: 22CZ2-39VHE-S-UNV-L935-CD1-SDWPD1-U

Luminous Intensity Polar Plot

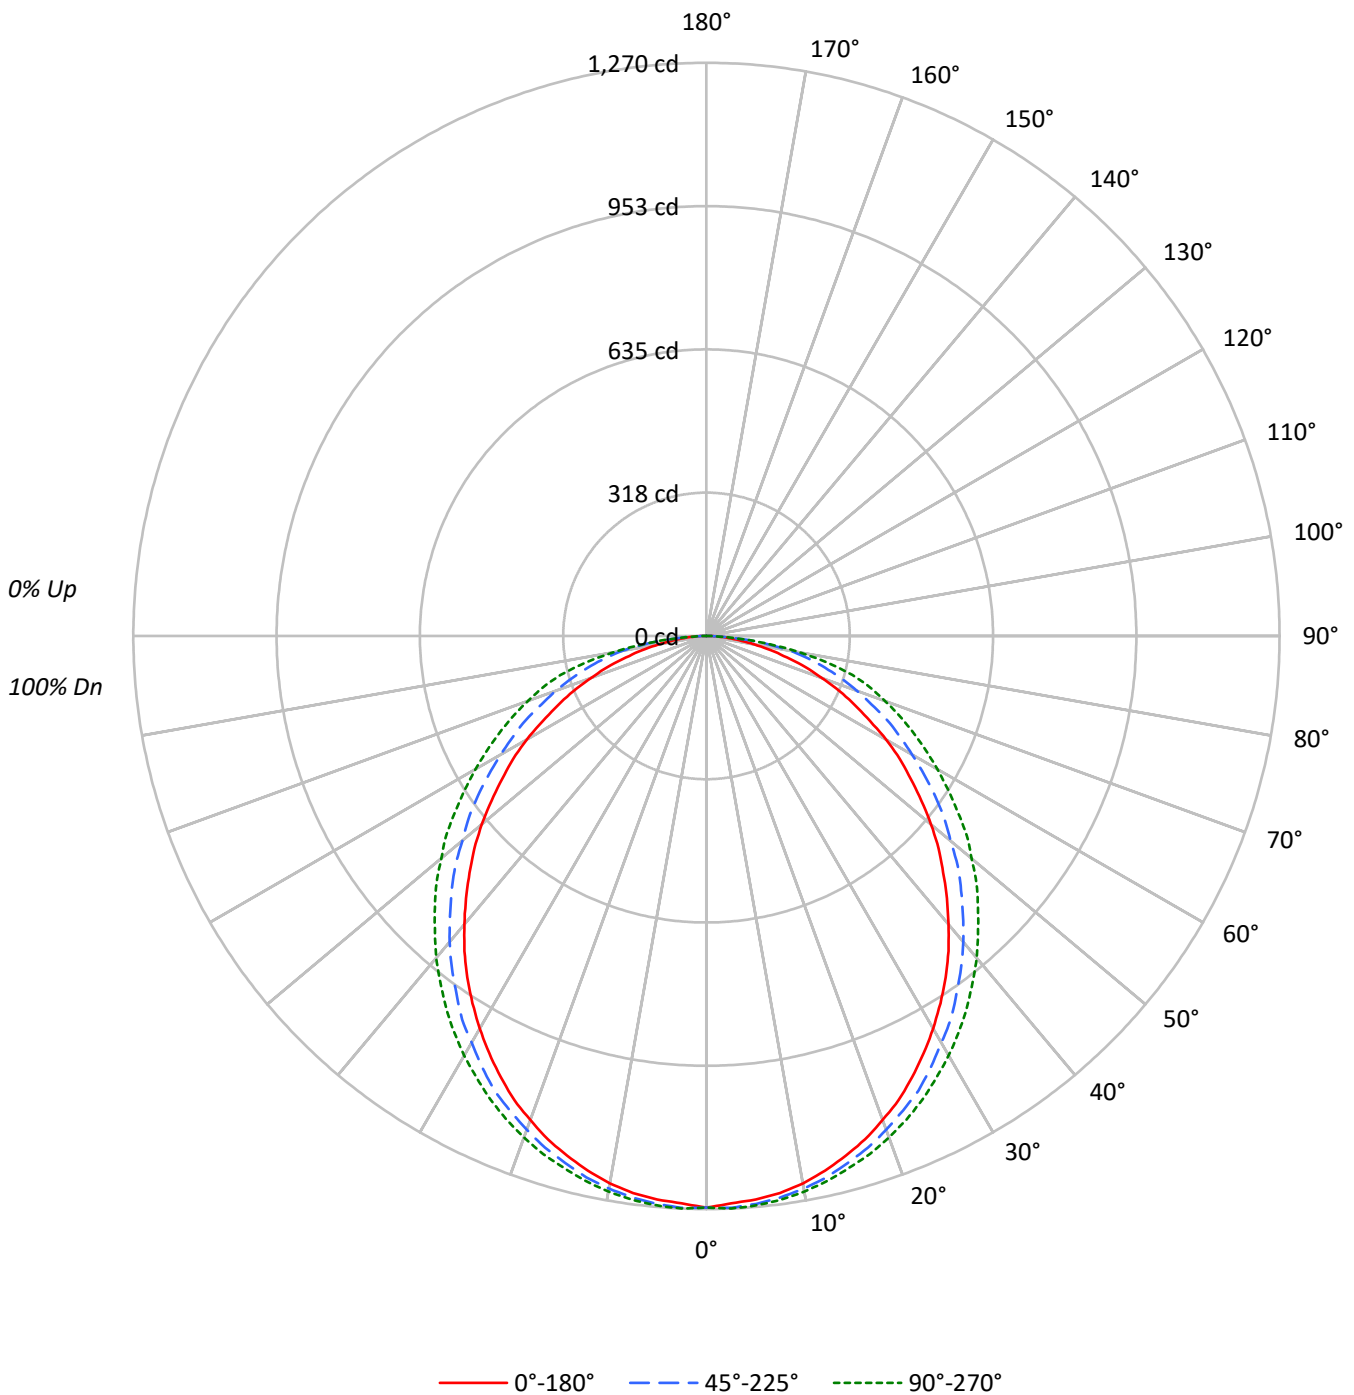



TEST NUMBER: P389232

CATALOG NUMBER: 22CZ2-39VHE-S-UNV-L935-CD1-SDWPD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	108	103	99	95	106	101	97	94	97	94	91	93	90	88	89	87	85	83					83			
2	98	90	83	77	96	88	82	76	84	79	74	81	77	73	78	74	71	69					69			
3	90	79	71	64	87	77	70	63	74	68	62	72	66	61	69	64	60	58					58			
4	82	70	61	54	80	69	60	54	66	59	53	64	57	52	61	56	52	49					49			
5	75	62	53	47	73	61	53	46	59	52	46	57	51	45	55	50	45	43					43			
6	70	56	47	41	68	55	47	41	53	46	40	52	45	40	50	44	39	37					37			
7	65	51	42	36	63	50	42	36	49	41	36	47	40	35	46	40	35	33					33			
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	31	30					30			
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	28	27					27			
10	53	40	32	26	51	39	31	26	38	31	26	37	31	26	36	30	26	24					24			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3408	3408	3408
5°	3386	3412	3421
10°	3366	3398	3416
15°	3322	3368	3400
20°	3268	3334	3386
25°	3203	3301	3364
30°	3121	3234	3336
35°	3034	3175	3305
40°	2931	3111	3273
45°	2824	3038	3239
50°	2720	2955	3211
55°	2592	2902	3188
60°	2476	2831	3178
65°	2310	2814	3214
70°	2128	2790	3308
75°	1920	2829	3481
80°	1661	2913	3271
85°	1374	2445	2445



TEST NUMBER: P389232

CATALOG NUMBER: 22CZ2-39VHE-S-UNV-L935-CD1-SDWPD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.8	3.4
10°-20°	340.9	9.6
20°-30°	510.0	14.4
30°-40°	604.0	17.1
40°-50°	615.5	17.4
50°-60°	551.7	15.6
60°-70°	431.9	12.2
70°-80°	278.5	7.9
80°-90°	82.3	2.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	970.7	27.5
0°-40°	1574.7	44.5
0°-60°	2741.9	77.6
0°-90°	3534.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3534.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1267	1267	1267	1267	1267	
5°	1253	1257	1263	1265	1267	119
15°	1192	1199	1209	1219	1220	336
25°	1079	1088	1112	1126	1133	497
35°	924	935	966	996	1006	577
45°	742	759	798	839	851	573
55°	552	571	618	661	680	495
65°	363	384	442	485	505	360
75°	185	213	272	318	335	198
85°	44	61	79	79	79	52
90°	0	0	0	0	0	



TEST NUMBER: P389232

CATALOG NUMBER: 22CZ2-39VHE-S-UNV-L935-CD1-SDWPD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1266.6	1266.6	1266.6	1266.6	1266.6
2.5°	1258.3	1261.6	1268.2	1269.9	1269.9
5°	1253.4	1256.7	1263.3	1264.9	1266.6
7.5°	1245.2	1246.8	1255.0	1258.3	1260.0
10°	1232.0	1235.3	1243.5	1248.5	1250.1
12.5°	1213.8	1218.8	1228.7	1235.3	1236.9
15°	1192.4	1199.0	1208.9	1218.8	1220.4
17.5°	1169.3	1175.9	1189.1	1200.6	1203.9
20°	1141.3	1149.5	1164.3	1177.5	1182.5
22.5°	1113.2	1119.8	1138.0	1154.4	1159.4
25°	1078.6	1088.5	1111.6	1126.4	1133.0
27.5°	1042.3	1053.8	1076.9	1096.7	1103.3
30°	1004.4	1015.9	1040.7	1065.4	1073.6
32.5°	964.8	978.0	1007.7	1032.4	1040.7
35°	923.6	935.1	966.4	996.1	1006.0
37.5°	880.7	890.6	926.9	958.2	968.1
40°	834.5	847.7	885.6	921.9	931.8
42.5°	788.3	803.2	841.1	880.7	890.6
45°	742.1	758.6	798.2	839.4	851.0
47.5°	697.6	710.8	755.3	794.9	811.4
50°	649.8	663.0	705.9	750.4	766.9
52.5°	600.3	618.5	664.6	707.5	727.3
55°	552.5	570.6	618.5	661.3	679.5
57.5°	508.0	522.8	572.3	616.8	634.9
60°	460.1	473.3	526.1	573.9	590.4
62.5°	409.0	428.8	483.2	527.7	547.5
65°	362.8	384.3	442.0	484.9	504.7
67.5°	319.9	339.7	395.8	442.0	463.4
70°	270.5	296.9	354.6	400.8	420.5
72.5°	230.9	254.0	313.3	359.5	381.0
75°	184.7	212.7	272.1	318.3	334.8
77.5°	146.8	174.8	230.9	267.2	275.4
80°	107.2	135.2	188.0	206.2	211.1
82.5°	72.6	99.0	135.2	140.2	141.8
85°	44.5	61.0	79.2	79.2	79.2
87.5°	21.4	24.7	28.0	26.4	26.4
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)