

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: METALUX

Report Number: P387769

Luminaire Tested: **22CZ2-24VHE-SQR-UNV-L930-CD1-SWPD1-U**

Issue Date: 2/28/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P387769
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-542-6)
Test Lab: INNOVATIONS CENTER(G3)
Issue Date: 2/28/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 22CZ2-24VHE-SQR-UNV-L930-CD1-SWPD1-U
Description: 2x2 CRUZE LED TROFFER WITH 3000K, 90 LEDS, AND SQUARE LENS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1957.2 lumens
Efficiency: N/A
Efficacy: 111.8 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.31 / 1.37
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')
CIE Type: Direct


Input Watts (W): 17.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P387769

CATALOG NUMBER: 22CZ2-24VHE-SQR-UNV-L930-CD1-SWPD1-U

Luminous Intensity Polar Plot

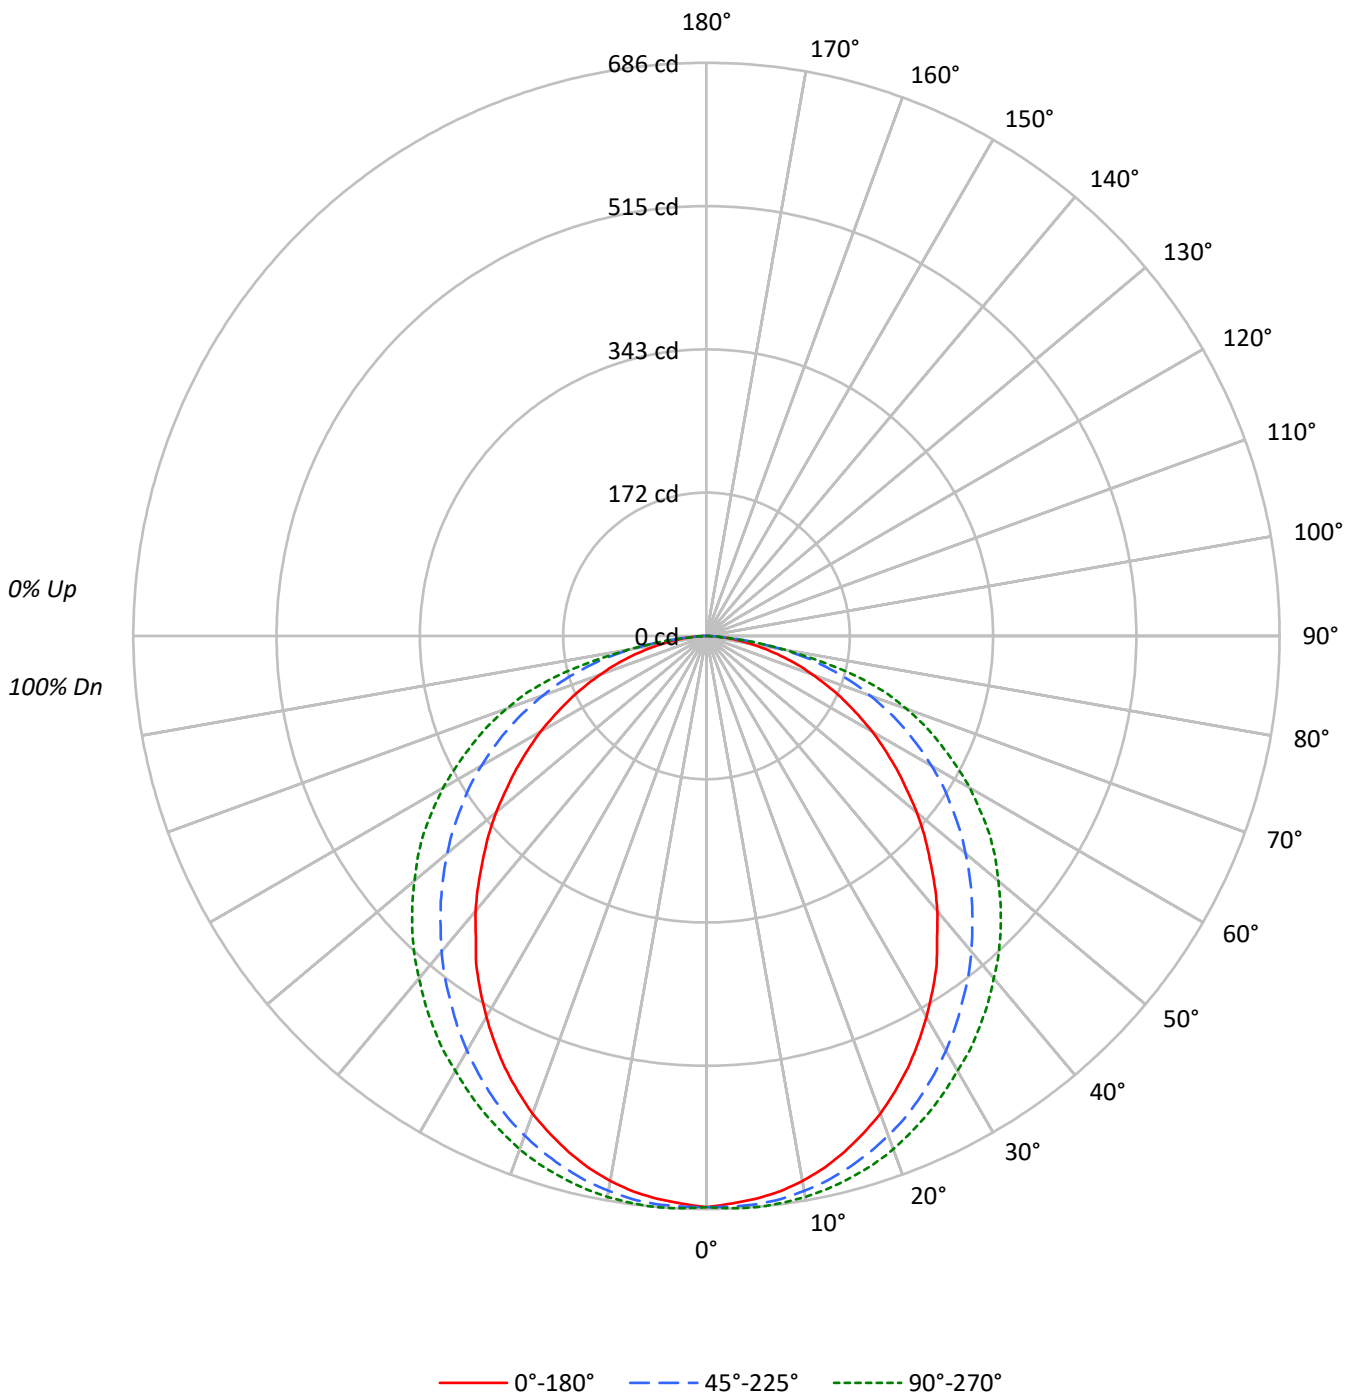



TEST NUMBER: P387769

CATALOG NUMBER: 22CZ2-24VHE-SQR-UNV-L930-CD1-SWPD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	99	95	106	101	97	94	97	94	91	93	91	88	90	87	85	83
2	99	90	83	77	96	88	82	76	85	79	75	81	77	73	78	75	71	69
3	90	79	71	64	87	77	70	63	74	68	62	72	66	61	69	64	60	58
4	82	70	61	54	80	68	60	54	66	59	53	64	57	52	61	56	51	49
5	75	62	53	46	73	61	53	46	59	51	46	57	50	45	55	49	45	43
6	70	56	47	41	68	55	47	40	53	46	40	52	45	40	50	44	39	37
7	64	51	42	36	63	50	42	36	48	41	35	47	40	35	46	39	35	33
8	60	46	38	32	58	46	37	32	44	37	32	43	36	31	42	36	31	29
9	56	43	34	29	55	42	34	29	41	34	28	40	33	28	39	33	28	26
10	53	39	31	26	51	39	31	26	38	31	26	37	30	26	36	30	26	24

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1840	1840	1840
5°	1827	1844	1854
10°	1810	1843	1863
15°	1780	1835	1869
20°	1743	1822	1873
25°	1694	1804	1870
30°	1637	1781	1867
35°	1578	1755	1874
40°	1511	1733	1880
45°	1439	1711	1895
50°	1376	1696	1909
55°	1303	1682	1939
60°	1235	1675	1960
65°	1153	1662	1976
70°	1060	1637	2002
75°	957	1594	1932
80°	820	1410	1454
85°	661	831	661



TEST NUMBER: P387769

CATALOG NUMBER: 22CZ2-24VHE-SQR-UNV-L930-CD1-SWPD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	64.8	3.3
10°-20°	185.3	9.5
20°-30°	278.3	14.2
30°-40°	332.0	17.0
40°-50°	343.2	17.5
50°-60°	315.5	16.1
60°-70°	251.2	12.8
70°-80°	153.5	7.8
80°-90°	33.3	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	528.5	27.0
0°-40°	860.4	44.0
0°-60°	1519.2	77.6
0°-90°	1957.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1957.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	684	684	684	684	684	
5°	676	678	683	686	686	64
15°	639	646	659	668	671	180
25°	570	584	608	624	630	262
35°	480	501	534	562	570	300
45°	378	405	450	486	498	292
55°	278	308	359	399	413	248
65°	181	212	261	297	310	179
75°	92	119	153	180	186	98
85°	21	26	27	23	21	25
90°	0	0	0	0	0	



TEST NUMBER: P387769

CATALOG NUMBER: 22CZ2-24VHE-SQR-UNV-L930-CD1-SWPD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	683.7	683.7	683.7	683.7	683.7
2.5°	680.0	680.9	683.7	685.6	685.6
5°	676.3	678.1	682.8	685.6	686.5
7.5°	670.7	673.5	680.0	683.7	684.6
10°	662.3	666.0	674.4	680.0	681.8
12.5°	652.1	657.7	667.9	675.3	677.2
15°	639.1	646.5	658.6	667.9	670.7
17.5°	624.2	633.5	648.4	659.5	663.3
20°	608.5	617.7	636.3	649.3	654.0
22.5°	589.9	602.0	623.3	638.2	641.9
25°	570.4	584.3	607.5	624.2	629.8
27.5°	549.0	565.7	590.8	611.2	615.9
30°	526.7	544.4	573.2	595.4	601.0
32.5°	503.5	523.9	554.6	579.7	587.1
35°	480.3	500.7	534.1	562.0	570.4
37.5°	453.3	477.5	514.6	543.4	553.6
40°	430.1	453.3	493.3	524.8	535.1
42.5°	404.1	429.2	471.0	505.3	517.4
45°	378.1	405.0	449.6	485.8	497.9
47.5°	353.9	380.9	427.3	465.4	477.5
50°	328.8	356.7	405.0	444.0	456.1
52.5°	301.9	332.6	382.7	421.7	435.7
55°	277.8	308.4	358.6	399.4	413.4
57.5°	252.7	284.3	336.3	375.3	388.3
60°	229.4	260.1	311.2	349.3	364.1
62.5°	204.4	235.9	286.1	323.3	337.2
65°	181.1	211.8	261.0	297.3	310.3
67.5°	157.9	188.6	235.0	269.4	284.3
70°	134.7	165.4	208.1	241.5	254.5
72.5°	114.3	141.2	182.1	212.7	224.8
75°	92.0	118.9	153.3	180.2	185.8
77.5°	71.5	95.7	124.5	136.6	138.4
80°	52.9	71.5	91.0	93.8	93.8
82.5°	35.3	49.2	56.7	57.6	56.7
85°	21.4	26.0	26.9	23.2	21.4
87.5°	7.4	7.4	4.6	2.8	0.9
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)