

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: METALUX

Report Number: P391319

Luminaire Tested: **24CZ2-40VHE-HRP-UNV-L930-CD1-U**

Issue Date: 2/28/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P391319
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)
Test Lab: INNOVATIONS CENTER(G3)
Issue Date: 2/28/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 24CZ2-40VHE-HRP-UNV-L930-CD1-U
Description: 2x4 CRUZE LED TROFFER WITH 3000K, 90 LEDS, AND HRP LENS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2830.8 lumens
Efficiency: N/A
Efficacy: 108.0 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 26.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P391319

CATALOG NUMBER: 24CZ2-40VHE-HRP-UNV-L930-CD1-U

Luminous Intensity Polar Plot

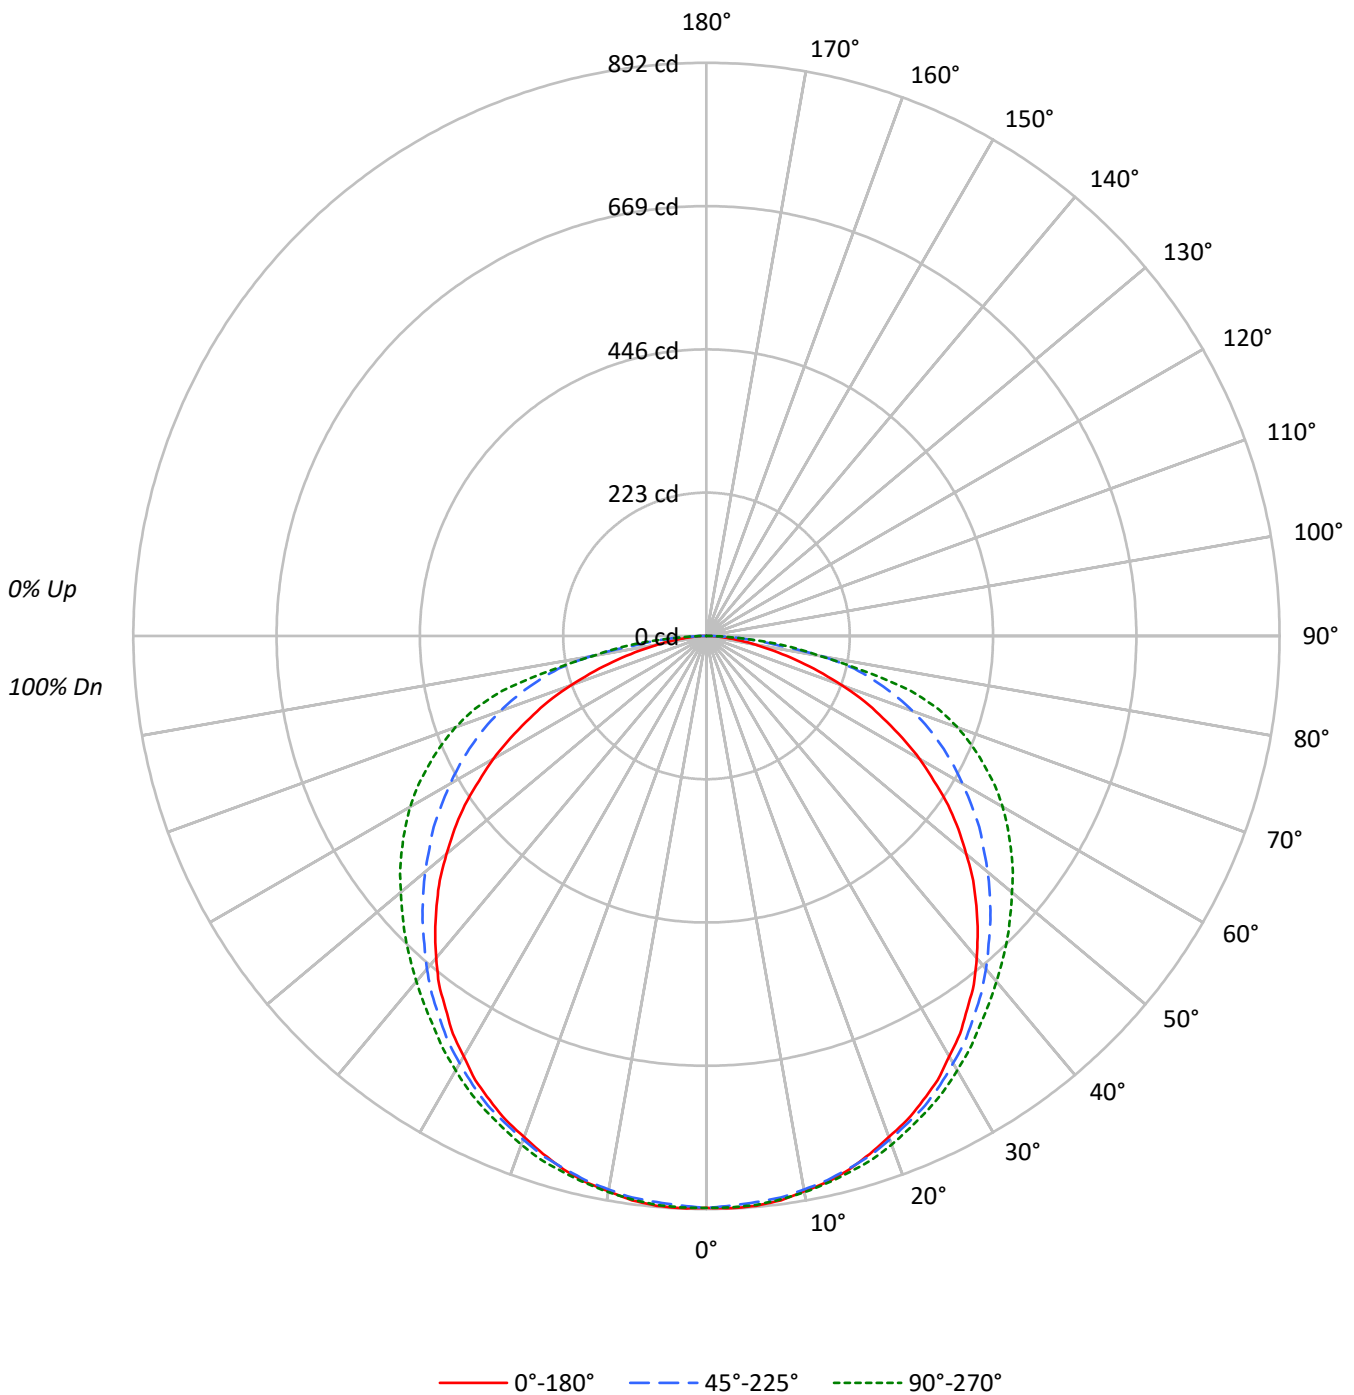



TEST NUMBER: P391319

CATALOG NUMBER: 24CZ2-40VHE-HRP-UNV-L930-CD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89		92	89	87		88	86	84	82
2	97	89	81	75	95	87	80	74	83	77	72		80	75	71		77	73	69	67
3	88	77	68	62	86	76	67	61	72	66	60		70	64	59		67	62	58	56
4	81	68	59	52	78	67	58	51	64	57	51		62	55	50		59	54	49	47
5	74	60	51	44	72	59	51	44	57	49	43		55	48	43		53	47	42	40
6	68	54	45	38	66	53	45	38	51	44	38		50	43	37		48	42	37	35
7	63	49	40	34	61	48	40	34	47	39	33		45	38	33		44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30		41	34	29		40	34	29	27
9	55	41	33	27	53	40	32	27	39	32	27		38	31	26		37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24		35	29	24		34	28	24	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1198	1198	1198
5°	1202	1195	1200
10°	1199	1195	1201
15°	1197	1195	1203
20°	1188	1194	1206
25°	1184	1197	1209
30°	1174	1193	1213
35°	1162	1190	1218
40°	1149	1189	1233
45°	1130	1189	1261
50°	1105	1196	1299
55°	1077	1215	1357
60°	1031	1239	1432
65°	966	1283	1520
70°	878	1342	1635
75°	744	1416	1708
80°	587	1425	1382
85°	434	1084	1213



TEST NUMBER: P391319

CATALOG NUMBER: 24CZ2-40VHE-HRP-UNV-L930-CD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.4	3.0
10°-20°	243.0	8.6
20°-30°	371.6	13.1
30°-40°	454.3	16.0
40°-50°	484.2	17.1
50°-60°	463.0	16.4
60°-70°	392.2	13.9
70°-80°	263.6	9.3
80°-90°	74.4	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	699.1	24.7
0°-40°	1153.4	40.7
0°-60°	2100.6	74.2
0°-90°	2830.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2830.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	890	890	890	890	890	
5°	890	889	885	889	889	85
15°	859	859	858	865	864	242
25°	798	800	806	813	814	368
35°	708	713	724	739	741	443
45°	594	604	625	652	663	458
55°	459	476	518	559	578	409
65°	303	334	403	456	477	301
75°	143	195	272	319	329	153
85°	28	58	70	76	79	35
90°	0	0	0	0	0	



TEST NUMBER: P391319

CATALOG NUMBER: 24CZ2-40VHE-HRP-UNV-L930-CD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	890.2	890.2	890.2	890.2	890.2
2.5°	891.6	891.6	887.4	890.2	890.2
5°	890.2	888.8	884.6	888.8	888.8
7.5°	886.0	884.6	881.8	886.0	884.6
10°	877.6	877.6	874.8	879.0	879.0
12.5°	870.5	869.1	867.7	873.4	872.0
15°	859.3	859.3	857.9	864.9	863.5
17.5°	845.3	846.7	848.1	853.7	855.1
20°	829.8	832.6	834.0	842.5	842.5
22.5°	815.8	817.2	820.0	828.4	828.4
25°	797.5	800.3	806.0	813.0	814.4
27.5°	779.3	780.7	787.7	797.5	798.9
30°	755.4	759.6	768.0	779.3	780.7
32.5°	734.3	738.6	748.4	759.6	762.4
35°	707.7	713.3	724.5	738.6	741.4
37.5°	683.8	688.0	702.1	717.5	721.7
40°	654.3	662.7	676.8	695.0	702.1
42.5°	624.8	633.3	650.1	674.0	682.4
45°	593.9	603.8	624.8	651.5	662.7
47.5°	563.0	574.3	598.2	629.0	641.7
50°	527.9	542.0	571.5	606.6	620.6
52.5°	494.2	511.1	543.4	582.7	601.0
55°	459.1	476.0	518.1	558.8	578.5
57.5°	419.8	442.3	488.6	535.0	556.0
60°	383.3	404.4	460.5	511.1	532.2
62.5°	344.0	372.1	432.5	485.8	506.9
65°	303.3	334.2	403.0	456.3	477.4
67.5°	266.8	300.5	373.5	426.8	447.9
70°	223.3	265.4	341.2	394.6	415.6
72.5°	182.5	228.9	307.5	359.5	379.1
75°	143.2	195.2	272.4	318.7	328.6
77.5°	106.7	161.5	235.9	255.5	248.5
80°	75.8	129.2	183.9	174.1	178.3
82.5°	49.1	98.3	113.7	129.2	133.4
85°	28.1	57.6	70.2	75.8	78.6
87.5°	12.6	21.1	28.1	28.1	26.7
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)