

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P391535

Luminaire Tested: **24CZ2-60VHE-RDP-UNV-L930-CD1-U**

Issue Date: 2/28/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P391535
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)
Test Lab: INNOVATIONS CENTER(G3)
Issue Date: 2/28/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 24CZ2-60VHE-RDP-UNV-L930-CD1-U
Description: 2x4 CRUZE LED TROFFER WITH 3000K, 90 LEDS, AND RDP LENS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3360.0 lumens
Efficiency: N/A
Efficacy: 86.8 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P391535

CATALOG NUMBER: 24CZ2-60VHE-RDP-UNV-L930-CD1-U

Luminous Intensity Polar Plot

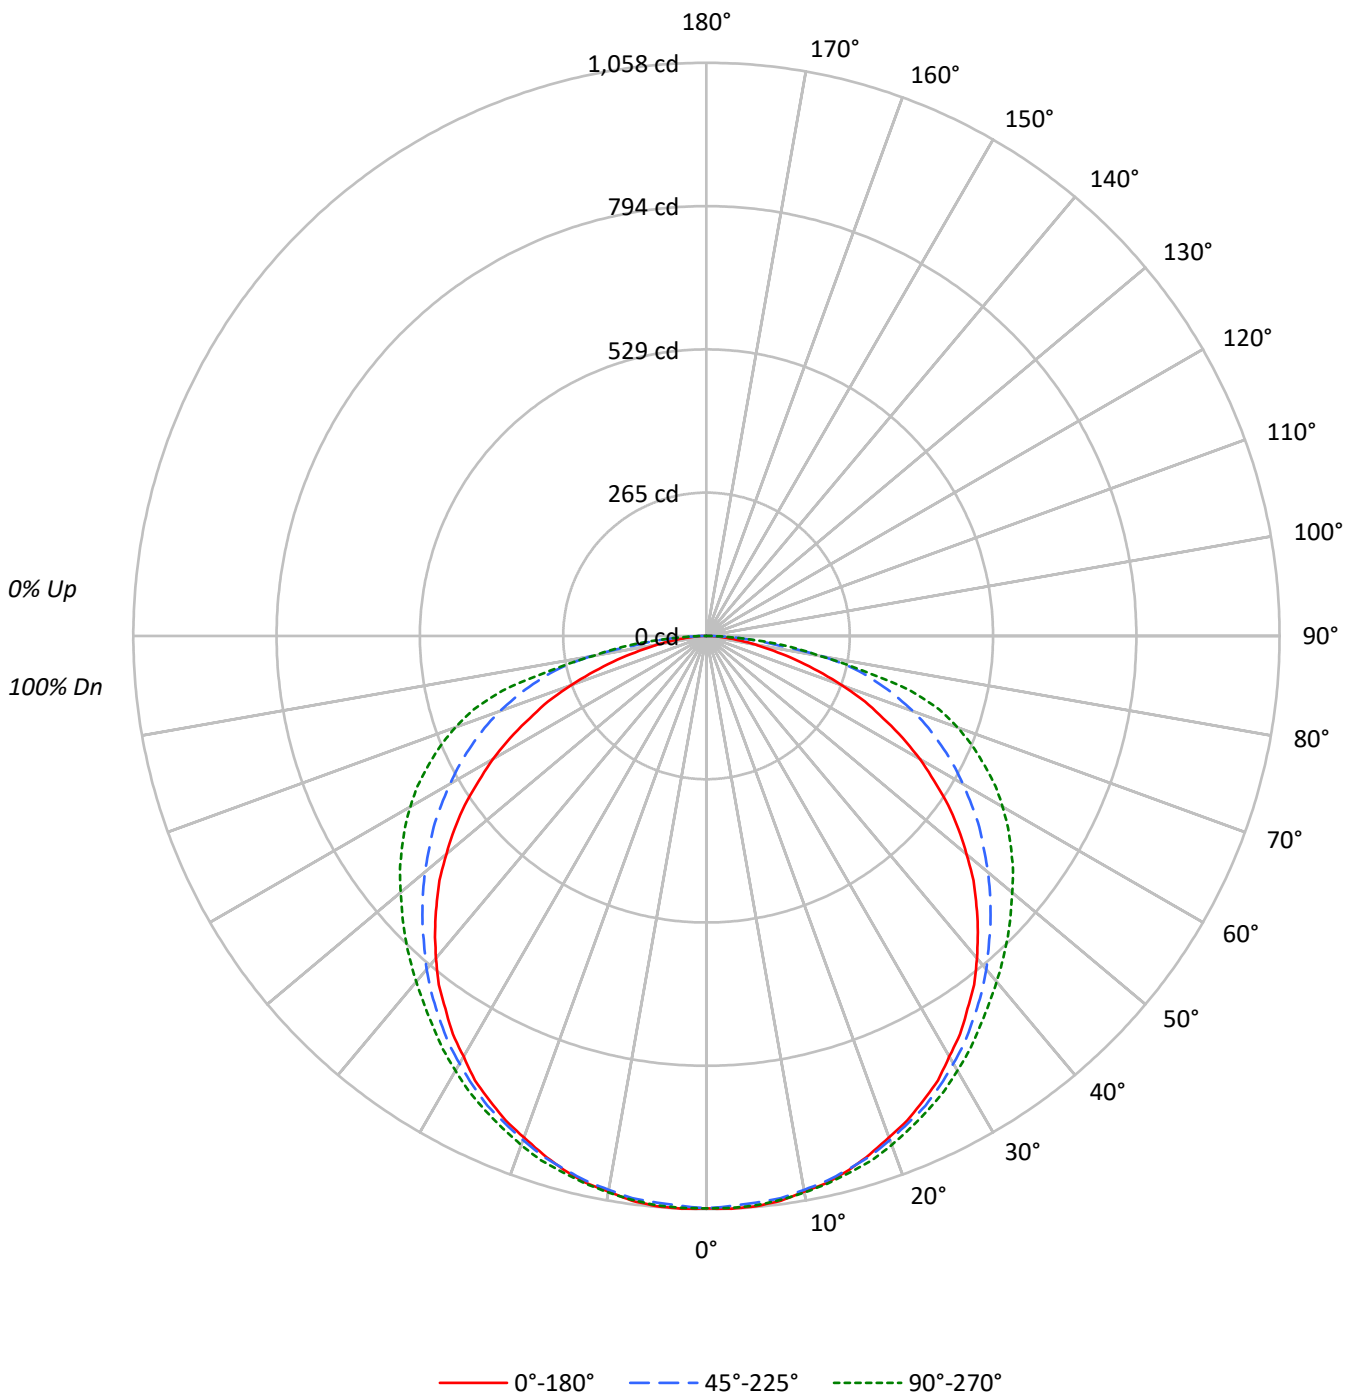



TEST NUMBER: P391535

CATALOG NUMBER: 24CZ2-60VHE-RDP-UNV-L930-CD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89	92	89	87	88	86	84	82
2	97	89	81	75	95	87	80	74	83	77	72	80	75	71	77	73	69	67
3	88	77	68	62	86	76	67	61	72	66	60	70	64	59	67	62	58	56
4	81	68	59	52	78	67	58	51	64	57	51	62	55	50	59	54	49	47
5	74	60	51	44	72	59	51	44	57	49	43	55	48	43	53	47	42	40
6	68	54	45	38	66	53	45	38	51	44	38	50	43	37	48	42	37	35
7	63	49	40	34	61	48	40	34	47	39	33	45	38	33	44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30	41	34	29	40	34	29	27
9	55	41	33	27	53	40	32	27	39	32	27	38	31	26	37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1422	1422	1422
5°	1427	1418	1425
10°	1423	1419	1425
15°	1421	1418	1428
20°	1410	1418	1432
25°	1405	1420	1435
30°	1393	1416	1440
35°	1380	1413	1445
40°	1364	1411	1464
45°	1341	1411	1497
50°	1312	1420	1542
55°	1278	1443	1611
60°	1224	1471	1700
65°	1146	1523	1804
70°	1042	1593	1941
75°	884	1681	2027
80°	697	1691	1640
85°	514	1286	1440



TEST NUMBER: P391535

CATALOG NUMBER: 24CZ2-60VHE-RDP-UNV-L930-CD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.2	3.0
10°-20°	288.5	8.6
20°-30°	441.1	13.1
30°-40°	539.3	16.0
40°-50°	574.7	17.1
50°-60°	549.5	16.4
60°-70°	465.5	13.9
70°-80°	312.9	9.3
80°-90°	88.2	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	829.8	24.7
0°-40°	1369.1	40.7
0°-60°	2493.3	74.2
0°-90°	3360.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3360.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1057	1057	1057	1057	1057	
5°	1057	1055	1050	1055	1055	100
15°	1020	1020	1018	1027	1025	288
25°	947	950	957	965	967	436
35°	840	847	860	877	880	526
45°	705	717	742	773	787	544
55°	545	565	615	663	687	485
65°	360	397	478	542	567	357
75°	170	232	323	378	390	182
85°	33	68	83	90	93	41
90°	0	0	0	0	0	



TEST NUMBER: P391535

CATALOG NUMBER: 24CZ2-60VHE-RDP-UNV-L930-CD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1056.6	1056.6	1056.6	1056.6	1056.6
2.5°	1058.3	1058.3	1053.3	1056.6	1056.6
5°	1056.6	1055.0	1050.0	1055.0	1055.0
7.5°	1051.6	1050.0	1046.6	1051.6	1050.0
10°	1041.6	1041.6	1038.3	1043.3	1043.3
12.5°	1033.3	1031.6	1030.0	1036.6	1035.0
15°	1020.0	1020.0	1018.3	1026.6	1025.0
17.5°	1003.3	1005.0	1006.6	1013.3	1015.0
20°	985.0	988.3	990.0	1000.0	1000.0
22.5°	968.3	970.0	973.3	983.3	983.3
25°	946.6	950.0	956.6	965.0	966.6
27.5°	925.0	926.6	935.0	946.6	948.3
30°	896.6	901.6	911.6	925.0	926.6
32.5°	871.6	876.6	888.3	901.6	905.0
35°	840.0	846.6	860.0	876.6	880.0
37.5°	811.6	816.6	833.3	851.6	856.6
40°	776.6	786.6	803.3	825.0	833.3
42.5°	741.6	751.6	771.6	800.0	810.0
45°	705.0	716.6	741.6	773.3	786.6
47.5°	668.3	681.6	710.0	746.6	761.6
50°	626.6	643.3	678.3	720.0	736.6
52.5°	586.6	606.6	645.0	691.6	713.3
55°	545.0	565.0	615.0	663.3	686.6
57.5°	498.3	525.0	580.0	635.0	660.0
60°	455.0	480.0	546.6	606.6	631.6
62.5°	408.3	441.6	513.3	576.6	601.6
65°	360.0	396.7	478.3	541.6	566.6
67.5°	316.7	356.7	443.3	506.6	531.6
70°	265.0	315.0	405.0	468.3	493.3
72.5°	216.7	271.7	365.0	426.6	450.0
75°	170.0	231.7	323.3	378.3	390.0
77.5°	126.7	191.7	280.0	303.3	295.0
80°	90.0	153.3	218.3	206.7	211.7
82.5°	58.3	116.7	135.0	153.3	158.3
85°	33.3	68.3	83.3	90.0	93.3
87.5°	15.0	25.0	33.3	33.3	31.7
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)