

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P388751

Luminaire Tested: **24CZ2-30VHE-UNV-L930-CD1-U**

Issue Date: 2/28/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P388751
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-5)
Test Lab: INNOVATIONS CENTER(G3)
Issue Date: 2/28/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 24CZ2-30VHE-UNV-L930-CD1-U
Description: 2x4 CRUZE LED TROFFER WITH 3000K, 90 LEDS, AND RIBBED LENS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2484.3 lumens
Efficiency: N/A
Efficacy: 121.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.27 / 1.37
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P388751
CATALOG NUMBER: 24CZ2-30VHE-UNV-L930-CD1-U

Luminous Intensity Polar Plot

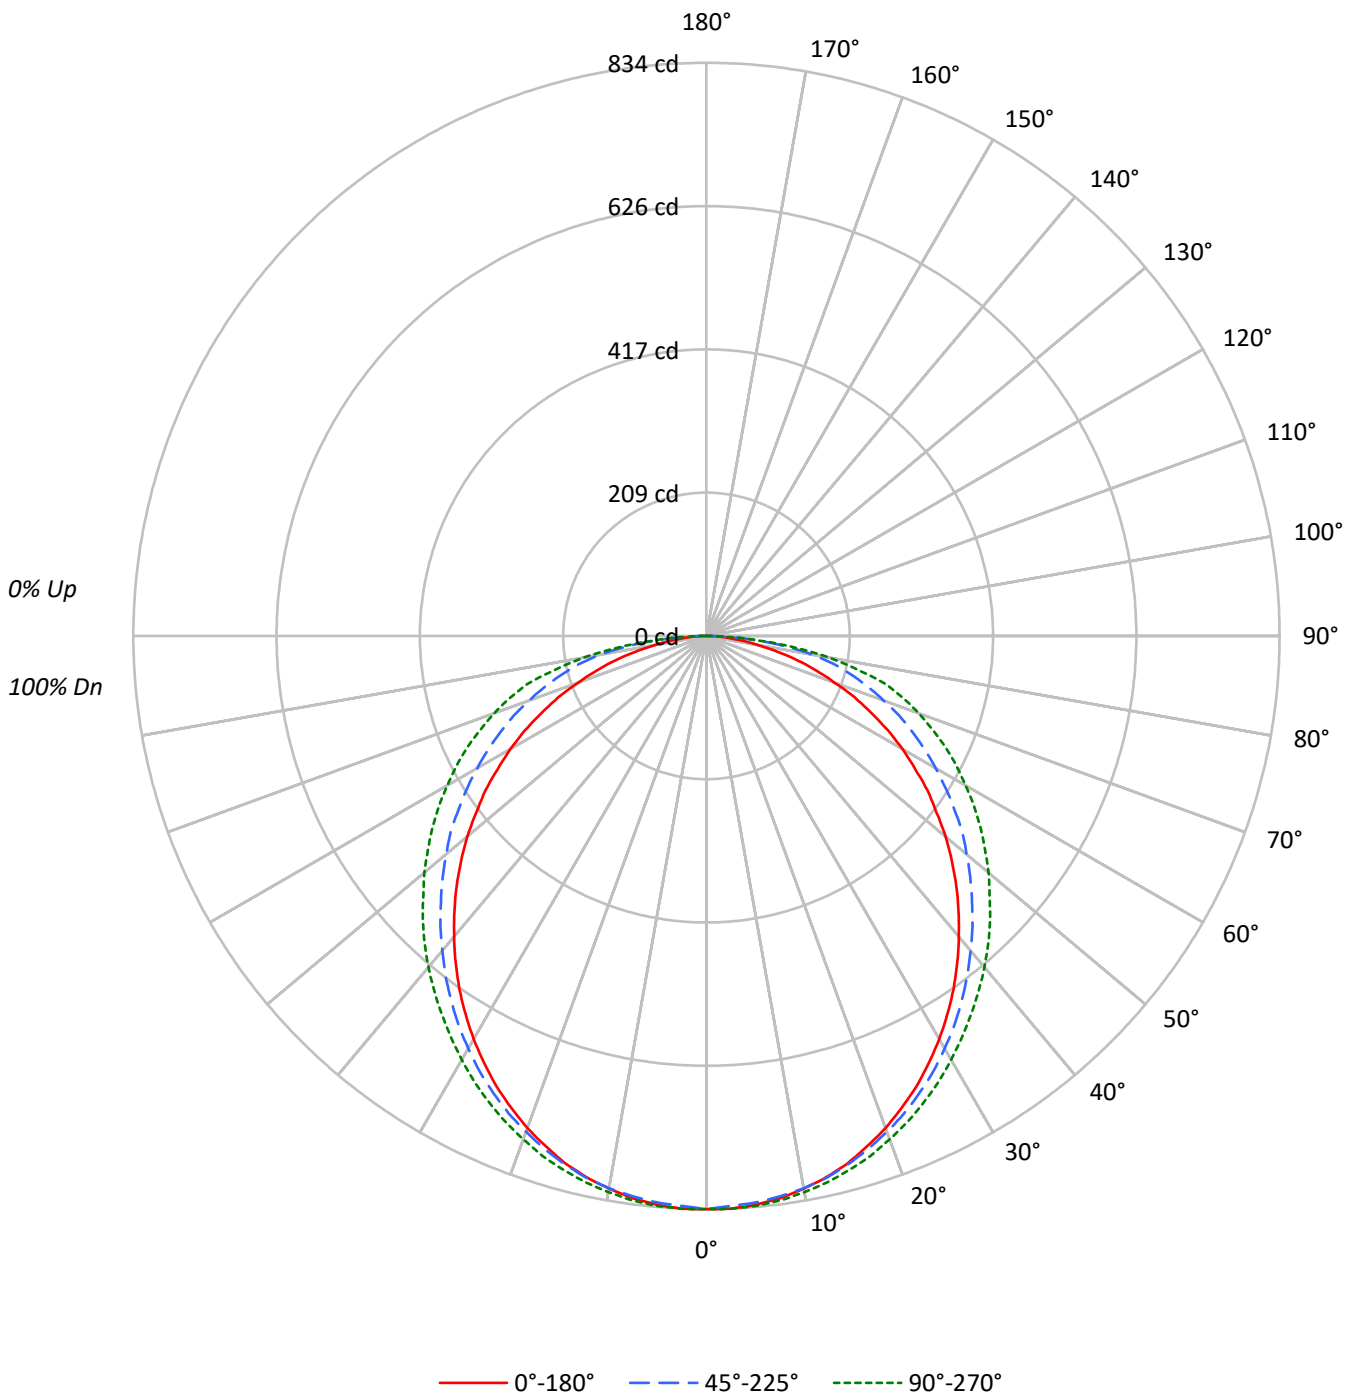



TEST NUMBER: P388751

CATALOG NUMBER: 24CZ2-30VHE-UNV-L930-CD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89		92	89	87		89	86	84	82
2	98	89	82	76	95	87	80	75	83	78	73		80	75	71		77	73	70	67
3	89	78	69	62	86	76	68	62	73	66	61		70	64	60		68	63	58	56
4	81	69	59	52	79	67	59	52	65	57	51		62	56	51		60	55	50	48
5	74	61	52	45	72	60	51	45	58	50	44		56	49	44		54	48	43	41
6	69	55	46	39	67	54	45	39	52	44	39		50	44	38		49	43	38	36
7	64	50	41	35	62	49	40	34	47	40	34		46	39	34		45	38	34	32
8	59	45	37	31	58	45	36	31	43	36	30		42	35	30		41	35	30	28
9	55	42	33	28	54	41	33	28	40	33	27		39	32	27		38	32	27	25
10	52	38	30	25	51	38	30	25	37	30	25		36	29	25		35	29	25	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1122	1122	1122
5°	1122	1118	1124
10°	1116	1115	1123
15°	1106	1109	1120
20°	1091	1099	1116
25°	1073	1089	1112
30°	1052	1077	1107
35°	1030	1064	1103
40°	1003	1050	1105
45°	978	1040	1111
50°	951	1034	1121
55°	922	1033	1142
60°	886	1037	1171
65°	840	1053	1222
70°	780	1079	1292
75°	711	1134	1401
80°	584	1220	1400
85°	448	1127	1203



TEST NUMBER: P388751

CATALOG NUMBER: 24CZ2-30VHE-UNV-L930-CD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.9	3.2
10°-20°	225.2	9.1
20°-30°	338.9	13.6
30°-40°	406.1	16.3
40°-50°	423.2	17.0
50°-60°	393.8	15.9
60°-70°	324.3	13.1
70°-80°	220.9	8.9
80°-90°	72.9	2.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	643.0	25.9
0°-40°	1049.2	42.2
0°-60°	1866.2	75.1
0°-90°	2484.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2484.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	834	834	834	834	834	
5°	831	831	828	832	832	79
15°	794	795	796	803	804	224
25°	723	726	734	746	749	333
35°	627	634	648	665	672	392
45°	514	525	546	574	584	396
55°	393	406	440	475	487	350
65°	264	286	331	370	384	262
75°	137	168	218	257	270	144
85°	29	56	73	78	78	36
90°	0	0	0	0	0	



TEST NUMBER: P388751

CATALOG NUMBER: 24CZ2-30VHE-UNV-L930-CD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	834.1	834.1	834.1	834.1	834.1
2.5°	834.1	834.1	829.9	834.1	834.1
5°	830.8	830.8	827.5	831.6	832.4
7.5°	825.0	825.8	822.5	827.5	828.3
10°	816.7	817.5	815.9	820.8	821.7
12.5°	806.7	807.6	807.6	813.4	814.2
15°	794.3	795.1	796.0	803.4	804.2
17.5°	778.5	781.0	782.7	791.8	793.5
20°	762.0	764.4	767.8	777.7	779.4
22.5°	742.9	746.2	752.0	762.8	765.3
25°	723.0	726.3	733.8	746.2	748.7
27.5°	700.6	705.6	714.7	728.0	731.3
30°	677.4	682.4	693.1	707.2	712.2
32.5°	652.5	659.2	671.6	687.3	692.3
35°	626.8	634.3	647.5	665.0	671.6
37.5°	599.5	607.7	623.5	642.6	650.9
40°	571.3	581.2	597.8	620.2	629.3
42.5°	543.1	552.2	572.9	597.0	606.9
45°	514.1	524.8	546.4	573.8	583.7
47.5°	484.2	495.0	520.7	549.7	558.8
50°	454.4	465.1	494.2	524.8	535.6
52.5°	422.0	436.1	469.3	500.0	510.7
55°	393.0	406.3	440.3	475.1	486.7
57.5°	359.8	375.6	412.9	449.4	461.8
60°	329.2	345.7	385.5	422.9	435.3
62.5°	297.7	315.9	358.2	396.3	410.4
65°	263.7	286.0	330.8	369.8	383.9
67.5°	233.0	256.2	303.5	343.3	355.7
70°	198.2	226.3	274.4	314.2	328.3
72.5°	168.3	196.5	247.1	286.0	300.1
75°	136.8	167.5	218.1	257.0	269.5
77.5°	105.3	139.3	189.9	219.7	223.9
80°	75.4	111.1	157.5	174.9	180.7
82.5°	53.1	85.4	116.1	127.7	131.0
85°	29.0	56.4	73.0	77.9	77.9
87.5°	12.4	24.0	29.0	29.8	30.7
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)