

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P388466

Luminaire Tested: **24CZ2-30-SQR-UNV-L930-CD1-U**

Issue Date: 2/28/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P388466
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2002-678-2)
Test Lab: INNOVATION CENTER (G2)
Issue Date: 2/28/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 24CZ2-30-SQR-UNV-L930-CD1-U
Description: 2x4 CRUZE LED TROFFER WITH 3000K, 90 LEDS, AND SQUARE LENS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2402.5 lumens
Efficiency: N/A
Efficacy: 99.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.33 / 1.41
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 24.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P388466
CATALOG NUMBER: 24CZ2-30-SQR-UNV-L930-CD1-U

Luminous Intensity Polar Plot

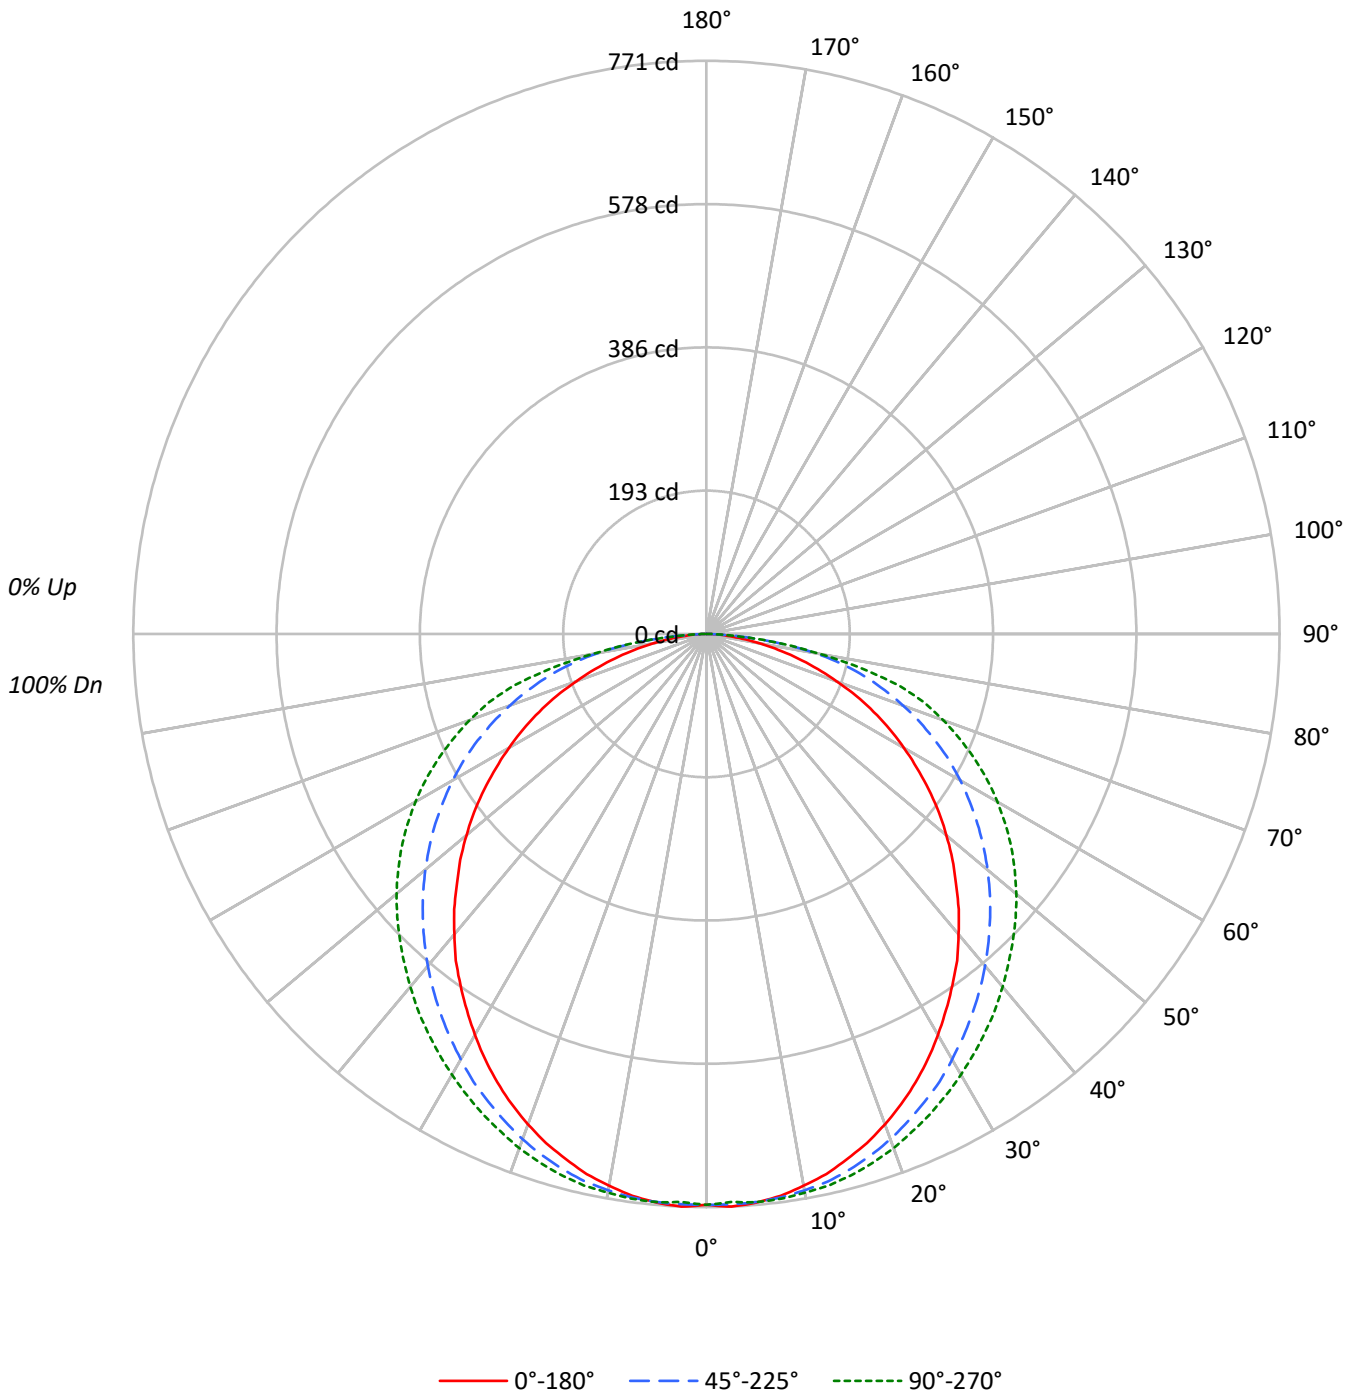



TEST NUMBER: P388466

CATALOG NUMBER: 24CZ2-30-SQR-UNV-L930-CD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89	92	89	87	89	86	84	82
2	98	89	81	75	95	87	80	74	83	78	73	80	75	71	77	73	69	67
3	89	77	69	62	86	76	68	61	73	66	60	70	64	59	67	62	58	56
4	81	68	59	52	78	67	58	52	64	57	51	62	55	50	60	54	49	47
5	74	61	51	44	72	60	51	44	57	50	44	55	49	43	54	48	43	41
6	68	55	45	39	66	54	45	38	52	44	38	50	43	38	48	42	37	35
7	63	49	40	34	62	49	40	34	47	39	34	45	39	33	44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30	42	35	30	40	34	30	28
9	55	41	33	27	54	41	33	27	39	32	27	38	32	27	37	31	27	25
10	52	38	30	25	50	37	30	24	36	29	24	36	29	24	35	29	24	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1033	1033	1033
5°	1037	1036	1036
10°	1030	1038	1043
15°	1019	1039	1050
20°	1005	1036	1054
25°	988	1031	1058
30°	968	1027	1064
35°	947	1024	1074
40°	927	1024	1088
45°	903	1027	1110
50°	882	1033	1139
55°	856	1044	1174
60°	826	1061	1217
65°	791	1081	1268
70°	733	1108	1333
75°	664	1146	1394
80°	559	1150	1199
85°	429	869	869



TEST NUMBER: P388466

CATALOG NUMBER: 24CZ2-30-SQR-UNV-L930-CD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.9	3.0
10°-20°	209.7	8.7
20°-30°	318.6	13.3
30°-40°	387.5	16.1
40°-50°	412.6	17.2
50°-60°	392.9	16.4
60°-70°	328.6	13.7
70°-80°	219.1	9.1
80°-90°	60.6	2.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	601.2	25.0
0°-40°	988.7	41.2
0°-60°	1794.2	74.7
0°-90°	2402.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2402.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	768	768	768	768	768	
5°	768	763	767	767	767	73
15°	732	733	746	751	754	206
25°	666	674	694	706	712	306
35°	577	593	624	644	654	361
45°	474	500	540	570	583	367
55°	365	397	445	484	501	326
65°	248	285	340	382	398	245
75°	128	168	220	258	268	135
85°	28	52	56	56	56	34
90°	0	0	0	0	0	



TEST NUMBER: P388466

CATALOG NUMBER: 24CZ2-30-SQR-UNV-L930-CD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	768.0	768.0	768.0	768.0	768.0
2.5°	771.1	765.6	768.0	768.0	764.8
5°	768.0	763.2	767.2	767.2	767.2
7.5°	762.4	758.4	764.8	766.4	766.4
10°	753.7	752.1	760.0	762.4	763.2
12.5°	744.2	743.4	754.5	757.6	760.0
15°	731.5	733.0	745.7	751.3	753.7
17.5°	718.0	721.1	735.4	743.4	745.7
20°	702.1	706.9	723.5	731.5	736.2
22.5°	684.7	691.8	709.2	718.8	724.3
25°	665.6	674.3	694.2	706.1	712.4
27.5°	645.0	656.1	679.1	692.6	698.9
30°	622.8	635.5	660.9	676.7	684.7
32.5°	599.8	614.8	642.6	660.1	669.6
35°	576.8	593.4	623.6	644.2	653.7
37.5°	553.8	570.4	603.7	625.9	637.8
40°	527.6	547.4	583.1	607.7	619.6
42.5°	502.2	523.6	561.7	588.7	601.4
45°	474.4	499.8	539.5	569.6	583.1
47.5°	449.0	474.4	517.3	549.0	564.1
50°	421.3	448.2	493.5	528.4	544.2
52.5°	394.3	422.1	469.7	506.9	522.8
55°	364.9	396.7	445.1	483.9	500.6
57.5°	335.6	369.7	419.7	460.1	476.8
60°	307.0	341.9	394.3	434.8	452.2
62.5°	278.5	313.4	368.1	409.4	426.0
65°	248.3	284.8	339.6	381.6	398.3
67.5°	218.2	256.2	311.0	353.0	368.9
70°	186.4	226.9	281.6	322.9	338.8
72.5°	157.1	197.5	251.5	292.0	307.0
75°	127.7	168.2	220.5	257.8	268.1
77.5°	99.2	139.6	186.4	211.0	213.4
80°	72.2	110.3	148.4	155.5	154.7
82.5°	48.4	82.5	102.3	103.1	105.5
85°	27.8	51.6	56.3	55.5	56.3
87.5°	11.1	18.2	15.9	11.9	11.9
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)