

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: METALUX

Report Number: P388634

Luminaire Tested: **24CZ2-40HE-SQR-UNV-L930-CD1-U**

Issue Date: 2/28/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P388634
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2002-678-2)
Test Lab: INNOVATION CENTER (G2)
Issue Date: 2/28/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 24CZ2-40HE-SQR-UNV-L930-CD1-U
Description: 2x4 CRUZE LED TROFFER WITH 3000K, 90 LEDS, AND SQUARE LENS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3192.5 lumens
Efficiency: N/A
Efficacy: 104.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.33 / 1.41
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 30.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P388634

CATALOG NUMBER: 24CZ2-40HE-SQR-UNV-L930-CD1-U

Luminous Intensity Polar Plot

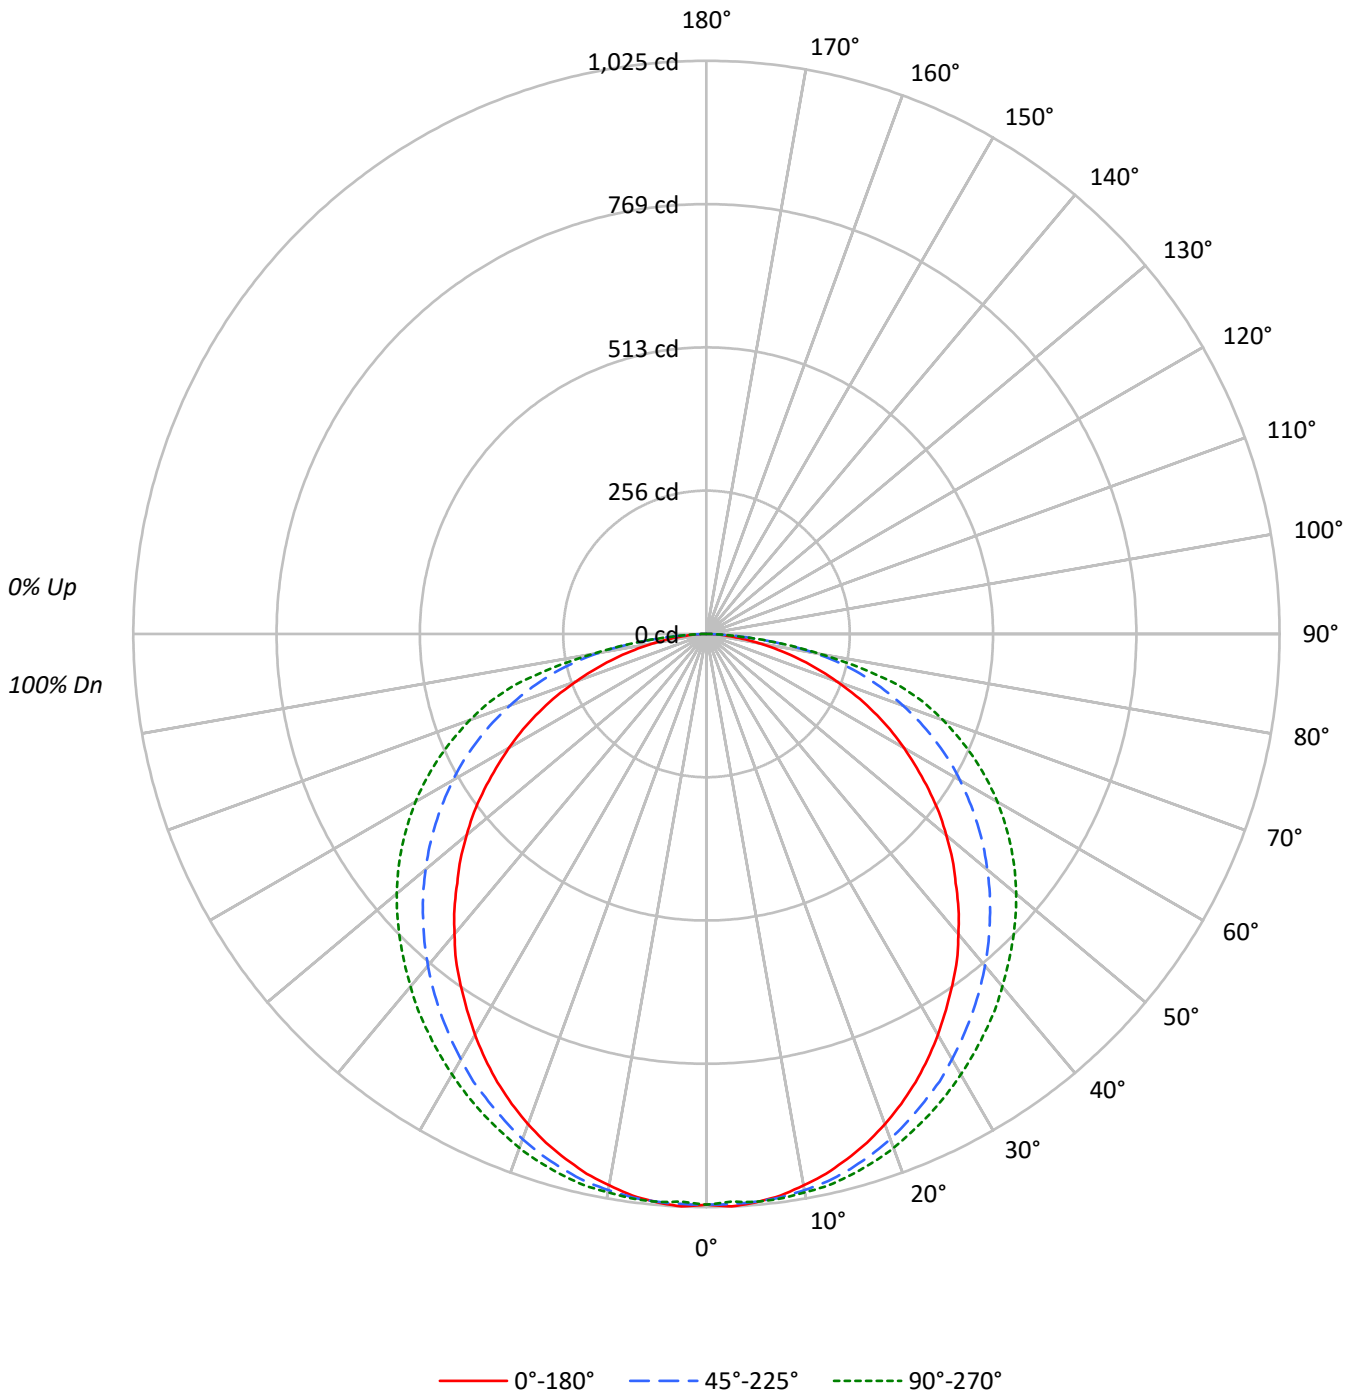



TEST NUMBER: P388634

CATALOG NUMBER: 24CZ2-40HE-SQR-UNV-L930-CD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89		92	89	87		89	86	84	82
2	98	89	81	75	95	87	80	74	83	78	73		80	75	71		77	73	69	67
3	89	77	69	62	86	76	68	61	73	66	60		70	64	59		67	62	58	56
4	81	68	59	52	78	67	58	52	64	57	51		62	55	50		60	54	49	47
5	74	61	51	44	72	60	51	44	57	50	44		55	49	43		54	48	43	41
6	68	55	45	39	66	54	45	38	52	44	38		50	43	38		48	42	37	35
7	63	49	40	34	62	49	40	34	47	39	34		45	39	33		44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30		42	35	30		40	34	30	28
9	55	41	33	27	54	41	33	27	39	32	27		38	32	27		37	31	27	25
10	52	38	30	25	50	37	30	24	36	29	24		36	29	24		35	29	24	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1373	1373	1373
5°	1378	1377	1377
10°	1368	1380	1386
15°	1354	1380	1395
20°	1336	1377	1401
25°	1313	1369	1405
30°	1286	1364	1413
35°	1259	1361	1427
40°	1231	1361	1446
45°	1200	1364	1474
50°	1172	1373	1514
55°	1137	1387	1560
60°	1098	1410	1617
65°	1051	1436	1685
70°	974	1472	1771
75°	882	1524	1852
80°	743	1527	1593
85°	570	1155	1155



TEST NUMBER: P388634

CATALOG NUMBER: 24CZ2-40HE-SQR-UNV-L930-CD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.9	3.0
10°-20°	278.7	8.7
20°-30°	423.3	13.3
30°-40°	514.9	16.1
40°-50°	548.2	17.2
50°-60°	522.1	16.4
60°-70°	436.7	13.7
70°-80°	291.1	9.1
80°-90°	80.5	2.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	798.9	25.0
0°-40°	1313.8	41.2
0°-60°	2384.1	74.7
0°-90°	3192.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3192.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1020	1020	1020	1020	1020	
5°	1020	1014	1019	1019	1019	97
15°	972	974	991	998	1002	274
25°	884	896	922	938	947	407
35°	766	789	829	856	869	480
45°	630	664	717	757	775	487
55°	485	527	591	643	665	433
65°	330	378	451	507	529	326
75°	170	224	293	343	356	180
85°	37	68	75	74	75	45
90°	0	0	0	0	0	



TEST NUMBER: P388634

CATALOG NUMBER: 24CZ2-40HE-SQR-UNV-L930-CD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1020.5	1020.5	1020.5	1020.5	1020.5
2.5°	1024.7	1017.3	1020.5	1020.5	1016.3
5°	1020.5	1014.2	1019.4	1019.4	1019.4
7.5°	1013.1	1007.8	1016.3	1018.4	1018.4
10°	1001.5	999.4	1009.9	1013.1	1014.2
12.5°	988.9	987.8	1002.6	1006.8	1009.9
15°	972.0	974.1	991.0	998.3	1001.5
17.5°	954.1	958.3	977.3	987.8	991.0
20°	933.0	939.3	961.4	972.0	978.3
22.5°	909.8	919.3	942.5	955.1	962.5
25°	884.5	896.1	922.4	938.2	946.7
27.5°	857.1	871.8	902.4	920.3	928.8
30°	827.6	844.4	878.2	899.2	909.8
32.5°	797.0	817.0	853.9	877.1	889.8
35°	766.4	788.6	828.6	856.0	868.7
37.5°	735.8	758.0	802.3	831.8	847.6
40°	701.1	727.4	774.8	807.5	823.3
42.5°	667.3	695.8	746.4	782.2	799.1
45°	630.4	664.2	716.9	756.9	774.8
47.5°	596.7	630.4	687.3	729.5	749.5
50°	559.8	595.6	655.7	702.1	723.2
52.5°	523.9	560.8	624.1	673.6	694.7
55°	484.9	527.1	591.4	643.1	665.2
57.5°	445.9	491.3	557.7	611.4	633.6
60°	408.0	454.4	523.9	577.7	600.9
62.5°	370.0	416.4	489.2	544.0	566.1
65°	330.0	378.5	451.2	507.1	529.2
67.5°	289.9	340.5	413.3	469.1	490.2
70°	247.7	301.5	374.2	429.1	450.1
72.5°	208.7	262.5	334.2	388.0	408.0
75°	169.7	223.5	293.1	342.6	356.3
77.5°	131.8	185.5	247.7	280.4	283.6
80°	95.9	146.5	197.1	206.6	205.6
82.5°	64.3	109.6	136.0	137.0	140.2
85°	36.9	68.5	74.8	73.8	74.8
87.5°	14.8	24.2	21.1	15.8	15.8
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)