

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: METALUX

Report Number: P388859

Luminaire Tested: **24CZ2-55HE-SQR-UNV-L950-CD1-U**

Issue Date: 2/28/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P388859  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2002-678-2)  
Test Lab: INNOVATION CENTER (G2)  
Issue Date: 2/28/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: METALUX  
Catalog Number: 24CZ2-55HE-SQR-UNV-L950-CD1-U  
Description: 2x4 CRUZE LED TROFFER WITH 5000K, 90 LEDS, AND SQUARE LENS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4845.0 lumens  
Efficiency: N/A  
Efficacy: 111.4 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.33 / 1.41  
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')  
CIE Type: Direct


Input Watts (W): 43.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P388859

CATALOG NUMBER: 24CZ2-55HE-SQR-UNV-L950-CD1-U

### Luminous Intensity Polar Plot

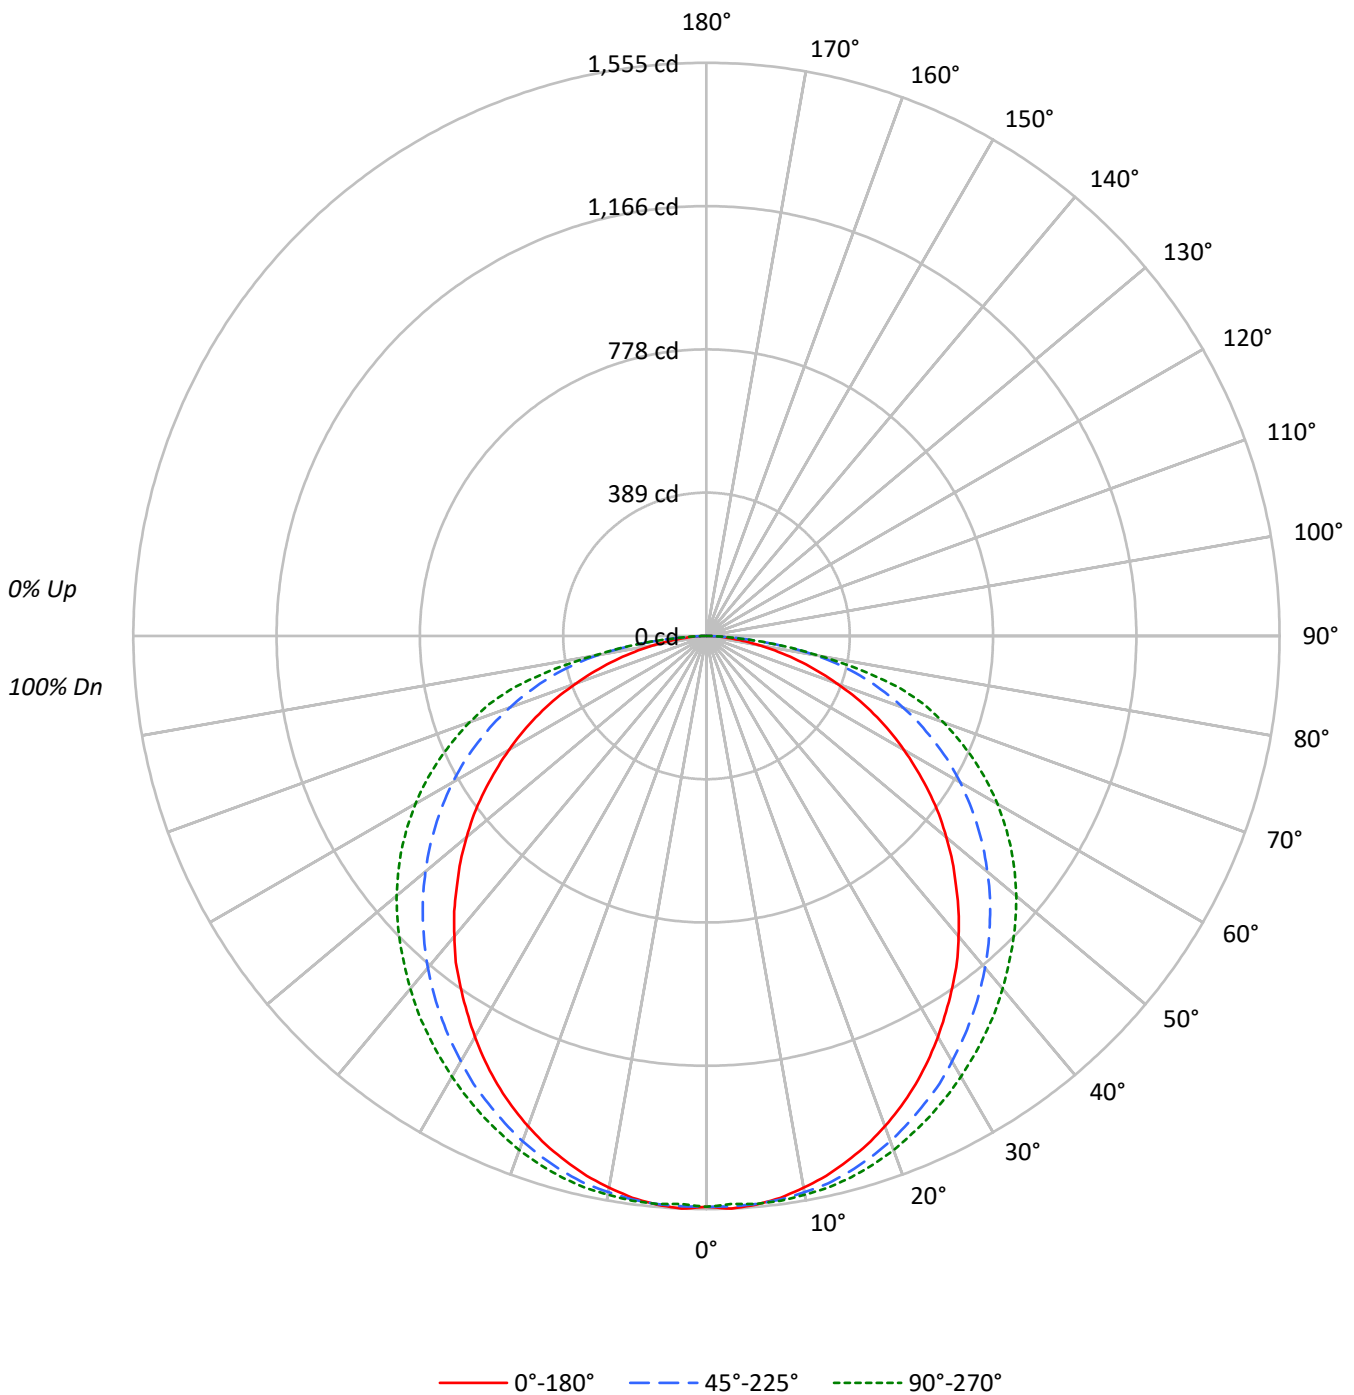



TEST NUMBER: P388859

CATALOG NUMBER: 24CZ2-55HE-SQR-UNV-L950-CD1-U

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89		92	89	87		89	86	84	82
2	98	89	81	75	95	87	80	74	83	78	73		80	75	71		77	73	69	67
3	89	77	69	62	86	76	68	61	73	66	60		70	64	59		67	62	58	56
4	81	68	59	52	78	67	58	52	64	57	51		62	55	50		60	54	49	47
5	74	61	51	44	72	60	51	44	57	50	44		55	49	43		54	48	43	41
6	68	55	45	39	66	54	45	38	52	44	38		50	43	38		48	42	37	35
7	63	49	40	34	62	49	40	34	47	39	34		45	39	33		44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30		42	35	30		40	34	30	28
9	55	41	33	27	54	41	33	27	39	32	27		38	32	27		37	31	27	25
10	52	38	30	25	50	37	30	24	36	29	24		36	29	24		35	29	24	22

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2084	2084	2084
5°	2092	2090	2090
10°	2077	2094	2103
15°	2055	2095	2117
20°	2027	2089	2126
25°	1993	2078	2133
30°	1951	2071	2145
35°	1910	2065	2165
40°	1869	2065	2195
45°	1820	2070	2238
50°	1778	2083	2297
55°	1727	2105	2368
60°	1666	2140	2454
65°	1594	2180	2557
70°	1479	2234	2688
75°	1339	2312	2811
80°	1128	2318	2417
85°	865	1754	1754



TEST NUMBER: P388859

CATALOG NUMBER: 24CZ2-55HE-SQR-UNV-L950-CD1-U

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	147.0	3.0
10°-20°	423.0	8.7
20°-30°	642.4	13.3
30°-40°	781.4	16.1
40°-50°	832.0	17.2
50°-60°	792.4	16.4
60°-70°	662.7	13.7
70°-80°	441.9	9.1
80°-90°	122.3	2.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1212.4	25.0
0°-40°	1993.8	41.2
0°-60°	3618.2	74.7
0°-90°	4845.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4845.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1549	1549	1549	1549	1549	
5°	1549	1539	1547	1547	1547	147
15°	1475	1478	1504	1515	1520	416
25°	1342	1360	1400	1424	1437	618
35°	1163	1197	1258	1299	1318	728
45°	957	1008	1088	1149	1176	740
55°	736	800	898	976	1010	658
65°	501	574	685	770	803	495
75°	258	339	445	520	541	273
85°	56	104	114	112	114	68
90°	0	0	0	0	0	



TEST NUMBER: P388859

CATALOG NUMBER: 24CZ2-55HE-SQR-UNV-L950-CD1-U

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1548.7	1548.7	1548.7	1548.7	1548.7
2.5°	1555.1	1543.9	1548.7	1548.7	1542.3
5°	1548.7	1539.1	1547.1	1547.1	1547.1
7.5°	1537.5	1529.5	1542.3	1545.5	1545.5
10°	1519.9	1516.7	1532.7	1537.5	1539.1
12.5°	1500.7	1499.1	1521.5	1527.9	1532.7
15°	1475.1	1478.3	1503.9	1515.1	1519.9
17.5°	1447.9	1454.3	1483.1	1499.1	1503.9
20°	1415.9	1425.5	1459.1	1475.1	1484.7
22.5°	1380.7	1395.1	1430.3	1449.5	1460.7
25°	1342.3	1359.9	1399.9	1423.9	1436.7
27.5°	1300.7	1323.1	1369.5	1396.7	1409.5
30°	1255.9	1281.5	1332.7	1364.7	1380.7
32.5°	1209.5	1239.9	1295.9	1331.1	1350.3
35°	1163.1	1196.7	1257.5	1299.1	1318.3
37.5°	1116.7	1150.3	1217.5	1262.3	1286.3
40°	1063.9	1103.9	1175.9	1225.5	1249.5
42.5°	1012.7	1055.9	1132.7	1187.1	1212.7
45°	956.7	1007.9	1087.9	1148.7	1175.9
47.5°	905.5	956.7	1043.1	1107.1	1137.5
50°	849.5	903.9	995.1	1065.5	1097.5
52.5°	795.1	851.1	947.1	1022.3	1054.3
55°	736.0	799.9	897.5	975.9	1009.5
57.5°	676.8	745.6	846.3	927.9	961.5
60°	619.2	689.6	795.1	876.7	911.9
62.5°	561.6	632.0	742.4	825.5	859.1
65°	500.8	574.4	684.8	769.5	803.1
67.5°	440.0	516.8	627.2	712.0	744.0
70°	376.0	457.6	568.0	651.2	683.2
72.5°	316.8	398.4	507.2	588.8	619.2
75°	257.6	339.2	444.8	520.0	540.8
77.5°	200.0	281.6	376.0	425.6	430.4
80°	145.6	222.4	299.2	313.6	312.0
82.5°	97.6	166.4	206.4	208.0	212.8
85°	56.0	104.0	113.6	112.0	113.6
87.5°	22.4	36.8	32.0	24.0	24.0
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)