

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P219129

Luminaire Tested: **24GR-LD5-30-A-UNV-L950-CD1-U**

Issue Date: 3/12/2020

Test Information

Test Method: LM-79-08
Report Number: P219129
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P33306)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/12/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: 24GR-LD5-30-A-UNV-L950-CD1-U
Description: METALUX GR 2X4 LED TROFFER WITH A LENS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2878.1 lumens
Efficiency: N/A
Efficacy: 122.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.2 / 1.26
Luminous Opening: Rectangular (W 1.83' x L: 3.83' x H: 0')
CIE Type: Direct


Input Watts (W): 23.434
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219129

CATALOG NUMBER: 24GR-LD5-30-A-UNV-L950-CD1-U

Luminous Intensity Polar Plot

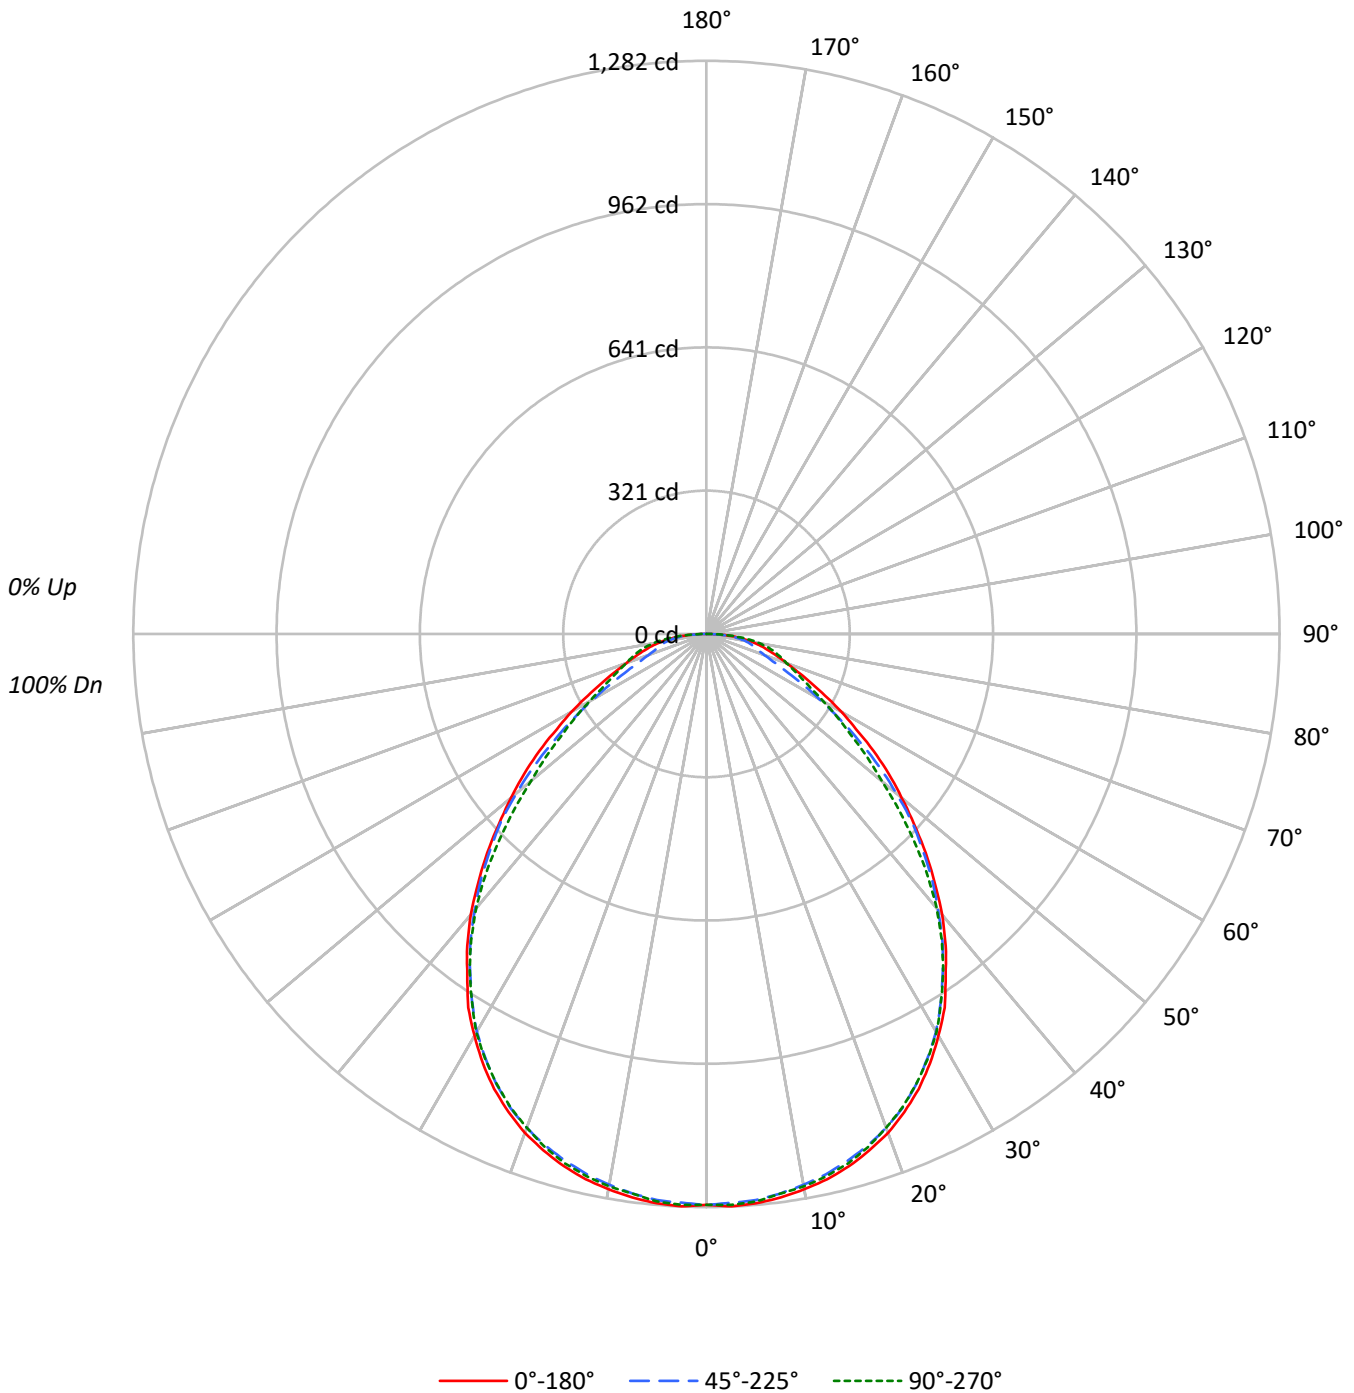



TEST NUMBER: P219129

CATALOG NUMBER: 24GR-LD5-30-A-UNV-L950-CD1-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	105	101	98	107	103	99	96	99	96	93	95	93	90	91	89	88	86
2	101	93	87	82	98	91	86	81	88	83	79	85	81	77	82	78	75	73
3	93	83	75	69	90	81	74	69	79	73	68	76	71	67	73	69	65	63
4	86	74	66	60	83	73	65	60	71	64	59	68	63	58	66	61	57	55
5	79	67	59	53	77	66	58	52	64	57	52	62	56	51	60	55	51	49
6	73	61	53	46	72	60	52	46	58	51	46	57	50	45	55	49	45	43
7	68	56	47	42	67	55	47	41	53	46	41	52	46	41	51	45	41	39
8	64	51	43	37	62	50	43	37	49	42	37	48	41	37	47	41	37	35
9	60	47	39	34	58	46	39	34	45	38	34	44	38	33	43	38	33	32
10	56	44	36	31	55	43	36	31	42	35	31	41	35	31	40	35	30	29

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1956	1956	1956
5°	1965	1954	1959
10°	1962	1946	1951
15°	1954	1934	1943
20°	1936	1916	1915
25°	1898	1878	1876
30°	1835	1816	1820
35°	1743	1723	1726
40°	1639	1611	1601
45°	1502	1482	1424
50°	1358	1321	1222
55°	1219	1110	1053
60°	1068	894	926
65°	931	702	852
70°	852	614	852
75°	853	653	939
80°	925	769	1071
85°	1016	866	1148



TEST NUMBER: P219129

CATALOG NUMBER: 24GR-LD5-30-A-UNV-L950-CD1-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.9	4.2
10°-20°	345.1	12.0
20°-30°	511.7	17.8
30°-40°	577.3	20.1
40°-50°	522.8	18.2
50°-60°	377.2	13.1
60°-70°	225.2	7.8
70°-80°	139.2	4.8
80°-90°	58.6	2.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	977.7	34.0
0°-40°	1555.0	54.0
0°-60°	2455.0	85.3
0°-90°	2878.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2878.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1277	1277	1277	1277	1277	
5°	1278	1276	1271	1270	1274	121
15°	1232	1225	1220	1220	1225	347
25°	1123	1117	1111	1107	1110	516
35°	932	931	922	922	923	583
45°	694	689	684	667	657	535
55°	457	442	416	395	394	408
65°	257	226	194	220	235	259
75°	144	125	110	137	159	154
85°	58	51	49	64	65	60
90°	0	0	0	0	0	



TEST NUMBER: P219129

CATALOG NUMBER: 24GR-LD5-30-A-UNV-L950-CD1-U

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1277.0	1277.0	1277.0	1277.0	1277.0
2.5°	1281.5	1277.9	1273.5	1276.1	1278.3
5°	1278.3	1276.5	1271.2	1269.9	1274.3
7.5°	1271.6	1267.2	1262.4	1264.5	1262.7
10°	1261.4	1257.4	1251.2	1251.6	1254.7
12.5°	1249.0	1244.1	1237.4	1239.1	1241.9
15°	1232.5	1225.0	1220.0	1220.5	1225.4
17.5°	1211.6	1205.8	1199.7	1200.9	1203.2
20°	1187.6	1184.5	1175.6	1172.9	1175.2
22.5°	1157.3	1151.6	1146.7	1145.3	1145.8
25°	1123.1	1116.9	1111.1	1107.1	1110.2
27.5°	1083.1	1077.8	1070.3	1068.9	1071.5
30°	1037.8	1033.8	1027.1	1025.3	1029.3
32.5°	991.5	984.9	975.5	975.5	976.4
35°	932.4	931.0	921.7	922.2	923.0
37.5°	879.1	872.8	867.5	862.1	864.8
40°	819.9	812.8	805.7	802.1	800.8
42.5°	756.3	751.0	747.8	735.0	731.8
45°	693.6	689.1	684.3	667.4	657.2
47.5°	629.6	628.7	624.7	595.0	584.7
50°	570.0	568.7	554.5	522.9	512.7
52.5°	513.5	504.7	485.9	454.8	453.1
55°	456.6	442.4	415.7	395.3	394.4
57.5°	396.6	379.7	352.6	341.4	347.3
60°	348.6	322.8	291.7	293.0	302.4
62.5°	298.8	269.9	239.2	252.5	263.6
65°	257.0	226.3	193.8	220.1	235.2
67.5°	220.5	192.1	161.0	196.1	210.8
70°	190.3	167.2	137.0	173.8	190.3
72.5°	166.3	145.0	121.4	156.1	175.2
75°	144.1	124.9	110.3	137.4	158.7
77.5°	124.9	106.3	99.6	121.4	142.3
80°	104.9	88.0	87.2	105.8	121.4
82.5°	81.8	70.3	70.3	88.5	97.8
85°	57.8	50.7	49.3	64.4	65.3
87.5°	29.8	28.5	25.8	33.8	33.8
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)