

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P510794

Luminaire Tested: **CTN-CA8-330-740-U-T5R**

Issue Date: 4/6/2021

Test Information

Test Method: LM-79-08
Report Number: P510794
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-151-14)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 4/6/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: CTN-CA8-330-740-U-T5R
Description: CELESTEON HIGH MAST LUMINAIRE
Light Source: (8) 4000K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 52385 lumens
Efficiency: N/A
Efficacy: 158.0 lumens/watt
Luminous Opening: Circular (Dia: 2.08' x H: 0')
IES Classification: Type V - Short
BUG Rating: B5 - U0 - G5


Input Watts (W): 331.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P510794
 CATALOG NUMBER: CTN-CA8-330-740-U-T5R

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

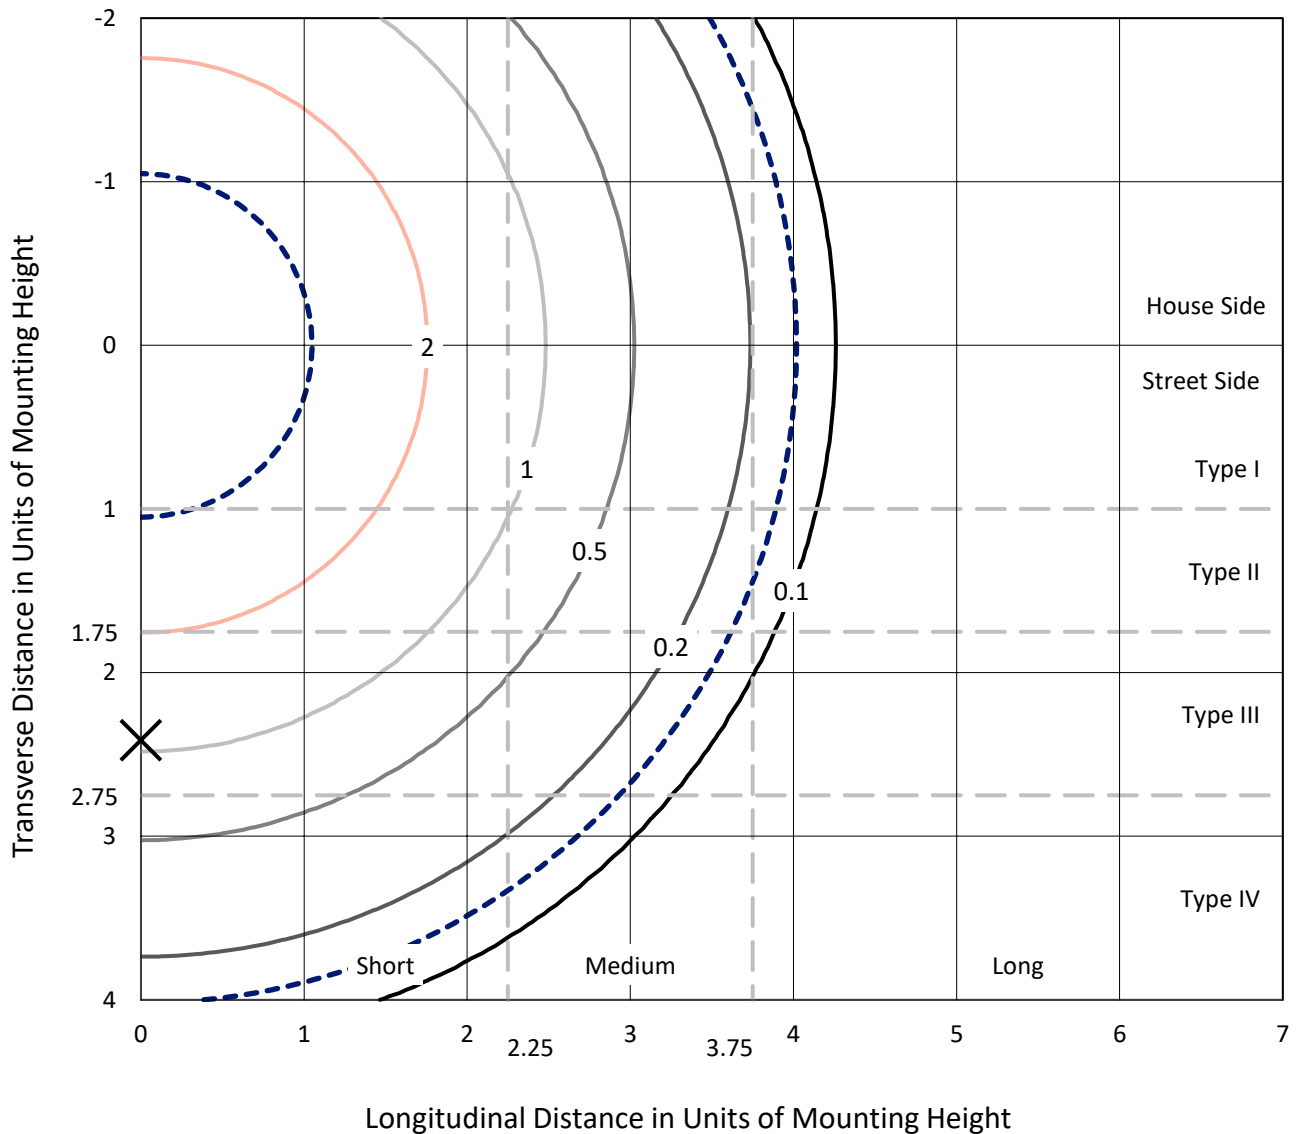

Based on 30 foot mounting height. Maximum calculated value = 4.3 fc
 Type V - Short - N/A

REPORT NUMBER: P510794
CATALOG NUMBER: CTN-CA8-330-740-U-T5R

Luminous Intensity Polar Plot

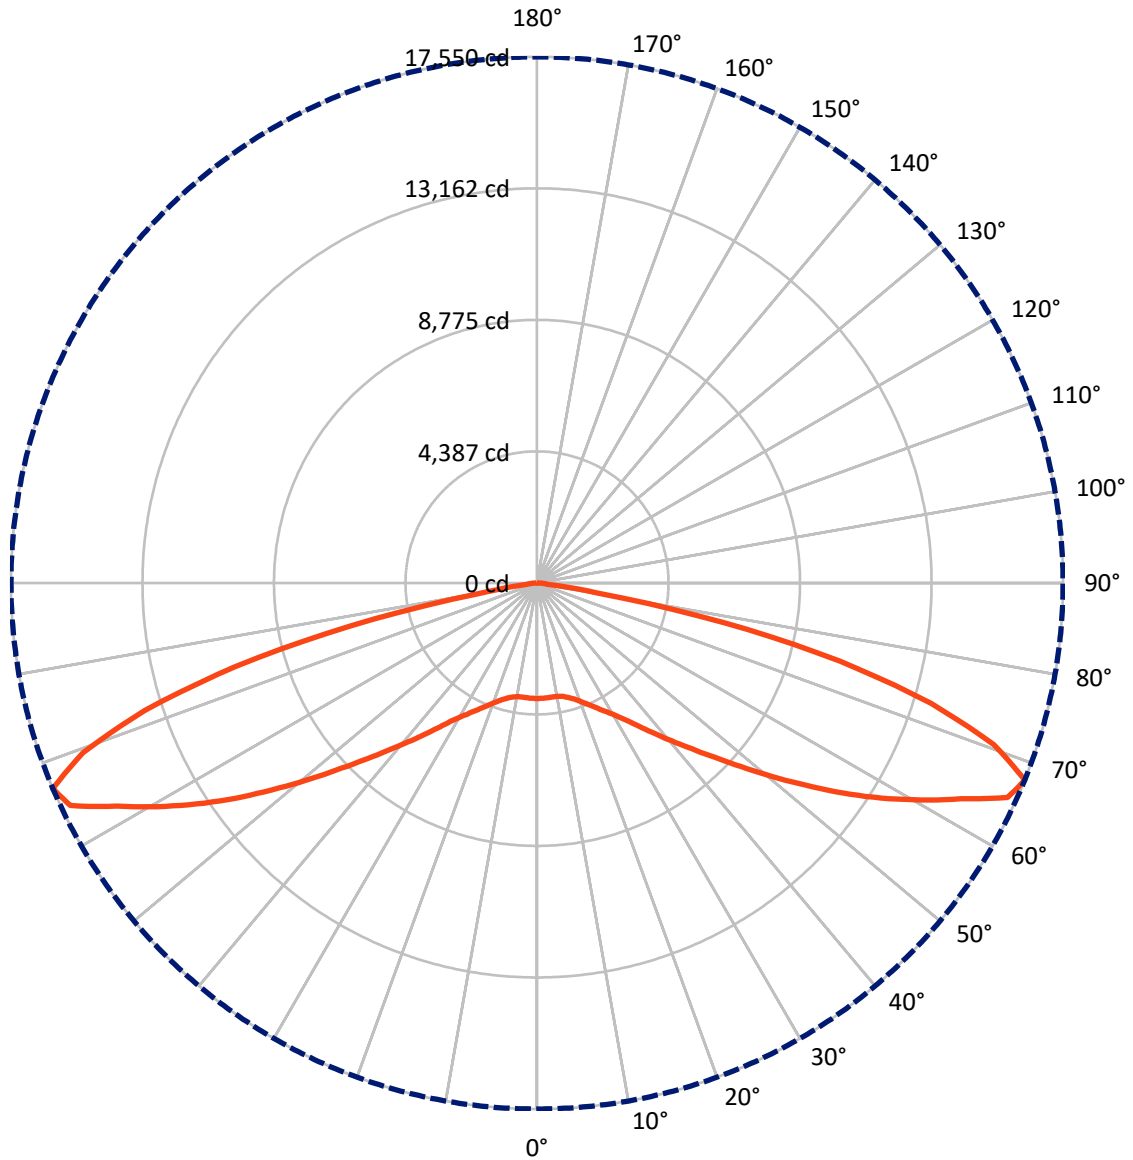

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P510794
 CATALOG NUMBER: CTN-CA8-330-740-U-T5R


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	26192.5	0.0	26192.5
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	26192.5	0.0	26192.5
	% Fixture	50.0	0.0	50.0
Total	Lumens	52385.0	0.0	52385.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	367.1	0.7
10°-20°	1137.5	2.2
20°-30°	2158.7	4.1
30°-40°	3749.4	7.2
40°-50°	6526.1	12.5
50°-60°	11149.1	21.3
60°-70°	16419.4	31.3
70°-80°	10437.5	19.9
80°-90°	440.2	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	52385.0	100.0
0°-180°	52385.0	100.0

Coefficient of Utilization

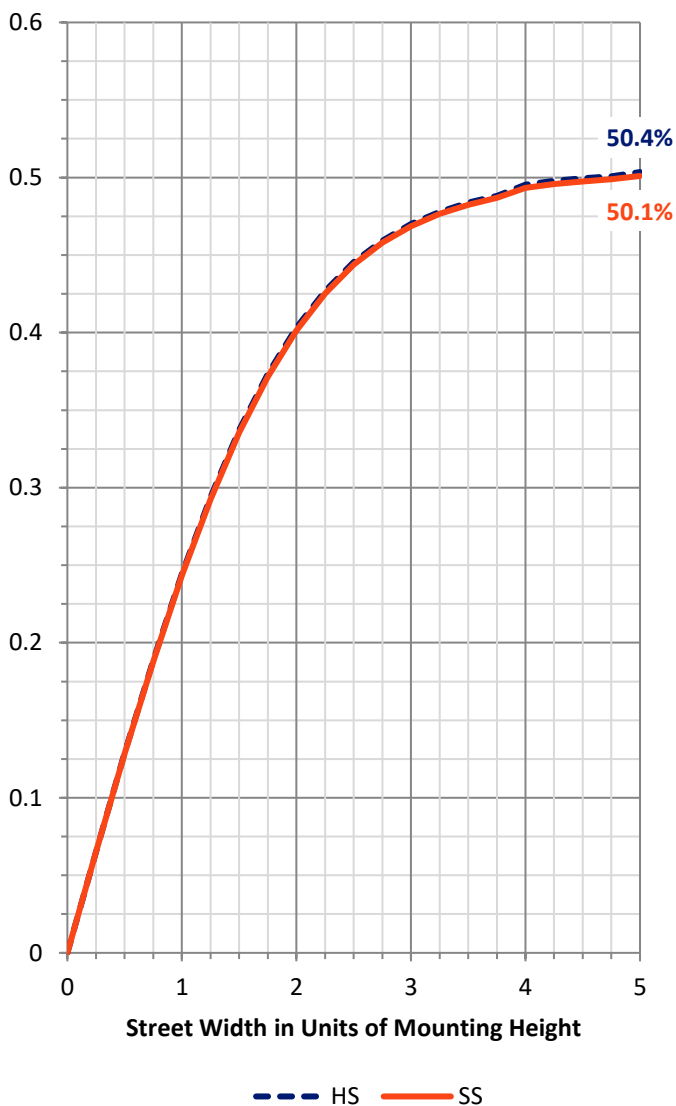


REPORT NUMBER: P510794
 CATALOG NUMBER: CTN-CA8-330-740-U-T5R

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	1831.7	3.5			
FM (30°-60°)	10712.3	20.4			
FH (60°-80°)	13428.4	25.6			G5
FVH (80°-90°)	220.1	0.4			G2/225
BL (0°-30°)	1831.7	3.5	B3/2500		
BM (30°-60°)	10712.3	20.4	B5		
BH (60°-80°)	13428.4	25.6	B5		G5
BVH (80°-90°)	220.1	0.4			G2/225
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G5
 Type V Short

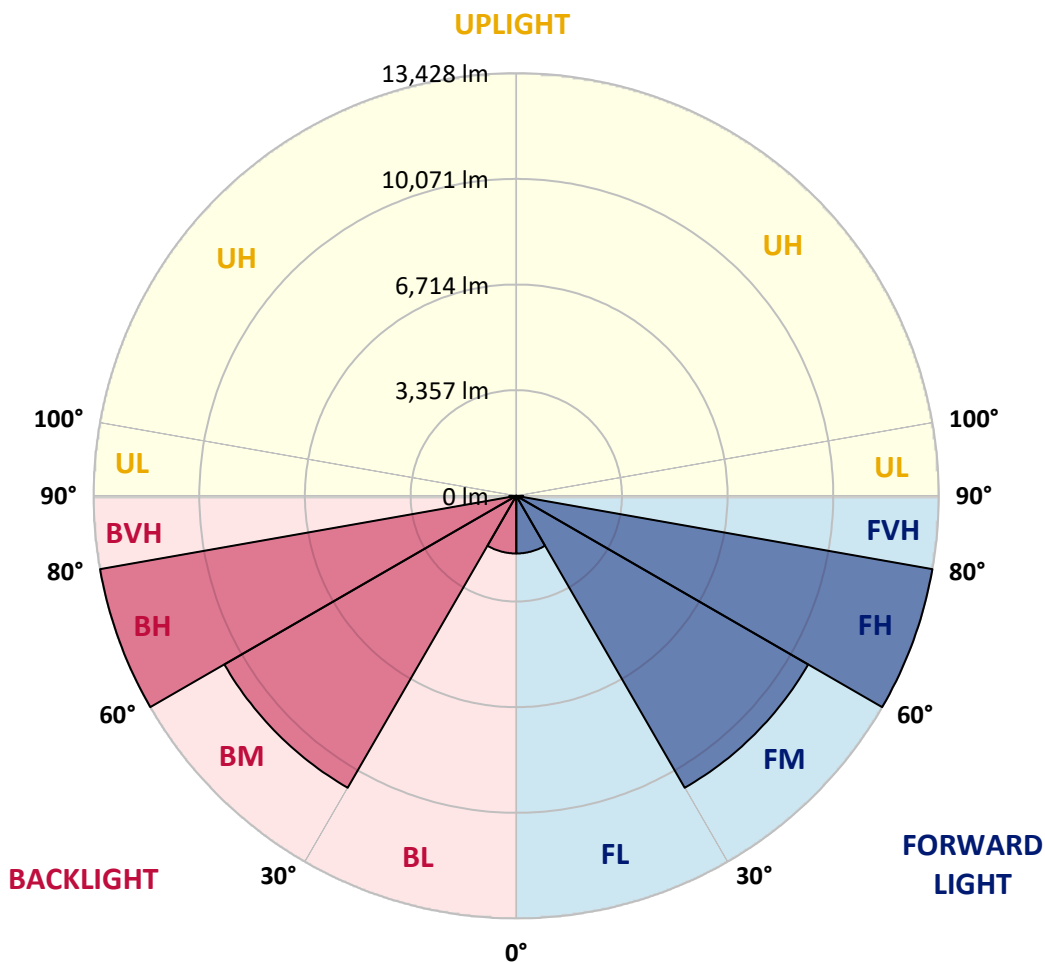

REPORT NUMBER: P510794
CATALOG NUMBER: CTN-CA8-330-740-U-T5R

CANDELA DISTRIBUTION (FULL):

0°	
0°	3853.2
2.5°	3854.2
5°	3846.6
7.5°	3840.2
10°	3846.7
12.5°	3888.0
15°	3967.7
17.5°	4079.3
20°	4230.7
22.5°	4409.5
25°	4620.1
27.5°	4848.5
30°	5117.0
32.5°	5446.9
35°	5880.2
37.5°	6378.9
40°	6933.1
42.5°	7556.0
45°	8295.2
47.5°	9147.8
50°	10135.2
52.5°	11201.7
55°	12371.7
57.5°	13540.2
60°	14702.2
62.5°	15867.6
65°	17255.0
67.5°	17549.7
70°	16168.4
72.5°	13752.0
75°	10441.0
77.5°	6383.2
80°	2026.0
82.5°	343.9
85°	194.3
87.5°	70.3
90°	0.0

(END OF REPORT)