

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P510684

Luminaire Tested: **CTN-CA6-230-750-U-T5R**

Issue Date: 4/6/2021

Test Information

Test Method: LM-79-08
Report Number: P510684
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-151-14)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 4/6/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: CTN-CA6-230-750-U-T5R
Description: CELESTEON HIGH MAST LUMINAIRE
Light Source: (6) 5000K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 37550 lumens
Efficiency: N/A
Efficacy: 164.8 lumens/watt
Luminous Opening: Circular (Dia: 2.08' x H: 0')
IES Classification: Type V - Short
BUG Rating: B5 - U0 - G4


Input Watts (W): 227.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P510684
 CATALOG NUMBER: CTN-CA6-230-750-U-T5R

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

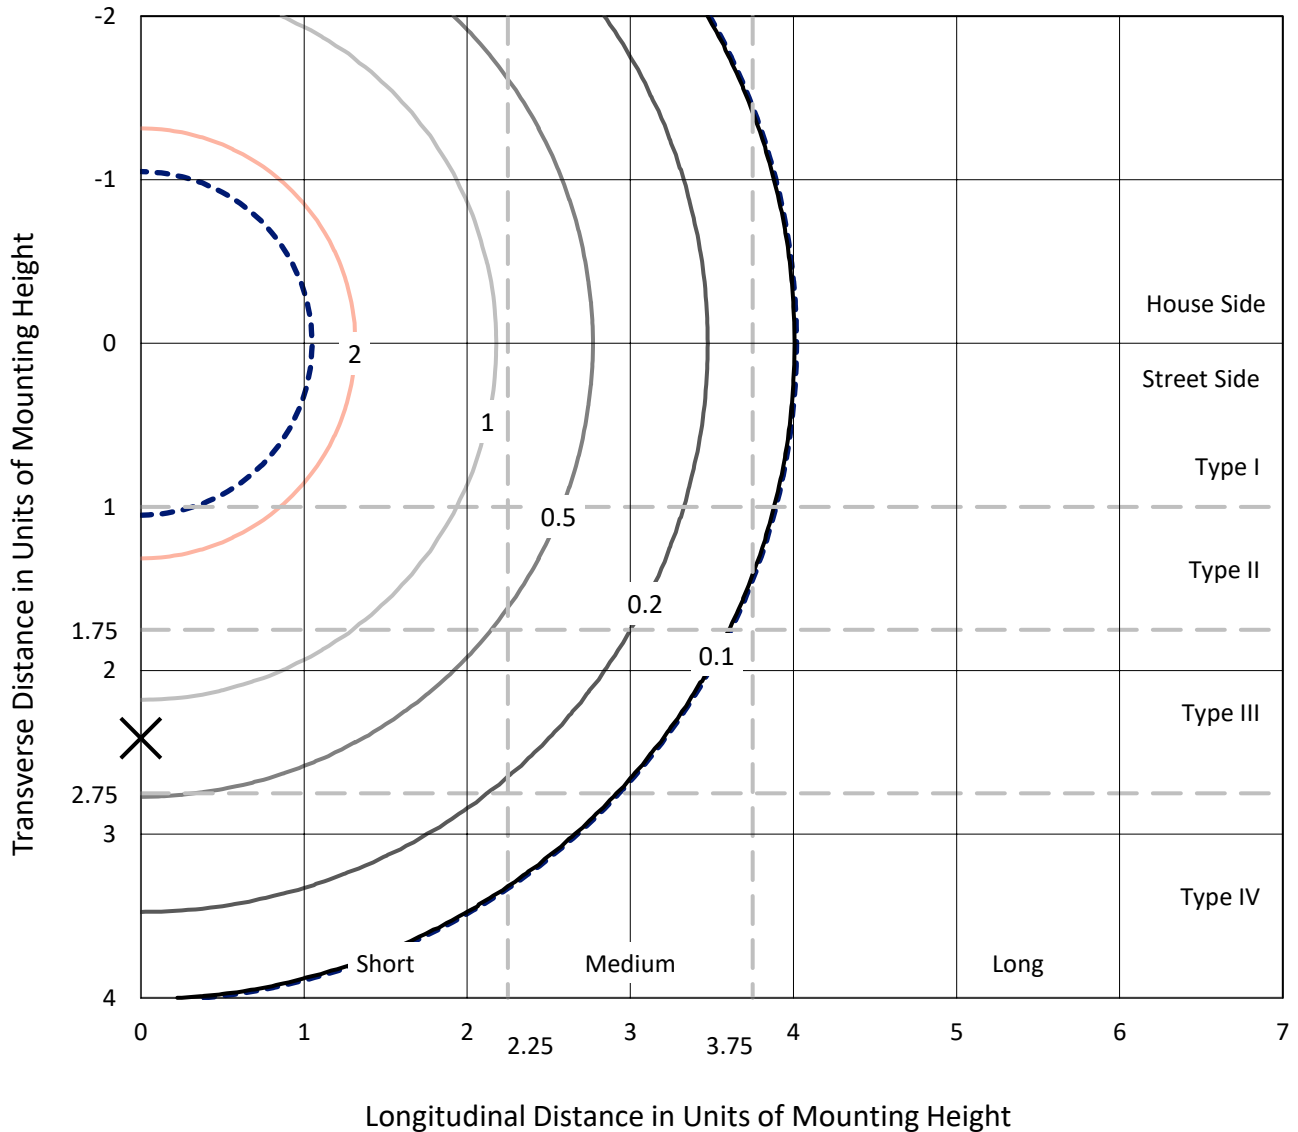

Based on 30 foot mounting height. Maximum calculated value = 3.1 fc
 Type V - Short - N/A

REPORT NUMBER: P510684
CATALOG NUMBER: CTN-CA6-230-750-U-T5R

Luminous Intensity Polar Plot

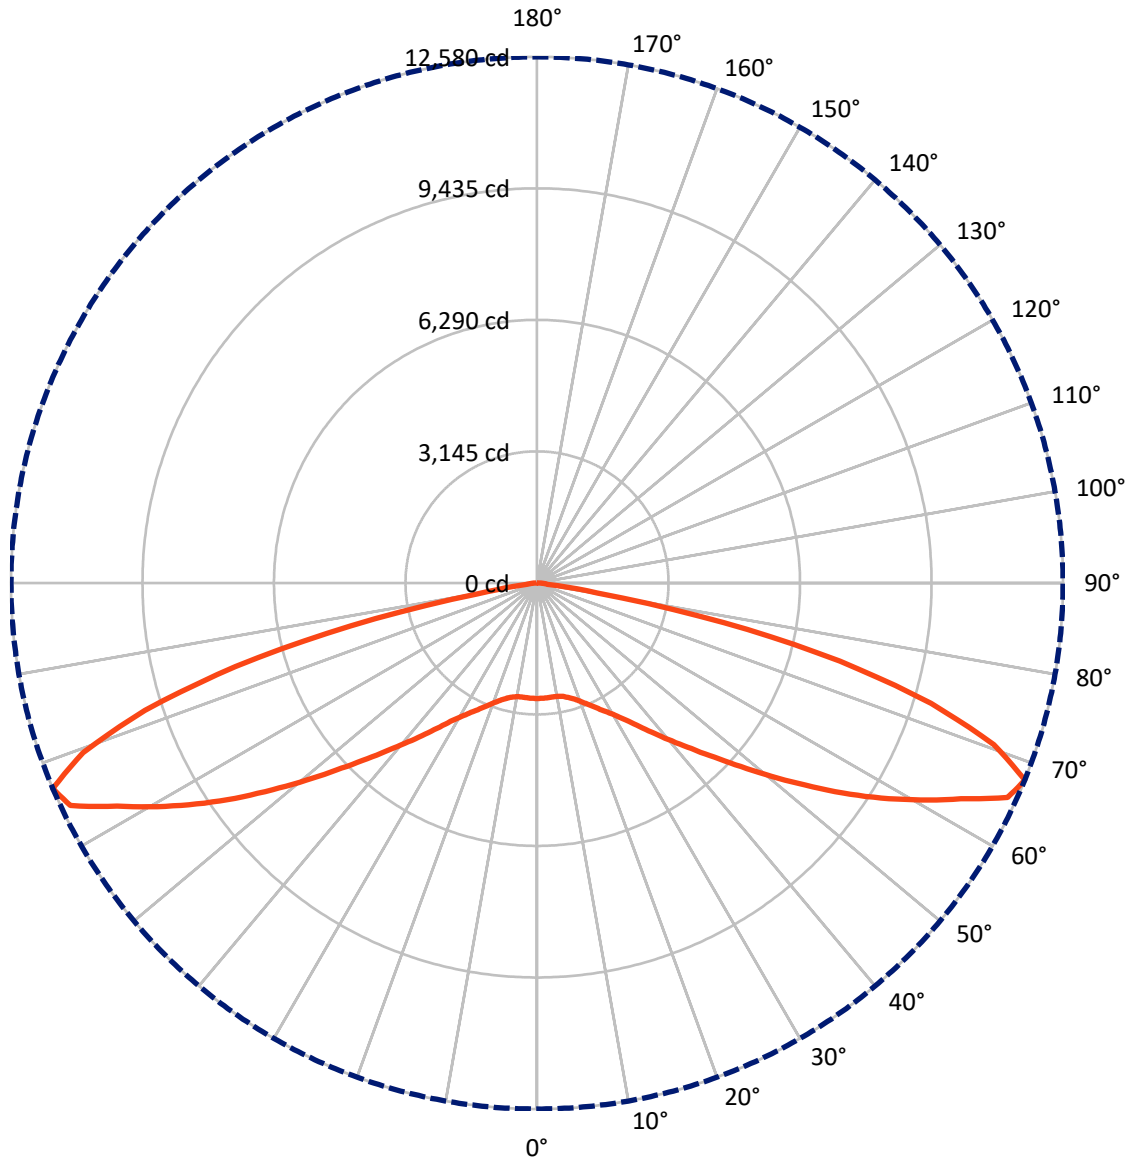

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P510684
 CATALOG NUMBER: CTN-CA6-230-750-U-T5R


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	18775.0	0.0	18775.0
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	18775.0	0.0	18775.0
	% Fixture	50.0	0.0	50.0
Total	Lumens	37550.0	0.0	37550.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	263.1	0.7
10°-20°	815.4	2.2
20°-30°	1547.4	4.1
30°-40°	2687.6	7.2
40°-50°	4678.0	12.5
50°-60°	7991.8	21.3
60°-70°	11769.5	31.3
70°-80°	7481.7	19.9
80°-90°	315.6	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	37550.0	100.0
0°-180°	37550.0	100.0

Coefficient of Utilization

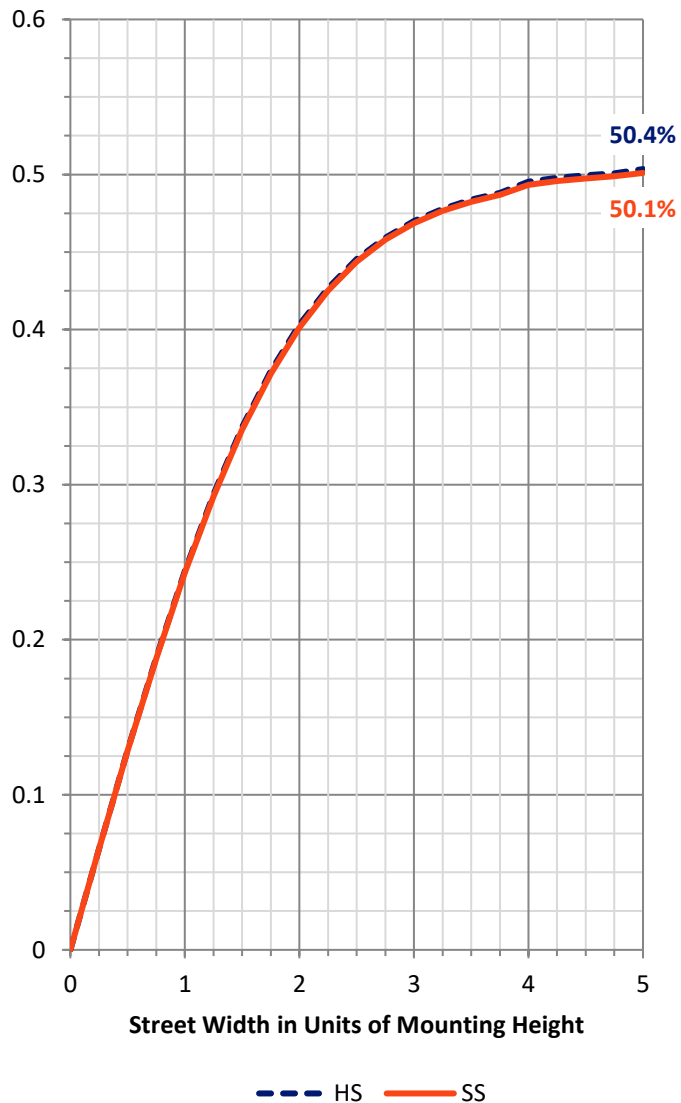


REPORT NUMBER: P510684
 CATALOG NUMBER: CTN-CA6-230-750-U-T5R

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	1312.9	3.5			
FM (30°-60°)	7678.7	20.4			
FH (60°-80°)	9625.6	25.6			G4/12000
FVH (80°-90°)	157.8	0.4			G2/225
BL (0°-30°)	1312.9	3.5	B3/2500		
BM (30°-60°)	7678.7	20.4	B4/8500		
BH (60°-80°)	9625.6	25.6	B5		G4/12000
BVH (80°-90°)	157.8	0.4			G2/225
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G4
 Type V Short

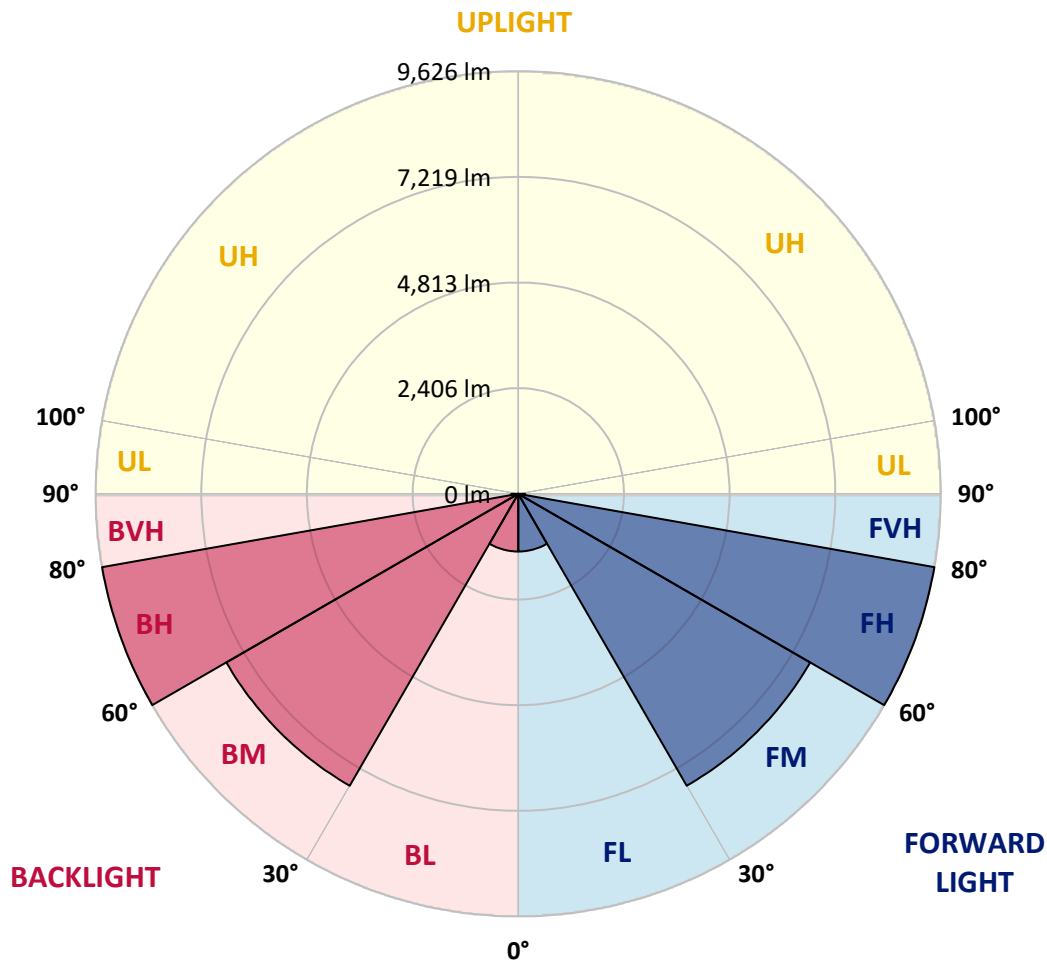



REPORT NUMBER: P510684
CATALOG NUMBER: CTN-CA6-230-750-U-T5R

CANDELA DISTRIBUTION (FULL):

0°	
0°	2762.0
2.5°	2762.7
5°	2757.3
7.5°	2752.7
10°	2757.3
12.5°	2787.0
15°	2844.1
17.5°	2924.0
20°	3032.6
22.5°	3160.7
25°	3311.8
27.5°	3475.4
30°	3667.9
32.5°	3904.4
35°	4214.9
37.5°	4572.4
40°	4969.7
42.5°	5416.2
45°	5946.1
47.5°	6557.2
50°	7265.0
52.5°	8029.5
55°	8868.2
57.5°	9705.7
60°	10538.6
62.5°	11374.0
65°	12368.5
67.5°	12579.8
70°	11589.7
72.5°	9857.6
75°	7484.2
77.5°	4575.6
80°	1452.3
82.5°	246.5
85°	139.3
87.5°	50.4
90°	0.0

(END OF REPORT)