

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P510454

Luminaire Tested: **CTN-CA10-210-760-U-T5R**

Issue Date: 4/6/2021

Test Information

Test Method: LM-79-08
Report Number: P510454
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-151-14)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 4/6/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: CTN-CA10-210-760-U-T5R
Description: CELESTEON HIGH MAST LUMINAIRE
Light Source: (10) 5700K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 37231 lumens
Efficiency: N/A
Efficacy: 174.9 lumens/watt
Luminous Opening: Circular (Dia: 2.08' x H: 0')
IES Classification: Type V - Short
BUG Rating: B5 - U0 - G4


Input Watts (W): 212.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P510454
 CATALOG NUMBER: CTN-CA10-210-760-U-T5R

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

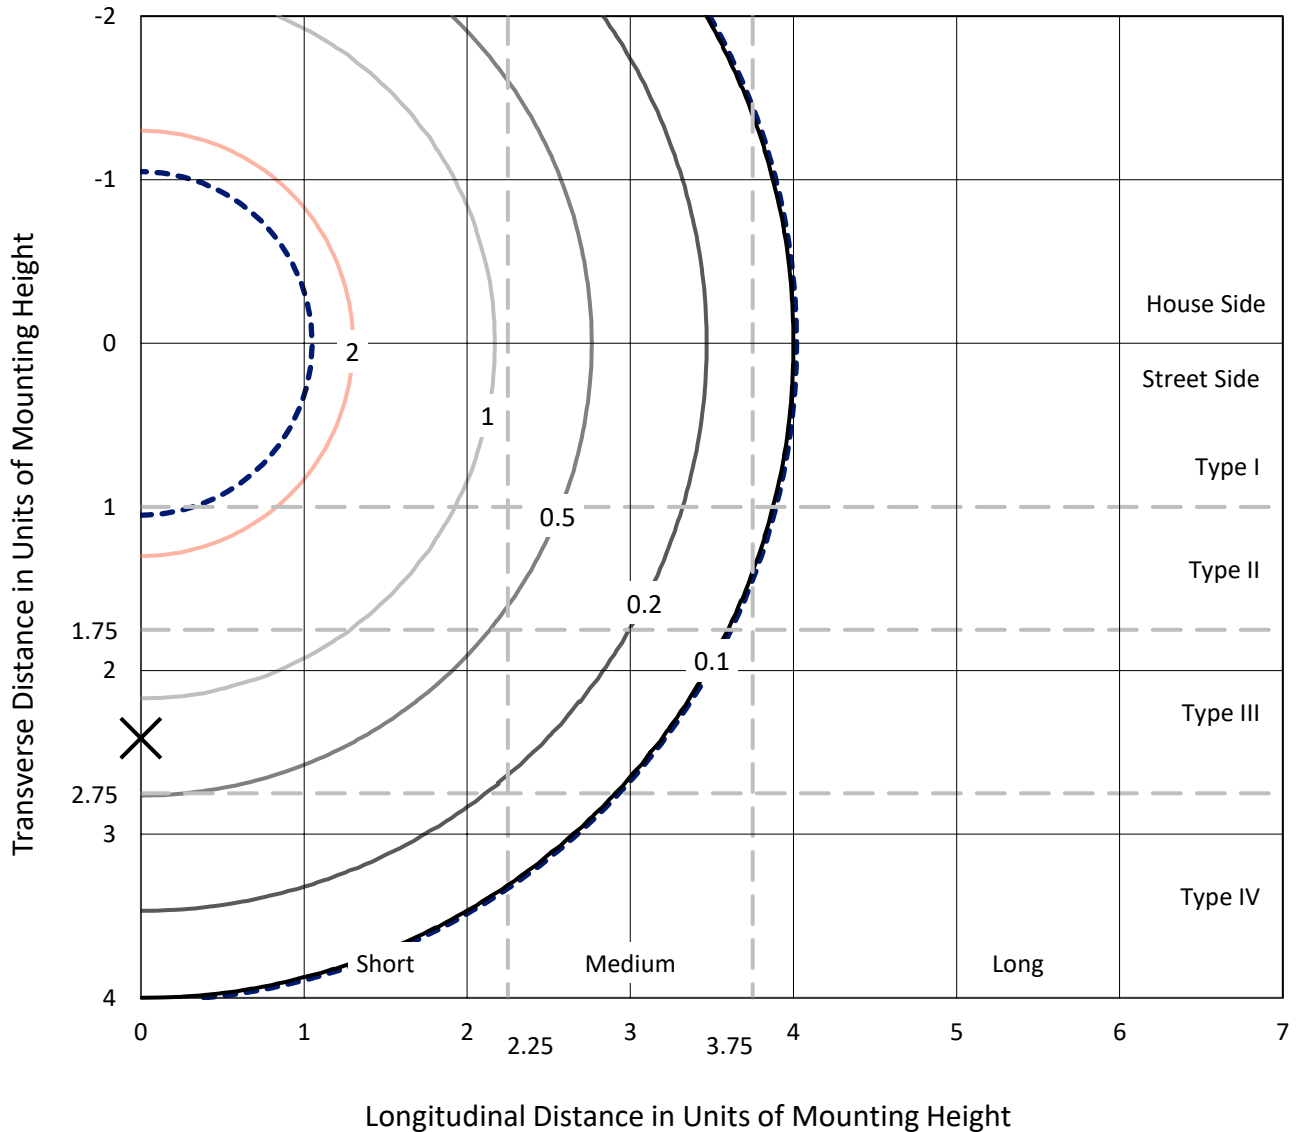

Based on 30 foot mounting height. Maximum calculated value = 3 fc
 Type V - Short - N/A

REPORT NUMBER: P510454
CATALOG NUMBER: CTN-CA10-210-760-U-T5R

Luminous Intensity Polar Plot

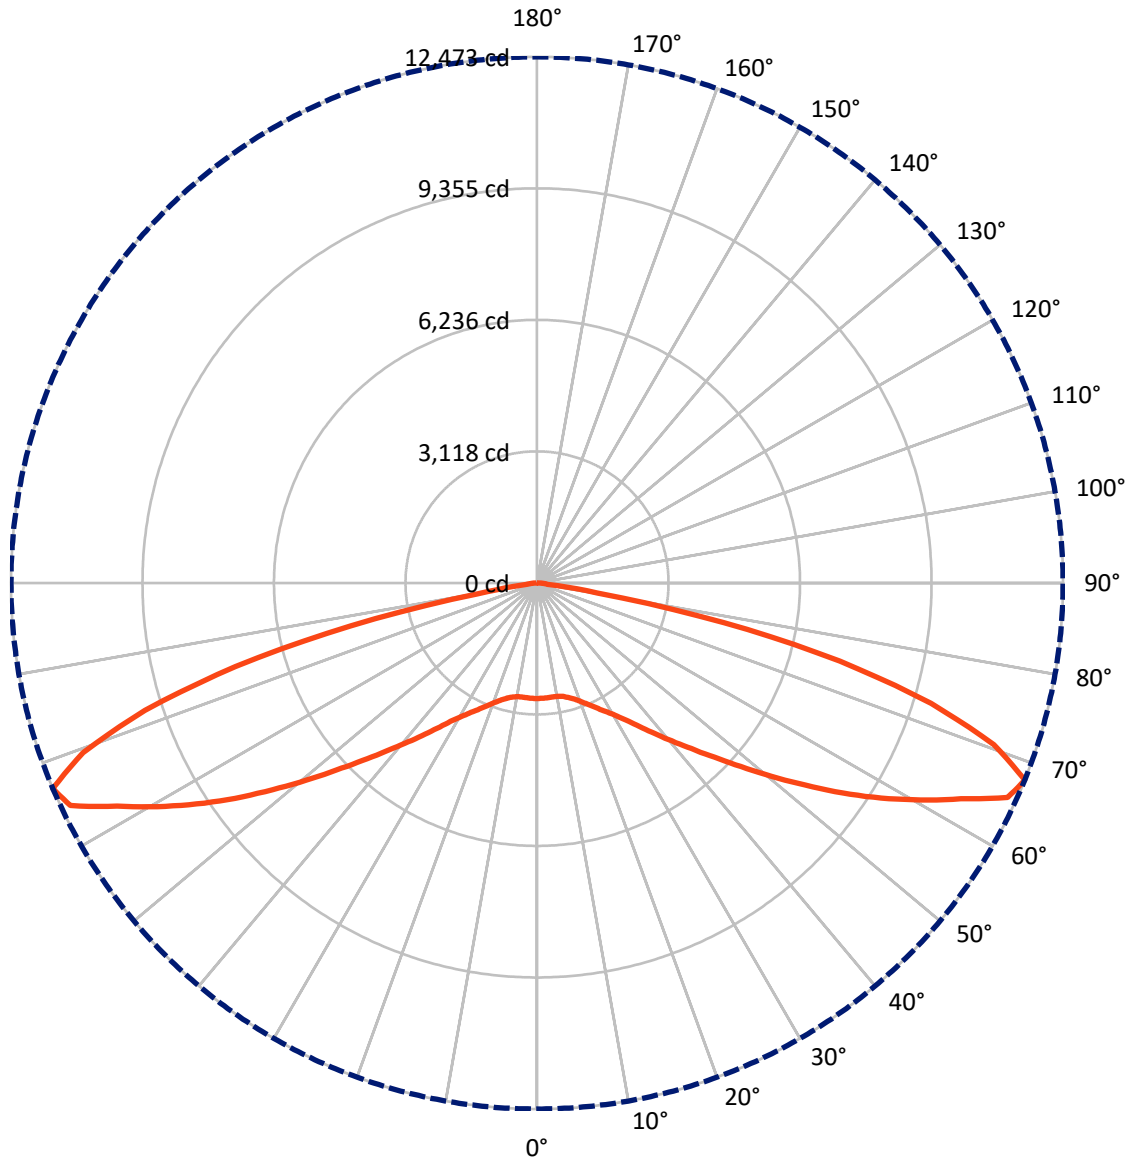

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P510454
 CATALOG NUMBER: CTN-CA10-210-760-U-T5R


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	18615.5	0.0	18615.5
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	18615.5	0.0	18615.5
	% Fixture	50.0	0.0	50.0
Total	Lumens	37231.0	0.0	37231.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	260.9	0.7
10°-20°	808.5	2.2
20°-30°	1534.2	4.1
30°-40°	2664.8	7.2
40°-50°	4638.2	12.5
50°-60°	7923.9	21.3
60°-70°	11669.6	31.3
70°-80°	7418.1	19.9
80°-90°	312.9	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	37231.0	100.0
0°-180°	37231.0	100.0

Coefficient of Utilization

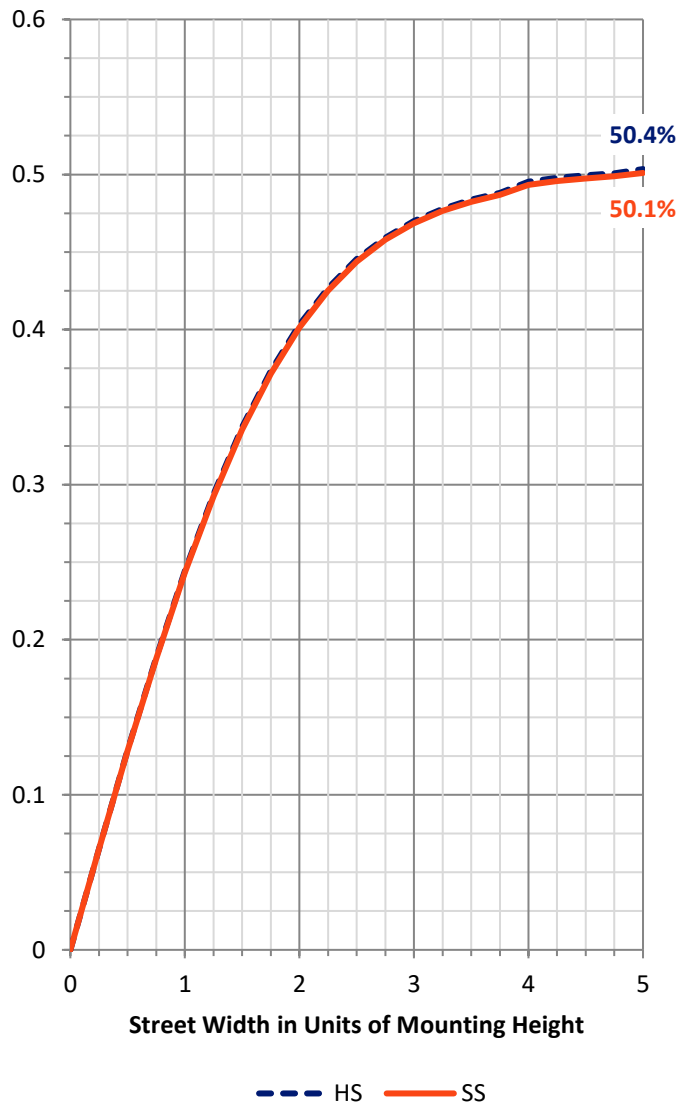


REPORT NUMBER: P510454
 CATALOG NUMBER: CTN-CA10-210-760-U-T5R

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	1301.8	3.5			
FM (30°-60°)	7613.4	20.4			
FH (60°-80°)	9543.8	25.6			G4/12000
FVH (80°-90°)	156.4	0.4			G2/225
BL (0°-30°)	1301.8	3.5	B3/2500		
BM (30°-60°)	7613.4	20.4	B4/8500		
BH (60°-80°)	9543.8	25.6	B5		G4/12000
BVH (80°-90°)	156.4	0.4			G2/225
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G4

Type V Short

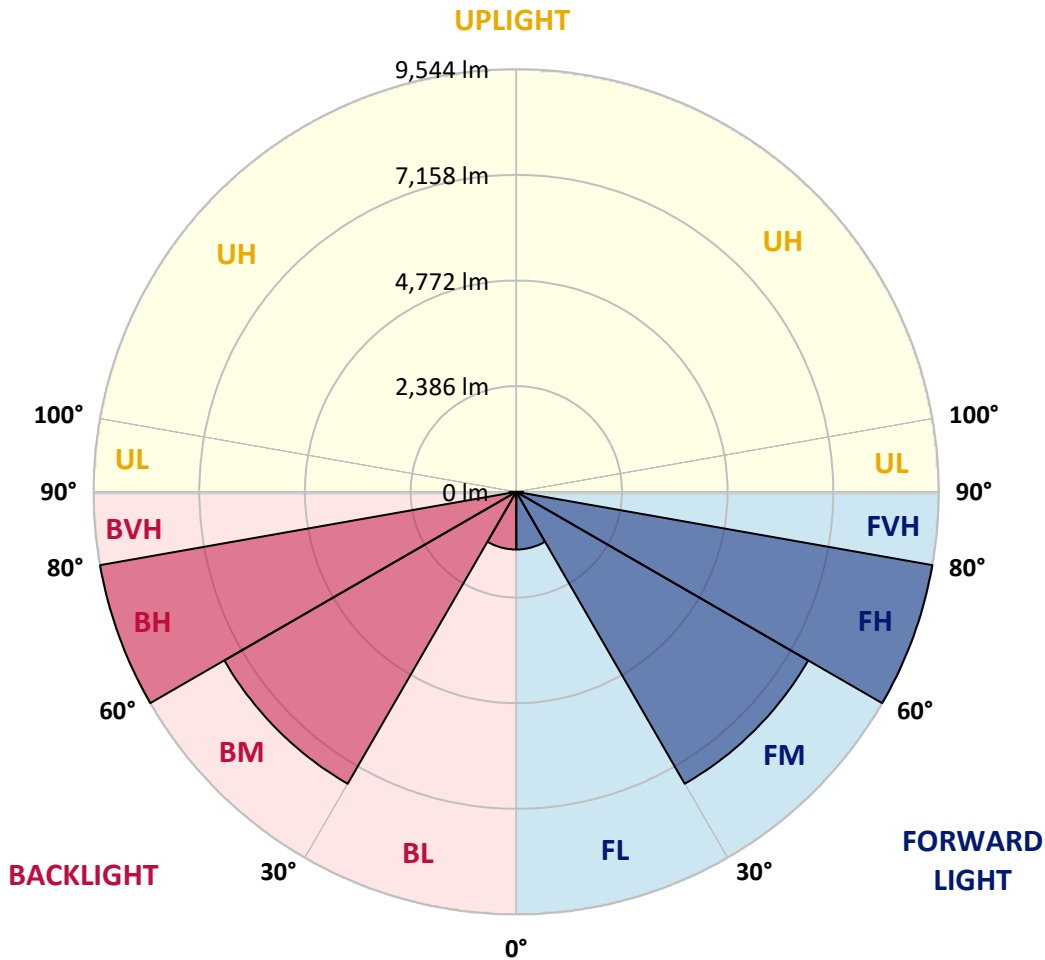



REPORT NUMBER: P510454
CATALOG NUMBER: CTN-CA10-210-760-U-T5R

CANDELA DISTRIBUTION (FULL):

0°	
0°	2738.5
2.5°	2739.3
5°	2733.8
7.5°	2729.3
10°	2733.9
12.5°	2763.3
15°	2819.9
17.5°	2899.2
20°	3006.8
22.5°	3133.9
25°	3283.6
27.5°	3445.9
30°	3636.7
32.5°	3871.2
35°	4179.1
37.5°	4533.6
40°	4927.5
42.5°	5370.2
45°	5895.6
47.5°	6501.5
50°	7203.3
52.5°	7961.3
55°	8792.8
57.5°	9623.3
60°	10449.1
62.5°	11277.4
65°	12263.5
67.5°	12472.9
70°	11491.2
72.5°	9773.8
75°	7420.6
77.5°	4536.7
80°	1439.9
82.5°	244.4
85°	138.1
87.5°	50.0
90°	0.0

(END OF REPORT)