

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P510634

Luminaire Tested: **CTN-CA10-760-760-U-T5R**

Issue Date: 4/6/2021

Test Information

Test Method: LM-79-08
Report Number: P510634
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2102-151-14)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 4/6/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: CTN-CA10-760-760-U-T5R
Description: CELESTEON HIGH MAST LUMINAIRE
Light Source: (10) 5700K CCT, 70 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 113639 lumens
Efficiency: N/A
Efficacy: 149.2 lumens/watt
Luminous Opening: Circular (Dia: 2.08' x H: 0')
IES Classification: Type V - Short
BUG Rating: B5 - U0 - G5


Input Watts (W): 761.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P510634
 CATALOG NUMBER: CTN-CA10-760-760-U-T5R

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

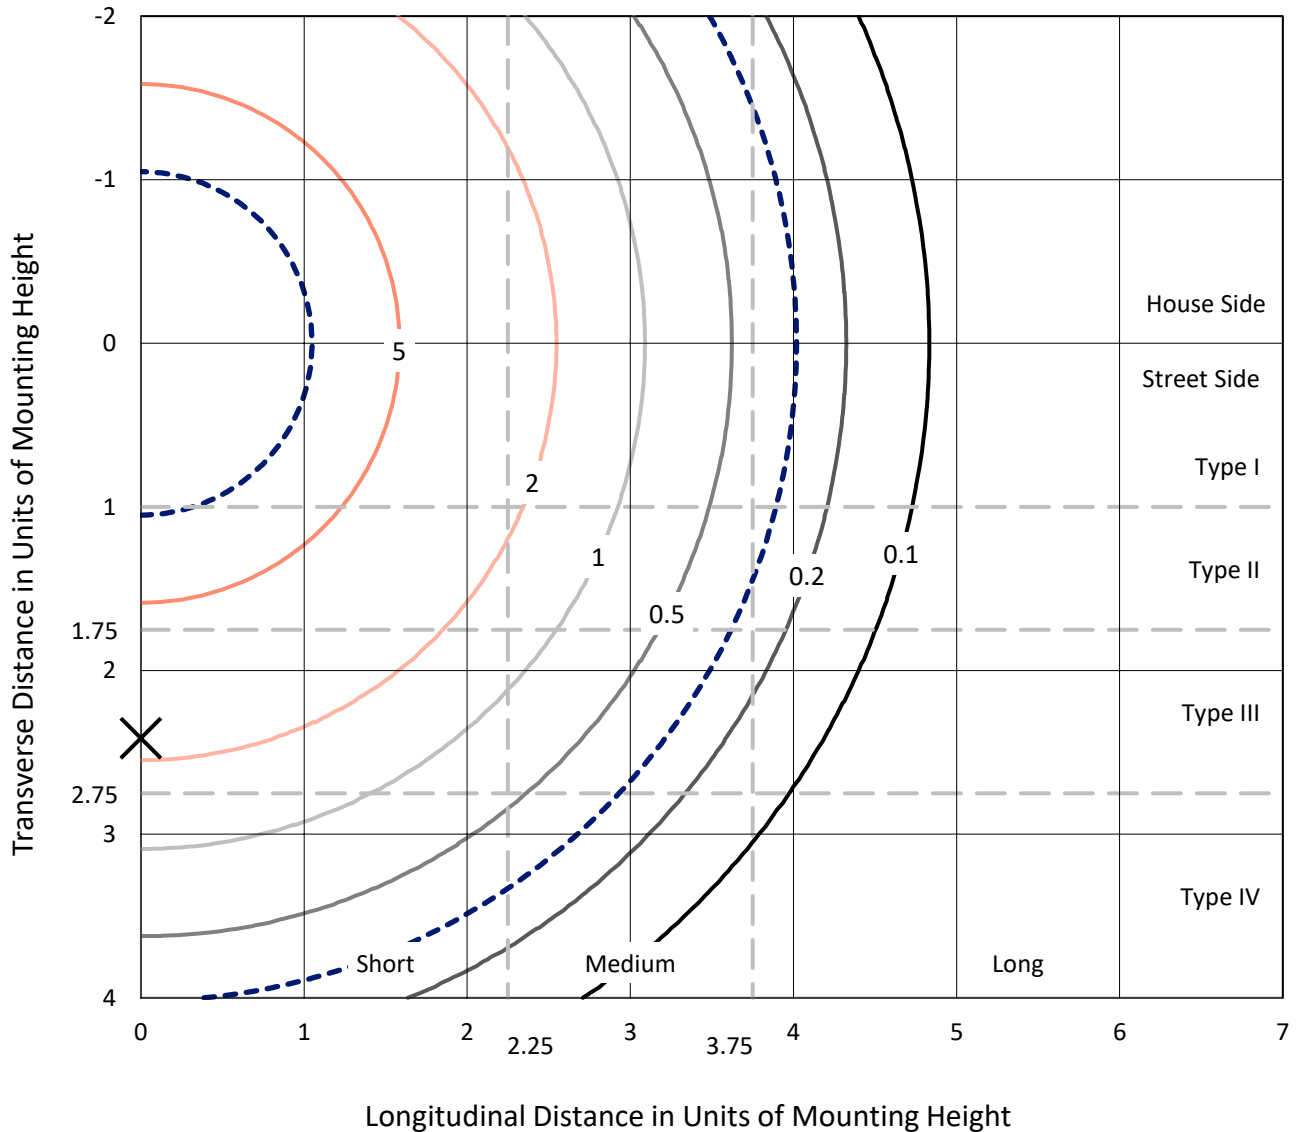

Based on 30 foot mounting height. Maximum calculated value = 9.3 fc
 Type V - Short - N/A

REPORT NUMBER: P510634
CATALOG NUMBER: CTN-CA10-760-760-U-T5R

Luminous Intensity Polar Plot

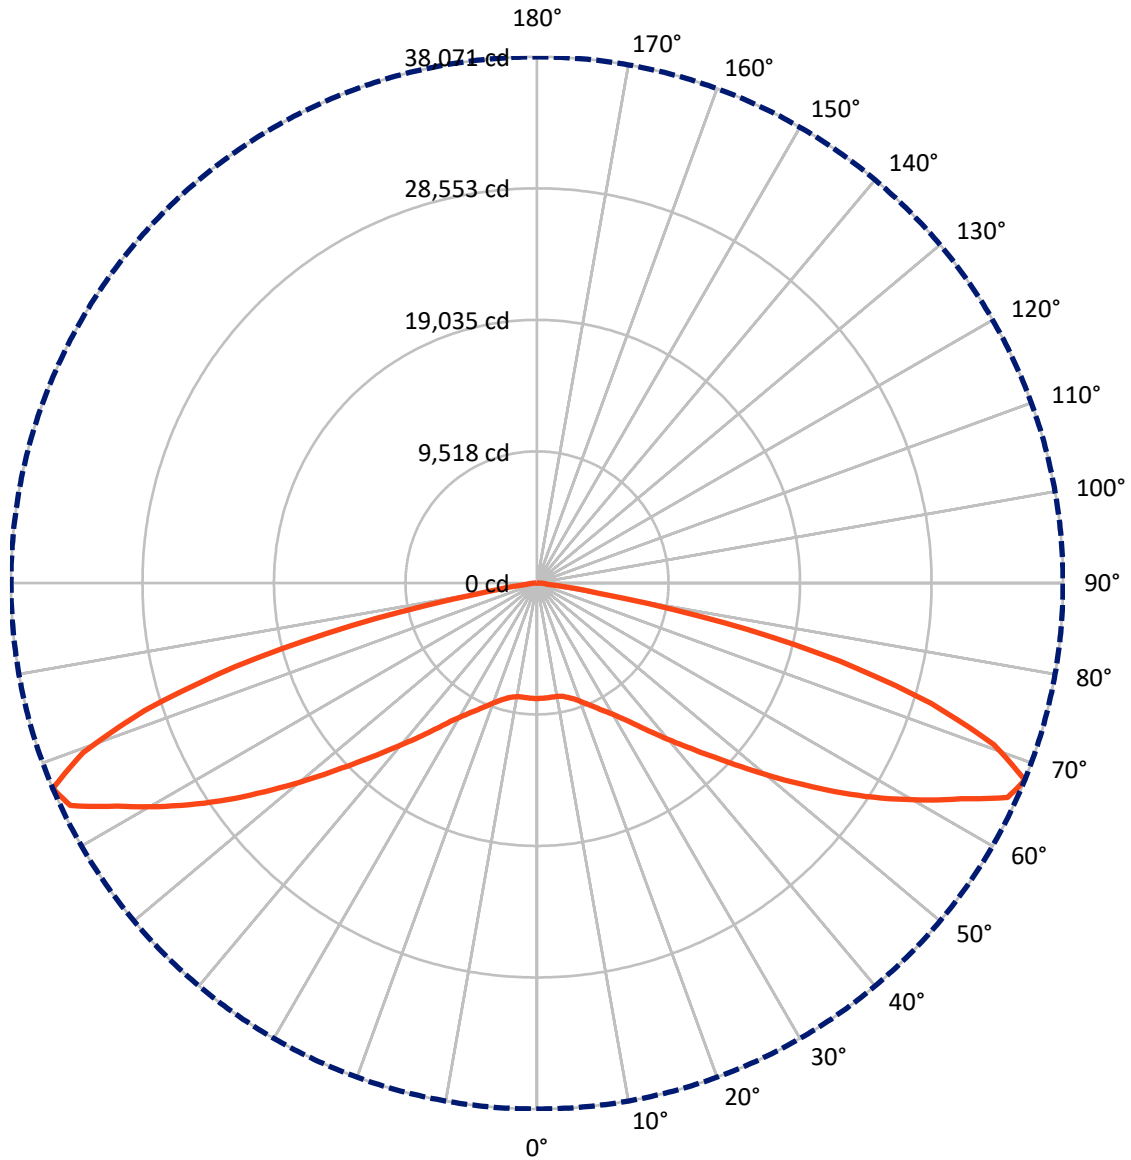

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P510634
 CATALOG NUMBER: CTN-CA10-760-760-U-T5R


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	56819.5	0.0	56819.5
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	56819.5	0.0	56819.5
	% Fixture	50.0	0.0	50.0
Total	Lumens	113639.0	0.0	113639.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	796.3	0.7
10°-20°	2467.6	2.2
20°-30°	4682.9	4.1
30°-40°	8133.6	7.2
40°-50°	14157.1	12.5
50°-60°	24185.9	21.3
60°-70°	35618.6	31.3
70°-80°	22642.1	19.9
80°-90°	955.0	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	113639.0	100.0
0°-180°	113639.0	100.0

Coefficient of Utilization

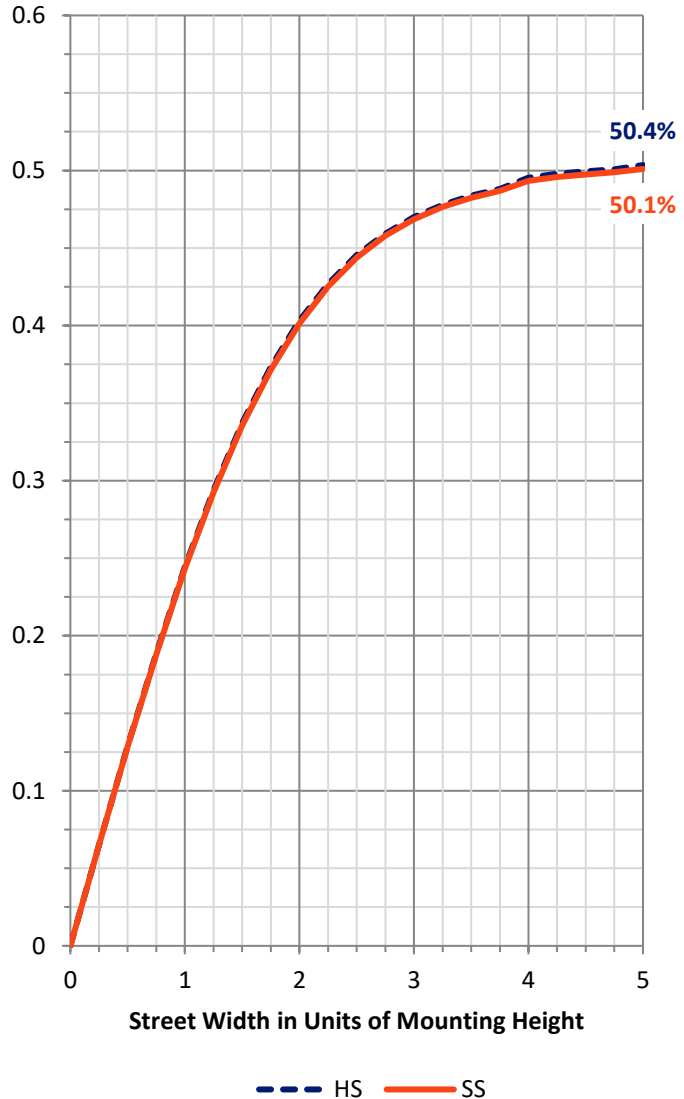


REPORT NUMBER: P510634
 CATALOG NUMBER: CTN-CA10-760-760-U-T5R

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	3973.4	3.5			
FM (30°-60°)	23238.3	20.4			
FH (60°-80°)	29130.3	25.6			G5
FVH (80°-90°)	477.5	0.4			G3/500
BL (0°-30°)	3973.4	3.5	B4/5000		
BM (30°-60°)	23238.3	20.4	B5		
BH (60°-80°)	29130.3	25.6	B5		G5
BVH (80°-90°)	477.5	0.4			G3/500
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G5

Type V Short

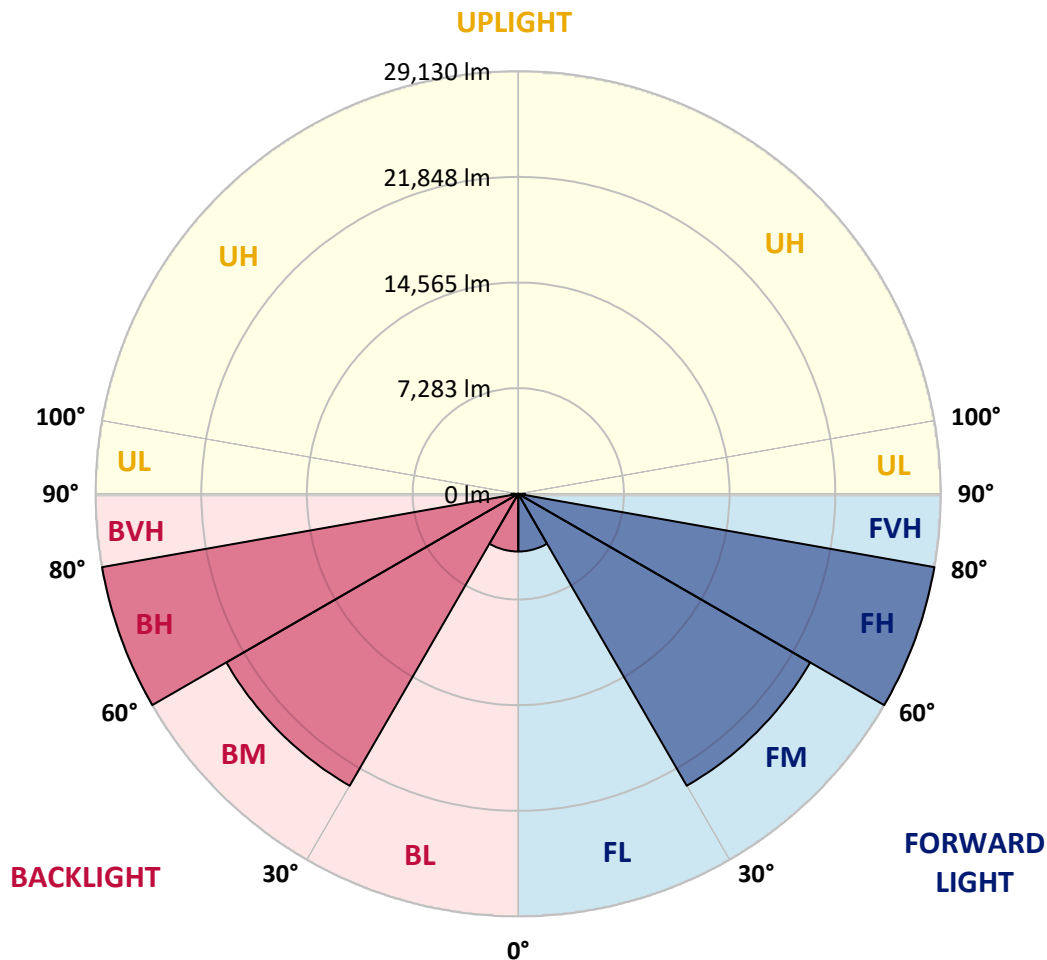

REPORT NUMBER: P510634
CATALOG NUMBER: CTN-CA10-760-760-U-T5R

CANDELA DISTRIBUTION (FULL):

0°	
0°	8358.8
2.5°	8361.0
5°	8344.4
7.5°	8330.6
10°	8344.6
12.5°	8434.3
15°	8607.2
17.5°	8849.1
20°	9177.6
22.5°	9565.5
25°	10022.5
27.5°	10517.8
30°	11100.2
32.5°	11816.0
35°	12755.9
37.5°	13837.7
40°	15040.1
42.5°	16391.3
45°	17994.8
47.5°	19844.3
50°	21986.3
52.5°	24299.9
55°	26838.1
57.5°	29372.9
60°	31893.5
62.5°	34421.6
65°	37431.4
67.5°	38070.6
70°	35074.2
72.5°	29832.3
75°	22649.6
77.5°	13847.2
80°	4395.1
82.5°	746.1
85°	421.5
87.5°	152.6
90°	0.0

(END OF REPORT)