

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P947356

Luminaire Tested: **GALN-SB2D-727-U-SL2**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P947356
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: GALN-SB2D-727-U-SL2
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(2) 70 CRI, 2700K, 900mA LIGHTSQUARES WITH 26 LEDS EACH AND TYPE II SPILL
LIGHT ELIMINATOR OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 18761 lumens
Efficiency: N/A
Efficacy: 127.1 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 1' x H: 0')
IES Classification: Type II - Medium
BUG Rating: B3 - U0 - G3

Input Watts (W): 147.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




REPORT NUMBER: P947356

CATALOG NUMBER: GALN-SB2D-727-U-SL2

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd

--- 1/2 Max cd

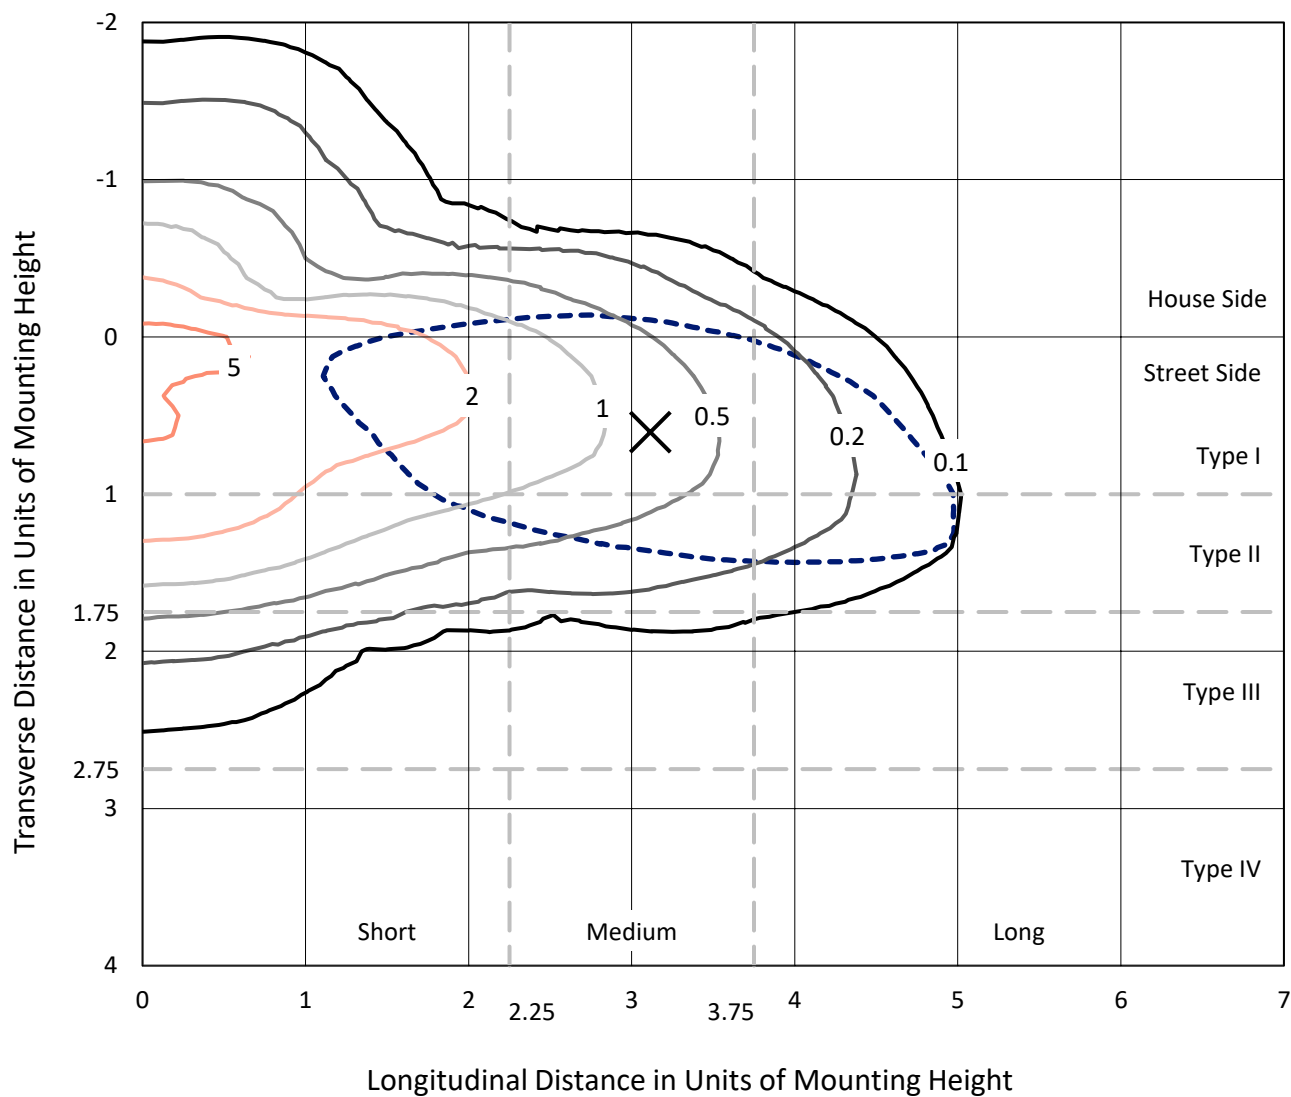

Based on 25 foot mounting height. Maximum calculated value = 6.1 fc
 Type II - Medium - N/A

REPORT NUMBER: P947356
CATALOG NUMBER: GALN-SB2D-727-U-SL2

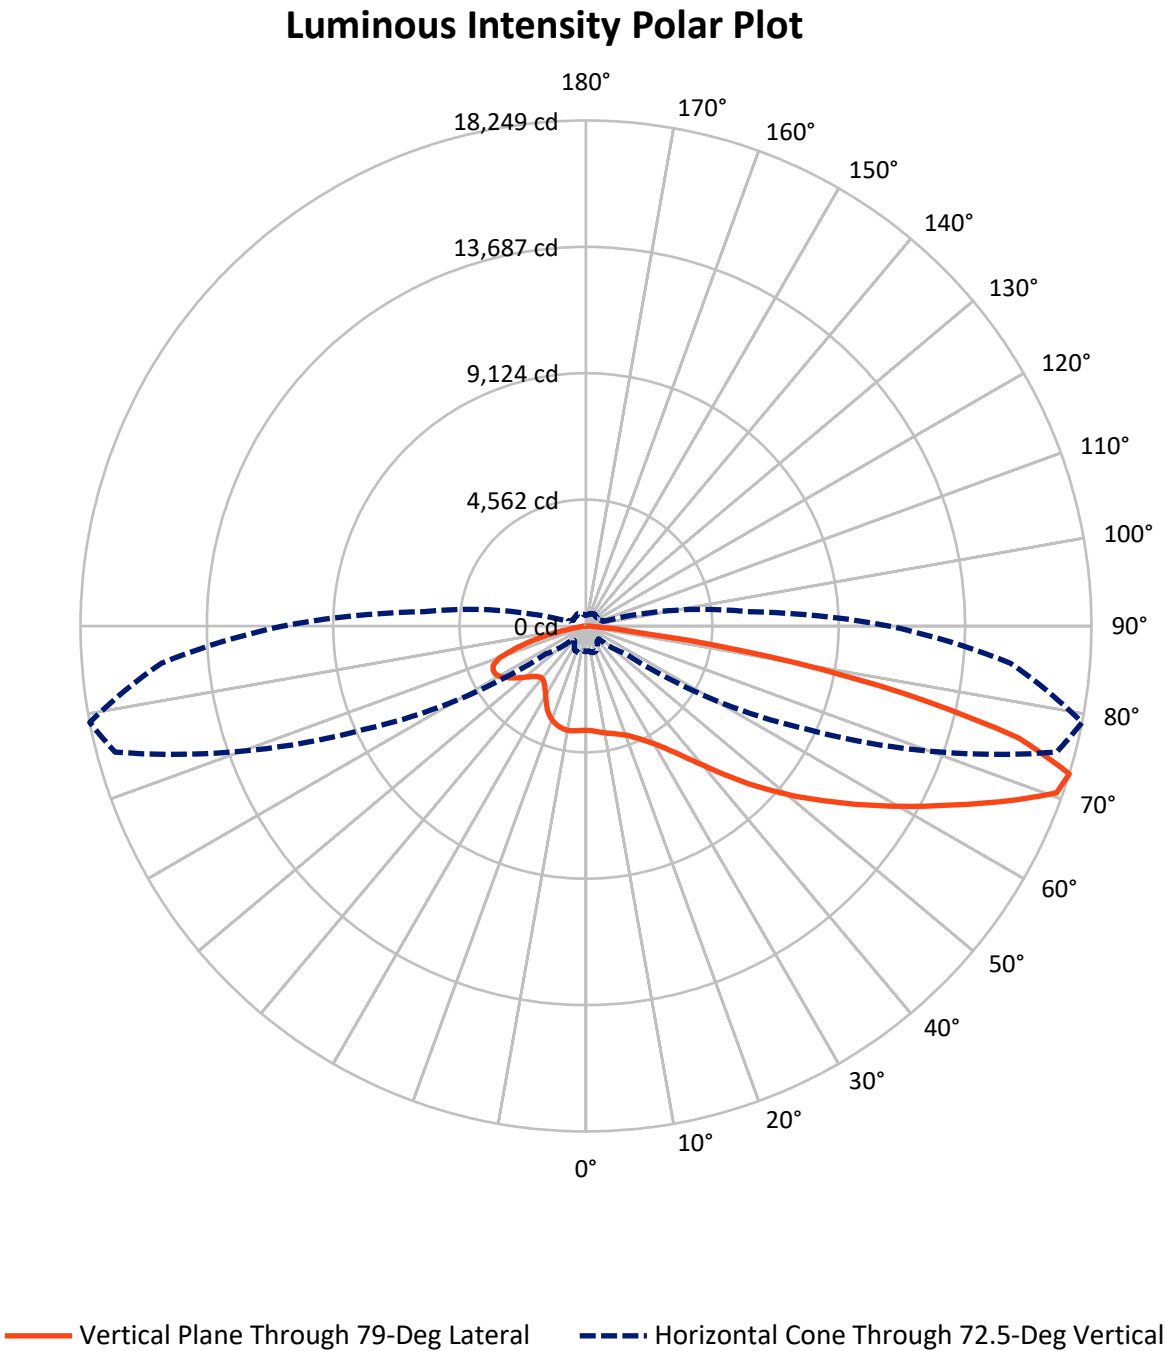

REPORT NUMBER: P947356

CATALOG NUMBER: GALN-SB2D-727-U-SL2


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	4128.5	0.0	4128.5
	% Fixture	22.0	0.0	22.0
Street Side	Lumens	14632.5	0.0	14632.5
	% Fixture	78.0	0.0	78.0
Total	Lumens	18761.0	0.0	18761.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	341.9	1.8
10°-20°	893.8	4.8
20°-30°	1442.2	7.7
30°-40°	2164.5	11.5
40°-50°	3070.5	16.4
50°-60°	3877.6	20.7
60°-70°	3938.2	21.0
70°-80°	2684.1	14.3
80°-90°	348.2	1.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	18761.0	100.0
0°-180°	18761.0	100.0

Coefficient of Utilization

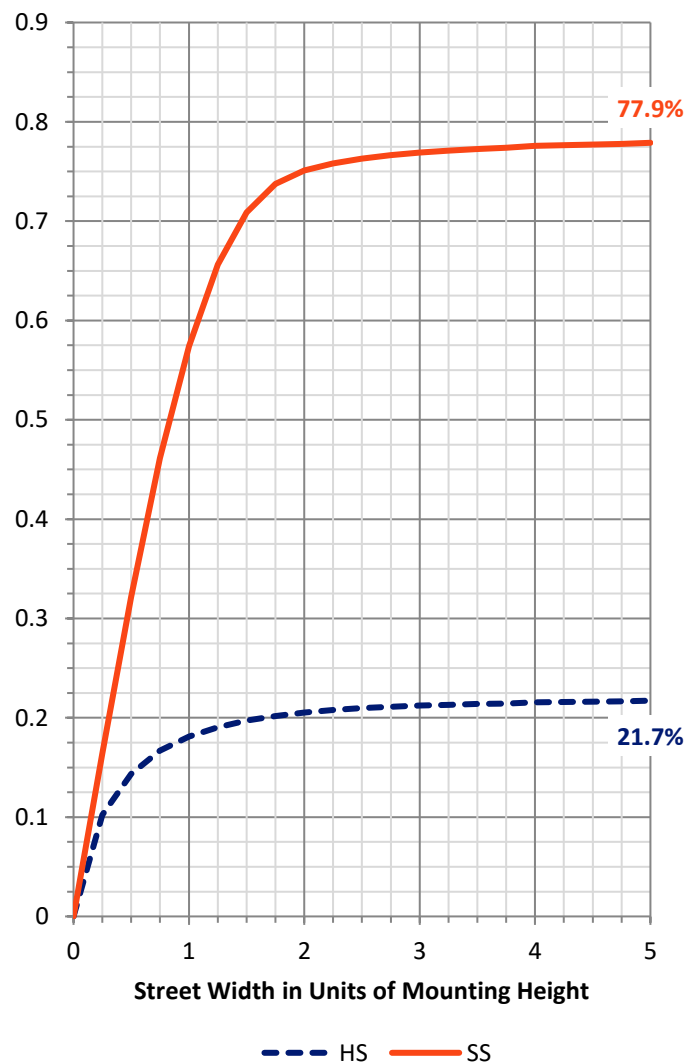

REPORT NUMBER: P947356


CATALOG NUMBER: GALN-SB2D-727-U-SL2

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1716.2	9.1			
FM	(30°-60°)	7317.2	39.0			
FH	(60°-80°)	5336.9	28.4			G3/7500
FVH	(80°-90°)	262.3	1.4			G3/500
BL	(0°-30°)	961.6	5.1	B2/1000		
BM	(30°-60°)	1795.4	9.6	B2/2500		
BH	(60°-80°)	1285.5	6.9	B3/2500		G3/2500
BVH	(80°-90°)	85.9	0.5			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G3

Type II Medium

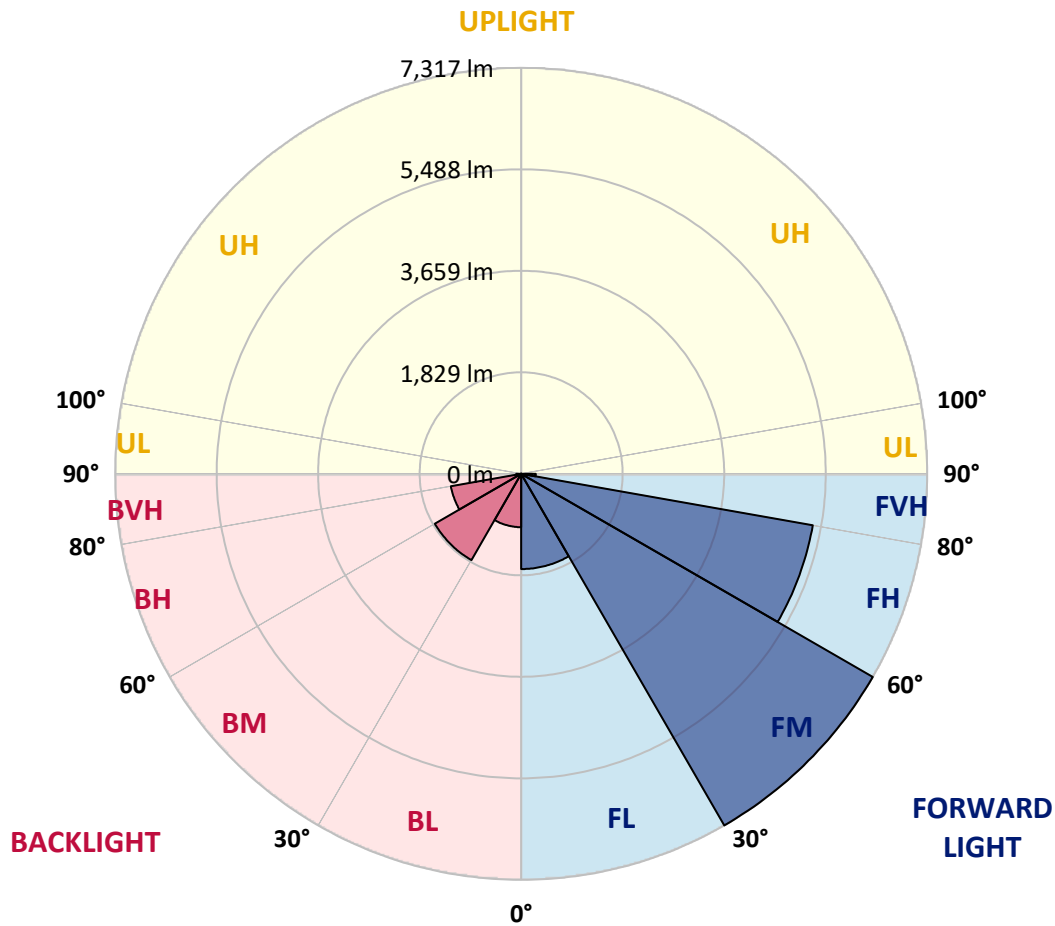

REPORT NUMBER: P947356

CATALOG NUMBER: GALN-SB2D-727-U-SL2

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	79°	85°
0°	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1
2.5°	3768.1	3750.2	3761.1	3757.2	3762.1	3768.1	3770.1	3773.0	3783.0	3782.0	3781.0
5°	3760.1	3742.3	3757.2	3752.2	3765.1	3779.0	3790.9	3801.8	3817.7	3824.6	3814.7
7.5°	3743.3	3731.4	3746.2	3761.1	3784.9	3805.8	3822.7	3847.5	3870.3	3874.3	3881.2
10°	3645.0	3636.1	3670.8	3709.5	3775.0	3831.6	3868.3	3897.1	3921.9	3925.9	3935.8
12.5°	3542.8	3531.9	3570.6	3623.2	3729.4	3831.6	3909.0	3946.7	3968.5	3981.4	3996.3
15°	3525.9	3517.0	3538.8	3584.5	3672.8	3804.8	3936.8	4006.2	4025.1	4040.0	4045.9
17.5°	3607.3	3590.4	3599.4	3615.3	3666.9	3780.0	3958.6	4073.7	4102.5	4118.4	4118.4
20°	3795.9	3772.0	3758.2	3726.4	3717.5	3784.0	3956.6	4155.1	4192.8	4212.7	4217.6
22.5°	4046.9	4031.1	4001.3	3920.9	3833.6	3832.6	3994.3	4259.3	4329.8	4348.6	4336.7
25°	4350.6	4326.8	4289.1	4179.9	4012.2	3928.8	4057.9	4392.3	4510.4	4515.3	4480.6
27.5°	4699.9	4664.2	4612.6	4468.7	4242.4	4079.7	4155.1	4545.1	4717.8	4715.8	4644.4
30°	5068.1	5032.4	4977.8	4803.1	4518.3	4283.1	4290.1	4709.8	4963.9	4953.0	4830.9
32.5°	5337.0	5310.2	5299.3	5164.4	4835.9	4523.3	4444.9	4892.4	5267.6	5257.6	5087.0
35°	5543.4	5508.7	5521.6	5453.1	5182.2	4792.2	4634.4	5109.8	5636.7	5635.7	5423.4
37.5°	5747.9	5717.1	5728.0	5682.4	5502.8	5133.6	4865.7	5375.7	6094.2	6116.1	5830.2
40°	5934.4	5901.7	5945.4	5902.7	5751.9	5496.8	5128.6	5676.4	6624.2	6665.8	6322.5
42.5°	6046.6	6020.8	6093.2	6094.2	5968.2	5803.5	5417.4	6007.9	7237.4	7330.7	6927.8
45°	6085.3	6076.4	6185.5	6208.3	6159.7	5981.1	5677.4	6369.1	7898.4	8065.1	7617.5
47.5°	6043.6	6026.7	6177.6	6261.9	6300.6	6064.5	5892.8	6760.1	8573.2	8817.3	8369.8
50°	5833.2	5800.5	6024.8	6202.4	6340.3	6119.0	6110.1	7211.6	9340.3	9607.3	9126.0
52.5°	5455.1	5430.3	5685.4	5994.0	6253.0	6145.8	6354.2	7704.9	10068.7	10414.1	9901.0
55°	4971.8	4939.1	5219.9	5622.8	6035.7	6136.9	6598.4	8256.6	10928.1	11278.4	10701.9
57.5°	4205.7	4140.2	4495.5	4971.8	5681.4	6126.0	6852.4	8805.4	11801.4	12221.2	11556.3
60°	3088.3	2991.0	3426.7	3991.4	4988.7	6019.8	7167.0	9420.7	12849.4	13227.5	12489.1
62.5°	1798.2	1741.6	2026.4	2553.4	3760.1	5394.6	7343.6	10136.2	13879.5	14276.4	13406.1
65°	1396.3	1380.4	1405.2	1445.9	2092.9	4039.0	6798.8	10833.8	15189.4	15467.3	14361.8
67.5°	1277.2	1265.3	1276.2	1199.8	1061.8	2249.7	5378.7	11010.5	16592.6	16761.3	15198.3
70°	1135.3	1121.4	1157.1	1091.6	835.6	1023.1	3475.3	10369.4	17709.1	18025.6	15834.5
72.5°	924.9	909.0	992.4	962.6	703.6	657.0	1745.6	8846.1	17592.0	18248.9	15379.0
75°	710.5	701.6	800.9	825.7	573.6	517.0	837.6	6575.5	15481.2	16143.1	13254.3
77.5°	551.8	544.8	595.4	685.7	462.5	400.9	515.0	4171.0	11666.5	11782.6	9133.9
80°	413.8	394.0	440.6	530.9	360.2	292.8	349.3	2432.3	7374.4	6684.7	3975.5
82.5°	259.0	249.1	287.8	354.3	254.0	201.5	227.3	1343.7	2955.3	1740.6	767.1
85°	147.9	143.9	156.8	202.4	137.9	116.1	130.0	593.4	539.9	371.2	231.2
87.5°	59.5	57.6	71.5	90.3	50.6	42.7	45.6	142.9	119.1	110.2	76.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P947356

CATALOG NUMBER: GALN-SB2D-727-U-SL2

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1	3766.1
2.5°	3777.0	3777.0	3763.1	3741.3	3716.5	3700.6	3674.8	3667.8	3641.1	3633.1	3646.0
5°	3822.7	3814.7	3772.0	3710.5	3626.2	3548.8	3463.4	3409.8	3334.4	3307.6	3327.5
7.5°	3880.2	3858.4	3784.9	3650.0	3473.3	3299.7	3119.1	2982.1	2851.1	2804.5	2810.4
10°	3932.8	3902.0	3777.0	3540.8	3235.2	2934.5	2646.7	2445.2	2292.4	2229.9	2243.8
12.5°	3985.4	3928.8	3724.4	3359.2	2896.8	2488.9	2182.2	2025.5	1931.2	1855.8	1880.6
15°	4035.0	3955.6	3643.0	3116.1	2525.6	2111.8	1885.5	1760.5	1685.1	1635.4	1644.4
17.5°	4092.6	3978.5	3521.0	2807.5	2172.3	1850.8	1666.2	1590.8	1575.9	1569.9	1573.9
20°	4173.0	3999.3	3360.2	2462.1	1912.3	1642.4	1547.1	1540.2	1539.2	1536.2	1546.1
22.5°	4259.3	4024.1	3147.8	2148.5	1691.0	1512.4	1495.5	1481.6	1472.7	1471.7	1482.6
25°	4361.5	4032.1	2881.9	1891.5	1502.5	1450.9	1431.0	1410.2	1404.2	1404.2	1410.2
27.5°	4460.8	4005.3	2572.3	1668.2	1396.3	1394.3	1368.5	1361.5	1360.6	1363.5	1371.5
30°	4560.0	3954.6	2264.6	1461.8	1334.8	1334.8	1325.8	1330.8	1334.8	1344.7	1351.6
32.5°	4694.0	3901.1	2007.6	1309.0	1281.2	1271.2	1280.2	1290.1	1294.1	1307.0	1317.9
35°	4890.5	3863.3	1803.2	1225.6	1225.6	1212.7	1217.7	1215.7	1206.7	1200.8	1214.7
37.5°	5150.5	3861.4	1634.5	1186.9	1179.0	1177.0	1178.0	1165.1	1130.3	1088.6	1089.6
40°	5463.1	3914.9	1504.5	1160.1	1154.1	1166.0	1160.1	1125.4	1030.1	957.6	955.7
42.5°	5882.8	4067.8	1421.1	1127.3	1145.2	1160.1	1136.3	1016.2	951.7	903.1	901.1
45°	6377.1	4315.9	1378.4	1092.6	1128.3	1146.2	1031.1	978.5	926.9	868.3	864.4
47.5°	6936.8	4628.5	1368.5	1059.9	1090.6	1101.5	986.4	962.6	904.1	840.5	835.6
50°	7546.1	4998.6	1395.3	1021.2	1036.0	998.3	971.5	949.7	889.2	826.7	819.7
52.5°	8176.2	5406.5	1448.9	968.6	981.5	939.8	965.6	946.7	880.2	795.9	789.9
55°	8795.5	5817.3	1500.5	907.0	925.9	887.2	948.7	934.8	839.6	744.3	739.3
57.5°	9424.7	6226.2	1551.1	852.5	872.3	836.6	921.9	903.1	793.9	696.7	694.7
60°	10078.6	6623.2	1574.9	799.9	813.8	789.9	881.2	848.5	742.3	648.0	645.0
62.5°	10690.9	6953.6	1536.2	747.3	756.2	746.3	827.6	784.0	690.7	593.4	592.5
65°	11305.2	7150.1	1417.1	695.7	697.6	692.7	752.2	714.5	630.2	545.8	539.9
67.5°	11862.0	7260.3	1227.6	640.1	635.1	633.1	681.8	639.1	571.6	498.2	492.2
70°	11980.0	6980.4	937.8	574.6	574.6	569.6	604.4	560.7	507.1	447.6	445.6
72.5°	10942.0	5871.9	665.9	500.2	508.1	498.2	527.0	490.2	441.6	401.9	390.0
75°	8823.3	4305.9	484.3	423.7	437.6	420.8	447.6	421.8	380.1	379.1	341.4
77.5°	6062.5	2662.6	351.3	349.3	359.2	337.4	368.2	354.3	316.6	299.7	280.8
80°	2587.1	1061.8	256.0	269.9	269.9	250.1	285.8	289.8	257.0	249.1	249.1
82.5°	515.0	301.7	179.6	185.6	174.7	168.7	202.4	224.3	309.6	344.4	345.3
85°	154.8	111.1	108.2	101.2	89.3	90.3	119.1	225.3	277.9	158.8	136.9
87.5°	42.7	27.8	28.8	22.8	18.9	24.8	40.7	170.7	93.3	39.7	33.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)