

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P946315

Luminaire Tested: **GALN-SB2A-730-U-T2U-HSS**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P946315
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: GALN-SB2A-730-U-T2U-HSS
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(2) 70 CRI, 3000K, 350mA LIGHTSQUARES WITH 26 LEDS EACH AND TYPE II U OPTICS WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6856 lumens
Efficiency: N/A
Efficacy: 119.7 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 1' x H: 0')
IES Classification: Type II - Short
BUG Rating: B1 - U0 - G2

Input Watts (W): 57.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




REPORT NUMBER: P946315
CATALOG NUMBER: GALN-SB2A-730-U-T2U-HSS

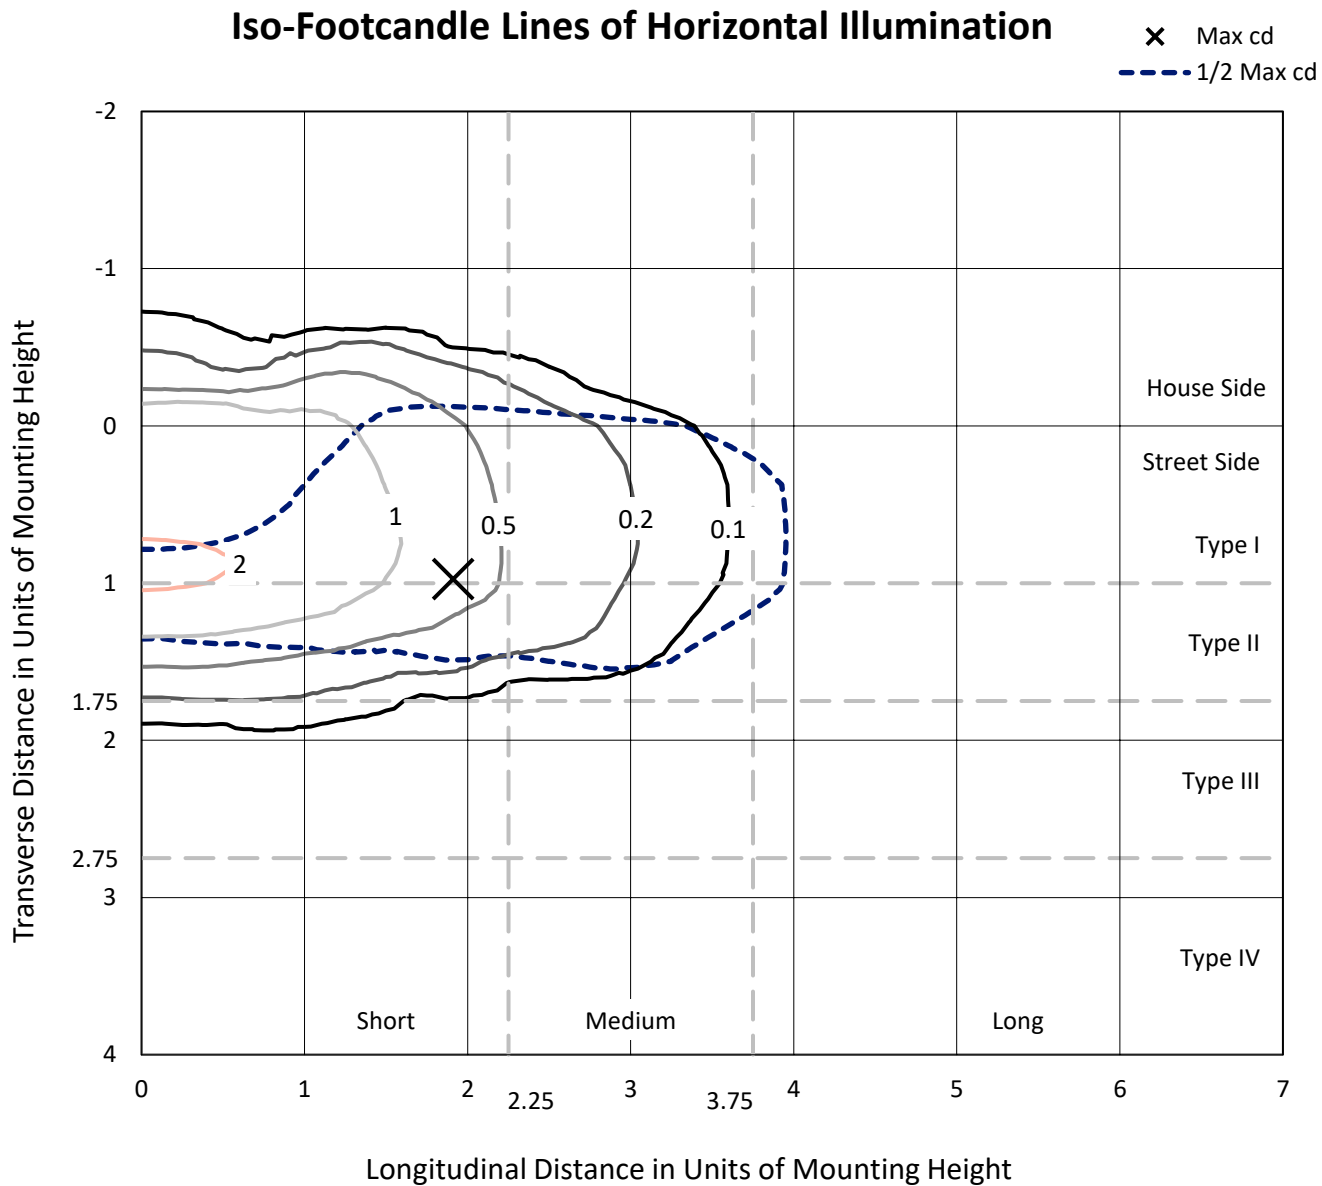

Based on 25 foot mounting height. Maximum calculated value = 2.3 fc
Type II - Short - N/A

REPORT NUMBER: P946315
CATALOG NUMBER: GALN-SB2A-730-U-T2U-HSS

Luminous Intensity Polar Plot

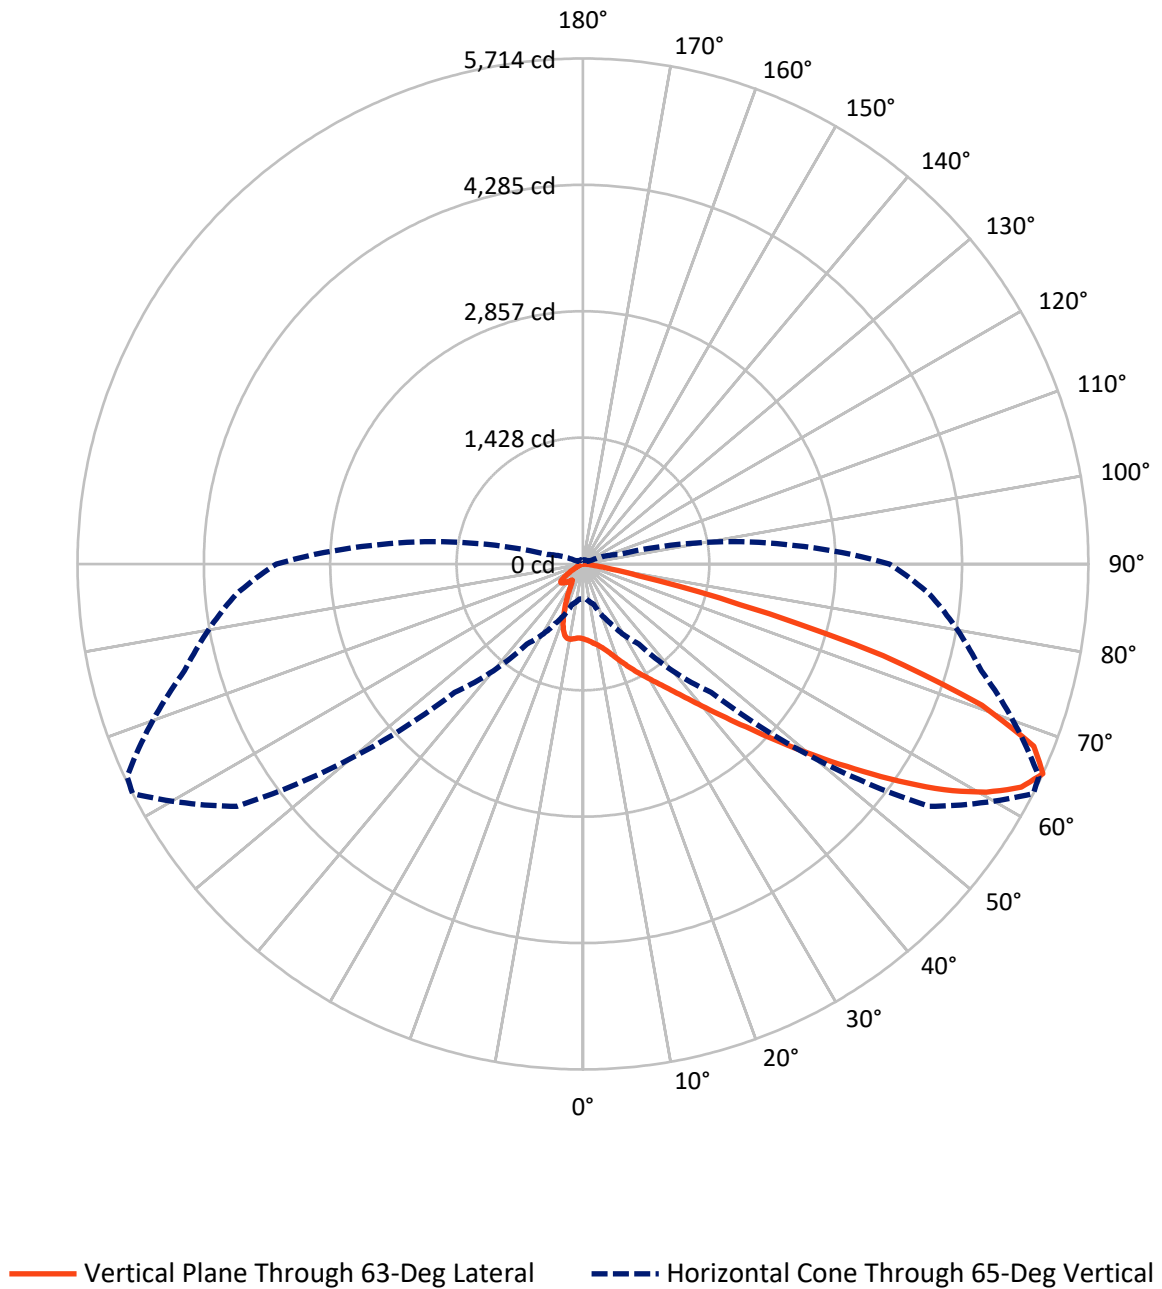

REPORT NUMBER: P946315

CATALOG NUMBER: GALN-SB2A-730-U-T2U-HSS

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1007.8	0.0	1007.8
	% Fixture	14.7	0.0	14.7
Street Side	Lumens	5848.2	0.0	5848.2
	% Fixture	85.3	0.0	85.3
Total	Lumens	6856.0	0.0	6856.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.7	1.2
10°-20°	221.2	3.2
20°-30°	385.2	5.6
30°-40°	694.2	10.1
40°-50°	1376.9	20.1
50°-60°	1875.6	27.4
60°-70°	1497.1	21.8
70°-80°	677.5	9.9
80°-90°	48.7	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	6856.0	100.0
0°-180°	6856.0	100.0

Coefficient of Utilization



REPORT NUMBER: P946315


CATALOG NUMBER: GALN-SB2A-730-U-T2U-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	468.0	6.8			
FM	(30°-60°)	3423.7	49.9			
FH	(60°-80°)	1911.4	27.9			G2/5000
FVH	(80°-90°)	45.1	0.7			G1/100
BL	(0°-30°)	218.1	3.2	B1/500		
BM	(30°-60°)	523.0	7.6	B1/1000		
BH	(60°-80°)	263.1	3.8	B1/500		G1/500
BVH	(80°-90°)	3.6	0.1			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G2

Type II Short

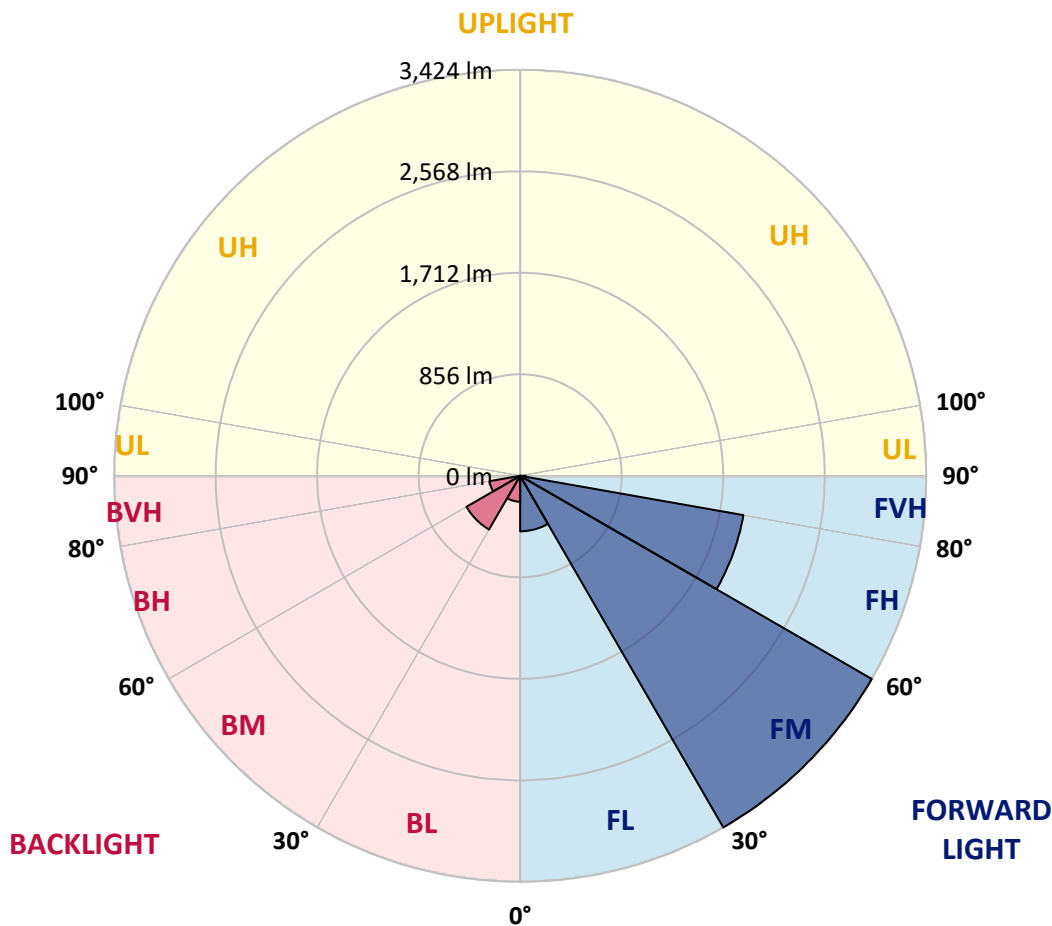

REPORT NUMBER: P946315

CATALOG NUMBER: GALN-SB2A-730-U-T2U-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	63°	65°	75°	85°
0°	846.2	846.2	846.2	846.2	846.2	846.2	846.2	846.2	846.2	846.2	846.2
2.5°	866.0	863.6	866.9	865.5	864.6	862.7	861.7	860.8	858.9	857.5	851.8
5°	868.3	866.9	870.2	873.0	875.9	878.7	880.1	882.0	880.1	876.3	870.7
7.5°	848.5	847.6	854.6	863.1	875.9	886.7	898.5	905.1	905.6	904.2	898.0
10°	847.1	844.7	851.8	862.2	878.7	898.0	918.8	932.9	934.8	941.0	934.4
12.5°	869.3	866.9	876.8	888.1	905.1	925.4	950.9	970.7	973.5	982.0	977.3
15°	906.5	903.2	914.6	929.2	950.9	974.0	1000.9	1018.8	1021.1	1031.5	1023.0
17.5°	949.9	946.6	959.8	975.4	999.0	1030.6	1061.7	1081.5	1084.3	1091.0	1075.4
20°	1005.6	1001.3	1011.7	1025.9	1050.9	1088.6	1125.9	1154.2	1153.7	1153.7	1128.2
22.5°	1070.2	1063.6	1072.6	1083.9	1107.5	1153.2	1202.7	1236.2	1236.2	1223.0	1181.0
25°	1139.5	1132.9	1142.8	1153.2	1174.0	1225.8	1283.9	1325.4	1327.3	1304.6	1237.6
27.5°	1226.3	1217.8	1225.4	1237.6	1249.9	1302.7	1371.6	1419.7	1420.6	1385.7	1291.4
30°	1393.3	1369.2	1345.6	1332.4	1338.1	1390.5	1464.0	1517.3	1522.1	1473.9	1349.9
32.5°	1698.9	1694.2	1611.2	1502.7	1446.1	1484.8	1567.3	1631.5	1634.3	1572.5	1425.8
35°	2173.9	2168.2	2034.7	1828.2	1643.7	1611.2	1692.8	1768.7	1766.8	1697.0	1524.4
37.5°	2740.8	2735.6	2559.7	2283.3	1984.7	1802.2	1854.6	1934.3	1946.1	1854.6	1651.8
40°	3225.2	3205.9	3094.6	2828.1	2437.5	2119.2	2084.7	2137.6	2149.8	2041.3	1813.5
42.5°	3592.2	3575.7	3519.1	3352.6	2985.6	2588.0	2355.9	2376.2	2389.9	2259.7	1999.4
45°	3782.3	3778.5	3801.1	3785.6	3544.1	3163.4	2743.7	2659.2	2664.4	2501.7	2210.2
47.5°	3809.1	3807.2	3910.5	4056.8	4024.2	3812.4	3241.3	3012.0	2993.6	2774.8	2439.4
50°	3650.7	3646.9	3845.0	4119.0	4344.9	4357.7	3806.3	3409.6	3369.1	3057.3	2678.6
52.5°	3144.6	3143.6	3469.1	3925.2	4457.7	4835.0	4364.8	3846.4	3778.5	3356.3	2931.4
55°	2419.6	2437.1	2810.2	3349.3	4252.0	5064.7	4866.1	4331.3	4227.0	3657.3	3164.4
57.5°	1714.0	1739.5	2108.3	2588.5	3614.3	4928.9	5205.3	4817.1	4704.8	3957.2	3400.7
60°	920.7	943.3	1312.6	1885.7	2688.9	4422.3	5384.0	5238.7	5132.6	4242.1	3613.9
62.5°	548.5	556.1	708.9	1217.4	1818.7	3378.5	5308.1	5559.9	5472.7	4481.3	3799.2
65°	393.8	395.3	472.1	743.3	1104.2	2052.7	4775.6	5713.7	5686.8	4661.4	3936.5
67.5°	331.6	330.6	362.7	493.8	752.3	1028.2	3660.1	5496.3	5610.4	4775.6	4014.3
70°	284.4	285.8	323.6	361.8	565.5	582.0	1819.7	4785.5	5028.9	4805.8	4009.6
72.5°	211.8	216.5	251.4	329.7	426.9	400.4	628.3	3548.3	3988.4	4527.9	3801.6
75°	149.5	151.9	176.9	277.3	318.4	291.5	320.7	1834.3	2398.4	3471.4	3111.5
77.5°	115.1	119.3	134.0	193.9	313.7	204.7	196.2	634.9	975.4	2097.0	2133.3
80°	62.3	69.8	96.7	140.1	220.3	144.8	97.2	252.8	330.6	980.6	822.6
82.5°	32.1	35.8	67.4	100.9	125.5	126.4	48.1	105.2	136.3	302.8	112.7
85°	12.7	15.6	45.3	55.7	64.6	62.3	21.7	42.4	49.1	84.0	34.4
87.5°	2.8	4.7	16.5	12.7	12.3	13.2	5.2	9.9	9.4	9.9	6.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P946315

CATALOG NUMBER: GALN-SB2A-730-U-T2U-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	846.2	846.2	846.2	846.2	846.2	846.2	846.2	846.2	846.2	846.2	846.2
2.5°	851.3	849.5	844.3	838.6	832.0	828.2	825.9	825.4	822.1	819.7	822.1
5°	865.5	863.6	853.7	841.9	829.2	819.3	809.8	801.4	789.1	786.7	785.8
7.5°	893.8	888.6	872.6	856.5	832.5	803.7	768.8	728.7	692.9	682.0	676.8
10°	928.7	921.6	901.3	873.0	819.7	741.5	657.0	578.7	516.5	499.0	492.4
12.5°	968.3	962.2	935.3	882.9	766.4	624.5	495.2	398.1	337.7	322.6	318.4
15°	1015.5	1006.5	969.3	867.9	671.2	474.5	340.1	282.5	260.8	258.0	255.2
17.5°	1065.5	1050.9	999.4	813.6	542.9	337.2	262.7	246.2	236.8	233.9	232.5
20°	1111.2	1092.4	1017.4	731.5	405.6	262.7	235.4	224.5	216.0	212.7	210.8
22.5°	1157.0	1130.1	1017.4	619.8	304.2	233.0	216.0	206.1	196.2	192.0	189.6
25°	1204.6	1168.8	999.4	495.2	244.8	213.7	197.6	186.8	178.3	173.1	171.2
27.5°	1250.8	1201.3	958.4	377.3	217.9	196.7	180.6	170.3	162.3	158.5	158.5
30°	1294.7	1233.4	900.9	286.3	200.5	180.2	165.1	156.1	148.1	144.3	144.8
32.5°	1354.1	1274.0	839.6	234.9	185.4	164.6	150.9	142.4	135.4	132.5	132.5
35°	1436.7	1333.9	786.7	230.6	172.6	151.9	138.2	130.2	123.1	120.7	120.7
37.5°	1553.7	1430.5	758.9	258.9	162.3	140.6	127.8	119.3	112.7	110.8	110.4
40°	1698.0	1561.7	774.0	287.2	155.2	130.7	118.4	109.9	104.2	101.9	101.4
42.5°	1869.2	1723.4	857.5	308.9	150.5	122.2	109.4	100.0	96.2	95.3	95.3
45°	2065.9	1901.3	985.3	332.0	142.9	114.1	100.5	93.4	90.6	90.1	89.6
47.5°	2289.4	2096.5	1133.4	360.8	135.4	106.6	93.4	88.7	86.3	85.4	85.4
50°	2511.1	2293.2	1285.7	376.9	129.2	99.5	87.7	84.0	82.1	81.6	81.6
52.5°	2743.2	2495.6	1408.9	361.8	124.0	93.9	83.0	80.2	78.3	77.8	77.8
55°	2964.4	2659.2	1430.1	307.1	113.7	88.2	77.8	76.4	74.1	74.1	73.6
57.5°	3154.9	2741.3	1280.1	225.5	103.3	79.7	72.6	71.2	69.3	68.9	68.4
60°	3329.9	2717.7	988.1	151.9	92.0	71.2	66.0	65.1	63.2	60.8	60.4
62.5°	3428.5	2613.9	675.9	99.0	80.7	62.3	58.5	58.0	53.8	49.1	48.1
65°	3465.8	2400.8	421.7	72.2	67.4	53.3	50.5	49.5	43.4	38.2	37.7
67.5°	3433.2	2049.8	212.7	57.1	53.3	44.3	41.5	41.5	37.3	32.5	32.1
70°	3303.0	1536.7	89.6	45.8	41.0	34.0	34.0	35.8	31.6	26.4	25.9
72.5°	3020.5	1033.9	47.6	34.9	30.7	24.1	27.8	29.2	25.0	19.8	19.8
75°	2401.2	630.6	33.0	25.9	19.3	17.0	21.2	22.2	17.0	13.2	12.7
77.5°	1642.3	362.2	22.2	16.5	12.3	9.9	14.6	13.7	9.0	6.1	6.6
80°	721.2	150.9	12.7	7.5	4.7	3.8	5.2	3.8	2.8	1.9	1.9
82.5°	84.4	35.4	4.7	2.8	1.9	0.9	0.5	0.0	0.0	0.0	0.0
85°	17.5	4.2	2.4	0.9	0.5	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	3.3	0.9	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)