

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P952379

Luminaire Tested: **GALN-SB6B-730-U-SLL**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P952379
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: GALN-SB6B-730-U-SLL
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(6) 70 CRI, 3000K, 450mA LIGHTSQUARES WITH 26 LEDS EACH AND SPILL LIGHT
ELIMINATOR LEFT OPTICS
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 34025 lumens
Efficiency: N/A
Efficacy: 154.4 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B3 - U0 - G5

Input Watts (W): 220.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P952379
 CATALOG NUMBER: GALN-SB6B-730-U-SLL

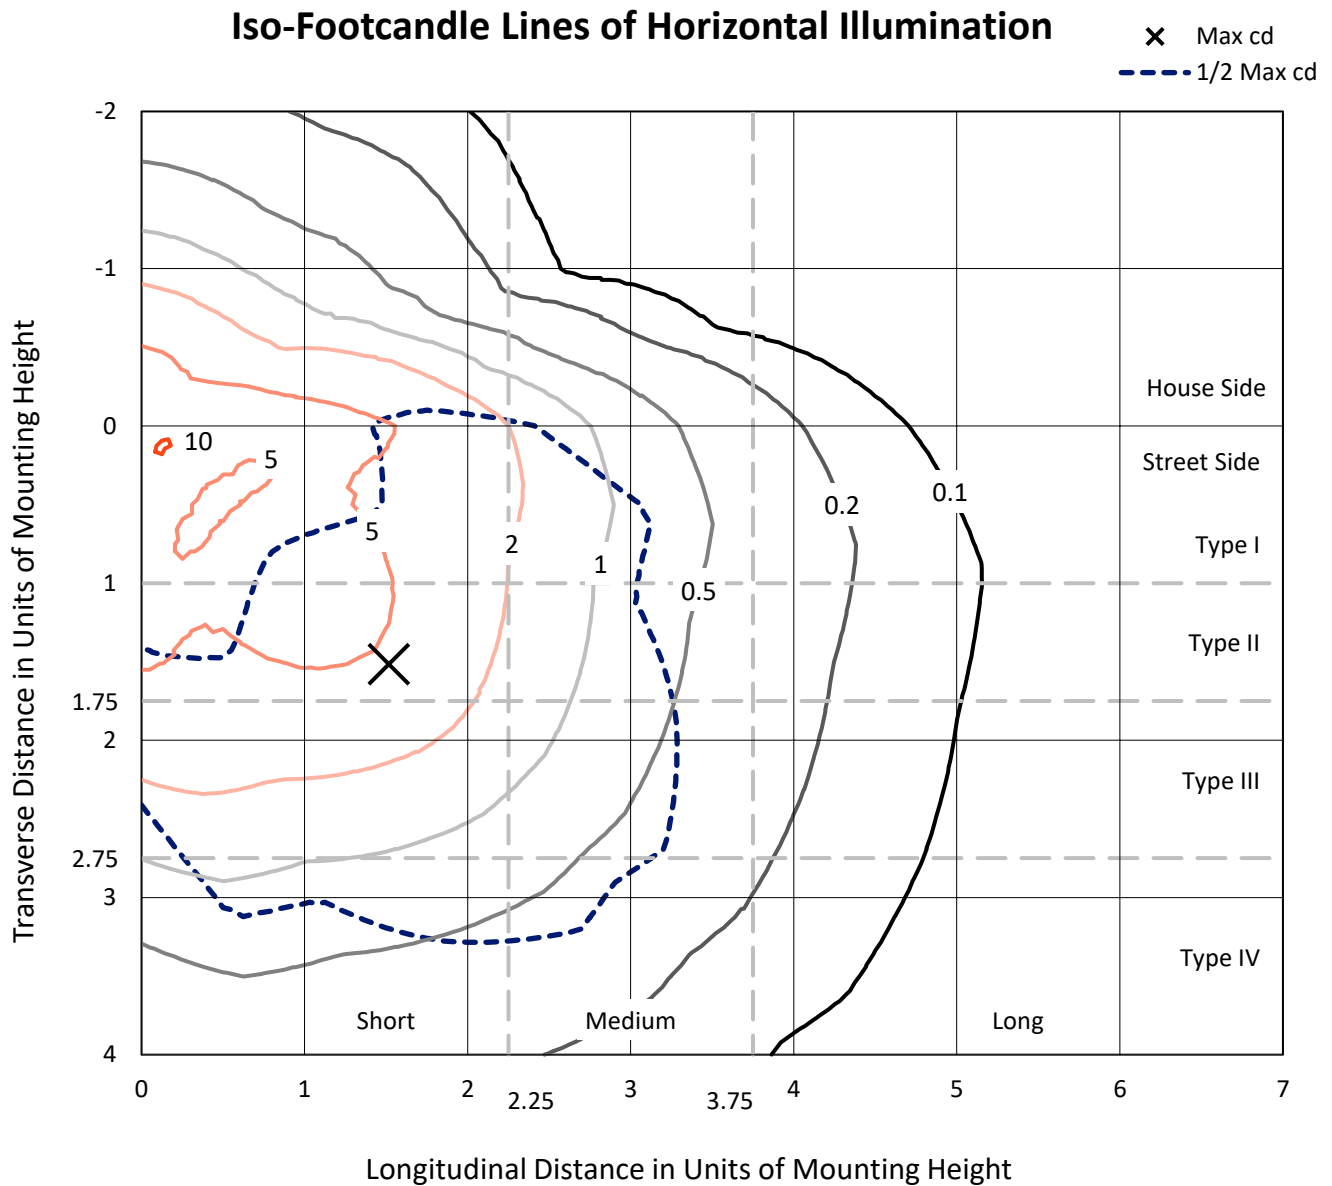


Based on 25 foot mounting height. Maximum calculated value = 10.4 fc
 Type IV - Short - N/A

REPORT NUMBER: P952379

CATALOG NUMBER: GALN-SB6B-730-U-SLL

Luminous Intensity Polar Plot

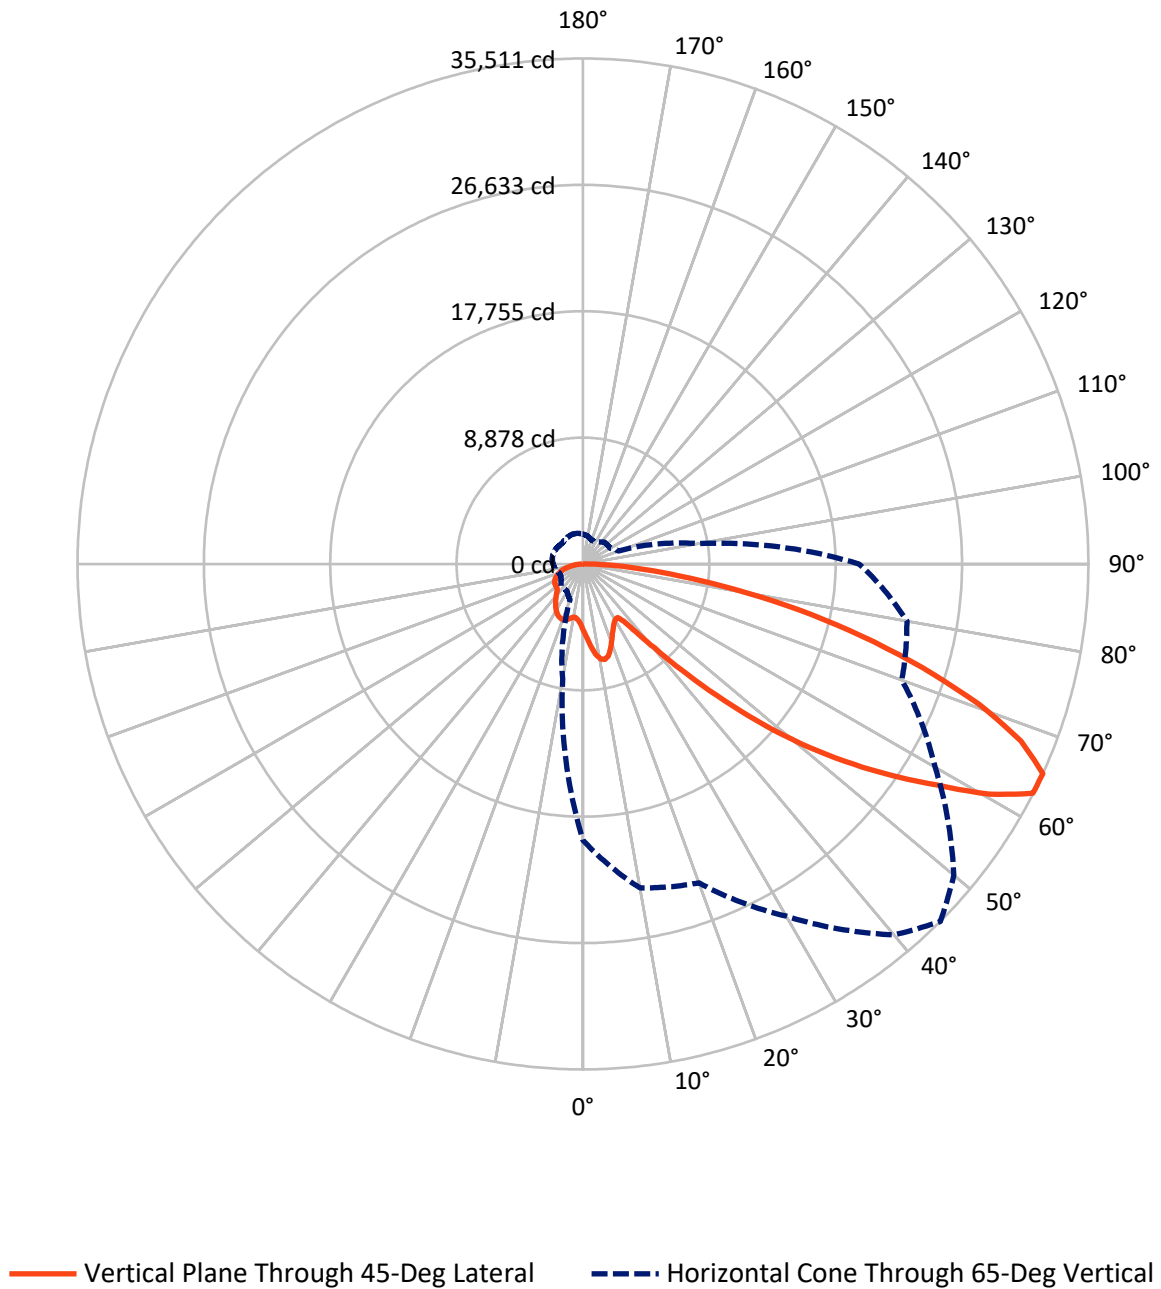

REPORT NUMBER: P952379

CATALOG NUMBER: GALN-SB6B-730-U-SLL

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	8647.4	0.0	8647.4
	% Fixture	25.4	0.0	25.4
Street Side	Lumens	25377.6	0.0	25377.6
	% Fixture	74.6	0.0	74.6
Total	Lumens	34025.0	0.0	34025.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	464.1	1.4
10°-20°	1457.0	4.3
20°-30°	2250.5	6.6
30°-40°	2852.0	8.4
40°-50°	4301.5	12.6
50°-60°	6949.8	20.4
60°-70°	8664.0	25.5
70°-80°	5681.4	16.7
80°-90°	1404.6	4.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	34025.0	100.0
0°-180°	34025.0	100.0

Coefficient of Utilization



REPORT NUMBER: P952379


CATALOG NUMBER: GALN-SB6B-730-U-SLL

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	2288.6	6.7			
FM	(30°-60°)	9924.4	29.2			
FH	(60°-80°)	12007.6	35.3			G5
FVH	(80°-90°)	1157.1	3.4			G5
BL	(0°-30°)	1883.1	5.5	B3/2500		
BM	(30°-60°)	4179.0	12.3	B3/5000		
BH	(60°-80°)	2337.9	6.9	B3/2500		G3/2500
BVH	(80°-90°)	247.5	0.7			G3/500
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G5

Type IV Short

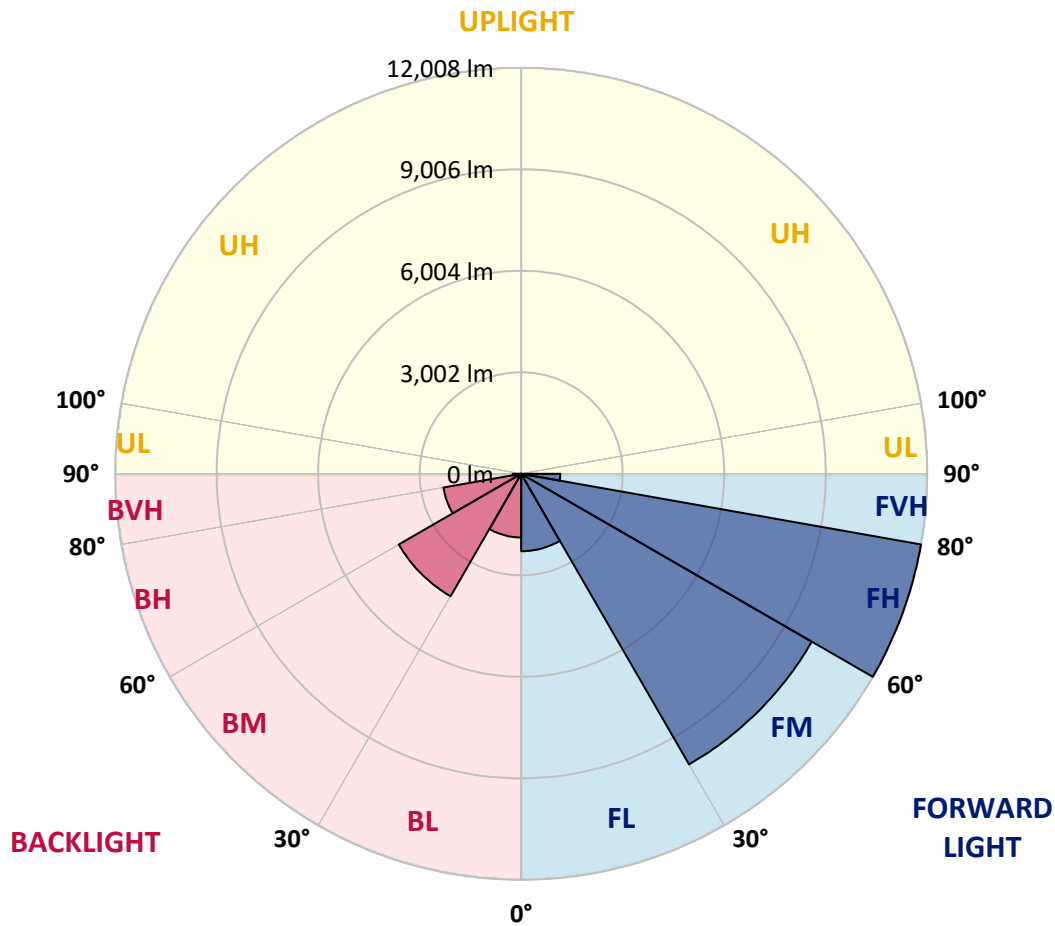

REPORT NUMBER: P952379

CATALOG NUMBER: GALN-SB6B-730-U-SLL

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7
2.5°	5031.5	5050.6	5069.8	5096.9	5124.0	5140.1	5156.3	5164.4	5172.5	5168.9	5172.5
5°	5410.3	5477.0	5543.7	5609.8	5676.1	5712.0	5747.9	5769.6	5791.5	5808.0	5791.5
7.5°	5791.0	5899.4	6007.7	6105.2	6202.6	6261.3	6320.1	6351.8	6383.4	6398.7	6383.4
10°	6082.7	6210.9	6339.1	6453.5	6567.8	6637.1	6706.1	6736.9	6767.6	6779.3	6767.6
12.5°	6261.3	6400.3	6539.1	6642.5	6745.6	6795.8	6846.1	6863.0	6879.9	6881.6	6879.9
15°	6370.0	6489.9	6609.6	6674.5	6739.5	6741.2	6743.0	6725.1	6707.1	6686.0	6707.1
17.5°	6431.0	6512.0	6593.0	6594.2	6595.3	6522.6	6449.9	6383.3	6316.5	6269.4	6316.5
20°	6498.3	6526.5	6554.9	6469.6	6384.3	6223.8	6063.3	5946.4	5829.6	5757.7	5829.6
22.5°	6576.4	6539.5	6502.5	6325.8	6149.1	5913.0	5677.0	5530.8	5384.7	5305.3	5384.7
25°	6677.0	6560.3	6443.6	6175.3	5907.1	5620.4	5333.7	5180.0	5026.7	4951.6	5026.7
27.5°	6813.4	6604.8	6396.0	6040.7	5685.6	5367.8	5050.0	4898.8	4747.9	4676.9	4747.9
30°	6997.4	6686.3	6375.4	5938.0	5500.7	5169.6	4838.5	4698.3	4558.1	4492.0	4558.1
32.5°	7214.7	6788.6	6362.8	5868.0	5373.2	5062.0	4750.9	4640.8	4530.6	4483.0	4530.6
35°	7478.6	6957.2	6436.0	5920.4	5405.0	5188.8	4972.8	4947.1	4921.5	4917.5	4921.5
37.5°	7923.0	7309.7	6696.4	6227.8	5759.2	5745.2	5731.2	5848.6	5966.0	6027.1	5966.0
40°	8594.4	7927.4	7260.5	6912.0	6563.5	6809.5	7055.4	7340.9	7626.4	7768.6	7626.4
42.5°	9484.9	8823.2	8161.4	7960.7	7759.9	8296.4	8832.9	9352.1	9871.3	10176.1	9871.3
45°	10584.6	9990.1	9395.5	9307.0	9218.3	10077.8	10937.4	11790.5	12643.9	13161.8	12643.9
47.5°	11959.8	11381.6	10803.1	10785.1	10767.2	12007.1	13246.6	14495.6	15744.5	16477.9	15744.5
50°	13762.4	13048.0	12333.8	12336.9	12339.9	13937.8	15535.7	17184.4	18833.1	19829.8	18833.1
52.5°	15831.6	14966.6	14101.7	14014.3	13926.7	15835.3	17744.0	19783.9	21823.6	23018.4	21823.6
55°	18034.5	17179.9	16325.3	15984.3	15643.4	17767.7	19891.8	22323.6	24755.4	26176.5	24755.4
57.5°	20038.1	19572.7	19107.2	18423.4	17739.7	19884.6	22029.5	24784.0	27538.3	29300.4	27538.3
60°	21249.1	21971.9	22694.9	21845.7	20996.5	23026.3	25056.2	28005.2	30954.3	32858.8	30954.3
62.5°	20634.2	22609.3	24584.3	24488.6	24392.8	26252.2	28111.9	30917.7	33723.3	35483.7	33723.3
65°	19403.4	21257.2	23110.9	23477.7	23844.3	26207.4	28570.6	31291.3	34011.8	35510.6	34011.8
67.5°	17754.4	19517.5	21280.5	21452.5	21624.3	24086.5	26548.5	29280.8	32013.2	33187.4	32013.2
70°	15773.2	17690.8	19608.7	19685.5	19762.5	21964.4	24166.0	26517.4	28868.6	29521.2	28868.6
72.5°	13412.3	15612.9	17813.6	17868.9	17924.1	19646.7	21369.4	23130.5	24891.3	24957.4	24891.3
75°	10425.7	12703.3	14980.9	15185.4	15389.9	16730.1	18070.4	19310.1	20549.8	20217.6	20549.8
77.5°	7449.0	9575.1	11701.3	11994.0	12286.6	13305.5	14324.3	15203.5	16082.9	15512.0	16082.9
80°	4875.3	6664.0	8452.6	8816.3	9180.1	9949.6	10718.7	11180.5	11642.1	10723.7	11642.1
82.5°	2834.0	4056.8	5279.8	5686.1	6092.6	6622.2	7151.9	7344.5	7537.0	6815.2	7537.0
85°	1246.9	1895.9	2544.9	2890.5	3236.2	3671.3	4106.4	4215.7	4325.0	3746.9	4325.0
87.5°	386.0	604.1	822.3	1015.1	1207.9	1425.5	1643.1	1652.5	1661.6	1395.0	1661.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P952379

CATALOG NUMBER: GALN-SB6B-730-U-SLL

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7
2.5°	5164.4	5156.3	5140.1	5124.0	5096.9	5069.8	5050.6	5031.5	4992.9	4954.3	4913.2
5°	5769.6	5747.9	5712.0	5676.1	5609.8	5543.7	5477.0	5410.3	5325.1	5239.8	5154.7
7.5°	6351.8	6320.1	6261.3	6202.6	6105.2	6007.7	5899.4	5791.0	5650.2	5509.6	5379.6
10°	6736.9	6706.1	6637.1	6567.8	6453.5	6339.1	6210.9	6082.7	5904.8	5726.9	5555.0
12.5°	6863.0	6846.1	6795.8	6745.6	6642.5	6539.1	6400.3	6261.3	6065.8	5870.5	5675.9
15°	6725.1	6743.0	6741.2	6739.5	6674.5	6609.6	6489.9	6370.0	6166.2	5962.4	5751.3
17.5°	6383.3	6449.9	6522.6	6595.3	6594.2	6593.0	6512.0	6431.0	6224.4	6017.7	5787.4
20°	5946.4	6063.3	6223.8	6384.3	6469.6	6554.9	6526.5	6498.3	6283.6	6068.7	5815.6
22.5°	5530.8	5677.0	5913.0	6149.1	6325.8	6502.5	6539.5	6576.4	6357.0	6137.5	5853.6
25°	5180.0	5333.7	5620.4	5907.1	6175.3	6443.6	6560.3	6677.0	6461.9	6247.0	5922.6
27.5°	4898.8	5050.0	5367.8	5685.6	6040.7	6396.0	6604.8	6813.4	6608.4	6403.2	6030.3
30°	4698.3	4838.5	5169.6	5500.7	5938.0	6375.4	6686.3	6997.4	6799.2	6601.2	6169.8
32.5°	4640.8	4750.9	5062.0	5373.2	5868.0	6362.8	6788.6	7214.7	7018.5	6822.4	6315.4
35°	4947.1	4972.8	5188.8	5405.0	5920.4	6436.0	6957.2	7478.6	7290.8	7102.8	6481.3
37.5°	5848.6	5731.2	5745.2	5759.2	6227.8	6696.4	7309.7	7923.0	7683.5	7444.0	6667.1
40°	7340.9	7055.4	6809.5	6563.5	6912.0	7260.5	7927.4	8594.4	8245.4	7896.4	6903.0
42.5°	9352.1	8832.9	8296.4	7759.9	7960.7	8161.4	8823.2	9484.9	8981.2	8477.4	7211.6
45°	11790.5	10937.4	10077.8	9218.3	9307.0	9395.5	9990.1	10584.6	9905.0	9225.5	7617.7
47.5°	14495.6	13246.6	12007.1	10767.2	10785.1	10803.1	11381.6	11959.8	11003.5	10046.9	8050.4
50°	17184.4	15535.7	13937.8	12339.9	12336.9	12333.8	13048.0	13762.4	12320.5	10878.5	8451.9
52.5°	19783.9	17744.0	15835.3	13926.7	14014.3	14101.7	14966.6	15831.6	13704.0	11576.5	8712.6
55°	22323.6	19891.8	17767.7	15643.4	15984.3	16325.3	17179.9	18034.5	14930.6	11827.0	8655.1
57.5°	24784.0	22029.5	19884.6	17739.7	18423.4	19107.2	19572.7	20038.1	15800.0	11561.8	8250.8
60°	28005.2	25056.2	23026.3	20996.5	21845.7	22694.9	21971.9	21249.1	16017.2	10785.1	7498.4
62.5°	30917.7	28111.9	26252.2	24392.8	24488.6	24584.3	22609.3	20634.2	15102.5	9570.8	6480.9
65°	31291.3	28570.6	26207.4	23844.3	23477.7	23110.9	21257.2	19403.4	13808.2	8212.9	5442.8
67.5°	29280.8	26548.5	24086.5	21624.3	21452.5	21280.5	19517.5	17754.4	12267.9	6781.5	4425.9
70°	26517.4	24166.0	21964.4	19762.5	19685.5	19608.7	17690.8	15773.2	10587.3	5401.4	3484.8
72.5°	23130.5	21369.4	19646.7	17924.1	17868.9	17813.6	15612.9	13412.3	8765.3	4118.6	2664.1
75°	19310.1	18070.4	16730.1	15389.9	15185.4	14980.9	12703.3	10425.7	6676.8	2927.9	1933.6
77.5°	15203.5	14324.3	13305.5	12286.6	11994.0	11701.3	9575.1	7449.0	4673.2	1897.3	1310.3
80°	11180.5	10718.7	9949.6	9180.1	8816.3	8452.6	6664.0	4875.3	3010.8	1146.3	844.2
82.5°	7344.5	7151.9	6622.2	6092.6	5686.1	5279.8	4056.8	2834.0	1742.6	651.4	519.2
85°	4215.7	4106.4	3671.3	3236.2	2890.5	2544.9	1895.9	1246.9	783.9	321.0	277.6
87.5°	1652.5	1643.1	1425.5	1207.9	1015.1	822.3	604.1	386.0	256.7	127.5	115.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P952379

CATALOG NUMBER: GALN-SB6B-730-U-SLL

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7
2.5°	4872.3	4831.0	4789.7	4750.2	4710.7	4672.4	4629.9	4595.4	4561.1	4530.1	4499.2
5°	5069.8	4984.1	4898.7	4818.8	4738.9	4663.5	4589.0	4524.0	4458.8	4404.2	4349.8
7.5°	5249.7	5123.1	4996.5	4885.0	4773.5	4670.7	4574.2	4487.7	4401.3	4329.5	4257.7
10°	5383.4	5229.7	5075.9	4944.1	4811.9	4685.0	4581.4	4490.2	4399.0	4327.2	4255.4
12.5°	5481.3	5299.9	5118.6	4969.4	4820.2	4686.8	4590.4	4515.7	4441.4	4393.6	4346.2
15°	5540.1	5331.3	5122.5	4949.8	4777.1	4629.4	4552.2	4516.4	4480.9	4487.3	4493.8
17.5°	5557.0	5314.7	5072.3	4864.6	4656.8	4483.0	4435.5	4448.6	4461.5	4539.8	4618.0
20°	5562.4	5268.7	4975.0	4717.5	4460.1	4257.7	4245.1	4306.2	4367.2	4503.1	4639.2
22.5°	5569.6	5212.3	4855.0	4545.0	4234.9	4004.6	4029.2	4119.5	4209.8	4364.9	4520.4
25°	5598.0	5156.7	4715.5	4352.3	3989.3	3753.2	3819.6	3923.8	4027.9	4167.4	4307.1
27.5°	5657.2	5119.5	4581.8	4176.2	3770.6	3555.7	3636.5	3737.1	3837.6	3952.3	4066.9
30°	5738.4	5102.1	4465.4	4029.0	3592.5	3412.1	3475.5	3555.2	3635.3	3730.4	3825.6
32.5°	5808.4	5080.5	4352.3	3902.1	3451.6	3306.2	3334.4	3381.6	3428.8	3504.7	3580.9
35°	5859.7	5040.0	4220.6	3777.3	3334.0	3212.8	3201.1	3214.1	3227.2	3285.2	3343.0
37.5°	5890.2	4970.5	4050.7	3630.4	3210.1	3104.2	3061.5	3047.1	3032.7	3074.4	3115.9
40°	5909.5	4874.8	3840.3	3455.2	3070.1	2974.0	2908.5	2876.0	2843.5	2873.5	2903.5
42.5°	5945.9	4776.0	3606.5	3261.8	2917.1	2828.6	2746.0	2702.9	2659.8	2684.3	2708.9
45°	6010.0	4684.3	3358.8	3056.4	2754.1	2664.3	2584.4	2542.4	2500.6	2521.1	2541.9
47.5°	6054.0	4608.5	3163.1	2894.0	2624.8	2509.0	2440.3	2405.1	2369.9	2389.3	2408.5
50°	6025.3	4525.9	3026.6	2786.1	2545.5	2393.2	2313.3	2282.1	2251.0	2281.2	2311.5
52.5°	5848.4	4386.4	2924.7	2715.0	2505.4	2330.4	2218.7	2187.8	2157.1	2202.6	2247.8
55°	5483.1	4155.2	2827.3	2663.4	2499.5	2336.7	2168.4	2119.6	2071.0	2135.4	2199.7
57.5°	4940.0	3829.2	2718.2	2602.4	2486.6	2343.0	2138.3	2067.2	1996.1	2065.4	2134.7
60°	4211.6	3405.8	2600.1	2509.0	2418.0	2323.2	2109.9	2017.8	1925.5	1986.4	2047.1
62.5°	3391.1	2899.2	2407.2	2346.7	2286.4	2274.7	2076.9	1961.6	1846.5	1885.1	1923.7
65°	2672.9	2443.3	2213.7	2185.1	2156.6	2158.0	2007.2	1884.8	1762.2	1777.1	1791.8
67.5°	2070.4	2005.2	1939.9	1955.9	1971.7	1967.7	1883.0	1781.0	1679.0	1674.4	1669.7
70°	1568.3	1586.9	1605.4	1679.4	1753.2	1753.2	1725.3	1652.8	1580.3	1564.1	1548.0
72.5°	1209.7	1265.9	1322.3	1427.1	1531.8	1549.4	1549.8	1500.0	1450.3	1426.6	1403.1
75°	939.3	990.3	1041.3	1158.7	1276.1	1357.3	1350.5	1312.2	1273.8	1251.2	1228.4
77.5°	723.2	757.8	792.7	906.7	1020.7	1154.4	1150.8	1120.1	1089.4	1066.4	1043.5
80°	542.2	556.6	570.9	667.5	763.9	923.7	923.2	897.5	871.7	852.4	833.1
82.5°	387.4	390.0	392.8	463.9	535.0	671.5	679.0	666.4	653.9	640.2	626.6
85°	234.3	233.0	231.6	283.7	335.7	437.2	447.0	433.6	420.1	404.9	389.6
87.5°	102.7	101.4	100.2	121.4	142.7	184.9	197.5	192.1	186.7	183.8	181.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P952379

CATALOG NUMBER: GALN-SB6B-730-U-SLL

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7
2.5°	4472.1	4445.0	4417.7	4390.6	4369.6	4348.4	4331.3	4314.3	4301.0	4287.7	4275.5
5°	4301.7	4253.6	4210.0	4166.2	4132.6	4098.8	4075.3	4051.8	4035.1	4018.4	4005.6
7.5°	4197.2	4136.5	4083.0	4029.7	3989.7	3949.8	3921.8	3893.8	3874.6	3855.6	3844.1
10°	4190.2	4124.9	4064.7	4004.6	3956.8	3908.9	3877.6	3846.0	3827.9	3809.8	3800.1
12.5°	4294.9	4243.9	4181.6	4119.5	4058.4	3997.4	3957.0	3916.6	3896.3	3876.2	3867.9
15°	4480.5	4467.2	4413.2	4359.2	4272.3	4185.4	4124.0	4062.6	4034.4	4006.4	3995.6
17.5°	4659.7	4701.2	4657.5	4614.1	4499.0	4383.9	4293.4	4203.0	4161.3	4119.5	4105.8
20°	4726.3	4813.4	4793.3	4773.0	4641.4	4510.0	4399.0	4288.2	4234.9	4181.4	4164.4
22.5°	4633.7	4747.0	4759.2	4771.2	4645.5	4519.8	4405.7	4291.3	4235.1	4178.7	4159.9
25°	4418.6	4530.1	4571.7	4613.2	4510.1	4407.3	4305.7	4204.4	4155.6	4106.9	4089.1
27.5°	4156.3	4245.7	4292.0	4338.5	4265.1	4191.8	4113.0	4034.2	4001.5	3968.7	3960.6
30°	3899.7	3974.0	4011.8	4049.5	3993.6	3937.6	3881.2	3824.5	3807.8	3790.9	3790.9
32.5°	3652.0	3723.2	3765.1	3807.1	3755.7	3704.2	3659.1	3614.1	3603.1	3592.2	3593.6
35°	3413.4	3483.9	3534.2	3584.5	3547.8	3511.4	3469.7	3428.3	3411.6	3395.0	3391.5
37.5°	3186.1	3256.4	3318.6	3380.7	3363.8	3346.9	3308.7	3270.3	3239.9	3209.8	3193.8
40°	2971.3	3039.2	3110.7	3182.3	3186.4	3190.4	3157.9	3125.4	3081.2	3037.4	3007.6
42.5°	2773.1	2837.6	2914.8	2992.0	3012.6	3033.3	3005.8	2978.5	2923.8	2869.0	2825.7
45°	2602.9	2664.0	2744.0	2824.1	2853.7	2883.4	2858.6	2834.0	2771.3	2708.9	2658.0
47.5°	2468.3	2527.9	2606.9	2685.9	2720.0	2754.1	2736.9	2719.6	2664.0	2608.3	2561.3
50°	2367.9	2424.1	2494.8	2565.6	2609.4	2653.2	2652.1	2651.4	2606.9	2562.4	2518.9
52.5°	2299.5	2351.0	2416.9	2483.0	2534.9	2586.8	2596.1	2605.4	2569.2	2532.9	2493.9
55°	2255.3	2311.0	2368.8	2426.4	2481.4	2536.5	2549.4	2562.4	2530.8	2499.2	2465.0
57.5°	2200.0	2265.4	2322.5	2379.8	2435.2	2490.5	2503.6	2516.7	2484.8	2452.8	2419.1
60°	2122.1	2197.2	2255.2	2313.3	2369.0	2424.6	2439.0	2453.4	2422.1	2391.1	2356.2
62.5°	2011.2	2098.8	2160.7	2222.7	2273.7	2324.6	2338.5	2352.3	2324.1	2295.9	2259.3
65°	1885.5	1979.4	2038.6	2097.9	2142.8	2187.7	2201.8	2215.8	2188.7	2161.6	2126.1
67.5°	1756.2	1842.9	1899.1	1955.2	1993.9	2032.7	2046.5	2060.2	2035.2	2010.5	1977.4
70°	1624.1	1700.2	1748.7	1797.2	1832.2	1867.2	1880.5	1893.8	1873.5	1853.2	1821.6
72.5°	1463.0	1522.8	1566.6	1610.4	1644.7	1679.0	1694.8	1710.6	1693.8	1676.9	1646.7
75°	1272.9	1317.4	1357.1	1396.8	1428.0	1459.3	1475.8	1492.3	1484.1	1475.8	1450.5
77.5°	1079.7	1115.8	1149.9	1184.0	1216.9	1249.6	1265.0	1280.5	1269.0	1257.1	1231.6
80°	863.2	893.2	921.9	950.6	975.6	1000.4	1020.8	1041.3	1036.3	1031.4	997.1
82.5°	624.1	621.6	611.5	601.4	654.6	707.7	742.6	777.4	775.2	772.9	744.0
85°	376.7	363.6	335.7	307.9	357.6	407.5	450.6	493.7	490.1	486.5	463.9
87.5°	180.4	179.9	158.7	137.3	158.2	179.2	196.6	214.0	209.7	205.0	193.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P952379

CATALOG NUMBER: GALN-SB6B-730-U-SLL

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7
2.5°	4263.1	4247.8	4263.1	4275.5	4287.7	4301.0	4314.3	4331.3	4348.4	4369.6	4390.6
5°	3992.9	3980.3	3992.9	4005.6	4018.4	4035.1	4051.8	4075.3	4098.8	4132.6	4166.2
7.5°	3832.8	3824.1	3832.8	3844.1	3855.6	3874.6	3893.8	3921.8	3949.8	3989.7	4029.7
10°	3790.4	3786.4	3790.4	3800.1	3809.8	3827.9	3846.0	3877.6	3908.9	3956.8	4004.6
12.5°	3859.7	3858.2	3859.7	3867.9	3876.2	3896.3	3916.6	3957.0	3997.4	4058.4	4119.5
15°	3984.8	3983.9	3984.8	3995.6	4006.4	4034.4	4062.6	4124.0	4185.4	4272.3	4359.2
17.5°	4092.0	4089.8	4092.0	4105.8	4119.5	4161.3	4203.0	4293.4	4383.9	4499.0	4614.1
20°	4147.3	4141.9	4147.3	4164.4	4181.4	4234.9	4288.2	4399.0	4510.0	4641.4	4773.0
22.5°	4141.0	4132.9	4141.0	4159.9	4178.7	4235.1	4291.3	4405.7	4519.8	4645.5	4771.2
25°	4071.5	4061.1	4071.5	4089.1	4106.9	4155.6	4204.4	4305.7	4407.3	4510.1	4613.2
27.5°	3952.5	3949.8	3952.5	3960.6	3968.7	4001.5	4034.2	4113.0	4191.8	4265.1	4338.5
30°	3790.9	3793.6	3790.9	3790.9	3790.9	3807.8	3824.5	3881.2	3937.6	3993.6	4049.5
32.5°	3595.2	3597.9	3595.2	3593.6	3592.2	3603.1	3614.1	3659.1	3704.2	3755.7	3807.1
35°	3387.9	3386.1	3387.9	3391.5	3395.0	3411.6	3428.3	3469.7	3511.4	3547.8	3584.5
37.5°	3177.8	3168.8	3177.8	3193.8	3209.8	3239.9	3270.3	3308.7	3346.9	3363.8	3380.7
40°	2978.2	2960.6	2978.2	3007.6	3037.4	3081.2	3125.4	3157.9	3190.4	3186.4	3182.3
42.5°	2782.5	2754.1	2782.5	2825.7	2869.0	2923.8	2978.5	3005.8	3033.3	3012.6	2992.0
45°	2607.2	2574.6	2607.2	2658.0	2708.9	2771.3	2834.0	2858.6	2883.4	2853.7	2824.1
47.5°	2514.4	2483.0	2514.4	2561.3	2608.3	2664.0	2719.6	2736.9	2754.1	2720.0	2685.9
50°	2475.5	2445.3	2475.5	2518.9	2562.4	2606.9	2651.4	2652.1	2653.2	2609.4	2565.6
52.5°	2455.2	2427.3	2455.2	2493.9	2532.9	2569.2	2605.4	2596.1	2586.8	2534.9	2483.0
55°	2430.9	2405.8	2430.9	2465.0	2499.2	2530.8	2562.4	2549.4	2536.5	2481.4	2426.4
57.5°	2385.1	2359.1	2385.1	2419.1	2452.8	2484.8	2516.7	2503.6	2490.5	2435.2	2379.8
60°	2321.4	2294.5	2321.4	2356.2	2391.1	2422.1	2453.4	2439.0	2424.6	2369.0	2313.3
62.5°	2222.7	2190.3	2222.7	2259.3	2295.9	2324.1	2352.3	2338.5	2324.6	2273.7	2222.7
65°	2090.7	2062.9	2090.7	2126.1	2161.6	2188.7	2215.8	2201.8	2187.7	2142.8	2097.9
67.5°	1944.4	1919.2	1944.4	1977.4	2010.5	2035.2	2060.2	2046.5	2032.7	1993.9	1955.2
70°	1790.0	1761.3	1790.0	1821.6	1853.2	1873.5	1893.8	1880.5	1867.2	1832.2	1797.2
72.5°	1616.7	1588.9	1616.7	1646.7	1676.9	1693.8	1710.6	1694.8	1679.0	1644.7	1610.4
75°	1425.2	1398.6	1425.2	1450.5	1475.8	1484.1	1492.3	1475.8	1459.3	1428.0	1396.8
77.5°	1206.1	1184.9	1206.1	1231.6	1257.1	1269.0	1280.5	1265.0	1249.6	1216.9	1184.0
80°	962.7	922.8	962.7	997.1	1031.4	1036.3	1041.3	1020.8	1000.4	975.6	950.6
82.5°	714.9	689.4	714.9	744.0	772.9	775.2	777.4	742.6	707.7	654.6	601.4
85°	441.3	418.3	441.3	463.9	486.5	490.1	493.7	450.6	407.5	357.6	307.9
87.5°	181.7	170.6	181.7	193.5	205.0	209.7	214.0	196.6	179.2	158.2	137.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P952379

CATALOG NUMBER: GALN-SB6B-730-U-SLL

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7
2.5°	4417.7	4445.0	4472.1	4499.2	4530.1	4561.1	4595.4	4629.9	4672.4	4710.7	4750.2
5°	4210.0	4253.6	4301.7	4349.8	4404.2	4458.8	4524.0	4589.0	4663.5	4738.9	4818.8
7.5°	4083.0	4136.5	4197.2	4257.7	4329.5	4401.3	4487.7	4574.2	4670.7	4773.5	4885.0
10°	4064.7	4124.9	4190.2	4255.4	4327.2	4399.0	4490.2	4581.4	4685.0	4811.9	4944.1
12.5°	4181.6	4243.9	4294.9	4346.2	4393.6	4441.4	4515.7	4590.4	4686.8	4820.2	4969.4
15°	4413.2	4467.2	4480.5	4493.8	4487.3	4480.9	4516.4	4552.2	4629.4	4777.1	4949.8
17.5°	4657.5	4701.2	4659.7	4618.0	4539.8	4461.5	4448.6	4435.5	4483.0	4656.8	4864.6
20°	4793.3	4813.4	4726.3	4639.2	4503.1	4367.2	4306.2	4245.1	4257.7	4460.1	4717.5
22.5°	4759.2	4747.0	4633.7	4520.4	4364.9	4209.8	4119.5	4029.2	4004.6	4234.9	4545.0
25°	4571.7	4530.1	4418.6	4307.1	4167.4	4027.9	3923.8	3819.6	3753.2	3989.3	4352.3
27.5°	4292.0	4245.7	4156.3	4066.9	3952.3	3837.6	3737.1	3636.5	3555.7	3770.6	4176.2
30°	4011.8	3974.0	3899.7	3825.6	3730.4	3635.3	3555.2	3475.5	3412.1	3592.5	4029.0
32.5°	3765.1	3723.2	3652.0	3580.9	3504.7	3428.8	3381.6	3334.4	3306.2	3451.6	3902.1
35°	3534.2	3483.9	3413.4	3343.0	3285.2	3227.2	3214.1	3201.1	3212.8	3334.0	3777.3
37.5°	3318.6	3256.4	3186.1	3115.9	3074.4	3032.7	3047.1	3061.5	3104.2	3210.1	3630.4
40°	3110.7	3039.2	2971.3	2903.5	2873.5	2843.5	2876.0	2908.5	2974.0	3070.1	3455.2
42.5°	2914.8	2837.6	2773.1	2708.9	2684.3	2659.8	2702.9	2746.0	2828.6	2917.1	3261.8
45°	2744.0	2664.0	2602.9	2541.9	2521.1	2500.6	2542.4	2584.4	2664.3	2754.1	3056.4
47.5°	2606.9	2527.9	2468.3	2408.5	2389.3	2369.9	2405.1	2440.3	2509.0	2624.8	2894.0
50°	2494.8	2424.1	2367.9	2311.5	2281.2	2251.0	2282.1	2313.3	2393.2	2545.5	2786.1
52.5°	2416.9	2351.0	2299.5	2247.8	2202.6	2157.1	2187.8	2218.7	2330.4	2505.4	2715.0
55°	2368.8	2311.0	2255.3	2199.7	2135.4	2071.0	2119.6	2168.4	2336.7	2499.5	2663.4
57.5°	2322.5	2265.4	2200.0	2134.7	2065.4	1996.1	2067.2	2138.3	2343.0	2486.6	2602.4
60°	2255.2	2197.2	2122.1	2047.1	1986.4	1925.5	2017.8	2109.9	2323.2	2418.0	2509.0
62.5°	2160.7	2098.8	2011.2	1923.7	1885.1	1846.5	1961.6	2076.9	2274.7	2286.4	2346.7
65°	2038.6	1979.4	1885.5	1791.8	1777.1	1762.2	1884.8	2007.2	2158.0	2156.6	2185.1
67.5°	1899.1	1842.9	1756.2	1669.7	1674.4	1679.0	1781.0	1883.0	1967.7	1971.7	1955.9
70°	1748.7	1700.2	1624.1	1548.0	1564.1	1580.3	1652.8	1725.3	1753.2	1753.2	1679.4
72.5°	1566.6	1522.8	1463.0	1403.1	1426.6	1450.3	1500.0	1549.8	1549.4	1531.8	1427.1
75°	1357.1	1317.4	1272.9	1228.4	1251.2	1273.8	1312.2	1350.5	1357.3	1276.1	1158.7
77.5°	1149.9	1115.8	1079.7	1043.5	1066.4	1089.4	1120.1	1150.8	1154.4	1020.7	906.7
80°	921.9	893.2	863.2	833.1	852.4	871.7	897.5	923.2	923.7	763.9	667.5
82.5°	611.5	621.6	624.1	626.6	640.2	653.9	666.4	679.0	671.5	535.0	463.9
85°	335.7	363.6	376.7	389.6	404.9	420.1	433.6	447.0	437.2	335.7	283.7
87.5°	158.7	179.9	180.4	181.0	183.8	186.7	192.1	197.5	184.9	142.7	121.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P952379

CATALOG NUMBER: GALN-SB6B-730-U-SLL

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7	4678.7
2.5°	4789.7	4831.0	4872.3	4913.2	4954.3	4992.9	5031.5
5°	4898.7	4984.1	5069.8	5154.7	5239.8	5325.1	5410.3
7.5°	4996.5	5123.1	5249.7	5379.6	5509.6	5650.2	5791.0
10°	5075.9	5229.7	5383.4	5555.0	5726.9	5904.8	6082.7
12.5°	5118.6	5299.9	5481.3	5675.9	5870.5	6065.8	6261.3
15°	5122.5	5331.3	5540.1	5751.3	5962.4	6166.2	6370.0
17.5°	5072.3	5314.7	5557.0	5787.4	6017.7	6224.4	6431.0
20°	4975.0	5268.7	5562.4	5815.6	6068.7	6283.6	6498.3
22.5°	4855.0	5212.3	5569.6	5853.6	6137.5	6357.0	6576.4
25°	4715.5	5156.7	5598.0	5922.6	6247.0	6461.9	6677.0
27.5°	4581.8	5119.5	5657.2	6030.3	6403.2	6608.4	6813.4
30°	4465.4	5102.1	5738.4	6169.8	6601.2	6799.2	6997.4
32.5°	4352.3	5080.5	5808.4	6315.4	6822.4	7018.5	7214.7
35°	4220.6	5040.0	5859.7	6481.3	7102.8	7290.8	7478.6
37.5°	4050.7	4970.5	5890.2	6667.1	7444.0	7683.5	7923.0
40°	3840.3	4874.8	5909.5	6903.0	7896.4	8245.4	8594.4
42.5°	3606.5	4776.0	5945.9	7211.6	8477.4	8981.2	9484.9
45°	3358.8	4684.3	6010.0	7617.7	9225.5	9905.0	10584.6
47.5°	3163.1	4608.5	6054.0	8050.4	10046.9	11003.5	11959.8
50°	3026.6	4525.9	6025.3	8451.9	10878.5	12320.5	13762.4
52.5°	2924.7	4386.4	5848.4	8712.6	11576.5	13704.0	15831.6
55°	2827.3	4155.2	5483.1	8655.1	11827.0	14930.6	18034.5
57.5°	2718.2	3829.2	4940.0	8250.8	11561.8	15800.0	20038.1
60°	2600.1	3405.8	4211.6	7498.4	10785.1	16017.2	21249.1
62.5°	2407.2	2899.2	3391.1	6480.9	9570.8	15102.5	20634.2
65°	2213.7	2443.3	2672.9	5442.8	8212.9	13808.2	19403.4
67.5°	1939.9	2005.2	2070.4	4425.9	6781.5	12267.9	17754.4
70°	1605.4	1586.9	1568.3	3484.8	5401.4	10587.3	15773.2
72.5°	1322.3	1265.9	1209.7	2664.1	4118.6	8765.3	13412.3
75°	1041.3	990.3	939.3	1933.6	2927.9	6676.8	10425.7
77.5°	792.7	757.8	723.2	1310.3	1897.3	4673.2	7449.0
80°	570.9	556.6	542.2	844.2	1146.3	3010.8	4875.3
82.5°	392.8	390.0	387.4	519.2	651.4	1742.6	2834.0
85°	231.6	233.0	234.3	277.6	321.0	783.9	1246.9
87.5°	100.2	101.4	102.7	115.1	127.5	256.7	386.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)