

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P945605

Luminaire Tested: **GALN-SB1C-730-U-T4W-HSS**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P945605
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: GALN-SB1C-730-U-T4W-HSS
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(1) 70 CRI, 3000K, 615mA LIGHTSQUARE WITH 26 LEDS AND TYPE IV WIDE OPTICS
WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5771 lumens
Efficiency: N/A
Efficacy: 106.1 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B1 - U0 - G2


Input Watts (W): 54.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P945605
 CATALOG NUMBER: GALN-SB1C-730-U-T4W-HSS


Iso-Footcandle Lines of Horizontal Illumination

✕ Max cd
 --- 1/2 Max cd

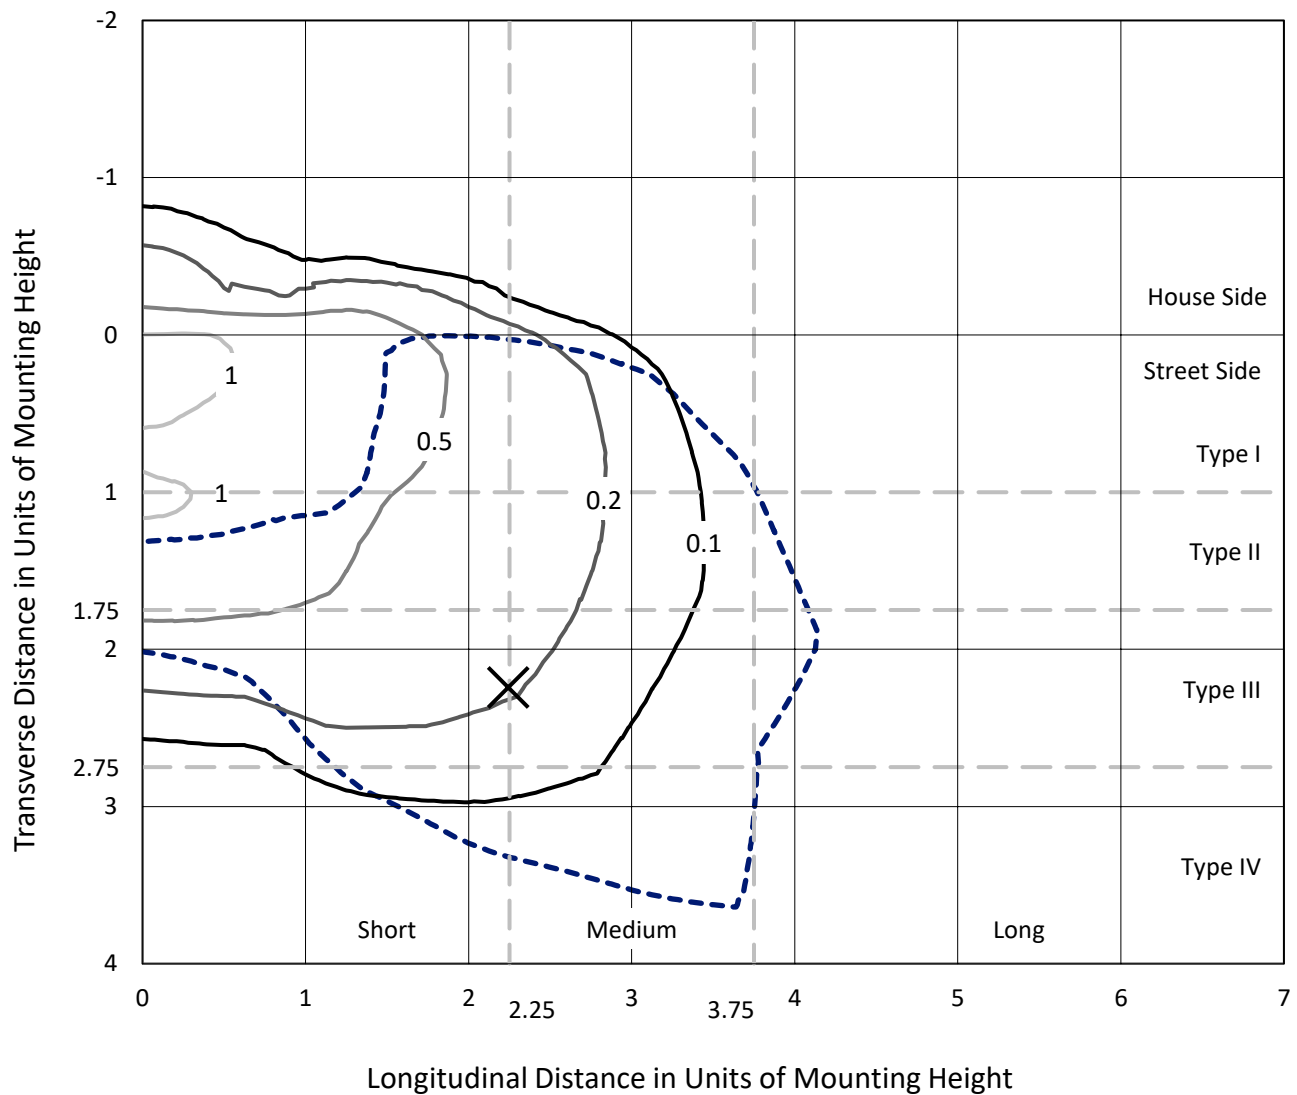

Based on 25 foot mounting height. Maximum calculated value = 1.4 fc
 Type IV - Short - N/A

REPORT NUMBER: P945605
CATALOG NUMBER: GALN-SB1C-730-U-T4W-HSS

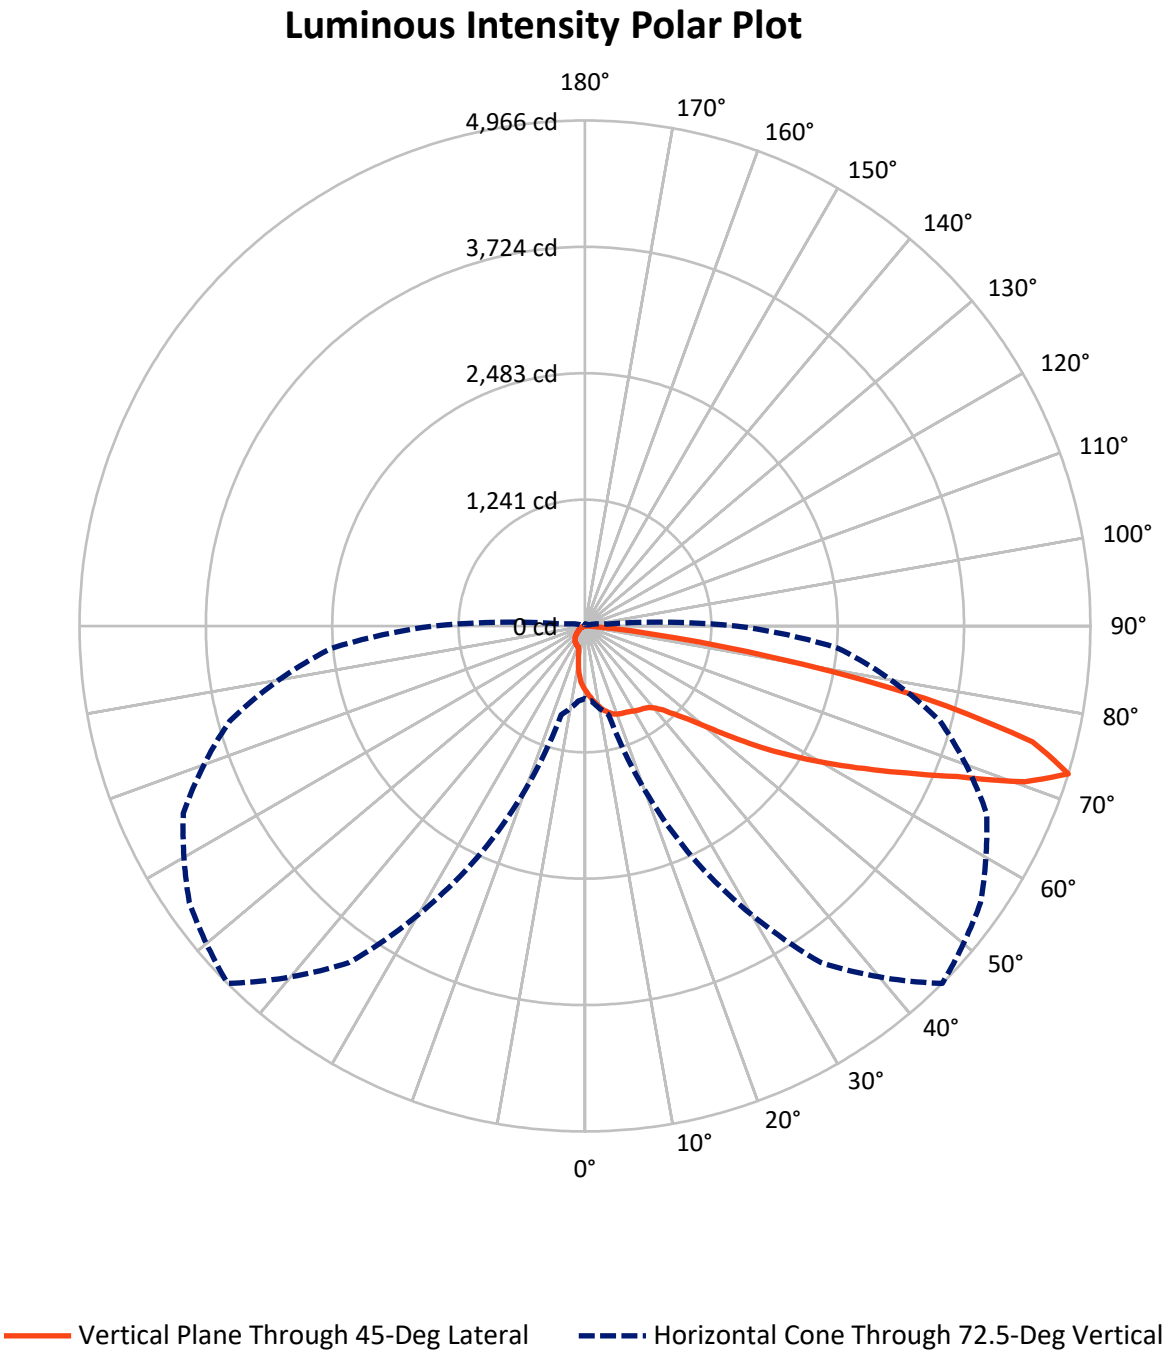

REPORT NUMBER: P945605

CATALOG NUMBER: GALN-SB1C-730-U-T4W-HSS


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	606.4	0.0	606.4
	% Fixture	10.5	0.0	10.5
Street Side	Lumens	5164.6	0.0	5164.6
	% Fixture	89.5	0.0	89.5
Total	Lumens	5771.0	0.0	5771.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.6	1.0
10°-20°	174.1	3.0
20°-30°	285.9	5.0
30°-40°	405.5	7.0
40°-50°	670.2	11.6
50°-60°	1203.9	20.9
60°-70°	1671.7	29.0
70°-80°	1212.6	21.0
80°-90°	87.7	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	5771.0	100.0
0°-180°	5771.0	100.0

Coefficient of Utilization

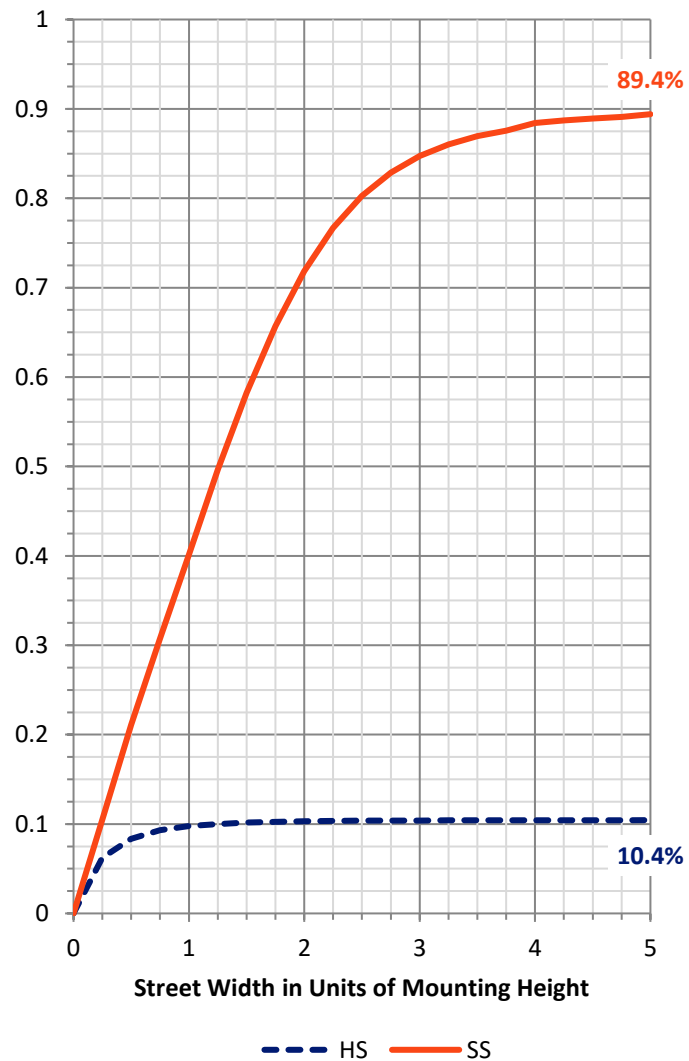

REPORT NUMBER: P945605


CATALOG NUMBER: GALN-SB1C-730-U-T4W-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	375.9	6.5			
FM	(30°-60°)	1949.7	33.8			
FH	(60°-80°)	2752.0	47.7			G2/5000
FVH	(80°-90°)	86.9	1.5			G1/100
BL	(0°-30°)	143.6	2.5	B1/500		
BM	(30°-60°)	329.8	5.7	B1/1000		
BH	(60°-80°)	132.2	2.3	B1/500		G1/500
BVH	(80°-90°)	0.7	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G2

Type IV Short

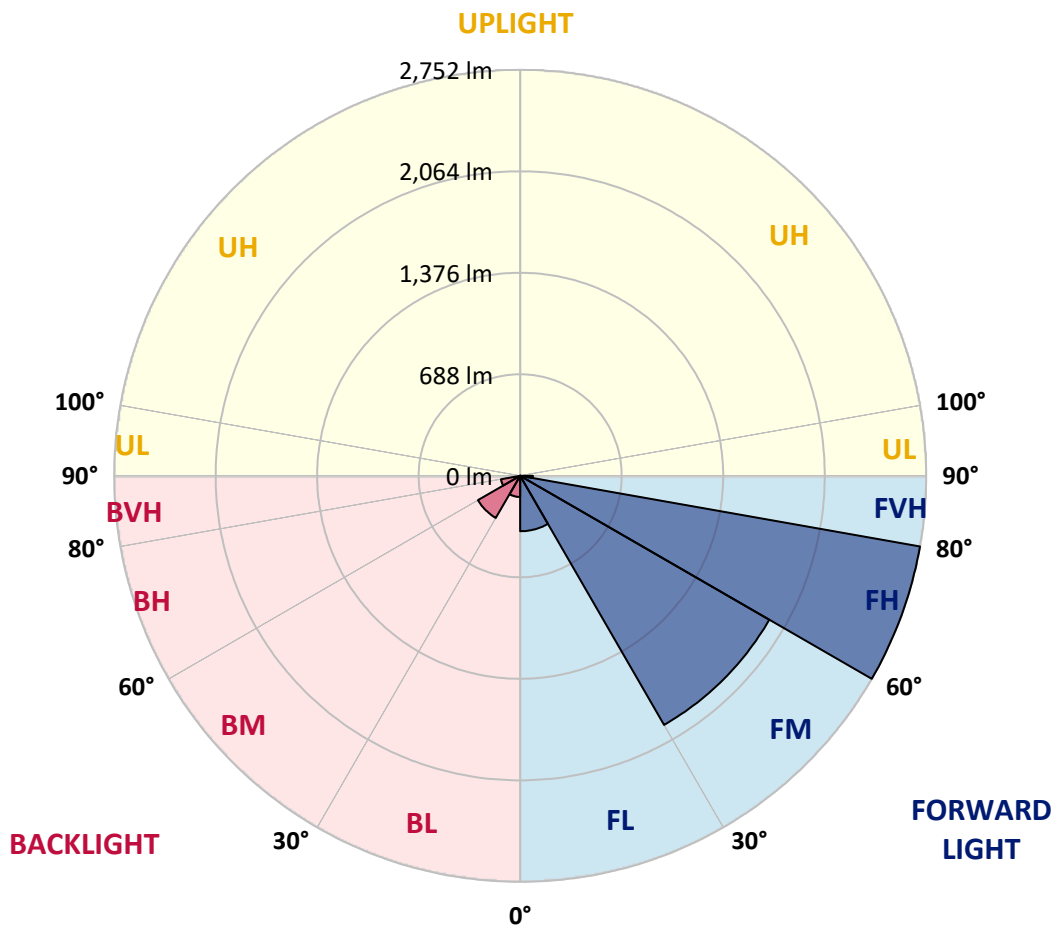

REPORT NUMBER: P945605

CATALOG NUMBER: GALN-SB1C-730-U-T4W-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	46°	55°	65°	75°	85°
0°	632.2	632.2	632.2	632.2	632.2	632.2	632.2	632.2	632.2	632.2	632.2
2.5°	690.5	691.7	690.9	686.2	678.3	674.0	671.6	663.7	658.6	649.6	640.1
5°	753.9	758.7	755.9	746.5	731.5	720.9	717.7	701.6	687.0	670.0	650.3
7.5°	821.3	823.7	818.5	806.3	786.2	768.1	765.4	742.9	719.7	693.7	666.9
10°	879.6	882.4	874.5	856.8	833.9	811.5	807.5	782.7	755.1	723.2	688.9
12.5°	928.4	931.2	921.0	899.7	874.5	851.2	847.3	821.3	791.0	755.5	713.0
15°	965.5	970.6	956.8	934.0	906.8	883.5	881.6	856.0	826.4	787.0	741.7
17.5°	987.1	992.3	979.3	951.7	928.4	908.8	906.4	885.1	857.5	819.7	769.7
20°	990.7	995.4	981.6	957.6	938.3	922.5	921.4	906.0	885.9	849.7	800.0
22.5°	980.0	986.0	973.4	954.0	940.7	932.4	930.8	922.1	910.7	880.0	828.4
25°	969.0	973.7	964.3	947.4	940.3	939.5	940.7	939.1	936.7	910.7	861.5
27.5°	968.2	973.4	962.7	946.6	942.6	950.9	952.1	959.6	961.5	938.7	893.4
30°	974.9	978.5	968.2	951.3	949.3	968.2	968.6	982.0	985.2	962.3	924.9
32.5°	989.5	993.4	983.2	958.4	955.6	982.0	983.2	1000.9	1006.0	987.5	958.0
35°	1023.8	1028.5	1016.7	978.1	968.2	995.0	998.6	1019.4	1029.7	1014.3	992.3
37.5°	1109.3	1095.5	1079.3	1017.9	997.0	1015.5	1021.4	1045.8	1064.0	1046.2	1033.2
40°	1321.6	1278.2	1227.8	1085.6	1047.4	1059.2	1064.0	1088.4	1113.2	1095.9	1089.6
42.5°	1640.2	1589.0	1507.9	1241.6	1123.4	1129.3	1132.9	1154.2	1189.2	1175.4	1177.0
45°	1924.2	1905.7	1823.0	1507.9	1265.6	1236.5	1240.8	1251.8	1303.4	1298.3	1308.6
47.5°	2142.5	2131.8	2068.0	1813.6	1505.9	1367.7	1379.9	1385.0	1459.4	1477.6	1505.1
50°	2310.3	2306.3	2249.2	2085.4	1819.9	1561.1	1565.4	1554.4	1665.8	1710.8	1763.1
52.5°	2468.6	2482.0	2439.9	2337.9	2155.1	1814.3	1813.6	1761.6	1912.0	1979.8	2069.2
55°	2611.6	2616.3	2620.7	2595.5	2492.3	2102.7	2095.2	2010.1	2197.6	2267.7	2364.6
57.5°	2745.9	2747.9	2786.5	2838.1	2843.2	2412.3	2398.5	2296.5	2509.6	2559.6	2619.1
60°	2836.2	2845.2	2926.8	3070.1	3132.8	2731.8	2724.3	2620.3	2827.1	2850.3	2839.3
62.5°	2706.2	2761.3	2966.9	3251.3	3406.1	3085.9	3082.3	2984.7	3161.1	3142.2	3047.7
65°	2190.5	2283.9	2645.5	3373.8	3674.4	3481.4	3486.5	3382.5	3504.2	3442.8	3217.1
67.5°	1532.3	1630.8	2058.6	3383.7	3974.2	3945.8	3975.3	3812.3	3868.6	3730.7	3257.2
70°	1059.6	1110.4	1388.9	3171.8	4207.7	4585.5	4584.7	4340.1	4231.0	3861.9	3052.4
72.5°	712.6	739.0	902.1	2516.3	4036.0	4965.6	4942.8	4743.5	4353.1	3611.8	2493.8
75°	300.6	319.9	417.5	1414.1	3193.0	4543.0	4481.1	4192.0	3867.8	2844.0	1555.9
77.5°	95.3	103.6	164.7	506.2	1758.8	3414.8	3349.4	2617.9	2592.3	1426.7	568.8
80°	45.3	52.8	92.6	203.3	692.1	1857.3	1848.2	1187.6	1115.2	385.2	114.2
82.5°	19.7	23.2	51.2	108.7	309.6	662.6	675.9	404.2	334.4	146.1	35.1
85°	6.3	8.3	23.6	50.0	130.8	164.7	162.7	96.1	134.7	79.6	12.2
87.5°	0.0	0.0	7.9	11.4	13.4	9.5	10.6	8.3	37.4	22.1	4.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P945605

CATALOG NUMBER: GALN-SB1C-730-U-T4W-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	632.2	632.2	632.2	632.2	632.2	632.2	632.2	632.2	632.2	632.2	632.2
2.5°	635.4	629.1	618.0	607.8	598.7	589.7	584.2	576.3	575.5	575.5	577.5
5°	639.7	629.5	609.8	588.9	564.9	542.0	519.2	497.1	490.0	484.9	487.3
7.5°	652.3	636.2	605.0	565.3	519.6	469.5	434.5	396.7	382.1	374.2	375.4
10°	670.4	648.4	601.1	531.4	457.3	389.2	339.2	298.2	282.4	275.7	275.7
12.5°	690.5	663.3	594.0	489.2	389.2	307.6	258.8	239.9	237.5	237.5	237.5
15°	714.6	681.5	581.8	439.6	317.9	243.4	226.1	226.9	229.3	230.8	230.8
17.5°	739.4	700.8	562.5	384.1	254.9	219.0	219.4	220.6	222.6	224.1	224.1
20°	766.2	720.1	536.9	325.0	218.6	211.9	213.1	214.3	215.9	216.7	217.0
22.5°	794.9	738.2	506.6	267.1	206.4	206.0	206.4	207.6	209.6	209.6	210.3
25°	825.6	758.3	471.9	224.9	200.1	200.1	200.9	201.7	203.3	203.3	203.7
27.5°	857.1	776.8	435.3	202.9	194.6	194.2	194.2	195.4	196.2	196.6	197.0
30°	891.8	798.5	398.6	198.1	190.3	188.3	187.1	187.9	188.7	189.1	189.9
32.5°	927.3	819.3	365.9	200.1	185.9	182.4	178.4	177.7	177.7	179.2	180.4
35°	966.7	842.2	340.7	206.8	183.6	173.7	167.4	163.9	164.3	166.6	167.8
37.5°	1013.9	869.8	322.2	212.7	182.0	163.9	153.6	149.3	146.5	149.3	148.5
40°	1075.8	910.3	308.8	217.4	180.0	152.4	138.7	131.6	126.4	128.0	127.2
42.5°	1166.8	974.1	303.7	217.8	175.7	139.1	123.3	113.8	106.4	106.7	105.2
45°	1294.4	1075.0	330.1	212.7	166.2	124.5	107.1	94.5	89.8	88.6	87.1
47.5°	1469.3	1221.9	391.2	202.1	152.4	110.3	91.4	80.8	77.2	75.2	74.1
50°	1703.7	1410.6	458.9	190.3	138.7	96.9	78.4	71.7	69.3	67.4	67.0
52.5°	1975.5	1602.0	514.4	178.4	124.9	85.1	70.1	66.2	64.2	62.6	62.2
55°	2224.8	1734.0	511.3	165.8	111.5	75.6	64.2	61.8	59.5	57.9	57.1
57.5°	2380.0	1752.5	421.5	152.0	96.1	68.1	58.7	57.1	54.4	52.4	52.0
60°	2451.3	1646.9	295.4	133.9	80.8	61.1	52.8	52.0	48.5	45.7	44.9
62.5°	2464.3	1450.8	197.0	111.5	67.4	54.4	46.9	45.7	41.0	36.2	33.9
65°	2411.5	1170.3	136.3	87.1	57.5	47.3	40.2	37.8	32.7	28.0	26.4
67.5°	2244.5	821.7	94.9	62.6	48.8	37.4	31.9	31.1	27.2	23.2	22.1
70°	1938.4	468.4	63.4	46.9	38.6	25.6	25.2	26.0	22.1	18.9	17.3
72.5°	1486.2	214.3	39.4	34.3	26.4	17.3	20.1	20.5	16.9	14.2	12.6
75°	874.9	91.8	24.8	22.1	13.4	11.4	14.6	15.0	11.4	9.1	7.9
77.5°	297.8	34.7	15.8	13.0	6.7	6.3	9.5	9.5	6.3	3.5	2.8
80°	67.8	13.0	7.9	5.1	3.2	2.8	3.2	2.8	1.6	0.4	0.0
82.5°	19.3	5.1	3.2	2.0	1.2	1.2	0.4	0.0	0.0	0.0	0.0
85°	5.5	2.4	0.8	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	2.4	0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)