

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P947390

Luminaire Tested: **GALN-SB2D-730-U-T4W-HSS**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P947390
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2411-289-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: GALN-SB2D-730-U-T4W-HSS
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(2) 70 CRI, 3000K, 900mA LIGHTSQUARES WITH 26 LEDS EACH AND TYPE IV WIDE
OPTICS WITH HOUSE SIDE SHIELD
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 15676 lumens
Efficiency: N/A
Efficacy: 106.2 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 1' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B1 - U0 - G3

Input Watts (W): 147.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




REPORT NUMBER: P947390

CATALOG NUMBER: GALN-SB2D-730-U-T4W-HSS


Iso-Footcandle Lines of Horizontal Illumination

× Max cd
--- 1/2 Max cd

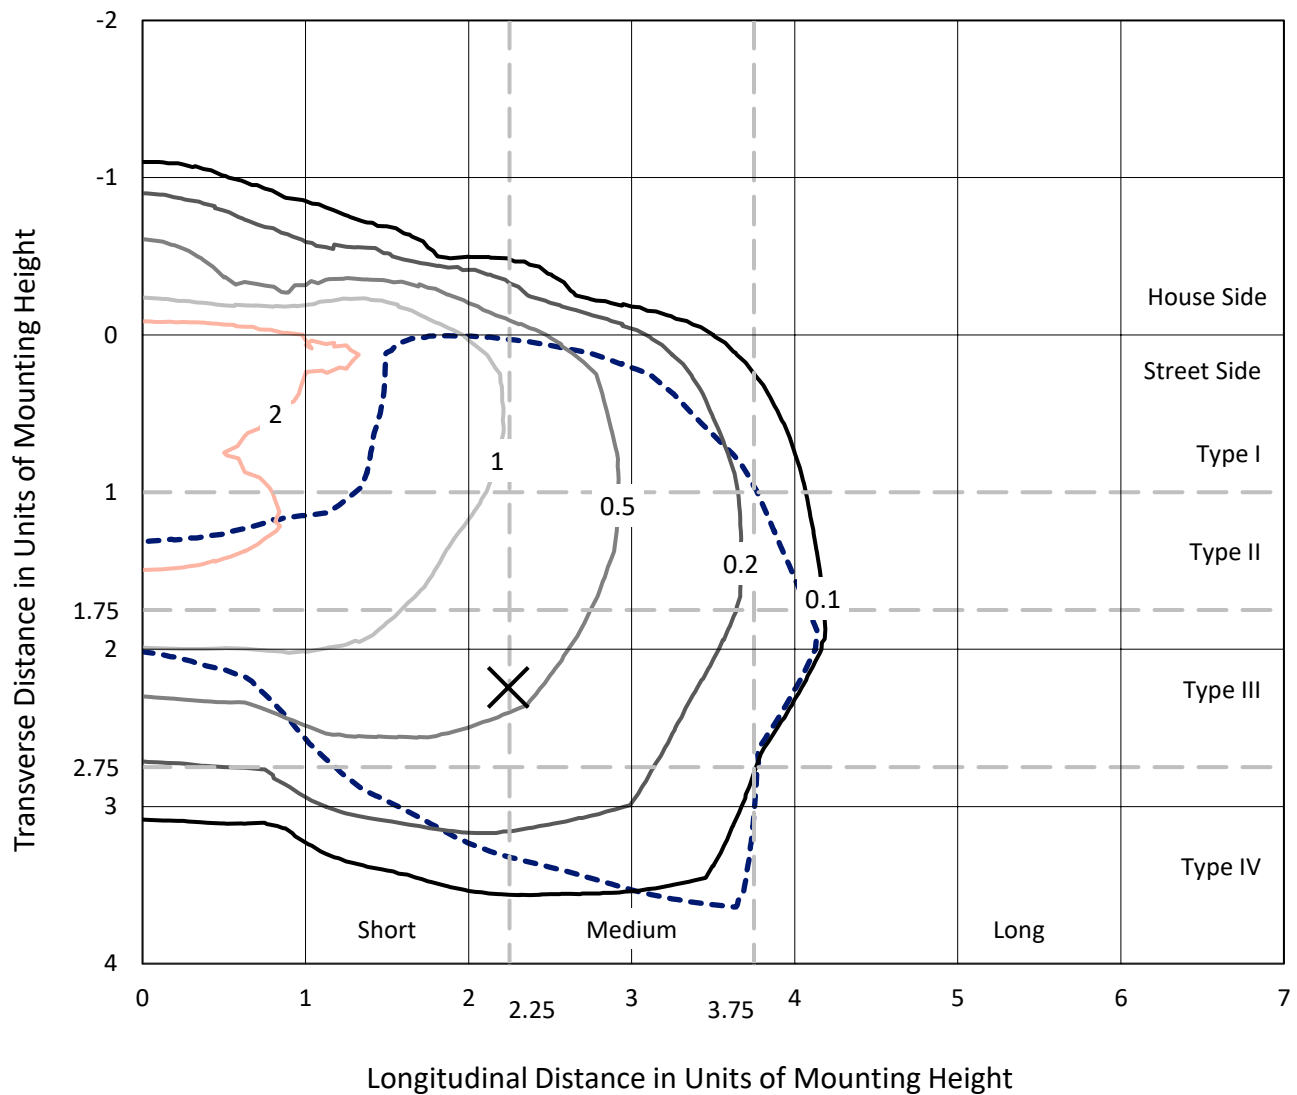

Based on 25 foot mounting height. Maximum calculated value = 3.8 fc
Type IV - Short - N/A

REPORT NUMBER: P947390
CATALOG NUMBER: GALN-SB2D-730-U-T4W-HSS

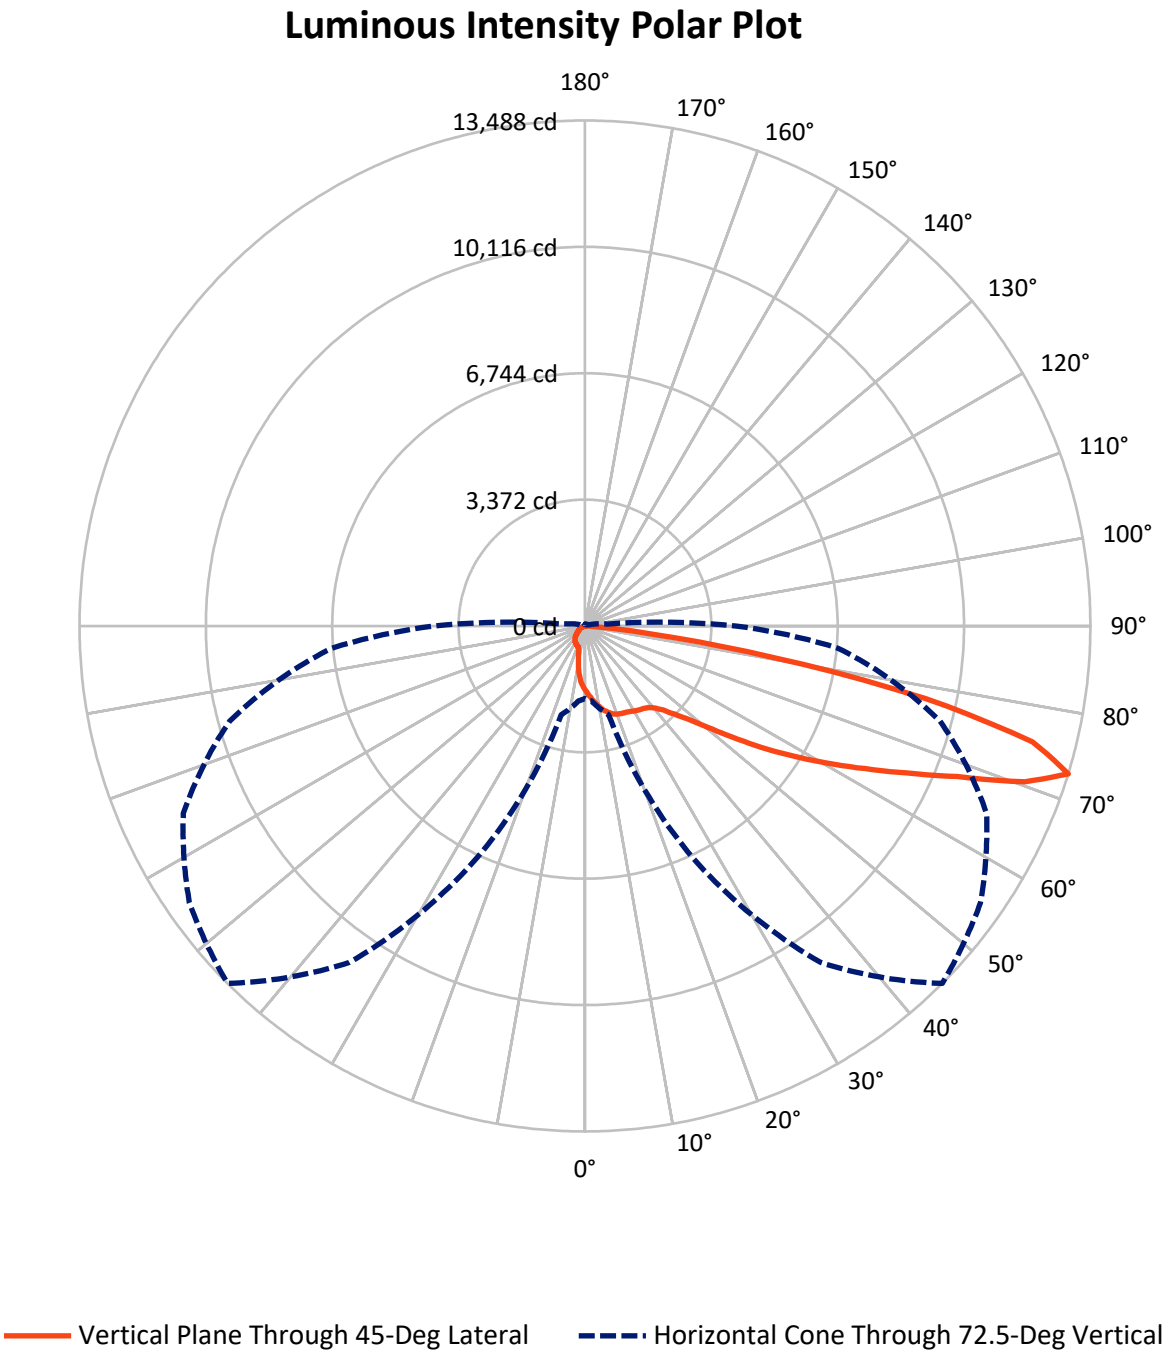

REPORT NUMBER: P947390

CATALOG NUMBER: GALN-SB2D-730-U-T4W-HSS

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1647.1	0.0	1647.1
	% Fixture	10.5	0.0	10.5
Street Side	Lumens	14028.9	0.0	14028.9
	% Fixture	89.5	0.0	89.5
Total	Lumens	15676.0	0.0	15676.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.8	1.0
10°-20°	472.9	3.0
20°-30°	776.6	5.0
30°-40°	1101.4	7.0
40°-50°	1820.4	11.6
50°-60°	3270.2	20.9
60°-70°	4540.8	29.0
70°-80°	3293.8	21.0
80°-90°	238.1	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	15676.0	100.0
0°-180°	15676.0	100.0

Coefficient of Utilization



REPORT NUMBER: P947390


CATALOG NUMBER: GALN-SB2D-730-U-T4W-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1021.1	6.5			
FM	(30°-60°)	5296.2	33.8			
FH	(60°-80°)	7475.4	47.7			G3/7500
FVH	(80°-90°)	236.1	1.5			G3/500
BL	(0°-30°)	390.1	2.5	B1/500		
BM	(30°-60°)	895.8	5.7	B1/1000		
BH	(60°-80°)	359.2	2.3	B1/500		G1/500
BVH	(80°-90°)	2.0	0.0			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G3

Type IV Short

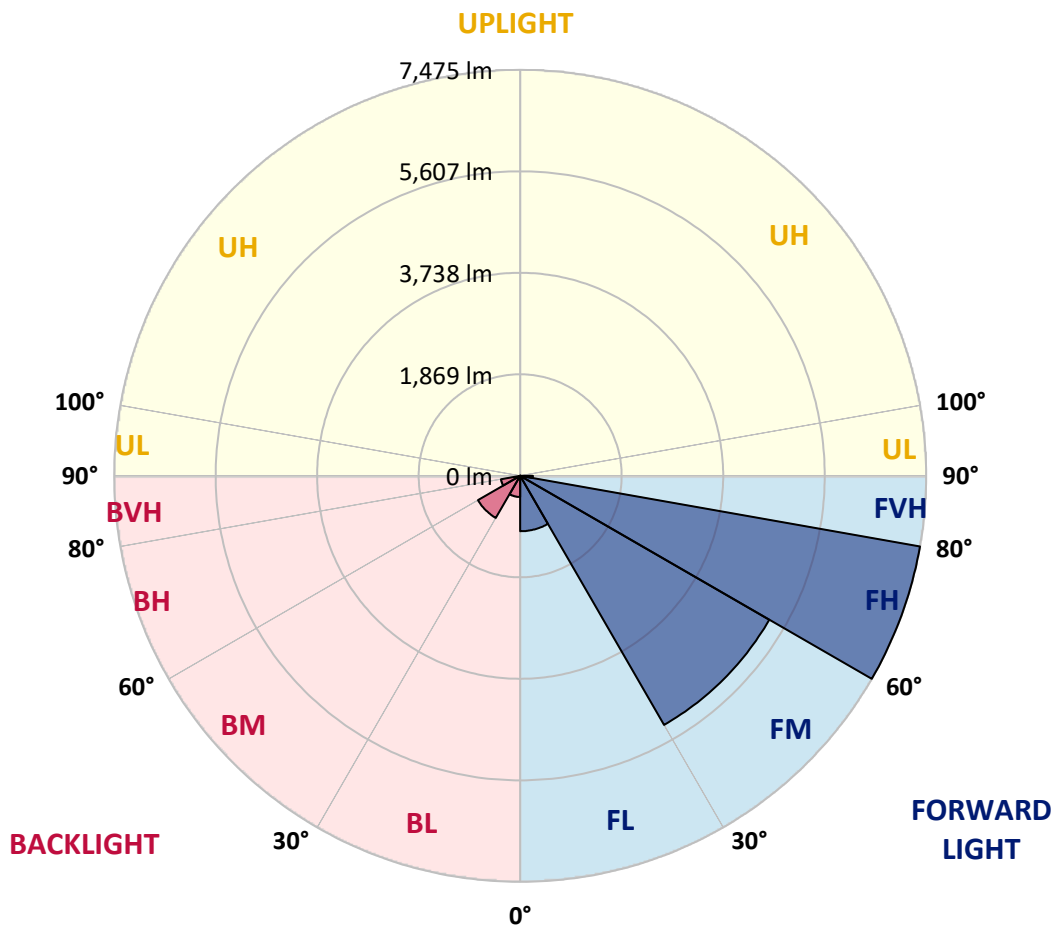

REPORT NUMBER: P947390

CATALOG NUMBER: GALN-SB2D-730-U-T4W-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	46°	55°	65°	75°	85°
0°	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3
2.5°	1875.7	1878.9	1876.8	1863.9	1842.5	1830.8	1824.3	1802.9	1789.0	1764.4	1738.7
5°	2048.0	2060.8	2053.3	2027.6	1987.0	1958.1	1949.5	1905.7	1866.1	1820.1	1766.6
7.5°	2230.9	2237.4	2223.4	2190.3	2135.7	2086.5	2079.0	2018.0	1954.9	1884.3	1811.5
10°	2389.3	2396.8	2375.4	2327.2	2265.2	2204.2	2193.5	2126.1	2051.2	1964.5	1871.4
12.5°	2522.0	2529.5	2501.6	2443.9	2375.4	2312.3	2301.6	2230.9	2148.5	2052.2	1936.7
15°	2622.6	2636.5	2599.0	2537.0	2463.1	2400.0	2394.6	2325.1	2244.8	2137.8	2014.8
17.5°	2681.4	2695.3	2660.0	2585.1	2522.0	2468.5	2462.1	2404.3	2329.4	2226.7	2090.8
20°	2691.0	2703.9	2666.4	2601.2	2548.7	2505.9	2502.7	2461.0	2406.4	2308.0	2173.2
22.5°	2662.1	2678.2	2644.0	2591.5	2555.1	2532.7	2528.4	2504.9	2473.8	2390.4	2250.2
25°	2632.2	2645.0	2619.3	2573.3	2554.1	2551.9	2555.1	2550.9	2544.4	2473.8	2340.1
27.5°	2630.0	2644.0	2615.1	2571.2	2560.5	2583.0	2586.2	2606.5	2611.9	2549.8	2426.7
30°	2648.2	2657.9	2630.0	2584.0	2578.7	2630.0	2631.1	2667.5	2676.1	2614.0	2512.3
32.5°	2687.8	2698.5	2670.7	2603.3	2595.8	2667.5	2670.7	2718.9	2732.8	2682.5	2602.2
35°	2780.9	2793.8	2761.7	2656.8	2630.0	2702.8	2712.4	2769.1	2797.0	2755.2	2695.3
37.5°	3013.1	2975.7	2931.8	2764.9	2708.2	2758.4	2774.5	2840.8	2890.1	2841.9	2806.6
40°	3589.8	3472.1	3335.2	2948.9	2845.1	2877.2	2890.1	2956.4	3023.8	2976.7	2959.6
42.5°	4455.5	4316.4	4095.9	3372.6	3051.6	3067.7	3077.3	3135.1	3230.3	3192.9	3197.1
45°	5226.9	5176.6	4951.9	4095.9	3437.9	3358.7	3370.5	3400.4	3540.6	3526.7	3554.5
47.5°	5819.7	5790.8	5617.5	4926.2	4090.6	3715.0	3748.2	3762.1	3964.3	4013.5	4088.4
50°	6275.5	6264.8	6109.7	5664.5	4943.4	4240.4	4252.2	4222.2	4525.0	4647.0	4789.3
52.5°	6705.6	6742.0	6627.5	6350.4	5853.9	4928.4	4926.2	4785.0	5193.7	5377.8	5620.7
55°	7094.1	7106.9	7118.7	7050.2	6769.8	5711.6	5691.3	5460.2	5969.5	6160.0	6423.2
57.5°	7458.9	7464.3	7569.1	7709.3	7723.2	6552.6	6515.2	6238.1	6816.9	6952.8	7114.4
60°	7704.0	7728.6	7950.0	8339.5	8509.7	7420.4	7400.1	7117.6	7679.3	7742.5	7712.5
62.5°	7350.9	7500.7	8059.2	8831.7	9252.2	8382.3	8372.7	8107.3	8586.7	8535.3	8278.5
65°	5950.2	6203.8	7186.1	9164.5	9980.9	9456.6	9470.5	9188.0	9518.7	9351.7	8738.6
67.5°	4162.3	4429.8	5591.8	9191.2	10795.2	10718.1	10798.4	10355.4	10508.4	10133.9	8847.8
70°	2878.3	3016.3	3772.8	8615.6	11429.7	12455.8	12453.7	11789.2	11492.8	10490.2	8291.4
72.5°	1935.6	2007.3	2450.3	6835.1	10963.2	13488.3	13426.3	12884.9	11824.5	9810.8	6774.1
75°	816.4	868.8	1134.2	3841.3	8673.4	12340.2	12172.2	11386.9	10506.3	7725.4	4226.5
77.5°	258.9	281.4	447.3	1374.9	4777.5	9275.8	9098.2	7111.2	7041.6	3875.5	1545.1
80°	123.0	143.4	251.4	552.1	1880.0	5045.0	5020.4	3226.0	3029.2	1046.5	310.3
82.5°	53.5	63.1	139.1	295.3	841.0	1799.7	1836.1	1097.8	908.4	397.0	95.2
85°	17.1	22.5	64.2	135.9	355.2	447.3	441.9	261.1	365.9	216.1	33.2
87.5°	0.0	0.0	21.4	31.0	36.4	25.7	28.9	22.5	101.6	59.9	11.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P947390

CATALOG NUMBER: GALN-SB2D-730-U-T4W-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3	1717.3
2.5°	1725.9	1708.8	1678.8	1651.0	1626.4	1601.8	1586.8	1565.4	1563.3	1563.3	1568.6
5°	1737.7	1709.8	1656.3	1599.6	1534.4	1472.3	1410.3	1350.3	1331.1	1317.2	1323.6
7.5°	1771.9	1728.0	1643.5	1535.4	1411.3	1275.4	1180.2	1077.5	1037.9	1016.5	1019.7
10°	1821.1	1761.2	1632.8	1443.4	1242.3	1057.2	921.3	810.0	767.2	749.0	749.0
12.5°	1875.7	1801.9	1613.5	1328.9	1057.2	835.7	703.0	651.6	645.2	645.2	645.2
15°	1941.0	1851.1	1580.4	1194.1	863.5	661.3	614.2	616.3	622.7	627.0	627.0
17.5°	2008.4	1903.5	1528.0	1043.2	692.3	594.9	596.0	599.2	604.5	608.8	608.8
20°	2081.1	1955.9	1458.4	882.7	593.8	575.7	578.9	582.1	586.4	588.5	589.6
22.5°	2159.2	2005.2	1376.0	725.5	560.7	559.6	560.7	563.9	569.2	569.2	571.4
25°	2242.7	2059.7	1281.9	611.0	543.6	543.6	545.7	547.8	552.1	552.1	553.2
27.5°	2328.3	2110.0	1182.3	551.0	528.6	527.5	527.5	530.7	532.9	533.9	535.0
30°	2422.5	2168.9	1082.8	538.2	516.8	511.5	508.2	510.4	512.5	513.6	515.7
32.5°	2518.8	2225.6	994.0	543.6	505.0	495.4	484.7	482.6	482.6	486.8	490.1
35°	2625.8	2287.6	925.5	561.7	498.6	471.9	454.7	445.1	446.2	452.6	455.8
37.5°	2754.2	2362.5	875.3	577.8	494.3	445.1	417.3	405.5	398.0	405.5	403.4
40°	2922.2	2472.8	838.9	590.6	489.0	414.1	376.6	357.4	343.5	347.7	345.6
42.5°	3169.3	2646.1	825.0	591.7	477.2	377.7	334.9	309.2	288.9	290.0	285.7
45°	3516.0	2920.0	896.7	577.8	451.5	338.1	291.0	256.8	244.0	240.7	236.5
47.5°	3991.1	3319.1	1062.5	548.9	414.1	299.6	248.2	219.3	209.7	204.4	201.2
50°	4627.7	3831.6	1246.5	516.8	376.6	263.2	212.9	194.7	188.3	183.0	181.9
52.5°	5366.0	4351.7	1397.4	484.7	339.2	231.1	190.5	179.8	174.4	170.1	169.1
55°	6043.3	4710.1	1388.9	450.5	302.8	205.4	174.4	168.0	161.6	157.3	155.1
57.5°	6464.9	4760.4	1144.9	413.0	261.1	185.1	159.4	155.1	147.7	142.3	141.2
60°	6658.6	4473.6	802.5	363.8	219.3	165.8	143.4	141.2	131.6	124.1	122.0
62.5°	6693.9	3940.8	535.0	302.8	183.0	147.7	127.3	124.1	111.3	98.4	92.0
65°	6550.5	3178.9	370.2	236.5	156.2	128.4	109.1	102.7	88.8	76.0	71.7
67.5°	6096.8	2232.0	257.9	170.1	132.7	101.6	86.7	84.5	73.8	63.1	59.9
70°	5265.4	1272.2	172.3	127.3	104.9	69.5	68.5	70.6	59.9	51.4	47.1
72.5°	4037.1	582.1	107.0	93.1	71.7	47.1	54.6	55.6	46.0	38.5	34.2
75°	2376.5	249.3	67.4	59.9	36.4	31.0	39.6	40.7	31.0	24.6	21.4
77.5°	808.9	94.2	42.8	35.3	18.2	17.1	25.7	25.7	17.1	9.6	7.5
80°	184.0	35.3	21.4	13.9	8.6	7.5	8.6	7.5	4.3	1.1	0.0
82.5°	52.4	13.9	8.6	5.3	3.2	3.2	1.1	0.0	0.0	0.0	0.0
85°	15.0	6.4	2.1	2.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	6.4	1.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)