

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P944000

Luminaire Tested: **GALN-SB8D-730-U-5WQ**

Issue Date: 1/21/2025

Test Information

Test Method: LM-79-08
Report Number: P944000
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2405-108-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2025
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: GALN-SB8D-730-U-5WQ
Description: GALLEON AREA AND ROADWAY HIGH DENSITY LED LUMINAIRE
(8) 70 CRI, 3000K, 900mA LIGHTSQUARES WITH 26 LEDS EACH AND TYPE V WIDE OPTICS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 83232 lumens
Efficiency: N/A
Efficacy: 142.3 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1.5' x H: 0')
IES Classification: Type V - Short
BUG Rating: B5 - U0 - G5

Input Watts (W): 584.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




REPORT NUMBER: P944000

CATALOG NUMBER: GALN-SB8D-730-U-5WQ

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd

--- 1/2 Max cd

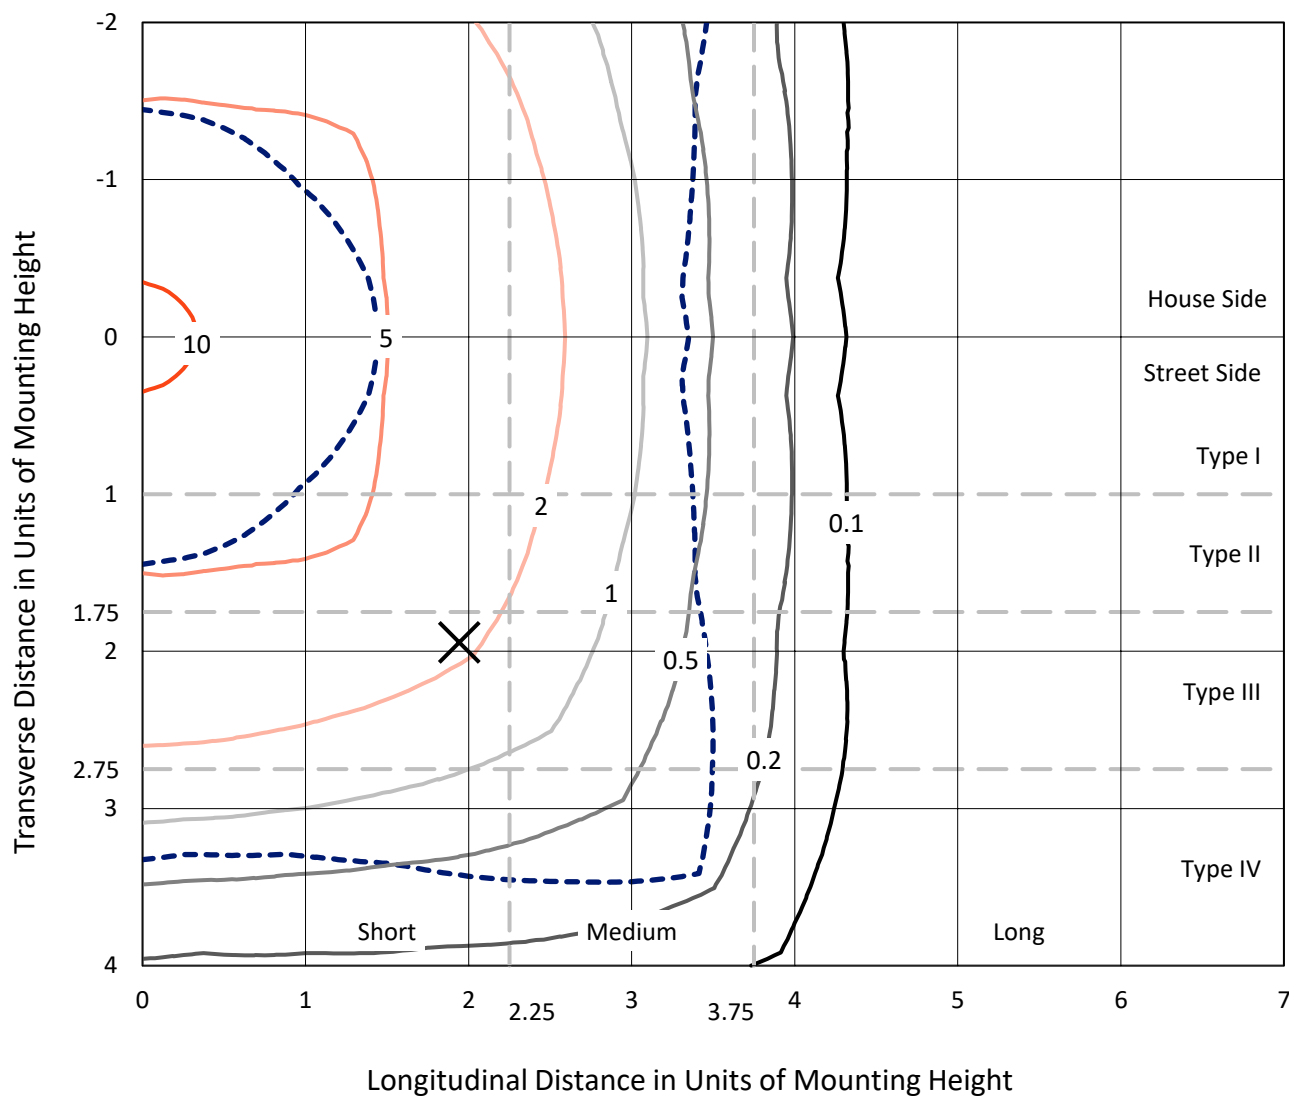

Based on 25 foot mounting height. Maximum calculated value = 12.1 fc
 Type V - Short - N/A

REPORT NUMBER: P944000
CATALOG NUMBER: GALN-SB8D-730-U-5WQ

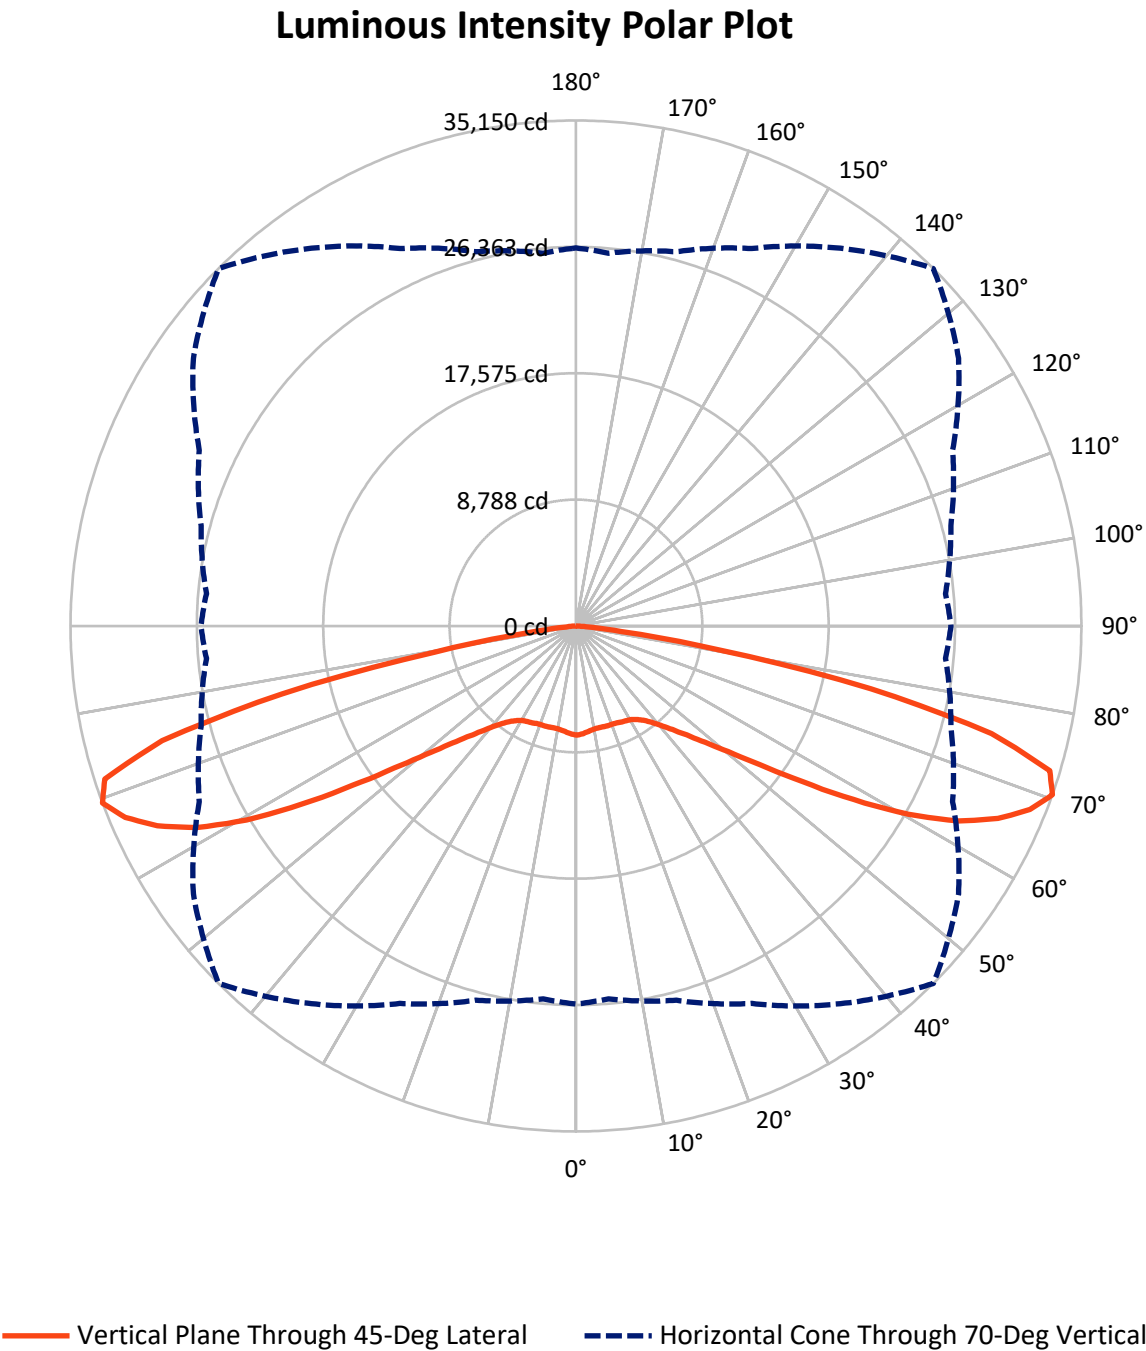

REPORT NUMBER: P944000

CATALOG NUMBER: GALN-SB8D-730-U-5WQ

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	41616.0	0.0	41616.0
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	41616.0	0.0	41616.0
	% Fixture	50.0	0.0	50.0
Total	Lumens	83232.0	0.0	83232.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	706.3	0.8
10°-20°	2073.8	2.5
20°-30°	3451.1	4.1
30°-40°	5219.1	6.3
40°-50°	8672.9	10.4
50°-60°	16365.5	19.7
60°-70°	27633.8	33.2
70°-80°	18158.2	21.8
80°-90°	951.3	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	83232.0	100.0
0°-180°	83232.0	100.0

Coefficient of Utilization



REPORT NUMBER: P944000


CATALOG NUMBER: GALN-SB8D-730-U-5WQ

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	3115.6	3.7			
FM	(30°-60°)	15128.8	18.2			
FH	(60°-80°)	22896.0	27.5			G5
FVH	(80°-90°)	475.7	0.6			G3/500
BL	(0°-30°)	3115.6	3.7	B4/5000		
BM	(30°-60°)	15128.8	18.2	B5		
BH	(60°-80°)	22896.0	27.5	B5		G5
BVH	(80°-90°)	475.7	0.6			G3/500
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G5

Type V Short

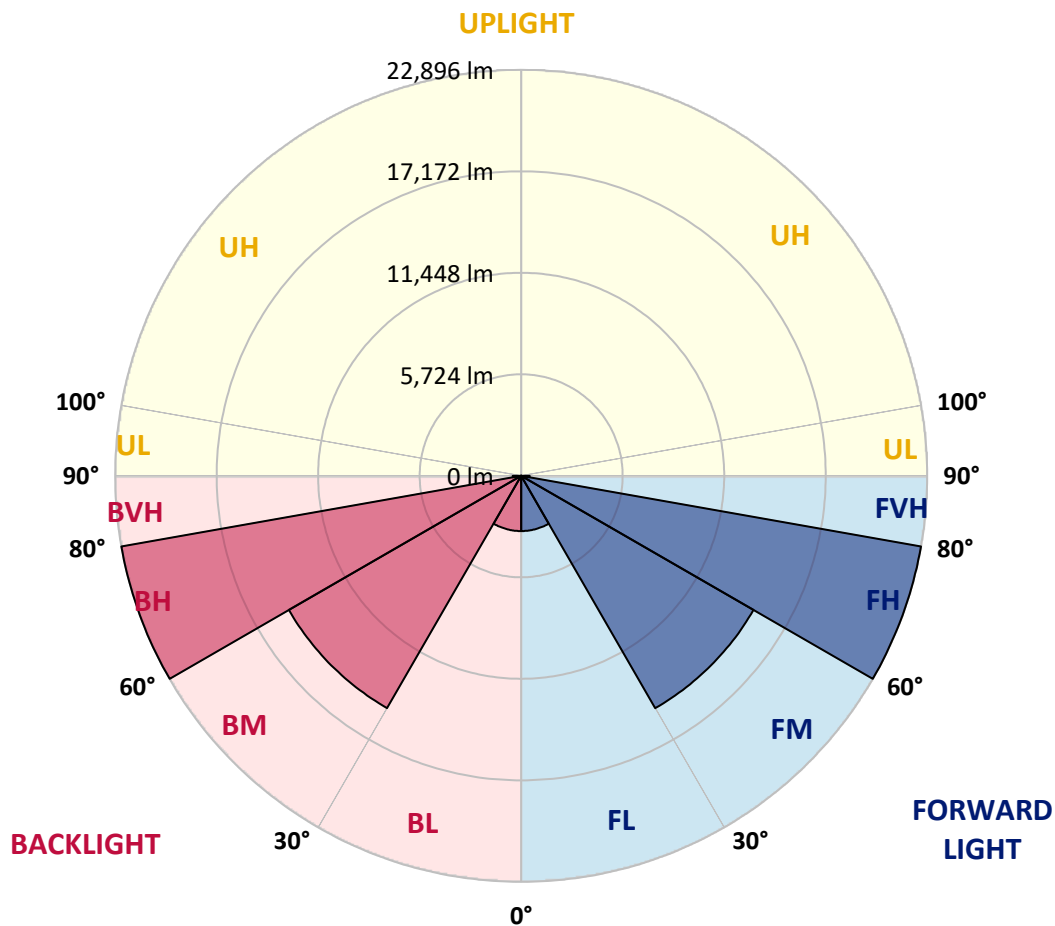

REPORT NUMBER: P944000

CATALOG NUMBER: GALN-SB8D-730-U-5WQ

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	7592.4	7592.4	7592.4	7592.4	7592.4	7592.4	7592.4	7592.4	7592.4	7592.4	7592.4
2.5°	7544.8	7566.5	7557.8	7540.5	7540.5	7527.5	7540.5	7549.2	7562.2	7570.8	7566.5
5°	7445.3	7462.6	7458.3	7445.3	7449.7	7436.7	7445.3	7458.3	7467.0	7471.3	7471.3
7.5°	7358.8	7376.1	7367.5	7345.8	7345.8	7332.9	7337.2	7350.2	7363.1	7367.5	7367.5
10°	7337.2	7354.5	7328.5	7293.9	7280.9	7263.6	7268.0	7280.9	7306.9	7319.9	7319.9
12.5°	7345.8	7358.8	7332.9	7280.9	7268.0	7250.7	7250.7	7263.6	7298.3	7315.6	7319.9
15°	7371.8	7384.8	7345.8	7289.6	7276.6	7263.6	7259.3	7276.6	7315.6	7345.8	7350.2
17.5°	7419.4	7432.4	7371.8	7293.9	7276.6	7280.9	7276.6	7289.6	7350.2	7406.4	7406.4
20°	7462.6	7471.3	7389.1	7293.9	7276.6	7280.9	7276.6	7302.6	7380.5	7458.3	7462.6
22.5°	7475.6	7484.3	7406.4	7324.2	7311.2	7315.6	7311.2	7337.2	7410.7	7488.6	7488.6
25°	7480.0	7492.9	7432.4	7367.5	7389.1	7397.8	7389.1	7393.4	7449.7	7518.9	7514.6
27.5°	7544.8	7562.2	7505.9	7449.7	7462.6	7458.3	7471.3	7484.3	7527.5	7596.8	7579.5
30°	7679.0	7691.9	7644.3	7588.1	7579.5	7549.2	7588.1	7631.4	7679.0	7739.5	7726.5
32.5°	7899.6	7925.5	7865.0	7804.4	7765.5	7748.2	7778.5	7852.0	7916.9	7981.8	7955.8
35°	8267.3	8284.6	8228.4	8115.9	8046.7	8046.7	8072.6	8167.8	8271.6	8353.8	8323.6
37.5°	8786.5	8808.1	8708.6	8574.5	8470.6	8470.6	8505.3	8604.8	8760.5	8877.3	8834.0
40°	9418.1	9448.4	9322.9	9184.5	9085.0	9067.7	9110.9	9223.4	9370.5	9517.6	9470.0
42.5°	10179.5	10214.1	10049.7	9928.6	9850.7	9850.7	9872.3	9976.2	10110.3	10292.0	10279.0
45°	11152.9	11213.4	10988.5	10867.3	10793.8	10811.1	10824.1	10914.9	11036.1	11243.7	11235.1
47.5°	12312.3	12372.9	12134.9	12009.5	11996.5	12078.7	12026.8	12091.7	12156.5	12394.5	12325.3
50°	13627.4	13731.3	13566.9	13558.2	13584.2	13735.6	13614.5	13649.1	13575.5	13726.9	13636.1
52.5°	15236.8	15388.2	15357.9	15409.8	15699.7	16011.2	15734.3	15613.2	15336.3	15383.9	15223.8
55°	17187.9	17417.2	17460.4	17771.9	18429.5	19065.4	18477.1	17988.2	17399.9	17291.7	17123.0
57.5°	19407.2	19588.9	19796.6	20432.5	21661.1	22790.3	21661.1	20579.6	19653.8	19433.2	19277.4
60°	21795.3	22020.2	22219.2	23158.0	24983.7	26571.4	24949.0	23231.6	22007.2	21708.7	21449.2
62.5°	24360.7	24650.5	24789.0	25831.6	27960.1	29854.9	27990.3	25909.5	24551.0	24230.9	23971.3
65°	26822.3	27060.2	27216.0	28327.8	30361.1	32260.3	30499.5	28448.9	27051.6	26631.9	26424.3
67.5°	27968.7	28098.5	28479.2	29738.1	31883.9	34051.3	32247.3	29872.2	28310.5	27575.0	27583.7
70°	26290.2	26026.3	26943.4	28959.4	32065.6	35150.2	32480.9	28898.8	26986.7	25792.6	26078.2
72.5°	20315.7	19861.5	21453.5	24901.5	29989.0	34449.3	30196.7	25096.1	22444.2	20021.5	20622.9
75°	11053.4	10538.6	12736.3	17097.0	23915.1	29859.2	24464.5	17585.9	14181.2	10971.2	11685.0
77.5°	3119.2	2924.5	4698.2	8271.6	14384.5	20964.6	14938.3	8453.3	5572.1	3305.2	3672.9
80°	956.1	925.8	1254.6	2491.9	6108.6	10041.0	5870.6	2522.2	1596.4	1008.0	1064.2
82.5°	566.7	519.1	623.0	908.5	1557.4	3153.8	1514.2	947.4	761.4	510.5	553.8
85°	324.5	302.8	367.7	441.3	523.5	670.6	436.9	449.9	406.7	272.5	285.5
87.5°	134.1	121.1	142.8	138.4	121.1	155.7	116.8	138.4	164.4	108.2	99.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)