

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P320854

Luminaire Tested: **GLEON-SA0C-722-U-SLR**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P320854  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1903-205-26)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: McGRAW-EDISON  
Catalog Number: GLEON-SA0C-722-U-SLR  
Description: GALLEON AREA AND ROADWAY LUMINAIRE  
(10) 70 CRI, 2200K, 1050mA LIGHTSQUARES WITH 16 LEDS EACH AND SPILL LIGHT  
ELIMINATOR RIGHT OPTICS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 45228 lumens  
Efficiency: N/A  
Efficacy: 81.1 lumens/watt  
Luminous Opening: Rectangular (W 2.5' x L: 1' x H: 0')  
IES Classification: Type IV - Medium  
BUG Rating: B3 - U0 - G5


Input Watts (W): 558  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

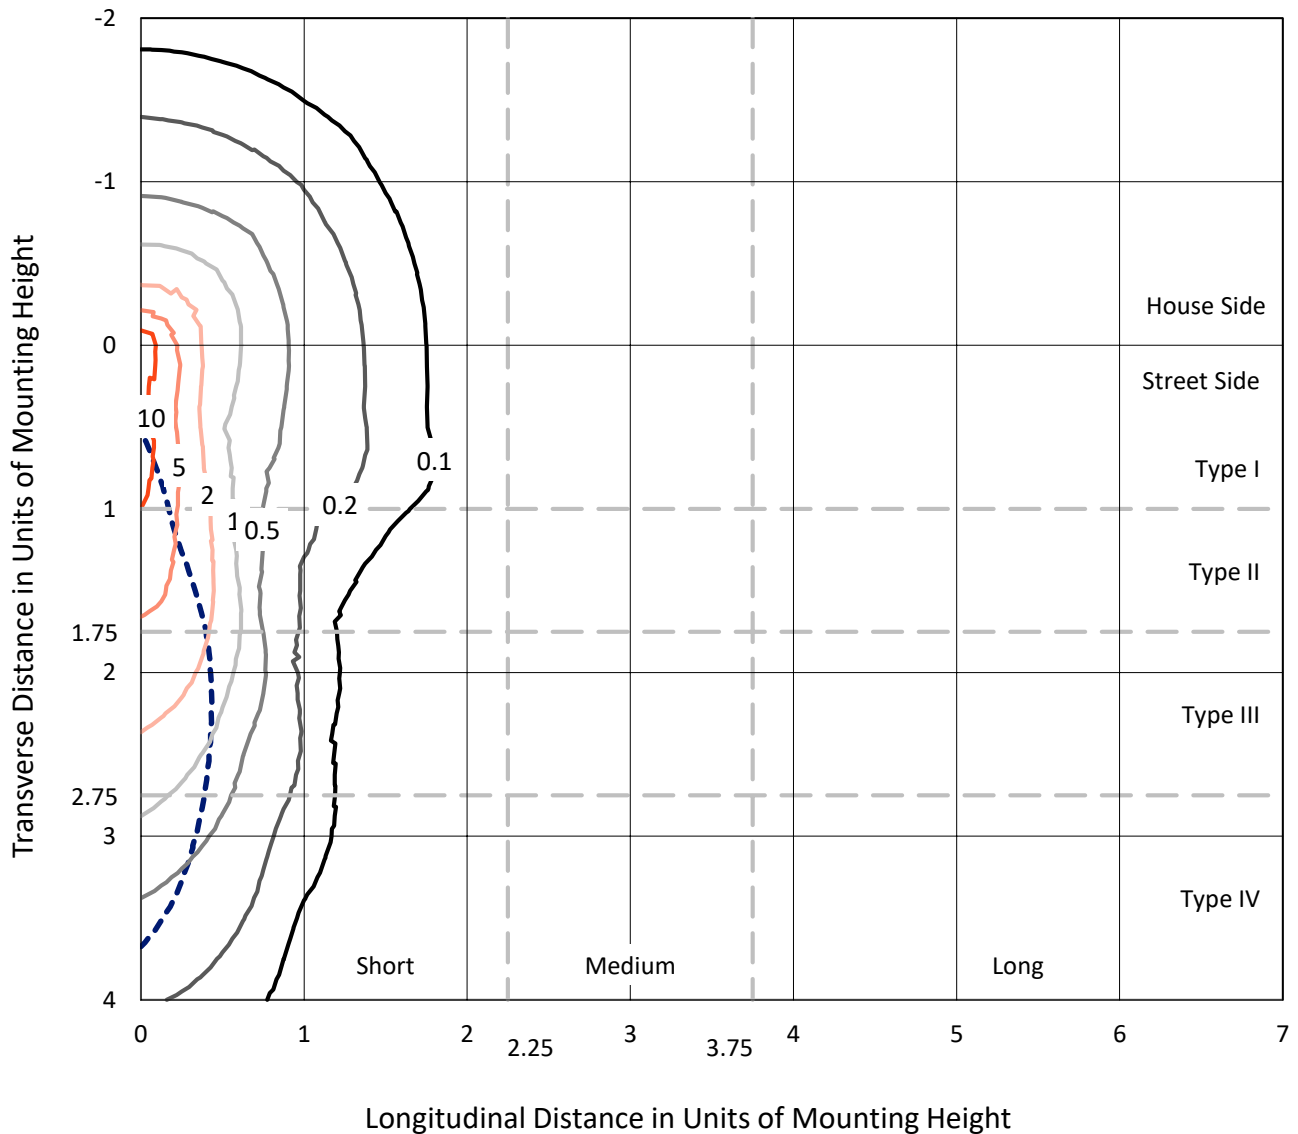

Based on 30 foot mounting height. Maximum calculated value = 15.3 fc  
 Type IV - Medium - N/A

REPORT NUMBER: P320854  
CATALOG NUMBER: GLEON-SA0C-722-U-SLR

### Luminous Intensity Polar Plot

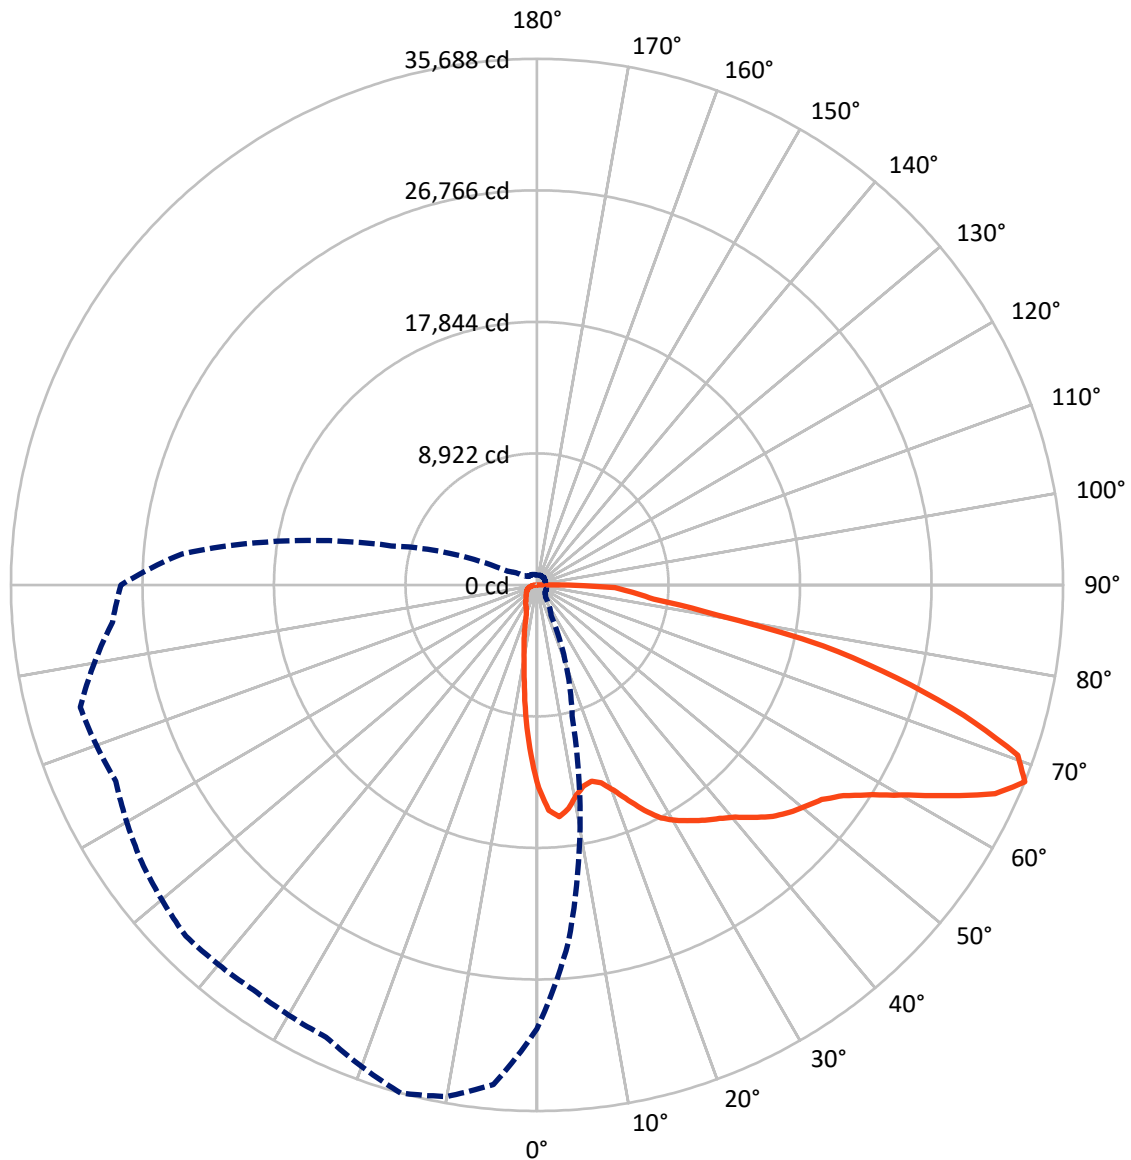

— Vertical Plane Through 345-Deg Lateral    - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	7819.0	0.0	7819.0
	% Fixture	17.3	0.0	17.3
<b>Street Side</b>	Lumens	37409.0	0.0	37409.0
	% Fixture	82.7	0.0	82.7
<b>Total</b>	Lumens	45228.0	0.0	45228.0
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1063.4	2.4
10°-20°	2209.2	4.9
20°-30°	3141.9	6.9
30°-40°	4527.5	10.0
40°-50°	6380.5	14.1
50°-60°	8870.0	19.6
60°-70°	10726.5	23.7
70°-80°	6593.4	14.6
80°-90°	1715.6	3.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	45228.0	100.0
0°-180°	45228.0	100.0

**Coefficient of Utilization**

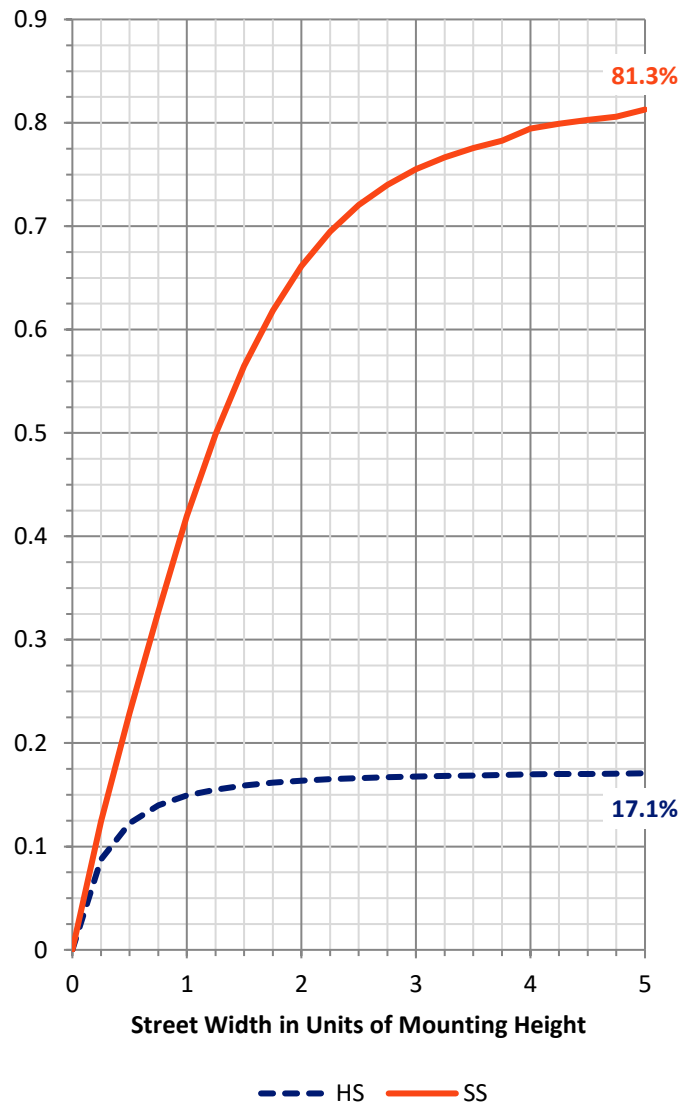


REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	4516.1	10.0			
FM (30°-60°)	16351.1	36.2			
FH (60°-80°)	15041.3	33.3			G5
FVH (80°-90°)	1500.6	3.3			G5
BL (0°-30°)	1898.4	4.2	B3/2500		
BM (30°-60°)	3426.9	7.6	B3/5000		
BH (60°-80°)	2278.6	5.0	B3/2500		G3/2500
BVH (80°-90°)	215.1	0.5			G2/225
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B3-U0-G5**  
 Type IV Medium

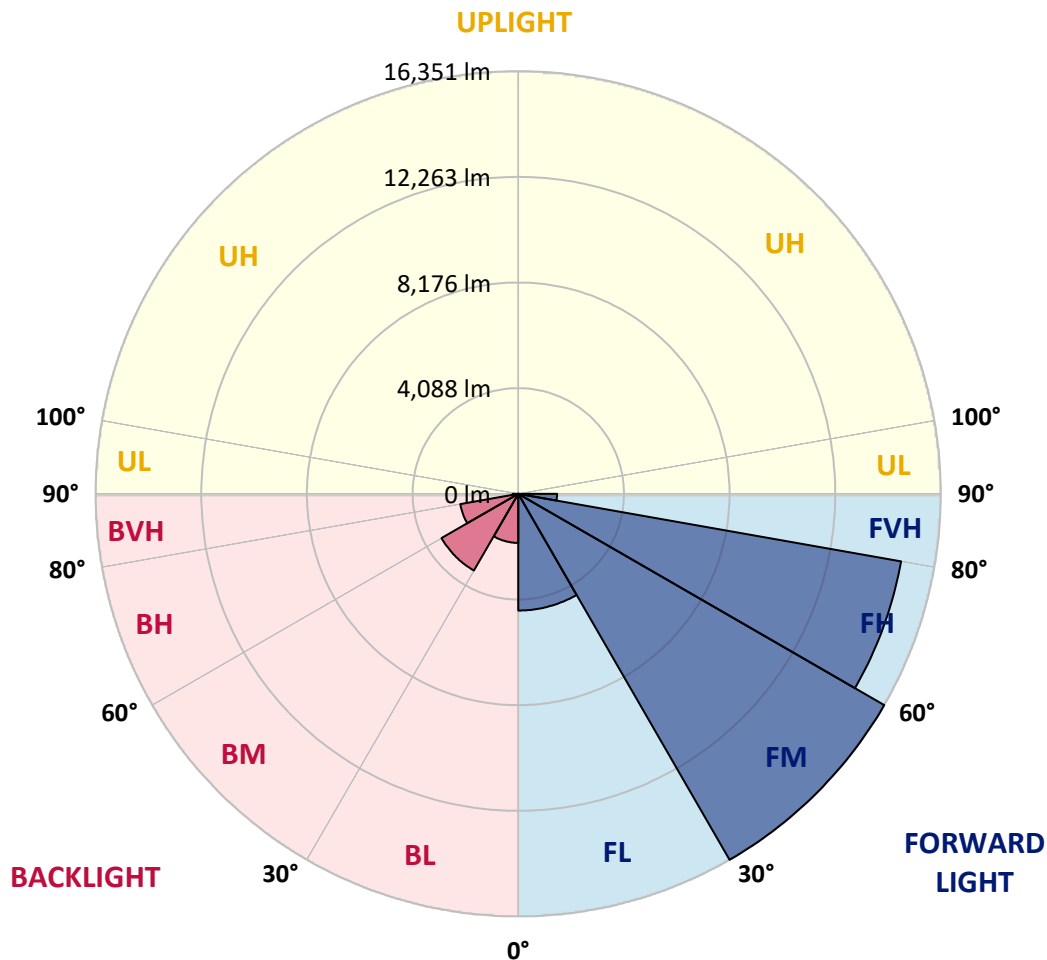



REPORT NUMBER: P320854

CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0
2.5°	14760.9	14630.7	14433.6	14236.5	14090.0	13941.8	13773.6	13605.4	13413.8	13220.3	13106.3
5°	14516.8	14155.1	13685.0	13214.8	12903.8	12592.8	12240.2	11887.6	11538.6	11189.6	11001.5
7.5°	13417.4	12874.9	12263.7	11652.5	11200.4	10746.6	10258.3	9768.3	9334.3	8898.5	8629.1
10°	12336.0	11685.0	10983.4	10280.0	9701.4	9122.7	8632.7	8140.8	7813.5	7486.2	7238.5
12.5°	11560.3	10838.8	10066.6	9292.7	8714.1	8135.4	7824.4	7513.4	7242.1	6970.9	6685.2
15°	11252.9	10437.3	9647.1	8855.1	8328.9	7802.7	7457.3	7110.1	6746.7	6381.4	6030.6
17.5°	11524.1	10569.3	9710.4	8851.5	8162.5	7473.6	6990.8	6506.2	6027.0	5547.8	5140.9
20°	12370.4	11151.6	10028.7	8903.9	7987.1	7070.3	6423.0	5773.8	5159.0	4544.2	4083.1
22.5°	13558.4	11945.4	10478.9	9012.4	7828.0	6641.8	5829.9	5016.1	4289.2	3562.3	3110.2
25°	15001.4	12997.9	11128.1	9256.5	7762.9	6267.5	5269.3	4271.1	3504.4	2735.9	2414.0
27.5°	16522.2	14252.8	11934.6	9614.6	7773.8	5932.9	4797.3	3659.9	2969.2	2278.4	2057.8
30°	17789.8	15686.7	12874.9	10061.2	7815.3	5569.5	4352.5	3135.5	2565.9	1996.3	1853.5
32.5°	18948.9	16686.7	13583.7	10478.9	7862.4	5244.0	4008.9	2772.1	2307.4	1840.8	1723.3
35°	20145.9	17574.6	14079.2	10582.0	7781.0	4978.2	3773.9	2569.6	2141.0	1710.6	1611.2
37.5°	21464.2	18534.8	14556.6	10576.6	7643.6	4710.5	3591.2	2470.1	2032.5	1593.1	1520.8
40°	22934.3	19596.2	15073.7	10551.3	7518.8	4484.5	3455.6	2424.9	1972.8	1518.9	1457.5
42.5°	24371.9	20608.9	15554.7	10500.6	7417.5	4332.6	3321.8	2311.0	1918.6	1524.4	1437.6
45°	25451.4	21493.1	15972.5	10450.0	7341.6	4233.2	3216.9	2200.7	1867.9	1535.2	1424.9
47.5°	26270.6	22381.0	16435.4	10488.0	7334.3	4180.7	3142.8	2104.8	1772.1	1437.6	1392.4
50°	27312.1	23447.8	17109.9	10771.9	7433.8	4095.7	3056.0	2014.4	1679.9	1345.4	1406.8
52.5°	28608.7	24970.4	18155.0	11337.9	7641.8	3945.6	2918.5	1891.5	1567.8	1242.3	1338.1
55°	30512.8	26921.5	19491.4	12059.4	7893.1	3725.0	2710.6	1694.3	1419.5	1142.8	1227.8
57.5°	32221.6	28892.6	20773.4	12652.5	8050.4	3446.6	2448.4	1450.2	1253.1	1056.0	1104.9
60°	32982.9	29908.8	21373.8	12836.9	7956.4	3075.9	2153.7	1229.6	1106.7	983.7	974.7
62.5°	32686.3	29263.2	20782.5	12301.7	7497.1	2692.5	1893.3	1094.0	1001.8	907.8	887.9
65°	31818.3	27234.4	19126.1	11017.8	6721.3	2424.9	1728.7	1032.5	929.5	826.4	804.7
67.5°	30107.7	24346.6	16778.9	9211.3	5735.8	2260.3	1634.7	1009.0	884.2	757.7	732.3
70°	27037.3	20871.1	14075.6	7278.3	4719.6	2159.1	1573.2	987.3	835.4	681.7	658.2
72.5°	22207.4	16733.7	11240.2	5744.9	3945.6	2146.4	1566.0	985.5	795.6	605.8	584.1
75°	15900.1	12710.3	8580.2	4448.3	3231.4	2014.4	1486.4	958.4	741.4	522.6	502.7
77.5°	10699.5	8797.2	5963.7	3128.3	2397.8	1667.2	1249.5	831.8	634.7	437.6	417.7
80°	6871.4	6088.4	3996.3	1904.1	1555.1	1206.1	893.3	580.5	462.9	343.6	327.3
82.5°	5041.5	4531.5	2777.5	1023.5	864.4	703.4	546.1	388.8	316.4	244.1	236.9
85°	3204.3	3533.4	2045.2	556.9	455.7	354.4	292.9	231.5	182.6	133.8	133.8
87.5°	622.0	860.7	566.0	269.4	197.1	124.8	106.7	86.8	48.8	9.0	10.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0
2.5°	12990.6	12865.8	12741.1	12600.0	12457.2	12325.2	12191.4	12044.9	12072.0	11959.9	11847.8
5°	10813.5	10614.5	10413.8	10240.2	10066.6	9916.6	9764.7	9629.0	9746.6	9667.0	9587.5
7.5°	8357.8	8111.9	7864.2	7656.2	7448.3	7287.3	7124.6	7012.5	7128.2	7113.7	7099.3
10°	6990.8	6752.1	6511.6	6281.9	6052.3	5857.0	5659.9	5493.5	5464.6	5381.4	5296.4
12.5°	6397.7	6070.4	5741.3	5500.8	5260.3	5027.0	4793.7	4598.4	4509.8	4372.4	4233.2
15°	5679.8	5292.8	4905.8	4632.8	4357.9	4131.9	3904.1	3735.9	3679.8	3573.1	3466.5
17.5°	4734.1	4310.9	3887.8	3611.1	3332.6	3151.8	2969.2	2857.1	2857.1	2826.3	2795.6
20°	3622.0	3244.0	2866.1	2654.5	2443.0	2347.1	2249.5	2202.5	2216.9	2218.7	2218.7
22.5°	2656.3	2424.9	2193.4	2108.4	2021.6	1987.3	1952.9	1933.0	1940.3	1942.1	1943.9
25°	2092.2	2003.6	1913.2	1869.8	1824.5	1802.8	1781.1	1773.9	1790.2	1792.0	1792.0
27.5°	1837.2	1783.0	1726.9	1699.8	1670.8	1661.8	1652.8	1640.1	1656.4	1656.4	1654.6
30°	1708.8	1651.0	1593.1	1558.7	1524.4	1528.0	1529.8	1526.2	1537.0	1544.3	1549.7
32.5°	1603.9	1547.9	1491.8	1457.5	1421.3	1415.9	1410.5	1406.8	1430.3	1443.0	1455.7
35°	1509.9	1448.4	1386.9	1354.4	1321.8	1309.2	1296.5	1287.5	1309.2	1325.5	1341.7
37.5°	1446.6	1383.3	1318.2	1287.5	1254.9	1238.7	1222.4	1211.5	1220.6	1227.8	1235.0
40°	1396.0	1330.9	1264.0	1227.8	1191.7	1175.4	1159.1	1150.1	1155.5	1157.3	1159.1
42.5°	1349.0	1285.7	1222.4	1182.6	1141.0	1121.1	1101.2	1090.4	1094.0	1097.6	1099.4
45°	1314.6	1251.3	1186.2	1139.2	1090.4	1068.7	1047.0	1034.3	1036.1	1036.1	1036.1
47.5°	1347.2	1254.9	1160.9	1106.7	1050.6	1025.3	1000.0	987.3	983.7	980.1	976.5
50°	1466.5	1309.2	1150.1	1081.3	1010.8	983.7	954.8	940.3	931.3	927.6	924.0
52.5°	1432.2	1296.5	1159.1	1070.5	980.1	947.5	915.0	891.5	882.4	877.0	871.6
55°	1311.0	1226.0	1139.2	1032.5	925.8	896.9	866.2	849.9	833.6	830.0	826.4
57.5°	1151.9	1117.5	1083.2	974.7	866.2	839.0	810.1	799.3	784.8	784.8	783.0
60°	963.8	1014.4	1065.1	940.3	813.7	783.0	752.2	743.2	737.8	736.0	734.2
62.5°	866.2	949.3	1030.7	898.7	764.9	732.3	699.8	689.0	687.1	689.0	689.0
65°	783.0	808.3	833.6	772.1	710.7	678.1	643.7	632.9	636.5	641.9	647.4
67.5°	707.0	701.6	696.2	674.5	651.0	623.9	594.9	584.1	585.9	593.1	600.3
70°	634.7	627.5	618.4	602.2	585.9	562.4	538.9	531.6	529.8	538.9	546.1
72.5°	562.4	553.3	542.5	529.8	515.4	495.5	475.6	470.2	472.0	477.4	482.8
75°	482.8	475.6	466.5	455.7	443.0	424.9	406.9	403.2	406.9	412.3	417.7
77.5°	396.0	394.2	390.6	381.5	372.5	352.6	330.9	329.1	334.5	340.0	343.6
80°	309.2	311.0	312.8	305.6	298.4	276.7	253.2	251.3	256.8	262.2	267.6
82.5°	227.8	233.3	236.9	227.8	218.8	193.5	168.2	164.6	182.6	188.1	193.5
85°	132.0	139.2	146.5	139.2	132.0	106.7	81.4	79.6	95.8	104.9	113.9
87.5°	10.8	14.5	18.1	16.3	14.5	7.2	0.0	0.0	1.8	9.0	16.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0
2.5°	11777.3	11706.7	11685.0	11663.3	11583.8	11502.4	11585.6	11667.0	11701.3	11735.7	11647.1
5°	9576.6	9563.9	9563.9	9562.1	9489.8	9415.7	9471.7	9526.0	9404.8	9283.7	9271.0
7.5°	7177.0	7254.8	7318.1	7379.6	7356.0	7332.5	7385.0	7437.4	7283.7	7128.2	7052.3
10°	5314.5	5330.8	5399.5	5468.2	5484.5	5499.0	5564.0	5627.3	5508.0	5388.6	5336.2
12.5°	4146.4	4059.6	4068.6	4075.8	4108.4	4139.1	4207.8	4274.8	4225.9	4175.3	4180.7
15°	3358.0	3247.7	3202.4	3155.4	3191.6	3227.8	3276.6	3323.6	3325.4	3325.4	3372.4
17.5°	2741.3	2685.3	2640.1	2593.1	2641.9	2688.9	2694.3	2699.7	2701.6	2703.4	2699.7
20°	2245.9	2273.0	2258.5	2244.1	2262.1	2278.4	2292.9	2305.5	2289.3	2271.2	2226.0
22.5°	1969.2	1992.7	2010.8	2027.1	2057.8	2086.7	2072.3	2056.0	2023.5	1989.1	1954.7
25°	1808.3	1824.5	1842.6	1860.7	1886.0	1909.5	1884.2	1858.9	1835.4	1811.9	1788.4
27.5°	1672.7	1688.9	1705.2	1719.7	1743.2	1764.9	1741.4	1717.9	1698.0	1678.1	1660.0
30°	1562.3	1573.2	1585.9	1598.5	1620.2	1640.1	1620.2	1598.5	1584.0	1567.8	1555.1
32.5°	1468.3	1479.2	1484.6	1490.0	1509.9	1529.8	1515.3	1500.9	1488.2	1475.5	1466.5
35°	1365.2	1386.9	1390.6	1394.2	1414.1	1434.0	1424.9	1414.1	1399.6	1385.1	1368.9
37.5°	1260.4	1285.7	1300.1	1312.8	1332.7	1352.6	1343.5	1334.5	1314.6	1294.7	1265.8
40°	1171.8	1182.6	1209.7	1235.0	1267.6	1298.3	1280.3	1260.4	1229.6	1198.9	1184.4
42.5°	1097.6	1095.8	1121.1	1146.4	1195.3	1242.3	1209.7	1177.2	1148.3	1119.3	1115.7
45°	1032.5	1027.1	1039.8	1052.4	1104.9	1155.5	1122.9	1088.6	1072.3	1056.0	1056.0
47.5°	974.7	971.0	980.1	987.3	1019.9	1050.6	1034.3	1018.1	1009.0	1000.0	1001.8
50°	922.2	918.6	927.6	934.9	947.5	958.4	962.0	963.8	958.4	953.0	956.6
52.5°	873.4	873.4	877.0	878.8	895.1	911.4	911.4	909.6	909.6	909.6	913.2
55°	831.8	835.4	835.4	835.4	860.7	884.2	877.0	869.8	871.6	871.6	875.2
57.5°	790.2	795.6	799.3	802.9	828.2	853.5	846.3	839.0	839.0	839.0	840.8
60°	743.2	750.4	757.7	764.9	790.2	815.5	808.3	799.3	801.1	802.9	804.7
62.5°	698.0	705.2	712.5	719.7	745.0	770.3	763.1	754.0	759.5	763.1	763.1
65°	654.6	660.0	667.3	674.5	698.0	721.5	714.3	707.0	714.3	719.7	723.3
67.5°	605.8	609.4	616.6	623.9	647.4	670.9	663.6	654.6	663.6	670.9	678.1
70°	549.7	553.3	562.4	569.6	593.1	616.6	607.6	598.5	607.6	616.6	623.9
72.5°	488.2	491.8	500.9	508.1	535.2	562.4	551.5	540.7	551.5	562.4	566.0
75°	421.3	424.9	435.8	444.8	472.0	499.1	490.0	479.2	488.2	497.3	499.1
77.5°	349.0	354.4	368.9	383.4	405.1	426.8	421.3	415.9	421.3	426.8	426.8
80°	273.0	278.5	296.6	312.8	325.5	338.1	340.0	341.8	343.6	345.4	343.6
82.5°	202.5	209.8	226.0	242.3	242.3	242.3	256.8	269.4	269.4	267.6	265.8
85°	124.8	133.8	148.3	162.7	153.7	144.7	168.2	189.9	189.9	188.1	184.4
87.5°	25.3	34.4	48.8	61.5	52.4	43.4	66.9	90.4	92.2	92.2	88.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854

CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0
2.5°	11556.7	11697.7	11836.9	11873.1	11927.4	11950.9	11972.6	12149.8	12325.2	12531.3	12737.5
5°	9256.5	9361.4	9466.3	9482.6	9538.6	9567.6	9596.5	9811.7	10025.1	10312.6	10600.1
7.5°	6976.3	7001.6	7026.9	7023.3	7070.3	7133.6	7195.1	7424.8	7652.6	7961.8	8269.2
10°	5283.8	5341.6	5397.7	5450.1	5553.2	5672.5	5790.1	6025.2	6260.2	6565.8	6869.6
12.5°	4186.1	4253.1	4318.2	4376.0	4495.4	4654.5	4811.8	5093.9	5376.0	5741.3	6104.7
15°	3417.6	3412.2	3406.8	3446.6	3551.4	3725.0	3896.8	4195.2	4493.6	4895.0	5294.6
17.5°	2696.1	2669.0	2641.9	2672.6	2770.3	2913.1	3054.2	3307.3	3558.7	3947.5	4336.2
20°	2180.8	2162.7	2144.6	2173.5	2235.0	2294.7	2354.4	2537.0	2717.8	3034.3	3348.9
22.5°	1918.6	1916.8	1913.2	1929.4	1958.4	1989.1	2018.0	2106.6	2193.4	2397.8	2600.3
25°	1764.9	1763.1	1761.3	1768.5	1792.0	1815.5	1839.0	1896.9	1954.7	2052.4	2150.0
27.5°	1641.9	1638.3	1634.7	1636.5	1641.9	1678.1	1712.4	1739.6	1764.9	1831.8	1896.9
30°	1542.5	1540.6	1538.8	1538.8	1533.4	1546.1	1558.7	1600.3	1640.1	1708.8	1777.5
32.5°	1457.5	1448.4	1439.4	1419.5	1406.8	1424.9	1443.0	1486.4	1529.8	1593.1	1656.4
35°	1350.8	1327.3	1302.0	1291.1	1292.9	1311.0	1329.1	1372.5	1414.1	1482.8	1549.7
37.5°	1235.0	1227.8	1218.8	1217.0	1222.4	1240.5	1258.6	1296.5	1332.7	1401.4	1468.3
40°	1170.0	1166.3	1162.7	1159.1	1162.7	1180.8	1198.9	1235.0	1269.4	1336.3	1401.4
42.5°	1112.1	1110.3	1108.5	1108.5	1110.3	1130.2	1150.1	1186.2	1220.6	1280.3	1339.9
45°	1056.0	1057.8	1057.8	1061.5	1066.9	1086.8	1104.9	1144.6	1184.4	1242.3	1300.1
47.5°	1003.6	1009.0	1012.6	1021.7	1027.1	1048.8	1068.7	1112.1	1155.5	1227.8	1298.3
50°	958.4	963.8	967.4	974.7	989.1	1014.4	1039.8	1092.2	1142.8	1264.0	1383.3
52.5°	916.8	922.2	927.6	934.9	953.0	981.9	1010.8	1075.9	1139.2	1280.3	1421.3
55°	878.8	884.2	887.9	898.7	916.8	942.1	965.6	1045.2	1124.7	1227.8	1330.9
57.5°	842.7	848.1	851.7	858.9	868.0	895.1	920.4	1005.4	1090.4	1162.7	1233.2
60°	804.7	808.3	810.1	810.1	817.3	848.1	878.8	987.3	1094.0	1081.3	1066.9
62.5°	763.1	766.7	768.5	763.1	772.1	804.7	837.2	978.3	1119.3	1032.5	945.7
65°	725.1	723.3	721.5	716.1	726.9	759.5	790.2	860.7	931.3	896.9	862.5
67.5°	683.5	678.1	672.7	665.4	676.3	705.2	732.3	755.9	779.4	783.0	786.6
70°	631.1	623.9	616.6	614.8	620.2	643.7	667.3	683.5	698.0	705.2	710.7
72.5°	569.6	564.2	558.8	555.1	556.9	576.8	594.9	609.4	623.9	629.3	632.9
75°	500.9	500.9	499.1	488.2	488.2	504.5	519.0	531.6	544.3	551.5	558.8
77.5°	426.8	428.6	428.6	414.1	412.3	428.6	443.0	453.9	462.9	470.2	475.6
80°	341.8	338.1	334.5	325.5	321.9	341.8	359.8	368.9	376.1	377.9	377.9
82.5°	262.2	255.0	245.9	226.0	227.8	249.5	269.4	276.7	283.9	283.9	283.9
85°	179.0	164.6	148.3	132.0	133.8	157.3	179.0	186.3	193.5	197.1	198.9
87.5°	85.0	70.5	54.2	41.6	41.6	61.5	79.6	83.2	86.8	94.0	101.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854

CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0
2.5°	12894.8	13050.3	13211.2	13372.2	13556.6	13741.0	13956.2	14169.6	14352.2	14534.9	14686.8
5°	10847.8	11095.5	11386.7	11677.8	12048.5	12419.2	12873.1	13325.1	13728.4	14131.6	14600.0
7.5°	8592.9	8914.8	9294.5	9674.2	10153.4	10632.6	11220.3	11808.0	12377.6	12945.4	13665.1
10°	7207.8	7545.9	7920.2	8292.7	8781.0	9267.4	9889.4	10509.7	11149.8	11788.1	12601.8
12.5°	6480.8	6855.2	7184.3	7513.4	7909.4	8303.6	8905.7	9507.9	10260.1	11010.6	11793.5
15°	5705.1	6113.8	6508.0	6902.2	7334.3	7764.7	8350.6	8936.5	9759.2	10582.0	11482.5
17.5°	4766.6	5197.0	5678.0	6157.2	6721.3	7283.7	8034.1	8784.6	9759.2	10732.1	11793.5
20°	3788.3	4227.7	4802.8	5377.8	6079.4	6779.2	7752.1	8724.9	10037.7	11348.7	12703.1
22.5°	2989.1	3376.0	4003.5	4629.2	5439.3	6249.4	7497.1	8743.0	10459.0	12173.3	14001.4
25°	2423.1	2696.1	3312.8	3927.6	4862.4	5797.3	7341.6	8884.0	11072.0	13258.2	15525.8
27.5°	2075.9	2254.9	2829.9	3403.2	4424.8	5444.7	7278.3	9110.1	11849.6	14589.1	17184.0
30°	1902.3	2027.1	2513.5	2998.1	4036.1	5074.0	7202.3	9330.7	12598.2	15864.0	18480.5
32.5°	1757.6	1857.1	2273.0	2687.1	3699.7	4712.4	7055.9	9397.6	13120.8	16844.0	19578.1
35°	1634.7	1717.9	2079.5	2441.2	3435.7	4430.3	6809.9	9189.6	13448.1	17706.6	20721.0
37.5°	1535.2	1600.3	1934.8	2269.4	3207.9	4146.4	6529.7	8913.0	13739.2	18565.5	22006.7
40°	1457.5	1513.5	1826.4	2139.2	2990.9	3842.6	6289.2	8733.9	14140.7	19547.4	23364.7
42.5°	1414.1	1486.4	1732.3	1976.4	2784.7	3593.0	6095.7	8598.3	14513.2	20426.2	24552.7
45°	1403.2	1506.3	1683.5	1860.7	2631.0	3401.4	5923.9	8444.6	14753.7	21062.7	25447.8
47.5°	1385.1	1470.1	1645.5	1820.9	2555.1	3287.4	5831.7	8374.1	14994.2	21612.5	26191.0
50°	1396.0	1406.8	1614.8	1820.9	2544.2	3267.5	5936.6	8605.6	15515.0	22422.6	27040.9
52.5°	1376.1	1329.1	1556.9	1784.8	2542.4	3300.1	6238.5	9177.0	16482.4	23786.0	27961.3
55°	1271.2	1209.7	1448.4	1687.1	2504.5	3320.0	6598.4	9875.0	17780.7	25684.7	29615.9
57.5°	1179.0	1122.9	1325.5	1526.2	2388.7	3251.3	6969.1	10685.1	19153.2	27619.5	31480.2
60°	1056.0	1043.4	1188.0	1332.7	2209.7	3084.9	7274.7	11462.6	20075.4	28686.4	32198.1
62.5°	954.8	962.0	1068.7	1175.4	1985.5	2793.8	7375.9	11956.3	20050.1	28143.9	31474.8
65°	877.0	889.7	994.5	1099.4	1793.8	2488.2	7043.2	11596.4	19035.7	26473.1	30044.4
67.5°	801.1	815.5	940.3	1063.3	1623.8	2182.6	6211.4	10238.4	17211.1	24182.0	28225.3
70°	728.7	746.8	882.4	1018.1	1500.9	1981.9	5139.1	8296.3	14927.3	21556.4	26118.7
72.5°	651.0	669.1	813.7	958.4	1423.1	1886.0	4189.8	6491.7	12113.6	17733.7	22341.2
75°	571.4	584.1	741.4	896.9	1316.4	1735.9	3287.4	4837.1	9271.0	13704.9	16874.8
77.5°	491.8	508.1	640.1	770.3	1117.5	1462.9	2477.3	3491.8	6802.7	10111.9	11735.7
80°	392.4	406.9	500.9	593.1	862.5	1130.2	1703.4	2276.6	4681.6	7086.6	8001.6
82.5°	300.2	316.4	379.7	441.2	614.8	788.4	1032.5	1276.6	3110.2	4942.0	5018.0
85°	206.1	211.6	256.8	300.2	379.7	459.3	591.3	723.3	2057.8	3392.3	2826.3
87.5°	103.1	103.1	133.8	164.6	204.3	244.1	312.8	379.7	658.2	936.7	538.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





REPORT NUMBER: P320854

CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0
2.5°	14880.3	15012.3	15146.1	15247.3	15350.4	15498.7	15647.0	15674.1	15703.0	15645.2	15587.3
5°	15071.9	15471.6	15873.0	16243.7	16614.4	16836.8	17059.2	17104.4	17149.6	17010.4	16869.4
7.5°	14361.3	15057.5	15753.7	16392.0	17030.3	17417.3	17806.0	17892.8	17981.4	17753.6	17525.8
10°	13411.9	14267.3	15122.6	15963.4	16804.3	17366.6	17929.0	18041.1	18153.2	17869.3	17585.4
12.5°	12677.8	13591.0	14504.1	15390.2	16278.1	16860.3	17442.6	17581.8	17721.1	17514.9	17307.0
15°	12451.8	13310.7	14169.6	14941.7	15715.7	16191.3	16668.6	16724.7	16782.6	16750.0	16717.5
17.5°	12862.2	13638.0	14415.5	14835.1	15256.4	15446.2	15637.9	15699.4	15762.7	15844.1	15927.2
20°	13856.8	14402.9	14950.8	14932.7	14912.8	14820.6	14726.6	14710.3	14694.0	14927.3	15162.4
22.5°	15341.4	15558.4	15777.2	15269.0	14760.9	14451.7	14140.7	14079.2	14015.9	14263.6	14513.2
25°	16952.5	16912.8	16871.2	15903.7	14934.5	14345.0	13755.5	13686.8	13618.1	13829.7	14043.0
27.5°	18547.4	18287.0	18026.7	16712.0	15397.4	14542.1	13686.8	13618.1	13549.4	13737.4	13925.5
30°	19717.4	19299.7	18882.0	17393.8	15905.6	14889.3	13873.1	13760.9	13647.0	13878.5	14109.9
32.5°	20630.6	20070.0	19509.4	17947.1	16384.7	15285.3	14185.9	14010.5	13835.1	14144.3	14453.5
35°	21541.9	20753.5	19963.3	18440.7	16916.4	15753.7	14589.1	14373.9	14158.8	14583.7	15008.6
37.5°	22688.4	21556.4	20422.6	18995.9	17569.2	16455.3	15339.6	15119.0	14898.3	15439.0	15981.5
40°	23932.5	22422.6	20912.7	19603.5	18294.3	17426.3	16556.5	16346.8	16135.2	16793.4	17451.6
42.5°	24966.8	23229.0	21491.3	20335.8	19178.5	18567.3	17954.3	17952.5	17948.9	18616.1	19283.4
45°	25807.6	23901.7	21994.0	21050.1	20104.4	19786.1	19467.8	19722.8	19977.8	20579.9	21183.9
47.5°	26435.1	24465.9	22494.9	21867.4	21239.9	21287.0	21334.0	21853.0	22371.9	22758.9	23147.7
50°	26843.8	24977.6	23109.7	22916.2	22722.7	23144.1	23567.2	24162.1	24758.8	25022.9	25286.9
52.5°	27438.7	25672.0	23903.5	24120.5	24337.5	25198.3	26059.0	26661.1	27263.3	27360.9	27460.4
55°	28814.8	26948.7	25080.7	25496.6	25914.3	27176.5	28440.5	28910.6	29380.8	29416.9	29453.1
57.5°	30769.5	28737.0	26704.5	27153.0	27601.4	29058.9	30518.2	31024.5	31532.6	31462.1	31389.8
60°	32232.4	30435.0	28635.8	29087.8	29539.9	30961.2	32382.5	32964.8	33548.8	33393.3	33237.8
62.5°	32322.8	31362.6	30400.6	30809.3	31219.8	32612.2	34004.5	34603.1	35201.6	34930.4	34659.1
65°	30885.3	31315.6	31746.0	31881.6	32017.2	33315.6	34615.7	35073.2	35532.5	35395.1	35257.7
67.5°	28905.2	30491.1	32078.7	31805.7	31532.6	32142.0	32751.4	33223.4	33695.3	33617.6	33538.0
70°	26928.8	29046.3	31163.7	29822.0	28478.5	28227.1	27975.8	28483.9	28993.8	28679.2	28362.7
72.5°	23563.6	25820.3	28078.8	25606.9	23135.0	22276.1	21417.2	22062.7	22708.3	22207.4	21704.7
75°	18496.8	20990.4	23485.8	20536.5	17587.2	16440.8	15294.4	15849.5	16404.6	16061.1	15715.7
77.5°	13770.0	16227.4	18684.9	15686.7	12686.8	11835.1	10981.6	11146.2	11312.5	11254.7	11195.0
80°	9339.7	11052.2	12766.4	10770.1	8773.7	8838.8	8905.7	8828.0	8748.4	8864.1	8979.9
82.5°	5960.1	7281.9	8605.6	7545.9	6486.3	7093.8	7701.4	7403.1	7102.9	7213.2	7325.3
85°	3401.4	4694.3	5989.0	5582.1	5173.5	5527.9	5884.1	5421.2	4958.3	5160.8	5365.1
87.5°	896.9	2596.7	4298.3	3902.2	3506.2	3046.9	2587.6	1974.6	1361.6	1989.1	2616.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854

CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0	13779.0
2.5°	15556.6	15525.8	15415.5	15303.4	15137.0	14999.6	14760.9
5°	16674.1	16478.8	16142.4	15804.3	15428.2	14996.0	14516.8
7.5°	17070.1	16612.6	15967.0	15319.7	14737.4	14053.9	13417.4
10°	16901.9	16216.6	15377.5	14536.7	13829.7	13043.1	12336.0
12.5°	16580.0	15851.3	14927.3	14001.4	13196.8	12352.3	11560.3
15°	16137.0	15554.7	14688.6	13822.4	13012.3	12191.4	11252.9
17.5°	15652.4	15375.7	14750.1	14122.6	13421.0	12625.3	11524.1
20°	15261.8	15363.1	15113.5	14864.0	14301.6	13607.2	12370.4
22.5°	14997.8	15484.2	15675.9	15869.4	15531.2	14988.8	13558.4
25°	14849.5	15656.0	16297.9	16941.7	16791.6	16373.9	15001.4
27.5°	14914.6	15903.7	16900.1	17898.3	18037.5	17921.8	16522.2
30°	15109.9	16111.7	17325.0	18540.2	19095.3	19250.9	17789.8
32.5°	15435.4	16417.3	17739.1	19062.8	19901.8	20397.3	18948.9
35°	15927.2	16845.9	18223.8	19601.7	20686.6	21590.8	20145.9
37.5°	16771.7	17561.9	18833.1	20106.2	21513.0	22871.0	21464.2
40°	18008.6	18567.3	19641.4	20717.4	22487.7	24321.2	22934.3
42.5°	19569.1	19856.6	20708.3	21560.0	23505.7	25637.7	24371.9
45°	21259.8	21335.8	21871.0	22408.1	24312.2	26534.6	25451.4
47.5°	22887.3	22626.9	22840.3	23053.6	24930.6	27174.7	26270.6
50°	24561.7	23836.6	23724.5	23612.4	25549.1	27928.7	27312.1
52.5°	26265.1	25069.9	24626.8	24182.0	26286.8	28928.7	28608.7
55°	27932.4	26411.6	25814.9	25218.1	27415.2	30149.3	30512.8
57.5°	29666.5	27943.2	27389.9	26836.5	29073.4	31695.4	32221.6
60°	31532.6	29825.6	29382.6	28937.8	31134.8	33366.2	32982.9
62.5°	33302.9	31946.7	31713.5	31478.4	33219.7	34650.1	32686.3
65°	34485.5	33711.6	33928.6	34147.4	34796.6	34970.1	31818.3
67.5°	33695.3	33852.6	34769.4	35688.0	35241.4	34019.0	30107.7
70°	29304.8	30248.8	32420.5	34594.0	33603.1	31471.1	27037.3
72.5°	22764.3	23825.8	27049.9	30275.9	29362.7	26751.6	22207.4
75°	16912.8	18111.6	21670.3	25229.0	23961.4	20010.3	15900.1
77.5°	11997.9	12800.7	16314.2	19829.5	17762.6	13319.7	10699.5
80°	8733.9	8488.0	10446.4	12404.7	12061.2	8809.9	6871.4
82.5°	6725.0	6124.6	7046.8	7969.0	7918.4	6113.8	5041.5
85°	5124.6	4884.1	5699.7	6515.2	5817.2	4140.9	3204.3
87.5°	2987.3	3359.8	4320.0	5282.0	3963.7	1256.7	622.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P320854  
 CATALOG NUMBER: GLEON-SA0C-722-U-SLR

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



LM-79-2008: Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGRAW-EDISON

Report Number: SP1-1908-441-10-R4

Test Date: 10/25/2019

Luminaire Tested: SA1C-722-U-5WQ

Data in this report applies to families of products SA1C-722-U-5WQ.

**Test Information**

Test Method: LM-79-2008 Report  
 Number: SP1-1908-441-10-R4  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 10/28/2024  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: MCGRAW-EDISON  
 Catalog Number: **SA1C-722-U-5WQ**  
 Description: MCGRAW EDISON ROADWAY AND AREA LUMINAIRE


\*\*\*THIS IS A REVISION OF SP1-1908-441-4-R3. TO UPDATE THE CATALOG INFORMATION.\*\*\*TESTED IN SITU. ROADWAY AND AREA LUMINAIRE. (1) 70 CRI, 5000K, 1050MA LIGHTSQUARE WITH 16 LEDS AND TYPE V WIDE OPTICS.

**Spectral Parameters**

CCT (K): 2237  
 CIE u': 0.2876  
 CIE v': 0.5346  
 Duv: -0.0006  
 CIE x: 0.5005  
 CIE y: 0.4134  
 CIE z: 0.0860  
 Peak Wavelength (nm): 603  
 Dominant Wavelength (nm): 587  
 Purity: 74.5

CRI (Ra):	72.0		
R1:	68.9	R9:	-17.4
R2:	83.0	R10:	61.3
R3:	95.2	R11:	59.8
R4:	66.2	R12:	50.5
R5:	65.9	R13:	71.1
R6:	76.3	R14:	96.9
R7:	76.7		
R8:	43.8		

Rf: 69.8  
 Rg: 99.2

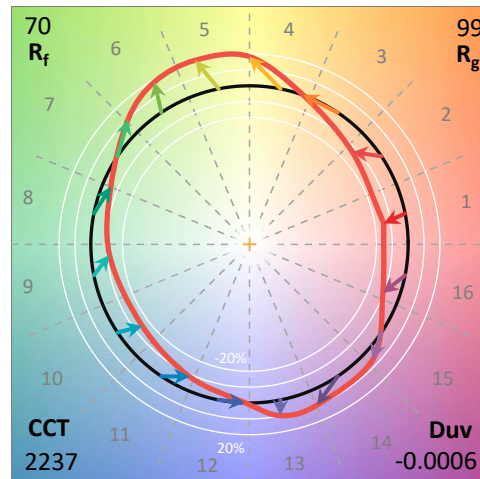

**Test Conditions**


Stabilization Time: 71M  
 Operation Time: 12H  
 Room Temperature (°C) / RH%: 24.7/41%  
 Sphere Temperature (°C): 25.6

REPORT NUMBER: SP1-1908-441-10-R4


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/28/2019	12/28/2019
Power Meter	IN0071	12/5/2018	12/5/2019
AC Power Source	IN0063	12/5/2018	12/5/2019
DC Power Source	IN0208	12/5/2018	12/5/2019
Sphere Thermometer	IN0085	12/5/2018	12/5/2019
Room Thermometer	IN0046	12/5/2018	12/5/2019

REPORT NUMBER: SP1-1908-441-10-R4

CIE 1931 Chromaticity Diagram

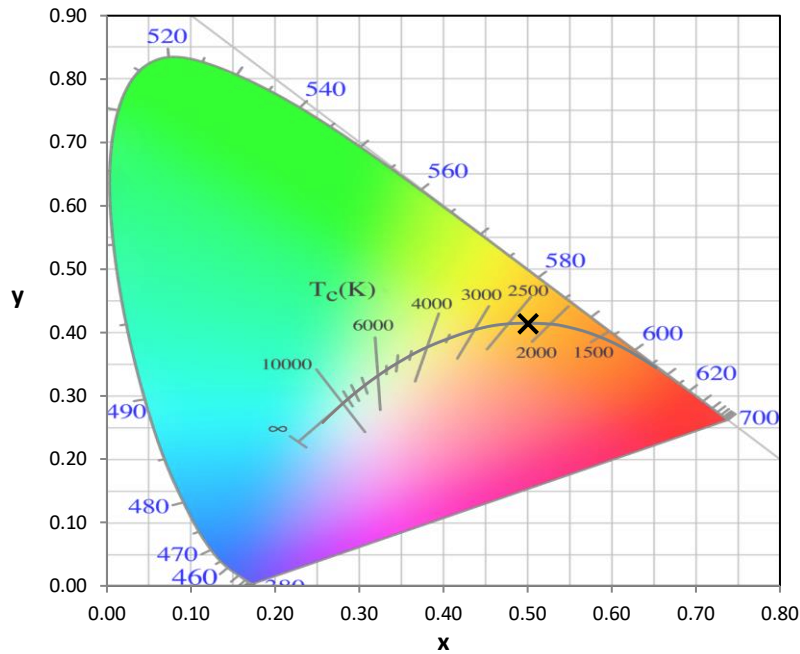

CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

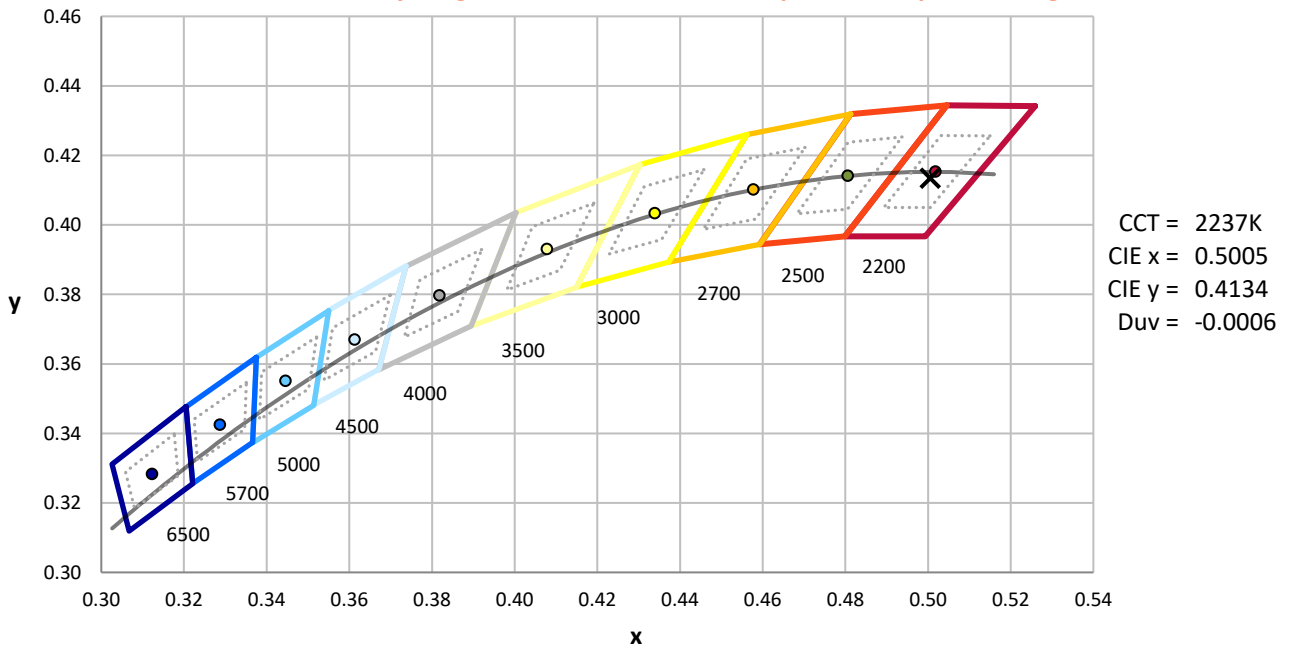


Point lies inside the ANSI 2200K 4-step quadrangle



REPORT NUMBER: SP1-1908-441-10-R4

**Photopic Flux vs. Wavelength**

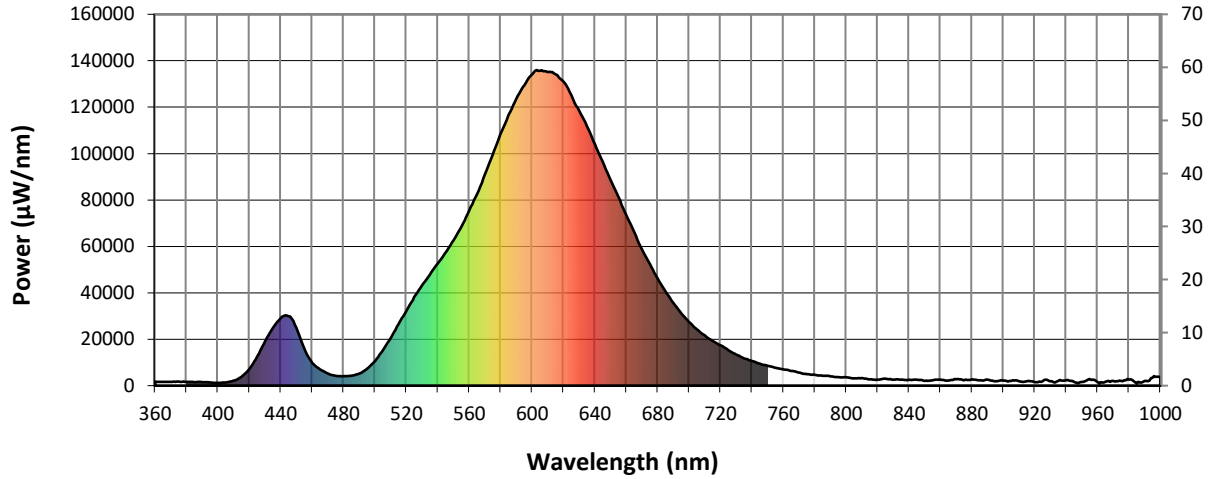


#####

λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)
360	1768	NR	490	5206	NR	620	130919	NR	750	8553	NR	880	2713	NR
365	1569	NR	495	7286	NR	625	125335	NR	755	7696	NR	885	2316	NR
370	1594	NR	500	10654	NR	630	118388	NR	760	6978	NR	890	2539	NR
375	1744	NR	505	15189	NR	635	111855	NR	765	6377	NR	895	1933	NR
380	1659	NR	510	20541	NR	640	104062	NR	770	5600	NR	900	2216	NR
385	1504	NR	515	26492	NR	645	96365	NR	775	5000	NR	905	2067	NR
390	1541	NR	520	32294	NR	650	88651	NR	780	4709	NR	910	1959	NR
395	1355	NR	525	38123	NR	655	81152	NR	785	4305	NR	915	1874	NR
400	1243	NR	530	43232	NR	660	73523	NR	790	4040	NR	920	1484	NR
405	1417	NR	535	48012	NR	665	66123	NR	795	3642	NR	925	1914	NR
410	2147	NR	540	52623	NR	670	58677	NR	800	3594	NR	930	1948	NR
415	3837	NR	545	57516	NR	675	52349	NR	805	3190	NR	935	2079	NR
420	7159	NR	550	62613	NR	680	46159	NR	810	3241	NR	940	2263	NR
425	12599	NR	555	68554	NR	685	40525	NR	815	2732	NR	945	1688	NR
430	19019	NR	560	75325	NR	690	35615	NR	820	2612	NR	950	1560	NR
435	24875	NR	565	82533	NR	695	31158	NR	825	2966	NR	955	2826	NR
440	29103	NR	570	90909	NR	700	27409	NR	830	2574	NR	960	1477	NR
445	29901	NR	575	99621	NR	705	24204	NR	835	2633	NR	965	1568	NR
450	24862	NR	580	108484	NR	710	21558	NR	840	2526	NR	970	2030	NR
455	15942	NR	585	116679	NR	715	19222	NR	845	2631	NR	975	1986	NR
460	9916	NR	590	123752	NR	720	17310	NR	850	2079	NR	980	2540	NR
465	7051	NR	595	129324	NR	725	15280	NR	855	2309	NR	985	1139	NR
470	5227	NR	600	134082	NR	730	13282	NR	860	2528	NR	990	2018	NR
475	4257	NR	605	135698	NR	735	11753	NR	865	2121	NR	995	3445	NR
480	4052	NR	610	135144	NR	740	10654	NR	870	2751	NR	1000	3704	NR
485	4298	NR	615	134180	NR	745	9451	NR	875	2317	NR			

REPORT NUMBER: SP1-1908-441-10-R4

Scotopic Flux vs. Wavelength

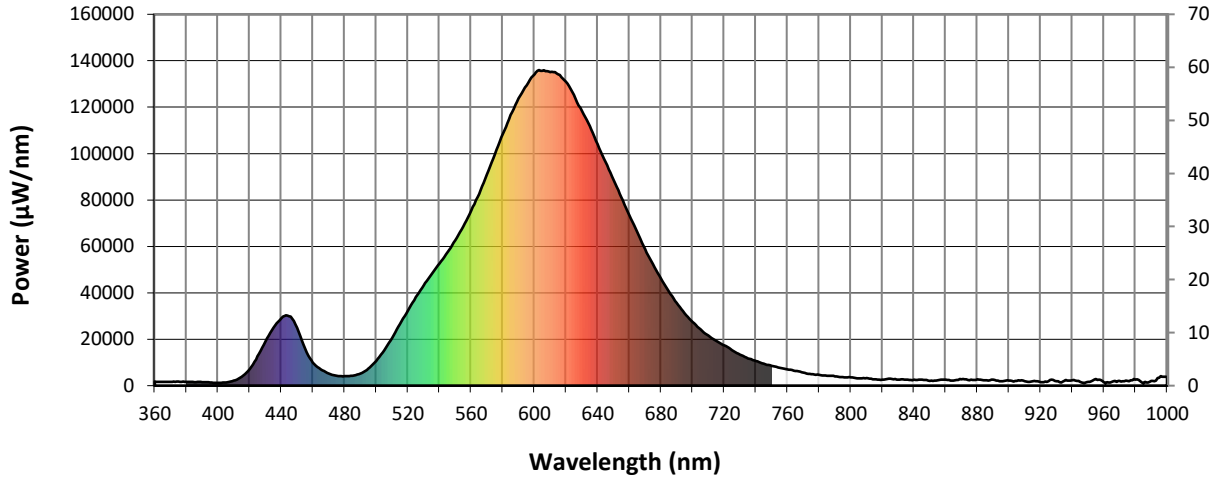


Scotopic Lumens: 4696.9

S/P: 0.85

λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)
360	1768	NR	490	5206	NR	620	130919	NR	750	8553	NR	880	2713	NR
365	1569	NR	495	7286	NR	625	125335	NR	755	7696	NR	885	2316	NR
370	1594	NR	500	10654	NR	630	118388	NR	760	6978	NR	890	2539	NR
375	1744	NR	505	15189	NR	635	111855	NR	765	6377	NR	895	1933	NR
380	1659	NR	510	20541	NR	640	104062	NR	770	5600	NR	900	2216	NR
385	1504	NR	515	26492	NR	645	96365	NR	775	5000	NR	905	2067	NR
390	1541	NR	520	32294	NR	650	88651	NR	780	4709	NR	910	1959	NR
395	1355	NR	525	38123	NR	655	81152	NR	785	4305	NR	915	1874	NR
400	1243	NR	530	43232	NR	660	73523	NR	790	4040	NR	920	1484	NR
405	1417	NR	535	48012	NR	665	66123	NR	795	3642	NR	925	1914	NR
410	2147	NR	540	52623	NR	670	58677	NR	800	3594	NR	930	1948	NR
415	3837	NR	545	57516	NR	675	52349	NR	805	3190	NR	935	2079	NR
420	7159	NR	550	62613	NR	680	46159	NR	810	3241	NR	940	2263	NR
425	12599	NR	555	68554	NR	685	40525	NR	815	2732	NR	945	1688	NR
430	19019	NR	560	75325	NR	690	35615	NR	820	2612	NR	950	1560	NR
435	24875	NR	565	82533	NR	695	31158	NR	825	2966	NR	955	2826	NR
440	29103	NR	570	90909	NR	700	27409	NR	830	2574	NR	960	1477	NR
445	29901	NR	575	99621	NR	705	24204	NR	835	2633	NR	965	1568	NR
450	24862	NR	580	108484	NR	710	21558	NR	840	2526	NR	970	2030	NR
455	15942	NR	585	116679	NR	715	19222	NR	845	2631	NR	975	1986	NR
460	9916	NR	590	123752	NR	720	17310	NR	850	2079	NR	980	2540	NR
465	7051	NR	595	129324	NR	725	15280	NR	855	2309	NR	985	1139	NR
470	5227	NR	600	134082	NR	730	13282	NR	860	2528	NR	990	2018	NR
475	4257	NR	605	135698	NR	735	11753	NR	865	2121	NR	995	3445	NR
480	4052	NR	610	135144	NR	740	10654	NR	870	2751	NR	1000	3704	NR
485	4298	NR	615	134180	NR	745	9451	NR	875	2317	NR			

REPORT NUMBER: SP1-1908-441-10-R4

**Melanopic Flux vs. Wavelength**

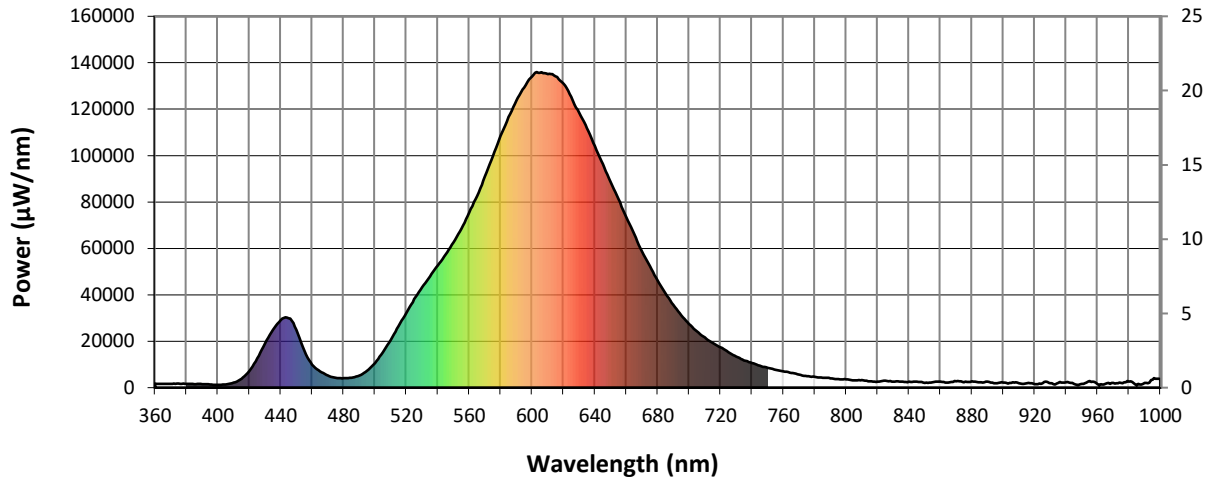

**Melanopic Lumens: 1470.8 M/P: 0.27**


λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)	λ (nm)	Power (µW/nm)	Lumens (φ/nm)
360	1768	NR	490	5206	NR	620	130919	NR	750	8553	NR	880	2713	NR
365	1569	NR	495	7286	NR	625	125335	NR	755	7696	NR	885	2316	NR
370	1594	NR	500	10654	NR	630	118388	NR	760	6978	NR	890	2539	NR
375	1744	NR	505	15189	NR	635	111855	NR	765	6377	NR	895	1933	NR
380	1659	NR	510	20541	NR	640	104062	NR	770	5600	NR	900	2216	NR
385	1504	NR	515	26492	NR	645	96365	NR	775	5000	NR	905	2067	NR
390	1541	NR	520	32294	NR	650	88651	NR	780	4709	NR	910	1959	NR
395	1355	NR	525	38123	NR	655	81152	NR	785	4305	NR	915	1874	NR
400	1243	NR	530	43232	NR	660	73523	NR	790	4040	NR	920	1484	NR
405	1417	NR	535	48012	NR	665	66123	NR	795	3642	NR	925	1914	NR
410	2147	NR	540	52623	NR	670	58677	NR	800	3594	NR	930	1948	NR
415	3837	NR	545	57516	NR	675	52349	NR	805	3190	NR	935	2079	NR
420	7159	NR	550	62613	NR	680	46159	NR	810	3241	NR	940	2263	NR
425	12599	NR	555	68554	NR	685	40525	NR	815	2732	NR	945	1688	NR
430	19019	NR	560	75325	NR	690	35615	NR	820	2612	NR	950	1560	NR
435	24875	NR	565	82533	NR	695	31158	NR	825	2966	NR	955	2826	NR
440	29103	NR	570	90909	NR	700	27409	NR	830	2574	NR	960	1477	NR
445	29901	NR	575	99621	NR	705	24204	NR	835	2633	NR	965	1568	NR
450	24862	NR	580	108484	NR	710	21558	NR	840	2526	NR	970	2030	NR
455	15942	NR	585	116679	NR	715	19222	NR	845	2631	NR	975	1986	NR
460	9916	NR	590	123752	NR	720	17310	NR	850	2079	NR	980	2540	NR
465	7051	NR	595	129324	NR	725	15280	NR	855	2309	NR	985	1139	NR
470	5227	NR	600	134082	NR	730	13282	NR	860	2528	NR	990	2018	NR
475	4257	NR	605	135698	NR	735	11753	NR	865	2121	NR	995	3445	NR
480	4052	NR	610	135144	NR	740	10654	NR	870	2751	NR	1000	3704	NR
485	4298	NR	615	134180	NR	745	9451	NR	875	2317	NR			

REPORT NUMBER: SP1-1908-441-10-R4





TM-30-18

**Summary**

$R_f = 69.8$   
 $R_g = 99.2$   
 $CIE R_a = 72.0$   
 $R_g = -17.4$

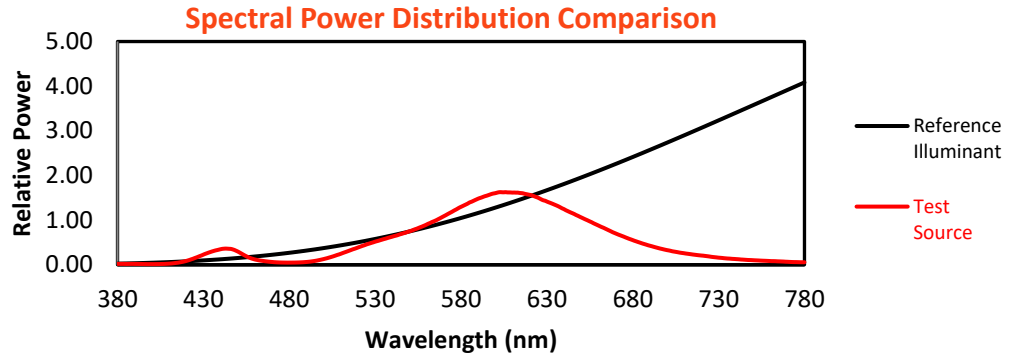

**Color Vector Graphics**

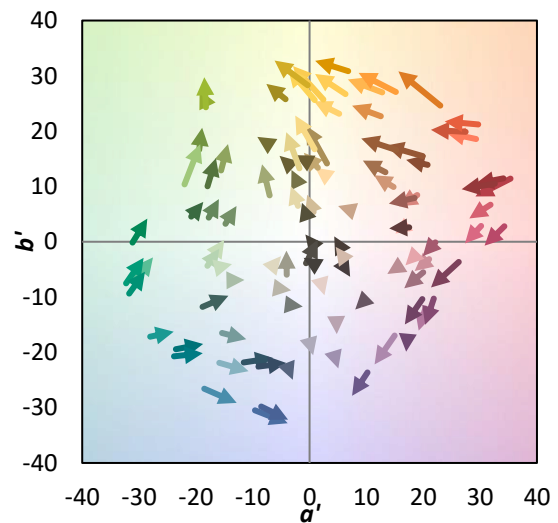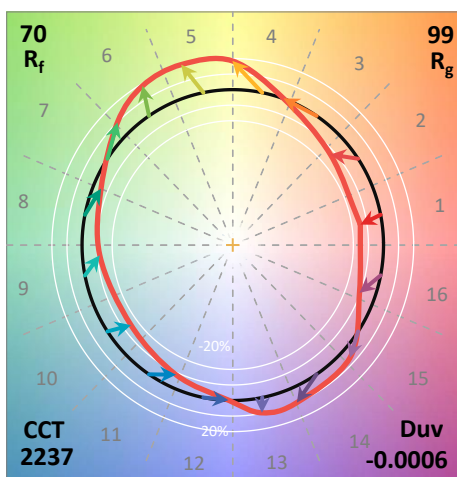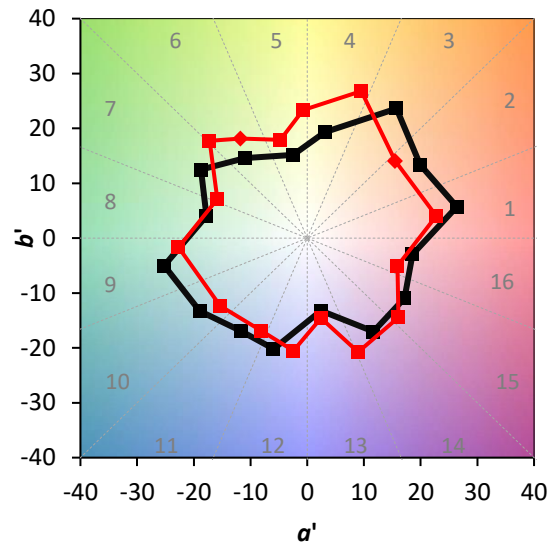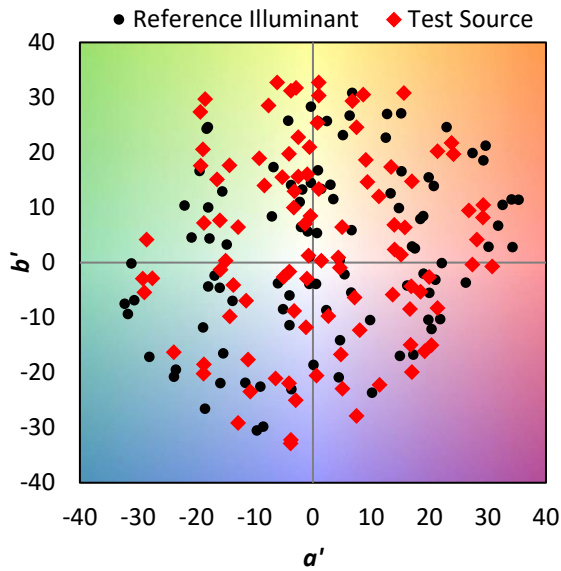


REPORT NUMBER: SP1-1908-441-10-R4

TM-30-18

**Individual Sample Fidelity Index ( $R_{f,i}$ )**




CES01 = 87	CES26 = 56	CES51 = 74	CES76 = 56
CES02 = 65	CES27 = 76	CES52 = 76	CES77 = 81
CES03 = 32	CES28 = 83	CES53 = 65	CES78 = 63
CES04 = 72	CES29 = 46	CES54 = 78	CES79 = 84
CES05 = 52	CES30 = 48	CES55 = 75	CES80 = 84
CES06 = 52	CES31 = 51	CES56 = 65	CES81 = 63
CES07 = 44	CES32 = 51	CES57 = 62	CES82 = 92
CES08 = 42	CES33 = 53	CES58 = 66	CES83 = 83
CES09 = 29	CES34 = 70	CES59 = 84	CES84 = 92
CES10 = 78	CES35 = 85	CES60 = 90	CES85 = 81
CES11 = 61	CES36 = 78	CES61 = 84	CES86 = 56
CES12 = 68	CES37 = 80	CES62 = 70	CES87 = 78
CES13 = 45	CES38 = 53	CES63 = 68	CES88 = 72
CES14 = 75	CES39 = 90	CES64 = 69	CES89 = 62
CES15 = 72	CES40 = 84	CES65 = 67	CES90 = 67
CES16 = 49	CES41 = 75	CES66 = 64	CES91 = 90
CES17 = 51	CES42 = 79	CES67 = 63	CES92 = 67
CES18 = 57	CES43 = 64	CES68 = 69	CES93 = 79
CES19 = 74	CES44 = 98	CES69 = 80	CES94 = 52
CES20 = 68	CES45 = 73	CES70 = 63	CES95 = 76
CES21 = 89	CES46 = 67	CES71 = 63	CES96 = 78
CES22 = 81	CES47 = 60	CES72 = 87	CES97 = 77
CES23 = 92	CES48 = 48	CES73 = 56	CES98 = 71
CES24 = 92	CES49 = 64	CES74 = 87	CES99 = 65
CES25 = 74	CES50 = 74	CES75 = 66	

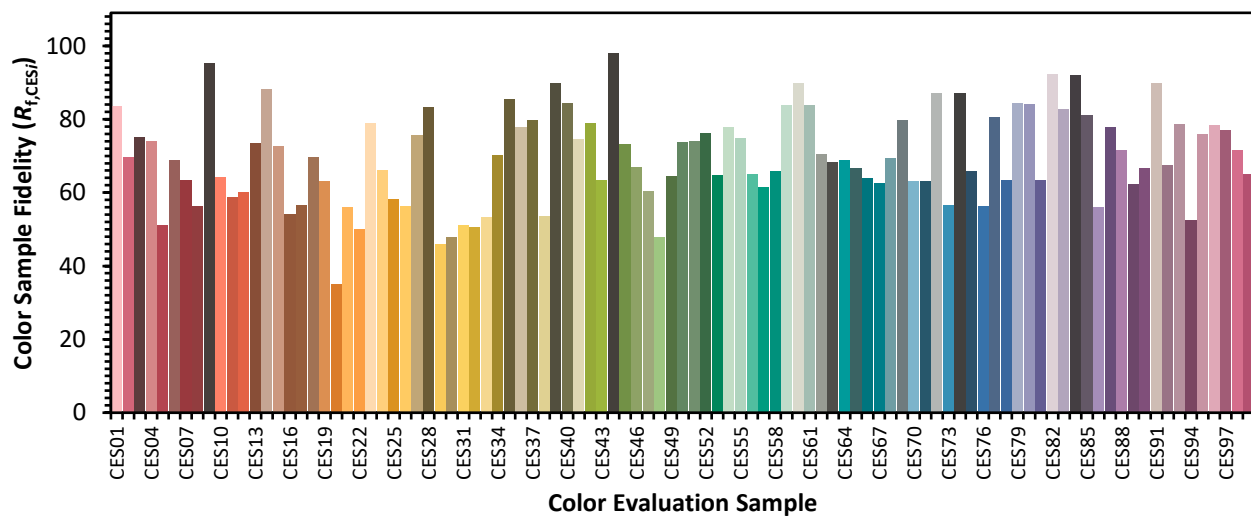

REPORT NUMBER: SP1-1908-441-10-R4

TM-30-18



Color Rendition by Hue-Angle Bin

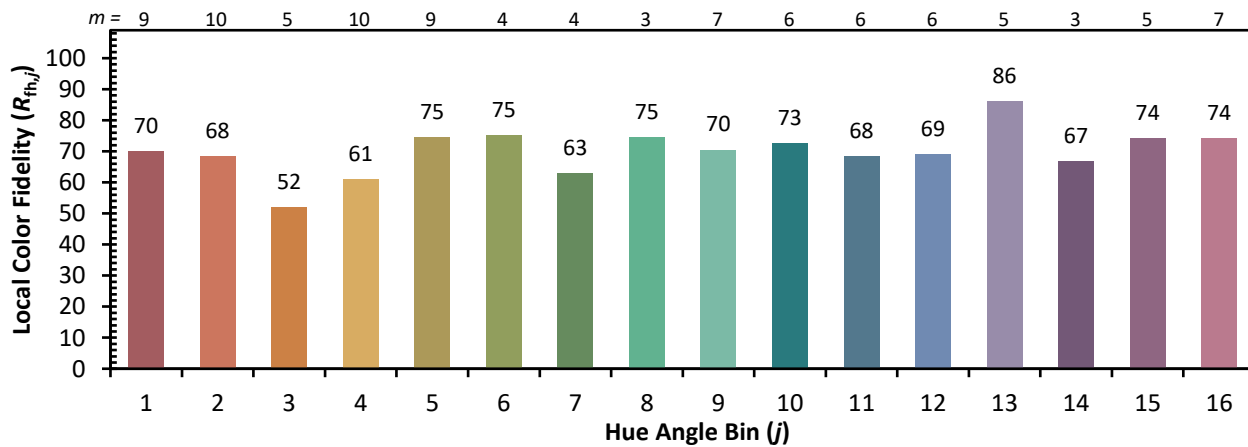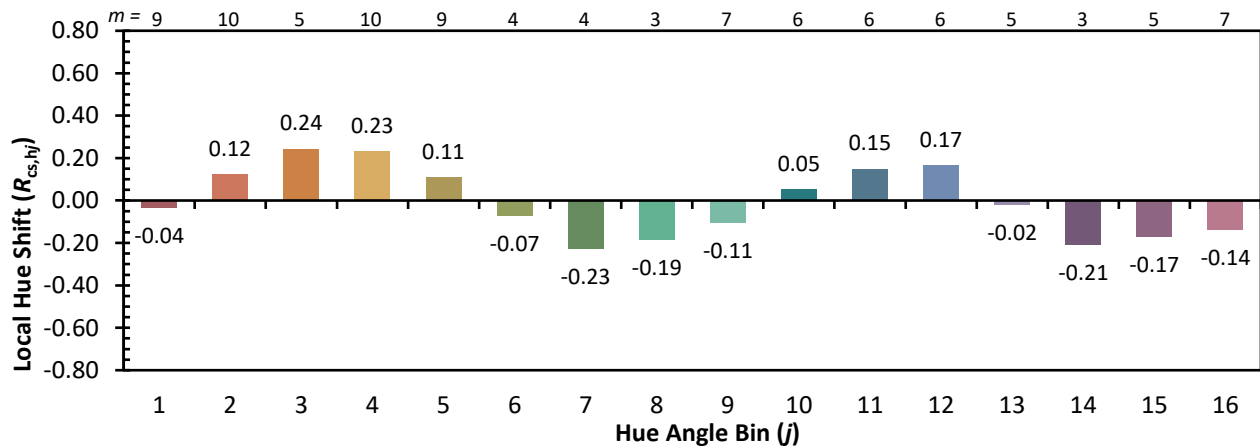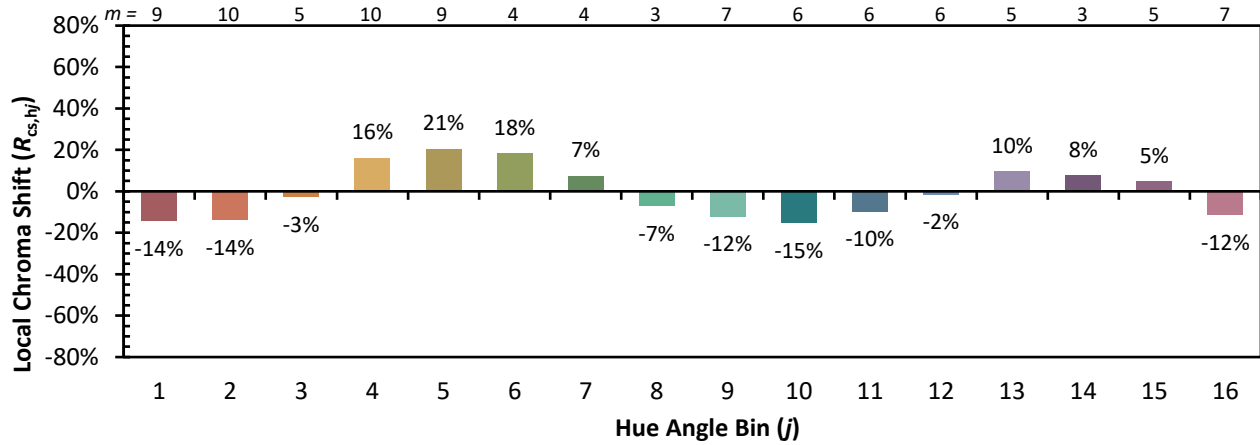

REPORT NUMBER: SP1-1908-441-10-R4

TM-30-18

Measure Comparisons

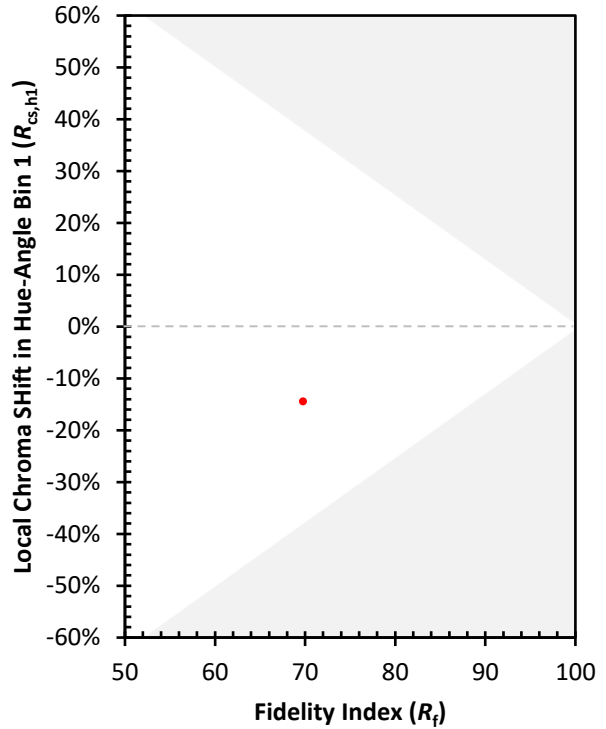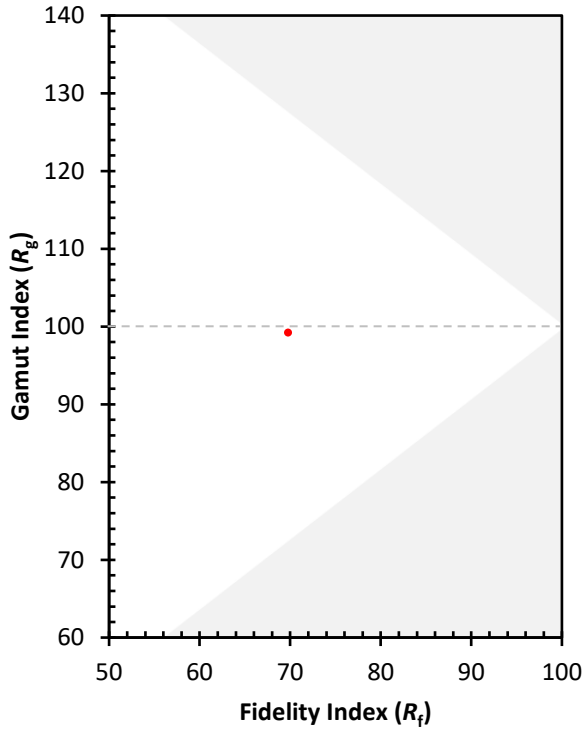

(END OF REPORT)