

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P821207

Luminaire Tested: **TT-D2-735-24VDC-DL-UPL**

Issue Date: 7/23/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P821207  
REPORT IS FROM IESNA LM-79-08 TEST DATA - UPLIGHT (G2-2002-677-2) AND  
Test Lab: INNOVATION CENTER  
Issue Date: 7/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: McGRAW-EDISON  
Catalog Number: TT-D2-735-24VDC-DL-UPL  
Description: TOPTIER LED PARKING GARAGE LUMINAIRE WITH UPLIGHT  
3500K, 70 CRI LEDS AND DRIVE LANE DISTRIBUTION  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5065.7 lumens  
Efficiency: N/A  
Efficacy: 133.3 lumens/watt  
Luminous Opening: Vertical Cylinder (Dia: 1.12' x H: 0.1')  
IES Classification: Type IV - Short  
BUG Rating: B2 - U4 - G3

Input Watts (W): 38  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

REPORT NUMBER: P821207  
 CATALOG NUMBER: TT-D2-735-24VDC-DL-UPL

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

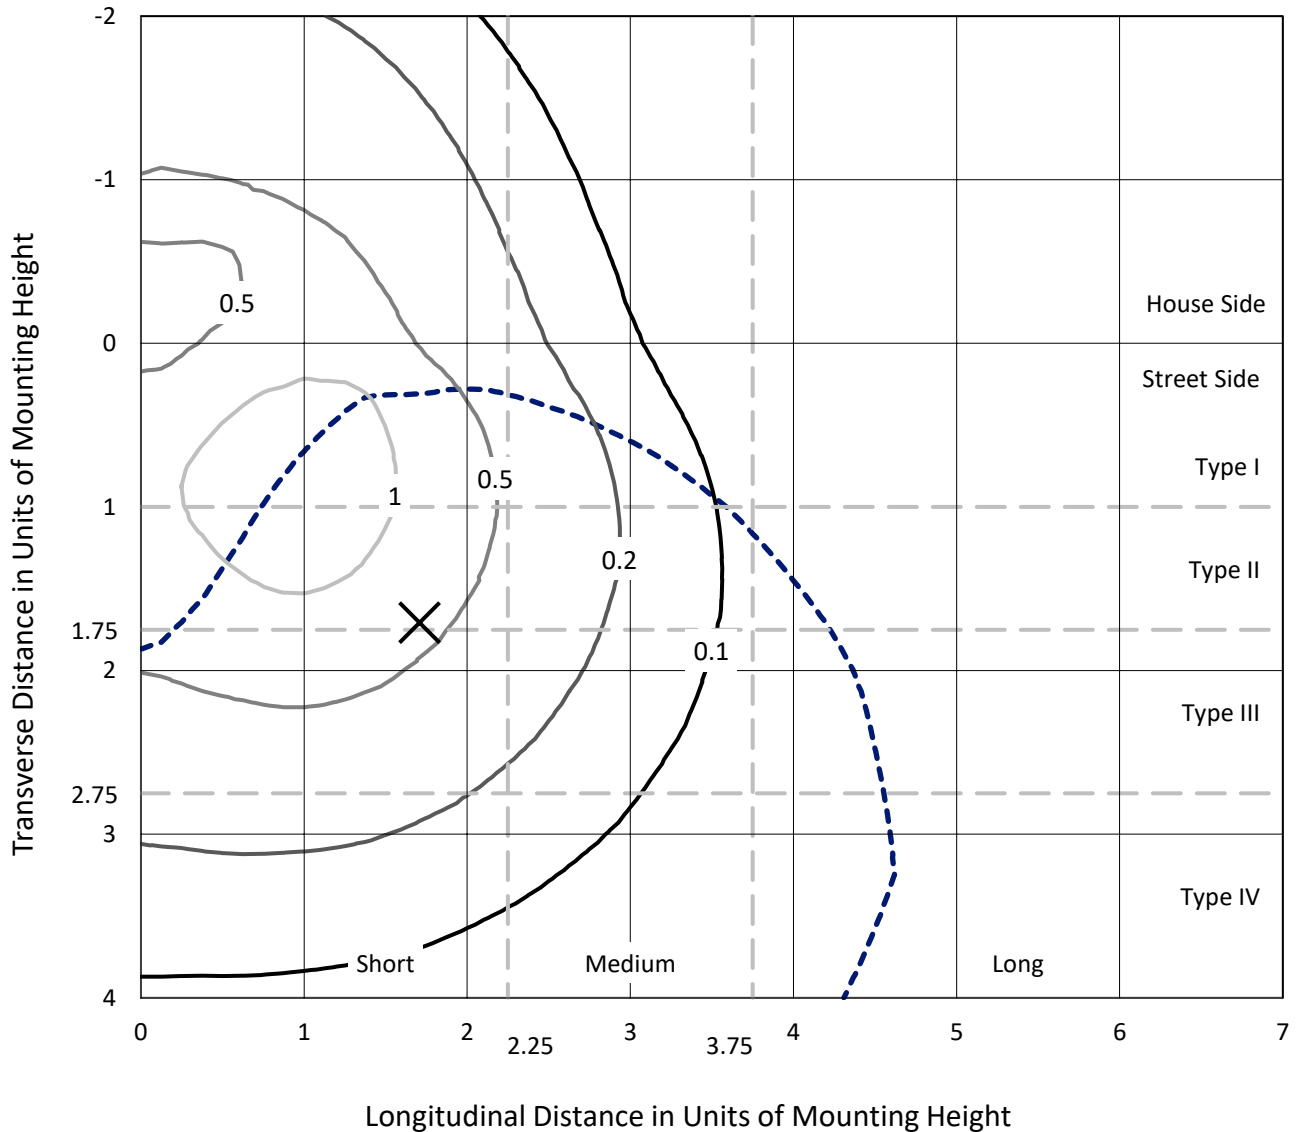

Based on 15 foot mounting height. Maximum calculated value = 1.4 fc  
 Type IV - Short - N/A

REPORT NUMBER: P821207  
CATALOG NUMBER: TT-D2-735-24VDC-DL-UPL

### Luminous Intensity Polar Plot

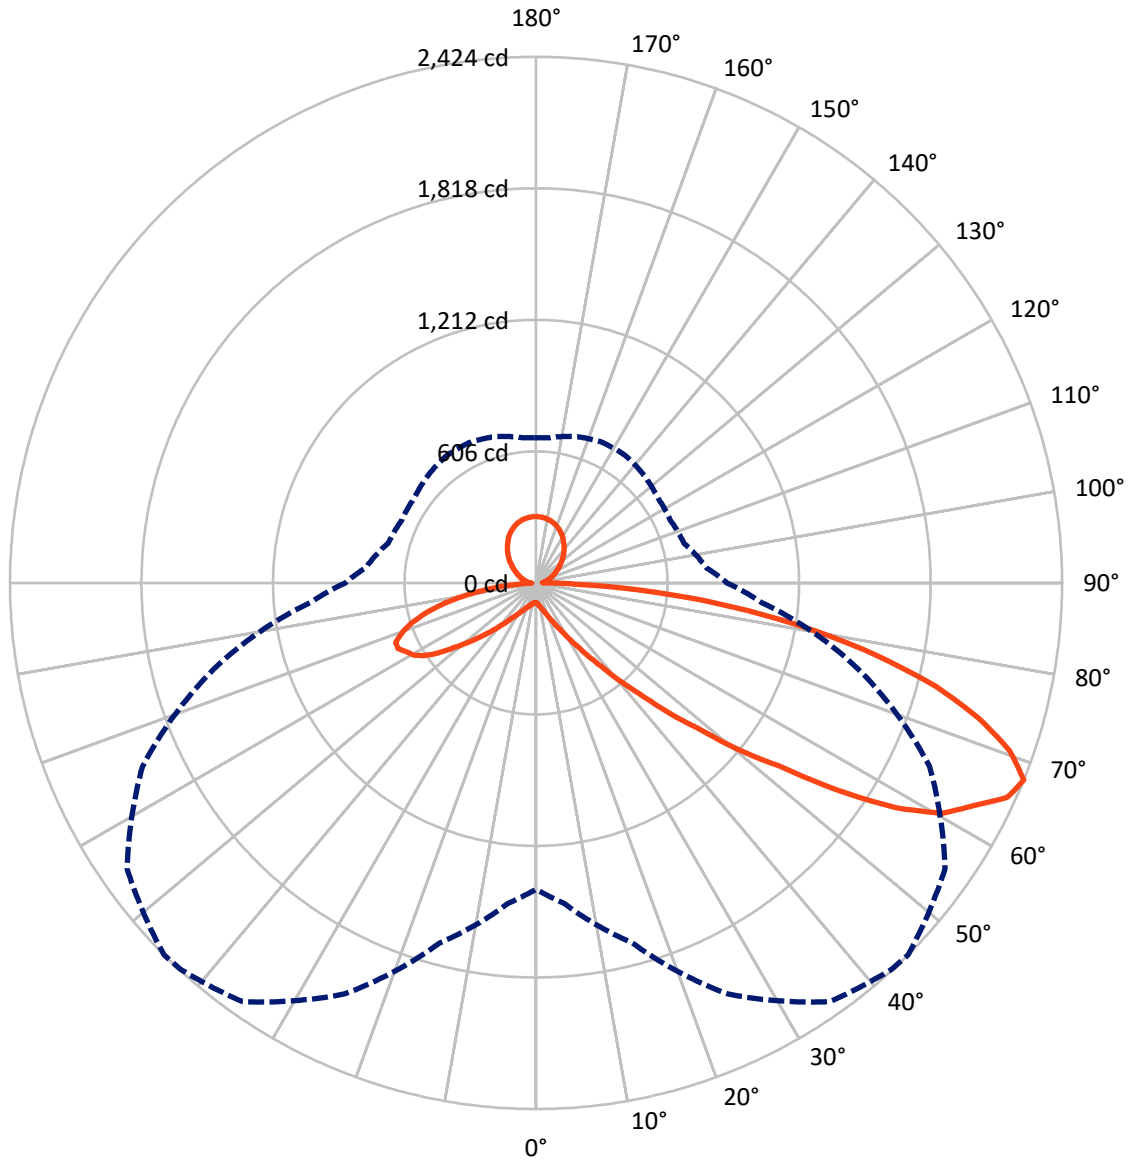

— Vertical Plane Through 45-Deg Lateral      - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P821207  
 CATALOG NUMBER: TT-D2-735-24VDC-DL-UPL


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	1234.6	415.9	1650.5
	% Fixture	24.4	8.2	32.6
<b>Street Side</b>	Lumens	2999.4	415.9	3415.2
	% Fixture	59.2	8.2	67.4
<b>Total</b>	Lumens	4234.0	831.7	5065.7
	% Fixture	83.6	16.4	100.0

**Coefficient of Utilization**

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	9.4	0.2
10°-20°	35.1	0.7
20°-30°	83.0	1.6
30°-40°	187.8	3.7
40°-50°	418.7	8.3
50°-60°	841.7	16.6
60°-70°	1236.3	24.4
70°-80°	1087.1	21.5
80°-90°	334.9	6.6
90°-100°	42.6	0.8
100°-110°	66.0	1.3
110°-120°	91.9	1.8
120°-130°	119.0	2.3
130°-140°	138.7	2.7
140°-150°	140.5	2.8
150°-160°	121.9	2.4
160°-170°	82.2	1.6
170°-180°	28.9	0.6
0°-90°	4234.0	83.6
0°-180°	5065.7	100.0

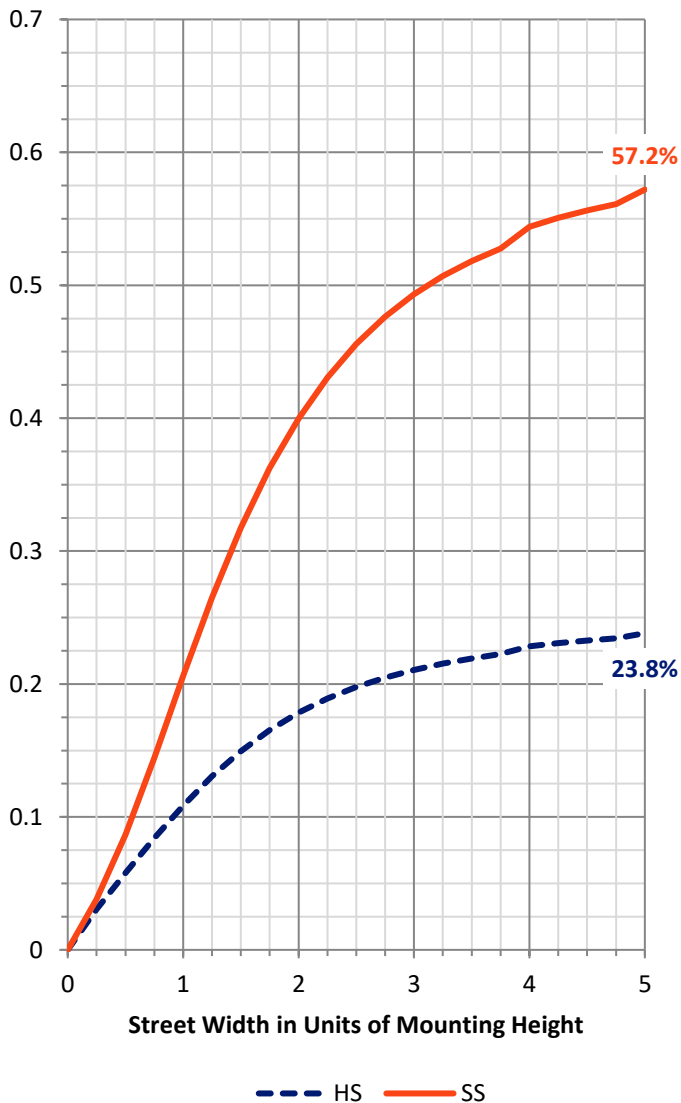


REPORT NUMBER: P821207  
 CATALOG NUMBER: TT-D2-735-24VDC-DL-UPL

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	73.9	1.5			
FM (30°-60°)	990.6	19.6			
FH (60°-80°)	1687.7	33.3			G1/1800
FVH (80°-90°)	247.2	4.9			G3/500
BL (0°-30°)	53.6	1.1	B0/110		
BM (30°-60°)	457.6	9.0	B1/1000		
BH (60°-80°)	635.6	12.5	B2/1000		G2/1000
BVH (80°-90°)	87.7	1.7			G1/100
UL (90°-100°)	42.6	0.8		U2/50	
UH (100°-180°)	789.1	15.6		U4/1000	

**BUG Rating: B2-U4-G3**  
 Type IV Short

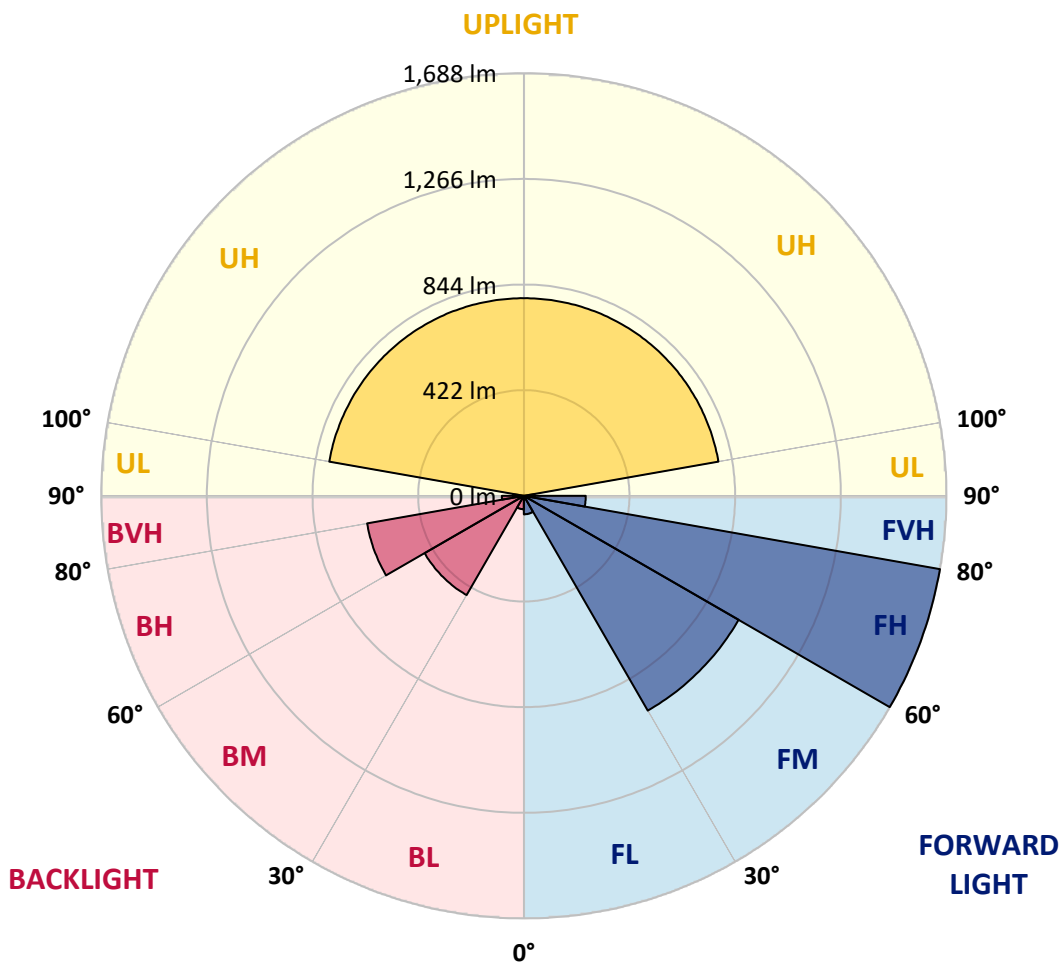



REPORT NUMBER: P821207  
 CATALOG NUMBER: TT-D2-735-24VDC-DL-UPL

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	42.5°	45°	55°	65°	75°	85°
0°	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8
2.5°	95.7	94.9	94.9	94.9	94.1	94.1	94.1	94.1	93.3	93.3	93.3
5°	101.2	100.5	101.2	99.7	98.9	98.9	98.1	98.1	97.3	96.5	95.7
7.5°	109.2	108.4	108.4	106.8	106.0	105.2	105.2	103.6	102.8	101.2	99.7
10°	117.9	117.9	117.1	116.3	114.7	113.1	113.1	110.7	109.9	107.6	105.2
12.5°	128.1	128.1	128.1	126.6	125.0	124.2	122.6	121.0	118.6	114.7	112.3
15°	140.8	140.8	140.8	139.2	137.6	136.0	135.3	132.1	128.1	124.2	119.4
17.5°	156.6	155.0	155.0	153.4	151.9	151.1	149.5	146.3	140.8	136.0	129.7
20°	174.0	173.2	172.4	172.4	170.8	169.3	168.5	163.7	157.4	148.7	140.8
22.5°	193.8	193.0	193.0	194.6	193.8	191.4	191.4	184.3	175.6	165.3	153.4
25°	218.3	217.5	219.1	222.3	222.3	220.7	218.3	211.2	198.5	184.3	170.1
27.5°	245.2	244.4	247.6	253.1	254.7	252.3	250.7	242.8	228.6	209.6	189.0
30°	277.6	278.4	287.1	293.5	297.4	295.8	295.0	286.3	263.4	241.2	214.4
32.5°	317.2	314.8	325.9	336.2	343.3	347.2	344.9	334.6	314.8	280.0	246.0
35°	359.1	359.9	373.3	388.4	405.0	406.6	411.3	401.0	374.1	333.0	285.5
37.5°	413.7	407.3	424.8	453.2	473.0	490.4	487.2	480.9	449.3	394.7	329.8
40°	462.7	461.1	485.7	525.2	561.6	586.9	590.1	582.2	540.2	462.7	377.3
42.5°	518.9	523.6	557.6	612.2	667.6	704.0	695.3	691.3	642.3	543.4	442.2
45°	575.8	591.6	635.1	714.2	779.1	831.3	846.3	832.9	772.8	670.7	524.4
47.5°	644.6	666.0	719.8	826.6	932.6	993.5	996.6	1037.0	946.0	793.3	609.8
50°	735.6	745.1	820.2	950.7	1096.3	1181.7	1206.2	1207.0	1116.1	916.7	706.3
52.5°	825.0	832.1	931.0	1099.4	1297.2	1394.5	1400.0	1430.9	1306.7	1116.1	844.8
55°	932.6	929.4	1065.4	1267.9	1501.3	1642.8	1684.0	1725.9	1567.7	1273.5	923.9
57.5°	1037.0	1032.2	1195.9	1461.7	1780.5	1921.3	1955.3	1925.2	1690.3	1339.1	962.6
60°	1133.5	1150.1	1349.4	1676.1	1996.4	2130.9	2153.8	2072.3	1769.4	1389.7	987.1
62.5°	1233.9	1267.1	1508.4	1854.8	2161.7	2258.2	2259.8	2164.1	1901.5	1487.8	1067.0
65°	1328.0	1381.0	1631.8	2007.5	2277.2	2373.7	2384.8	2298.6	2031.2	1573.2	1080.5
67.5°	1411.1	1481.5	1717.2	2089.7	2355.5	2418.0	2423.5	2299.4	2000.4	1538.4	1043.3
70°	1478.3	1535.3	1770.2	2091.3	2300.9	2318.3	2314.4	2182.3	1914.9	1469.6	980.8
72.5°	1504.4	1551.1	1744.9	1993.2	2140.4	2136.4	2133.2	2011.4	1774.1	1354.9	890.6
75°	1467.3	1480.7	1606.5	1783.6	1877.0	1899.1	1902.3	1792.3	1556.6	1184.9	764.1
77.5°	1313.8	1306.7	1403.2	1520.2	1590.6	1606.5	1603.3	1511.5	1305.1	984.8	640.7
80°	1041.7	1056.7	1116.9	1194.4	1264.8	1282.2	1271.1	1201.5	1015.6	768.0	492.0
82.5°	728.5	746.7	797.3	855.8	908.8	908.8	919.1	851.9	719.8	551.3	344.1
85°	393.1	382.8	438.2	504.6	542.6	549.7	553.7	531.5	445.3	333.0	204.1
87.5°	64.9	69.6	86.2	132.1	150.3	174.0	185.1	144.7	87.8	56.2	41.1
90°	30.1	29.1	29.1	29.1	29.1	29.1	29.1	29.1	29.1	29.1	29.1
92.5°	34.8	34.2	34.2	33.8	33.8	33.8	33.8	33.8	33.8	33.8	33.8
95°	39.4	39.4	39.4	38.5	38.5	38.5	38.5	38.5	38.5	38.5	38.5
97.5°	44.6	44.6	44.6	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2
100°	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8
102.5°	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9	56.4	55.9	55.9
105°	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.9	62.0	62.0
107.5°	68.6	68.6	69.0	69.0	69.0	69.0	69.0	69.0	69.5	69.0	69.0
110°	75.1	75.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1



REPORT NUMBER: P821207  
 CATALOG NUMBER: TT-D2-735-24VDC-DL-UPL

**CANDELA DISTRIBUTION (continued):**

	0°	5°	15°	25°	35°	42.5°	45°	55°	65°	75°	85°
112.5°	83.1	83.1	84.0	84.0	84.0	84.0	84.0	84.6	84.6	84.0	84.0
115°	91.1	91.1	92.0	92.0	92.0	92.0	92.0	93.0	93.0	92.0	92.0
117.5°	100.5	100.5	101.0	101.4	101.4	101.4	101.4	102.4	102.4	101.4	101.4
120°	109.9	109.9	109.9	110.8	110.8	110.8	110.8	111.8	111.8	110.8	110.8
122.5°	120.7	120.7	121.2	121.6	121.6	121.6	121.6	122.6	122.6	122.1	122.1
125°	131.5	131.5	132.4	132.4	132.4	132.4	132.4	133.4	133.4	133.4	133.4
127.5°	143.2	143.2	144.2	144.2	144.2	144.2	144.2	145.1	145.1	145.1	145.1
130°	155.0	155.0	155.9	155.9	155.9	155.9	155.9	156.8	156.8	156.8	156.8
132.5°	167.2	167.2	167.6	167.6	167.6	168.0	168.1	168.6	168.6	168.6	168.6
135°	179.4	179.4	179.4	179.4	179.4	180.1	180.3	180.3	180.3	180.3	180.3
137.5°	191.2	190.6	191.2	190.6	191.2	191.5	191.6	191.6	191.6	191.6	191.6
140°	202.9	201.9	202.9	201.9	202.9	202.9	202.9	202.9	202.9	202.9	202.9
142.5°	213.7	213.2	213.7	212.7	213.7	213.7	213.7	213.7	213.7	213.7	213.7
145°	224.5	224.5	224.5	223.5	224.5	224.5	224.5	224.5	224.5	224.5	224.5
147.5°	235.8	235.3	235.8	234.8	235.8	235.8	235.8	235.8	235.8	235.8	235.8
150°	247.0	246.1	247.0	246.1	247.0	247.0	247.0	247.0	247.0	247.0	247.0
152.5°	256.0	255.5	256.4	255.5	256.0	256.0	256.0	256.4	256.0	256.0	256.0
155°	264.9	264.9	265.8	264.9	264.9	264.9	264.9	265.8	264.9	264.9	264.9
157.5°	272.4	272.4	273.3	272.4	272.4	272.4	272.4	273.3	272.4	272.4	272.4
160°	279.9	279.9	280.8	279.9	279.9	279.9	279.9	280.8	279.9	279.9	279.9
162.5°	286.0	286.0	286.9	286.0	286.0	286.0	286.0	286.9	286.0	286.0	286.0
165°	292.1	292.1	293.0	292.1	292.1	292.1	292.1	293.0	292.1	292.1	292.1
167.5°	295.8	295.8	296.8	295.8	295.8	295.8	295.8	296.8	295.8	295.8	295.8
170°	299.6	299.6	300.5	299.6	299.6	299.6	299.6	300.5	299.6	299.6	299.6
172.5°	302.0	302.0	302.8	302.0	302.4	302.1	302.0	302.8	302.0	302.0	302.0
175°	304.3	304.3	305.2	304.3	305.2	304.6	304.3	305.2	304.3	304.3	304.3
177.5°	305.2	305.2	305.7	305.2	305.7	305.4	305.2	305.7	305.2	305.2	305.2
180°	306.2	306.2	306.2	306.2	306.2	306.2	306.2	306.2	306.2	306.2	306.2





REPORT NUMBER: P821207  
 CATALOG NUMBER: TT-D2-735-24VDC-DL-UPL

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8
2.5°	93.3	92.5	91.8	91.0	91.0	90.2	90.2	90.2	91.0	91.0	91.0
5°	95.7	94.9	94.1	93.3	91.8	91.8	91.8	91.8	91.8	91.8	91.8
7.5°	99.7	98.1	97.3	95.7	94.1	94.1	93.3	93.3	93.3	94.1	93.3
10°	104.4	102.8	101.2	98.9	98.1	97.3	96.5	96.5	97.3	97.3	96.5
12.5°	109.9	109.2	106.0	103.6	102.0	101.2	100.5	101.2	100.5	101.2	101.2
15°	117.9	115.5	111.5	109.2	106.8	106.0	105.2	106.0	106.0	106.8	106.0
17.5°	126.6	123.4	119.4	115.5	112.3	111.5	111.5	111.5	112.3	113.1	112.3
20°	136.8	132.9	127.3	122.6	119.4	118.6	118.6	119.4	120.2	121.0	121.0
22.5°	147.1	144.0	136.0	129.7	128.1	127.3	126.6	128.1	129.7	130.5	131.3
25°	162.9	156.6	147.1	140.0	136.8	136.8	137.6	139.2	140.0	141.6	140.8
27.5°	179.6	172.4	160.6	151.1	148.7	147.9	149.5	151.1	154.2	154.2	153.4
30°	202.5	190.6	175.6	166.9	160.6	161.4	163.7	166.1	169.3	170.8	170.8
32.5°	228.6	215.9	195.4	181.9	178.8	179.6	180.3	184.3	187.5	190.6	188.3
35°	262.6	246.8	221.5	206.4	198.5	197.7	200.9	205.7	208.8	210.4	210.4
37.5°	299.8	279.2	247.6	234.9	225.4	224.6	225.4	229.4	233.3	234.9	238.1
40°	344.9	319.6	282.4	261.8	254.7	253.1	256.3	261.8	261.8	264.2	265.0
42.5°	400.2	367.8	326.7	299.8	291.1	291.1	290.3	295.0	295.0	295.0	293.5
45°	470.6	434.2	380.5	352.8	337.7	329.8	332.2	329.0	328.3	330.6	323.5
47.5°	538.7	492.8	429.5	399.4	384.4	379.7	371.0	368.6	364.6	364.6	354.4
50°	617.7	560.8	499.9	457.2	442.9	429.5	422.4	411.3	399.4	397.1	393.1
52.5°	749.8	678.7	582.9	537.1	500.7	487.2	470.6	456.4	442.2	431.1	437.4
55°	803.6	730.9	639.9	595.6	570.3	557.6	526.8	507.8	486.4	470.6	479.3
57.5°	830.5	751.4	666.8	633.6	626.4	614.6	591.6	559.2	534.7	514.9	516.5
60°	845.5	762.5	681.0	651.0	647.0	654.9	643.1	620.9	582.9	563.2	560.8
62.5°	903.3	816.3	721.4	678.7	670.0	675.5	678.7	665.2	633.6	607.5	600.3
65°	915.2	822.6	729.3	701.6	702.4	704.0	706.3	692.1	676.3	643.9	637.5
67.5°	879.6	788.6	705.5	682.6	684.2	702.4	716.6	715.8	698.4	670.7	668.4
70°	825.8	737.2	660.5	639.9	643.9	660.5	691.3	707.1	704.0	685.8	689.7
72.5°	741.9	662.8	595.6	579.8	589.3	605.1	634.4	662.8	679.4	683.4	692.1
75°	643.9	580.6	517.3	507.8	514.9	533.1	560.0	593.2	629.6	649.4	654.9
77.5°	531.5	473.8	427.1	420.8	431.1	447.7	474.6	500.7	541.8	576.6	584.5
80°	416.1	366.2	333.0	327.5	333.8	348.0	368.6	389.9	429.5	456.4	460.3
82.5°	288.7	258.6	237.3	234.1	238.1	243.6	260.2	280.0	302.2	323.5	325.9
85°	167.7	148.7	143.2	138.4	147.1	147.1	151.1	162.1	173.2	174.8	179.6
87.5°	30.8	29.3	30.1	22.1	27.7	19.8	19.8	25.3	19.0	22.1	18.2
90°	29.1	29.1	29.1	29.1	29.1	29.1	29.1	29.1	29.1	29.1	30.1
92.5°	33.8	33.8	33.8	33.8	33.8	33.8	33.8	33.8	34.2	34.2	34.8
95°	38.5	38.5	38.5	38.5	38.5	38.5	38.5	38.5	39.4	39.4	39.4
97.5°	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.6	44.6	44.6
100°	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8
102.5°	55.9	55.9	55.9	56.4	55.9	55.9	55.9	55.9	55.9	55.9	55.9
105°	62.0	62.0	62.0	62.9	62.0	62.0	62.0	62.0	62.0	62.0	62.0
107.5°	69.0	69.0	69.0	69.5	69.0	69.0	69.0	69.0	69.0	68.6	68.6
110°	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	75.1	75.1



REPORT NUMBER: P821207  
 CATALOG NUMBER: TT-D2-735-24VDC-DL-UPL

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
112.5°	84.0	84.0	84.0	84.6	84.6	84.0	84.0	84.0	84.0	83.1	83.1
115°	92.0	92.0	92.0	93.0	93.0	92.0	92.0	92.0	92.0	91.1	91.1
117.5°	101.4	101.4	101.4	102.4	102.4	101.4	101.4	101.4	101.0	100.5	100.5
120°	110.8	110.8	110.8	111.8	111.8	110.8	110.8	110.8	109.9	109.9	109.9
122.5°	121.6	122.1	122.1	122.6	122.6	121.6	121.6	121.6	121.2	120.7	120.7
125°	132.4	133.4	133.4	133.4	133.4	132.4	132.4	132.4	132.4	131.5	131.5
127.5°	144.2	145.1	145.1	145.1	145.1	144.2	144.2	144.2	144.2	143.2	143.2
130°	155.9	156.8	156.8	156.8	156.8	155.9	155.9	155.9	155.9	155.0	155.0
132.5°	168.1	168.6	168.6	168.6	168.6	168.1	167.6	167.6	167.6	167.2	167.2
135°	180.3	180.3	180.3	180.3	180.3	180.3	179.4	179.4	179.4	179.4	179.4
137.5°	191.6	191.6	191.6	191.6	191.6	191.6	191.2	190.6	191.2	190.6	191.2
140°	202.9	202.9	202.9	202.9	202.9	202.9	202.9	201.9	202.9	201.9	202.9
142.5°	213.7	213.7	213.7	213.7	213.7	213.7	213.7	212.7	213.7	213.2	213.7
145°	224.5	224.5	224.5	224.5	224.5	224.5	224.5	223.5	224.5	224.5	224.5
147.5°	235.8	235.8	235.8	235.8	235.8	235.8	235.8	234.8	235.8	235.3	235.8
150°	247.0	247.0	247.0	247.0	247.0	247.0	247.0	246.1	247.0	246.1	247.0
152.5°	256.0	256.0	256.0	256.0	256.4	256.0	256.0	255.5	256.4	255.5	256.0
155°	264.9	264.9	264.9	264.9	265.8	264.9	264.9	264.9	265.8	264.9	264.9
157.5°	272.4	272.4	272.4	272.4	273.3	272.4	272.4	272.4	273.3	272.4	272.4
160°	279.9	279.9	279.9	279.9	280.8	279.9	279.9	279.9	280.8	279.9	279.9
162.5°	286.0	286.0	286.0	286.0	286.9	286.0	286.0	286.0	286.9	286.0	286.0
165°	292.1	292.1	292.1	292.1	293.0	292.1	292.1	292.1	293.0	292.1	292.1
167.5°	295.8	295.8	295.8	295.8	296.8	295.8	295.8	295.8	296.8	295.8	295.8
170°	299.6	299.6	299.6	299.6	300.5	299.6	299.6	299.6	300.5	299.6	299.6
172.5°	302.0	302.0	302.0	302.0	302.8	302.0	302.4	302.0	302.8	302.0	302.0
175°	304.3	304.3	304.3	304.3	305.2	304.3	305.2	304.3	305.2	304.3	304.3
177.5°	305.2	305.2	305.2	305.2	305.7	305.2	305.7	305.2	305.7	305.2	305.2
180°	306.2	306.2	306.2	306.2	306.2	306.2	306.2	306.2	306.2	306.2	306.2

(END OF REPORT)