

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P823287

Luminaire Tested: **TTN-D0-830-U-DL**

Issue Date: 4/16/2024

**Test Information**

Test Method: LM-79-08  
Report Number: P823287  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2312-254-11)  
Test Lab: INNOVATION CENTER  
Issue Date: 4/16/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: MCGRAW-EDISON  
Catalog Number: TTN-D0-830-U-DL  
Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE  
3000K, 80 CRI LEDS AND DRIVE LANE DISTRIBUTION  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1032 lumens  
Efficiency: N/A  
Efficacy: 96.4 lumens/watt  
Luminous Opening: Circular (Dia: 0.71' x H: 0')  
IES Classification: Type IV - Short  
BUG Rating: B0 - U0 - G1  
  
Input Watts (W): 10.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



REPORT NUMBER: P823287  
 CATALOG NUMBER: TTN-D0-830-U-DL

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

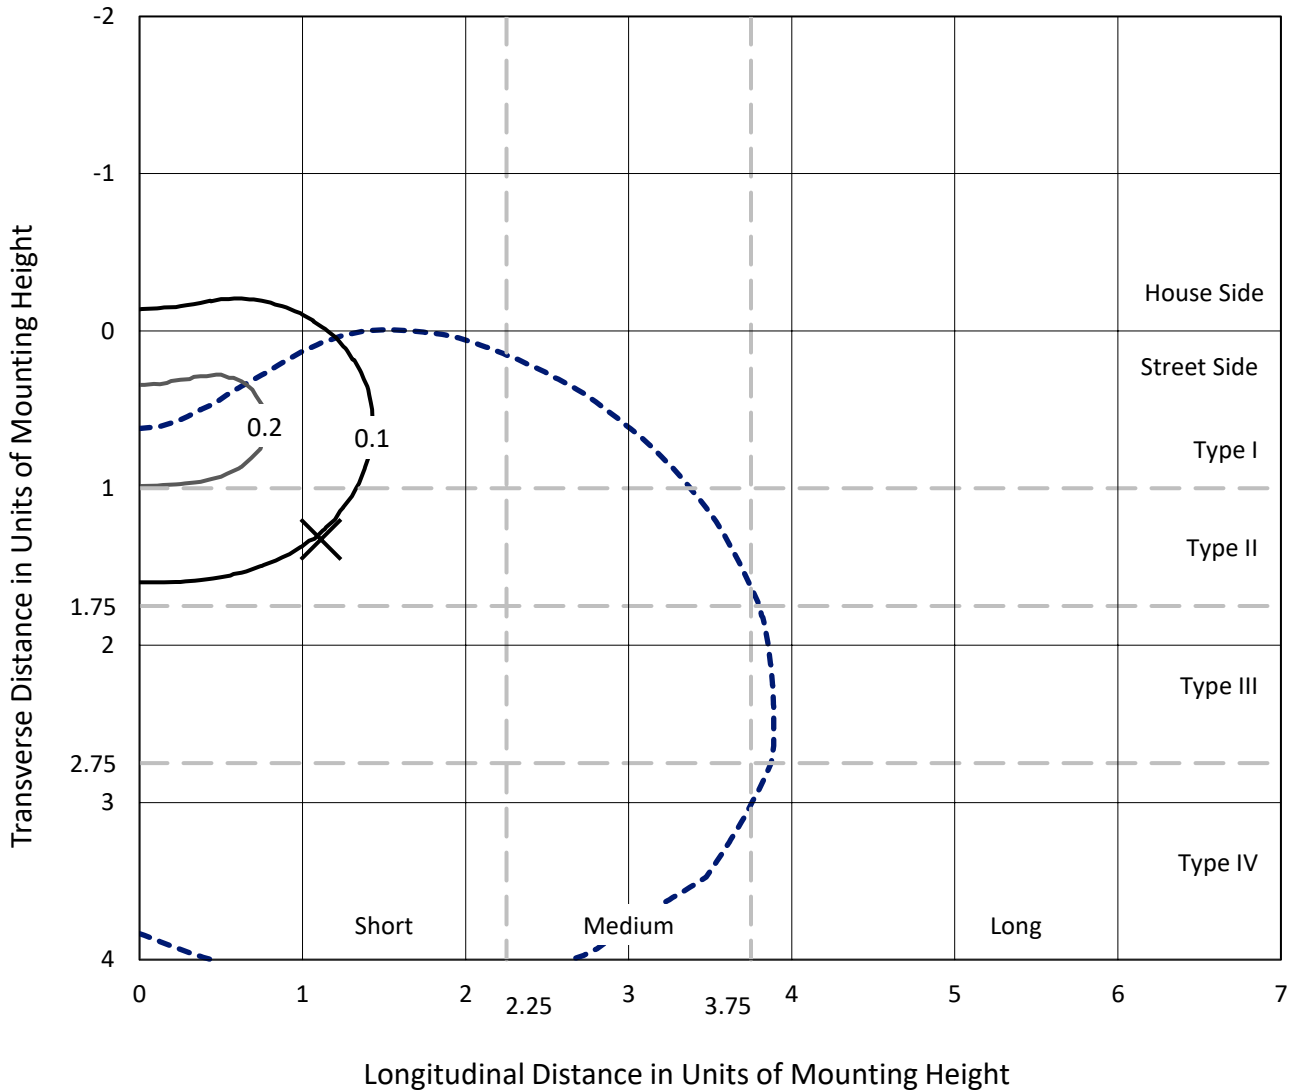

Based on 25 foot mounting height. Maximum calculated value = 0.2 fc  
 Type IV - Short - N/A

REPORT NUMBER: P823287  
CATALOG NUMBER: TTN-D0-830-U-DL

### Luminous Intensity Polar Plot

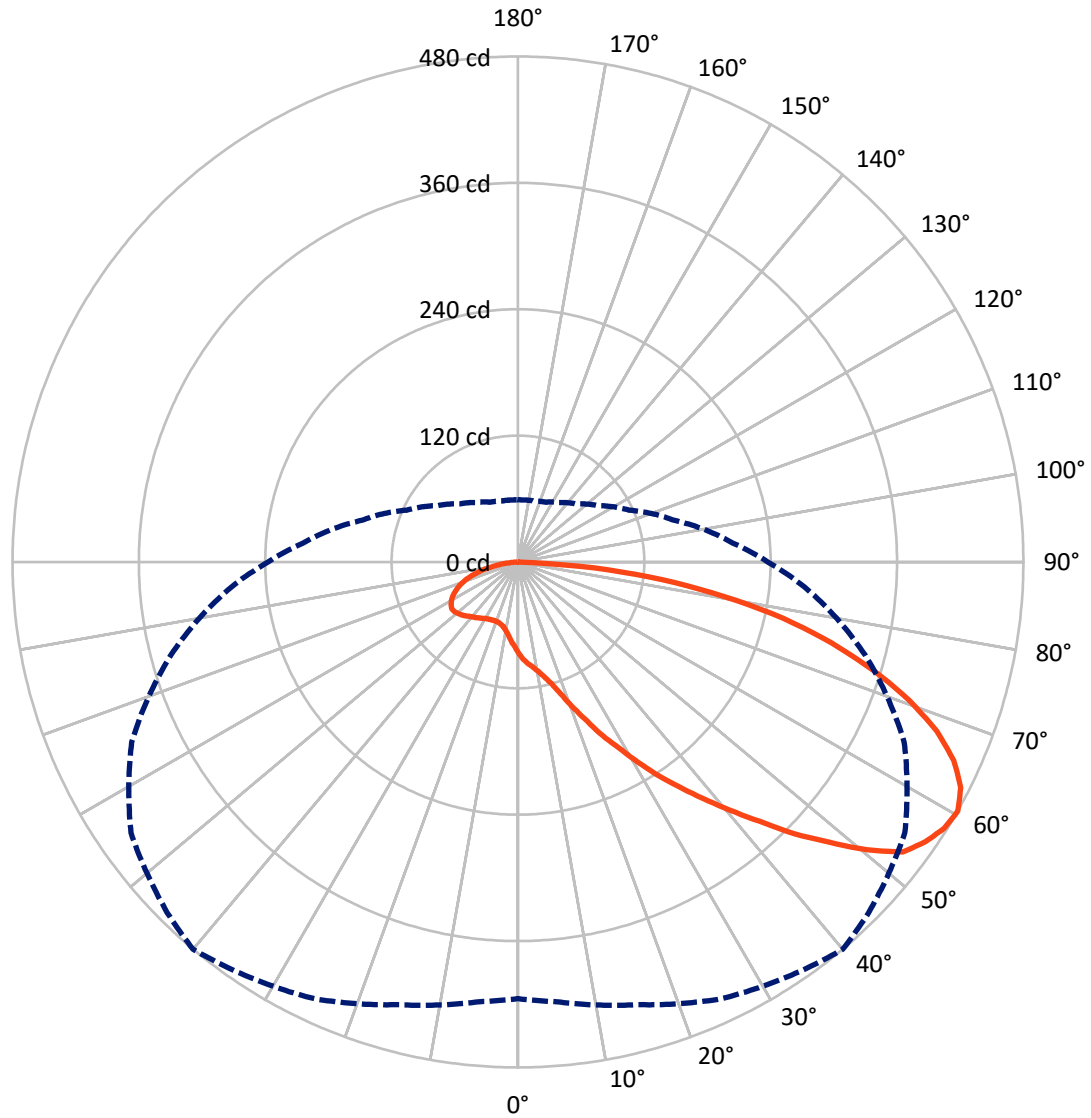

— Vertical Plane Through 40-Deg Lateral      - - - Horizontal Cone Through 60-Deg Vertical

REPORT NUMBER: P823287  
 CATALOG NUMBER: TTN-D0-830-U-DL


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	219.8	0.0	219.8
	% Fixture	21.3	0.0	21.3
<b>Street Side</b>	Lumens	812.2	0.0	812.2
	% Fixture	78.7	0.0	78.7
<b>Total</b>	Lumens	1032.0	0.0	1032.0
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	8.2	0.8
10°-20°	26.2	2.5
20°-30°	55.3	5.4
30°-40°	101.0	9.8
40°-50°	164.1	15.9
50°-60°	228.1	22.1
60°-70°	236.5	22.9
70°-80°	169.5	16.4
80°-90°	43.2	4.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	1032.0	100.0
0°-180°	1032.0	100.0

**Coefficient of Utilization**

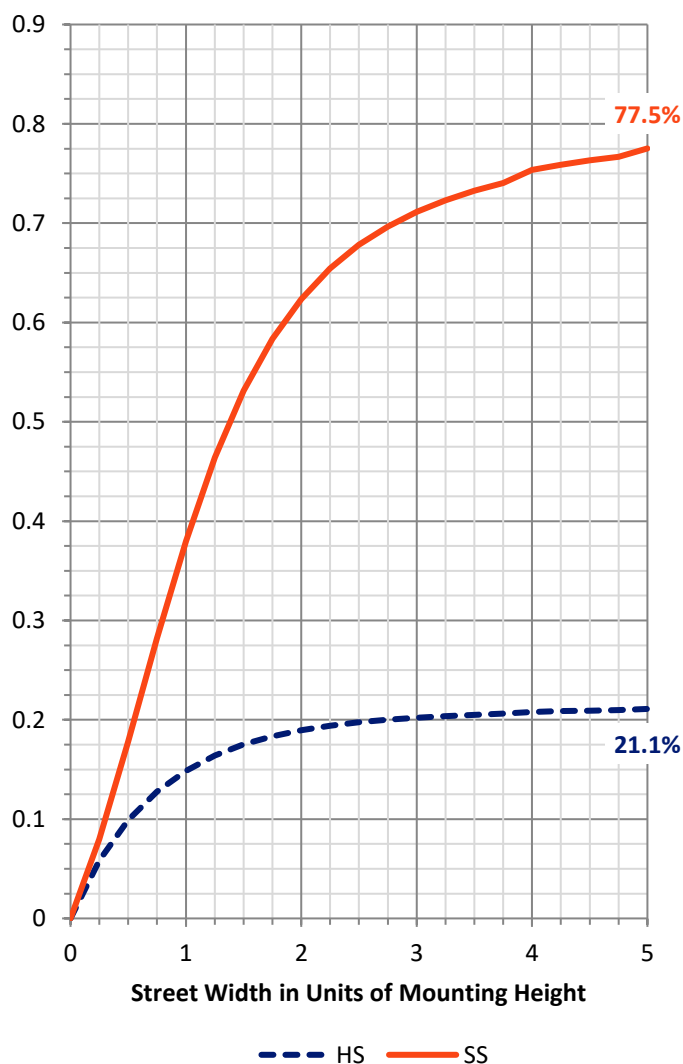

REPORT NUMBER: P823287


CATALOG NUMBER: TTN-D0-830-U-DL

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	60.4	5.9			
FM (30°-60°)	385.3	37.3			
FH (60°-80°)	330.5	32.0			G0/660
FVH (80°-90°)	36.0	3.5			G1/100
BL (0°-30°)	29.2	2.8	B0/110		
BM (30°-60°)	107.9	10.5	B0/220		
BH (60°-80°)	75.4	7.3	B0/110		G0/110
BVH (80°-90°)	7.2	0.7			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B0-U0-G1**

Type IV Short

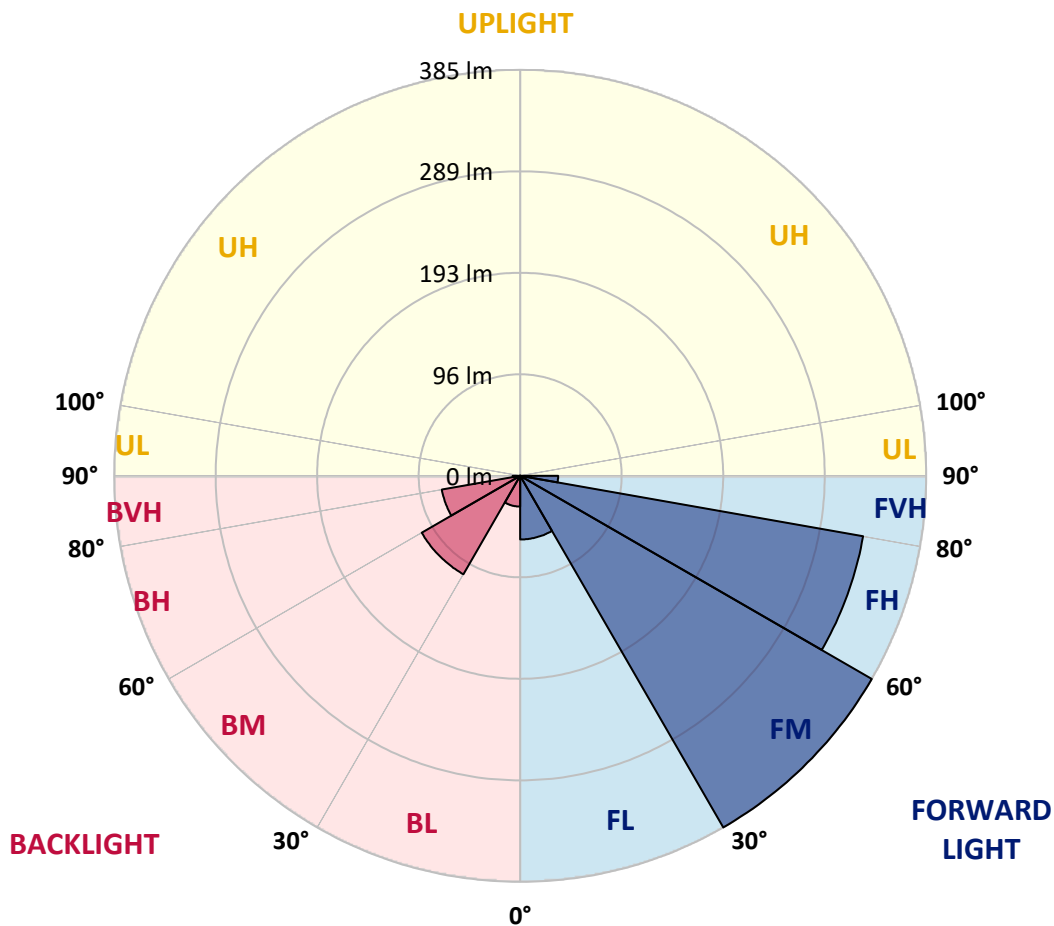



REPORT NUMBER: P823287  
 CATALOG NUMBER: TTN-D0-830-U-DL

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	40°	45°	55°	65°	75°	85°
0°	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9
2.5°	93.2	93.2	93.2	93.2	92.3	92.3	91.4	90.5	89.6	88.7	86.9
5°	101.3	101.3	100.4	99.5	97.7	96.8	95.9	94.1	92.3	90.5	87.8
7.5°	104.8	104.8	104.8	103.9	101.3	100.4	98.6	95.9	93.2	90.5	86.9
10°	111.1	111.1	110.2	109.3	106.6	105.7	103.9	100.4	95.9	91.4	86.9
12.5°	119.2	118.3	117.4	116.5	113.8	112.0	109.3	105.7	100.4	95.0	89.6
15°	129.0	127.2	127.2	125.4	122.8	120.1	118.3	112.9	107.5	100.4	93.2
17.5°	139.8	138.9	138.0	136.2	133.5	131.7	129.0	122.8	115.6	106.6	98.6
20°	153.2	151.4	152.3	149.6	147.0	146.1	141.6	134.4	125.4	115.6	105.7
22.5°	169.4	167.6	167.6	164.9	163.1	161.3	156.8	148.7	137.1	126.3	113.8
25°	187.3	185.5	185.5	183.7	181.9	180.1	174.7	165.8	152.3	138.9	124.6
27.5°	207.0	205.2	205.2	204.3	199.8	197.1	192.7	182.8	169.4	152.3	135.3
30°	227.6	225.8	227.6	225.8	223.1	217.7	212.4	201.6	186.4	167.6	147.0
32.5°	243.7	243.7	244.6	246.4	244.6	240.1	233.9	224.9	204.3	181.0	157.7
35°	262.5	262.5	264.3	267.0	266.1	261.6	255.4	245.5	224.0	196.2	169.4
37.5°	283.2	283.2	284.9	289.4	287.6	284.9	280.5	267.9	243.7	211.5	181.9
40°	305.6	304.7	306.5	312.7	313.6	310.0	304.7	292.1	264.3	231.2	195.3
42.5°	328.0	327.1	330.6	336.9	337.8	336.9	331.5	317.2	285.8	250.9	208.8
45°	350.4	350.4	355.7	365.6	370.1	368.3	363.8	345.9	312.7	271.5	226.7
47.5°	373.7	373.7	380.8	393.4	398.7	397.8	396.1	374.6	338.7	293.0	241.9
50°	391.6	391.6	403.2	417.6	426.5	430.1	421.1	401.4	361.1	311.8	254.5
52.5°	409.5	409.5	421.1	443.5	452.5	457.9	446.2	425.6	386.2	328.9	266.1
55°	418.5	420.2	436.4	457.9	472.2	469.5	474.0	446.2	402.3	341.4	273.3
57.5°	419.4	422.0	440.0	462.4	478.5	477.6	478.5	453.4	408.6	344.1	274.2
60°	414.9	419.4	435.5	457.9	473.1	480.3	471.3	448.9	405.0	341.4	273.3
62.5°	404.1	413.1	430.1	447.1	469.5	472.2	465.1	446.2	395.2	338.7	268.8
65°	379.9	389.8	414.0	433.7	451.6	455.2	447.1	431.0	385.3	326.2	254.5
67.5°	355.7	362.0	382.6	413.1	425.6	429.2	426.5	407.7	368.3	301.1	237.5
70°	328.0	336.0	352.1	383.5	396.1	395.2	403.2	381.7	342.3	279.6	219.5
72.5°	290.3	302.0	318.1	344.1	359.3	353.9	366.5	348.6	308.2	252.7	195.3
75°	246.4	256.3	276.9	297.5	314.5	308.2	318.1	305.6	268.8	220.4	167.6
77.5°	197.1	208.8	227.6	246.4	258.1	258.1	262.5	251.8	223.1	181.0	137.1
80°	146.1	156.8	173.8	187.3	198.0	198.9	203.4	198.0	172.0	140.7	104.8
82.5°	96.8	102.2	117.4	128.1	138.9	138.0	145.2	141.6	120.1	96.8	69.9
85°	41.2	44.8	57.3	66.3	76.2	72.6	82.4	81.5	64.5	46.6	31.4
87.5°	1.8	2.7	2.7	1.8	2.7	0.9	2.7	3.6	2.7	1.8	1.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P823287  
 CATALOG NUMBER: TTN-D0-830-U-DL

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9
2.5°	86.9	86.0	84.2	83.3	82.4	80.6	80.6	79.7	79.7	79.7	78.9
5°	86.9	85.1	83.3	80.6	78.9	77.1	75.3	73.5	72.6	72.6	71.7
7.5°	85.1	83.3	80.6	78.0	75.3	71.7	69.9	66.3	65.4	64.5	64.5
10°	85.1	83.3	78.9	75.3	71.7	68.1	65.4	61.8	59.1	58.2	58.2
12.5°	86.0	83.3	78.9	74.4	69.9	65.4	61.8	58.2	55.6	53.8	53.8
15°	89.6	86.0	80.6	74.4	69.0	63.6	60.0	55.6	52.9	51.1	51.1
17.5°	94.1	90.5	82.4	75.3	69.0	62.7	58.2	53.8	51.1	49.3	48.4
20°	100.4	95.0	86.0	76.2	69.0	62.7	57.3	52.9	49.3	47.5	47.5
22.5°	107.5	101.3	89.6	78.0	69.9	62.7	57.3	52.0	48.4	46.6	46.6
25°	116.5	108.4	95.0	81.5	71.7	63.6	57.3	52.0	48.4	46.6	46.6
27.5°	126.3	117.4	100.4	85.1	73.5	64.5	57.3	52.0	48.4	46.6	46.6
30°	135.3	125.4	105.7	88.7	76.2	65.4	58.2	52.9	49.3	47.5	46.6
32.5°	145.2	132.6	111.1	92.3	78.0	67.2	59.1	53.8	49.3	47.5	47.5
35°	155.0	141.6	116.5	96.8	80.6	69.0	60.0	54.7	50.2	48.4	48.4
37.5°	165.8	151.4	122.8	100.4	83.3	70.8	61.8	55.6	51.1	49.3	49.3
40°	178.3	161.3	129.0	104.8	86.0	72.6	62.7	57.3	52.9	51.1	51.1
42.5°	190.0	170.3	135.3	108.4	88.7	74.4	64.5	58.2	54.7	52.9	52.9
45°	201.6	181.0	141.6	112.9	91.4	77.1	66.3	60.9	56.5	54.7	54.7
47.5°	215.1	190.9	148.7	116.5	94.1	78.9	68.1	62.7	58.2	57.3	56.5
50°	225.8	198.0	153.2	120.1	95.9	80.6	69.9	63.6	60.0	58.2	58.2
52.5°	235.7	205.2	156.8	121.9	96.8	81.5	71.7	65.4	61.8	60.0	60.0
55°	241.0	207.9	159.5	121.9	97.7	82.4	71.7	65.4	61.8	60.9	60.0
57.5°	241.0	207.9	157.7	120.1	95.9	80.6	70.8	64.5	61.8	60.0	60.0
60°	237.5	205.2	153.2	116.5	93.2	78.0	69.0	62.7	60.0	59.1	59.1
62.5°	232.1	200.7	149.6	112.0	89.6	74.4	66.3	60.0	58.2	58.2	57.3
65°	217.7	187.3	141.6	105.7	84.2	69.9	62.7	57.3	55.6	54.7	53.8
67.5°	202.5	174.7	129.0	98.6	77.1	65.4	58.2	53.8	51.1	51.1	50.2
70°	187.3	161.3	117.4	88.7	69.0	60.0	52.9	48.4	46.6	46.6	46.6
72.5°	166.7	144.3	103.9	78.0	60.9	52.9	47.5	43.0	42.1	42.1	41.2
75°	142.5	122.8	87.8	66.3	51.1	44.8	40.3	35.8	35.8	35.8	35.8
77.5°	116.5	99.5	69.9	52.9	40.3	35.8	33.2	29.6	29.6	29.6	29.6
80°	87.8	73.5	51.1	38.5	29.6	26.0	24.2	22.4	23.3	23.3	22.4
82.5°	57.3	48.4	32.3	24.2	18.8	17.0	17.0	15.2	16.1	16.1	16.1
85°	25.1	21.5	13.4	10.8	9.0	9.0	9.0	8.1	9.0	9.0	9.0
87.5°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	0.0	0.9	1.8	0.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)