

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P833319

Luminaire Tested: **TTN-D1-830-U-DL-UPL3**

Issue Date: 5/15/2024

**Test Information**

Test Method: LM-79-08  
Report Number: P833319  
REPORT IS FROM IESNA LM-79-08 TEST DATA - UPLIGHT (G3-2308-121-4) AND  
Test Lab: INNOVATION CENTER  
Issue Date: 5/15/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: MCGRAW-EDISON  
Catalog Number: TTN-D1-830-U-DL-UPL3  
Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE WITH UPLIGHT  
3000K, 80 CRI LEDS AND DRIVE LANE DISTRIBUTION  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3596.7 lumens  
Efficiency: N/A  
Efficacy: 107.7 lumens/watt  
Luminous Opening: Vertical Cylinder (Dia: 0.71' x H: 0.1')  
IES Classification: Type IV - Short  
BUG Rating: B1 - U4 - G2  
  
Input Watts (W): 33.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



REPORT NUMBER: P833319  
 CATALOG NUMBER: TTN-D1-830-U-DL-UPL3

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

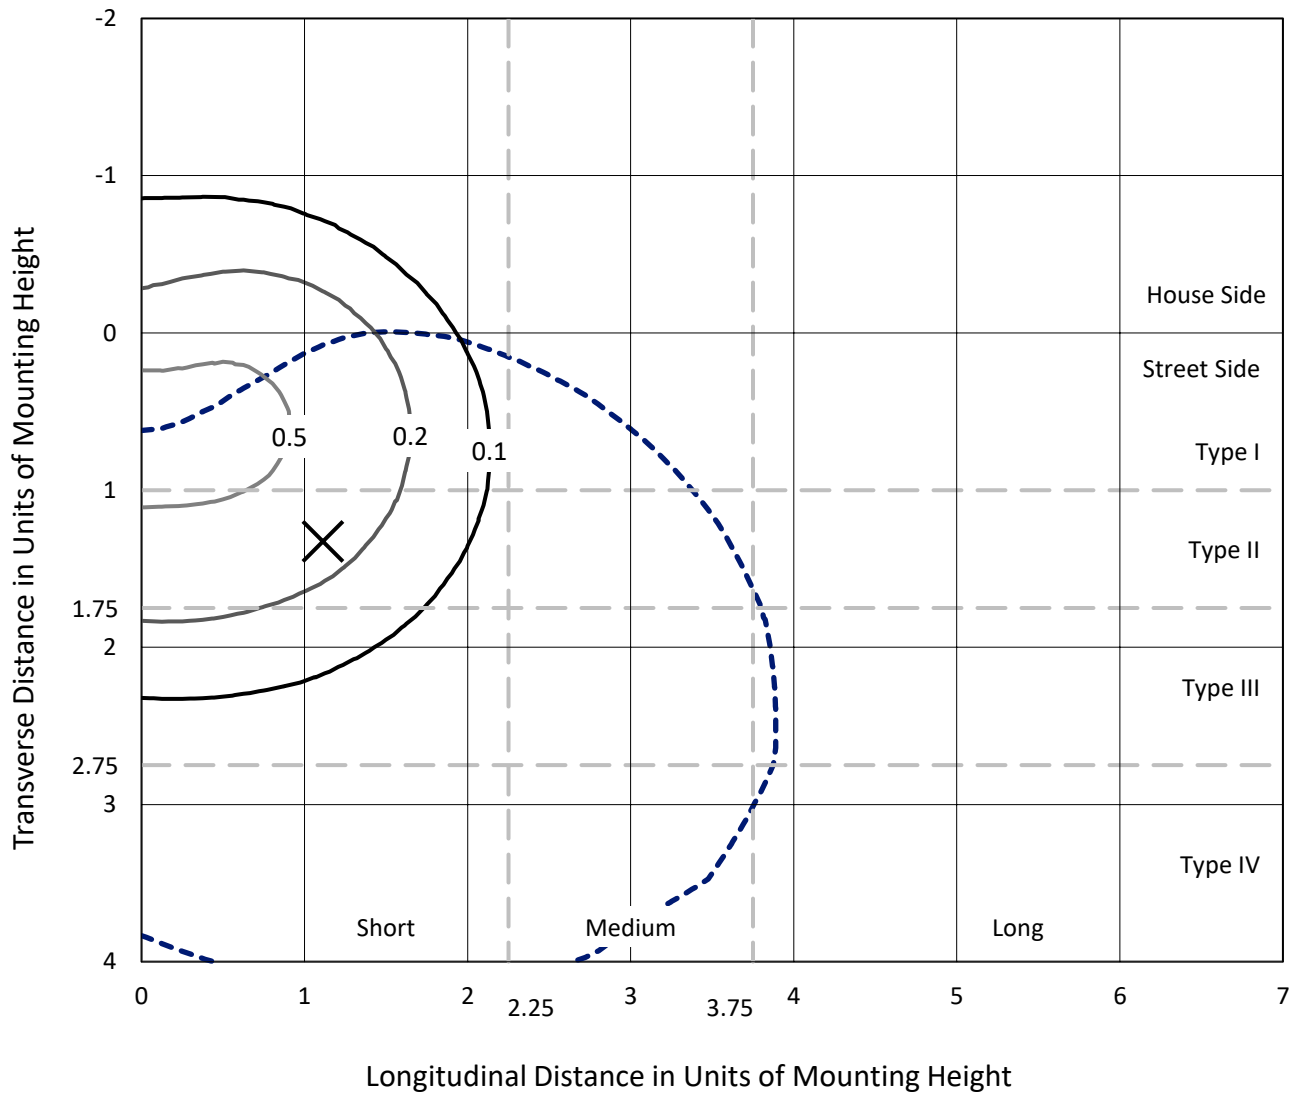

Based on 25 foot mounting height. Maximum calculated value = 0.7 fc  
 Type IV - Short - N/A

REPORT NUMBER: P833319  
CATALOG NUMBER: TTN-D1-830-U-DL-UPL3

### Luminous Intensity Polar Plot

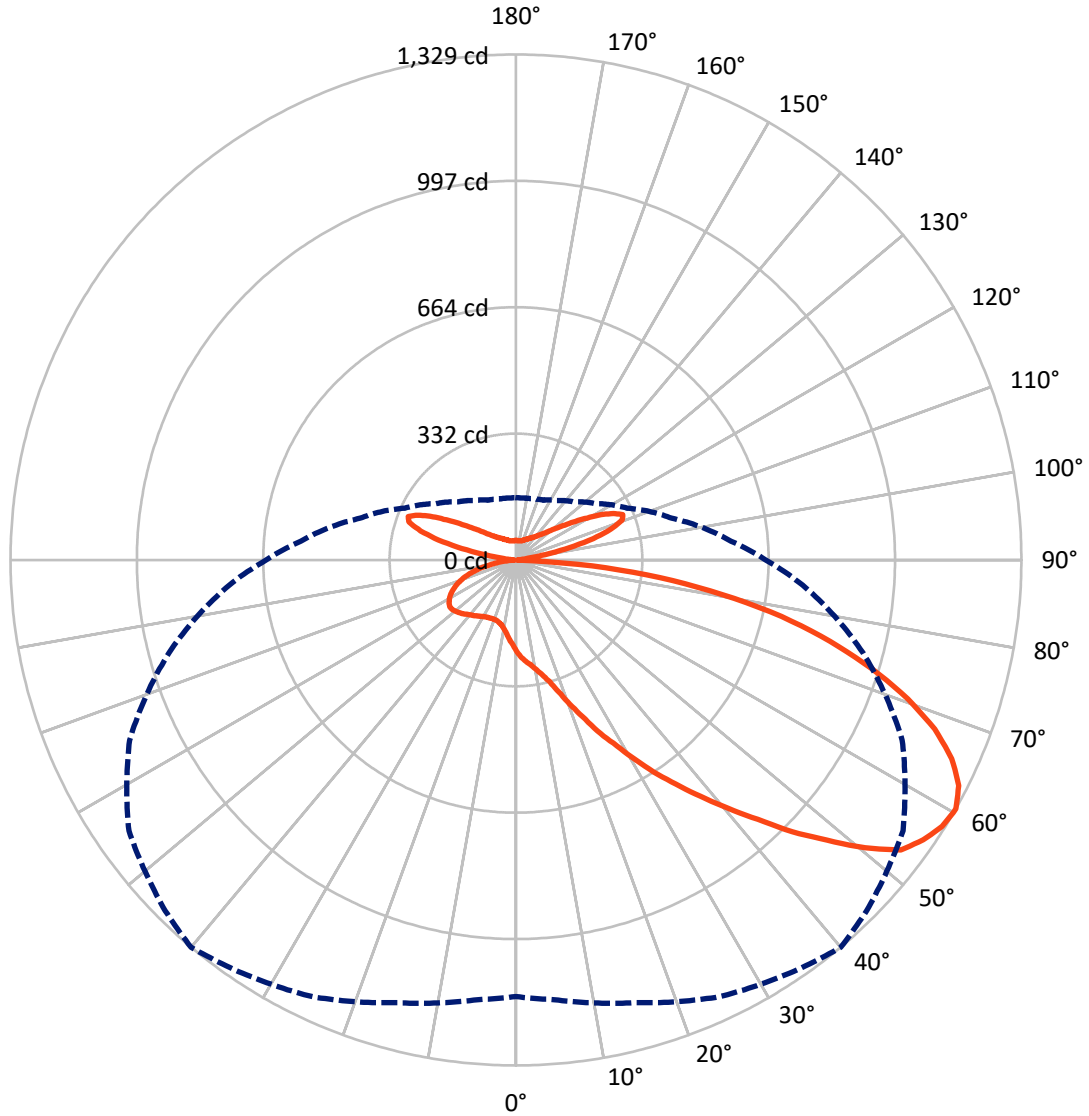

— Vertical Plane Through 40-Deg Lateral    - - - Horizontal Cone Through 60-Deg Vertical

REPORT NUMBER: P833319  
 CATALOG NUMBER: TTN-D1-830-U-DL-UPL3


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	608.5	370.3	978.8
	% Fixture	16.9	10.3	27.2
<b>Street Side</b>	Lumens	2247.5	370.3	2617.9
	% Fixture	62.5	10.3	72.8
<b>Total</b>	Lumens	2856.0	740.7	3596.7
	% Fixture	79.4	20.6	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	22.7	0.6
10°-20°	72.4	2.0
20°-30°	152.9	4.3
30°-40°	279.4	7.8
40°-50°	454.0	12.6
50°-60°	631.1	17.5
60°-70°	654.2	18.2
70°-80°	468.8	13.0
80°-90°	120.5	3.4
90°-100°	16.5	0.5
100°-110°	168.0	4.7
110°-120°	245.6	6.8
120°-130°	142.5	4.0
130°-140°	75.5	2.1
140°-150°	44.9	1.2
150°-160°	27.6	0.8
160°-170°	15.1	0.4
170°-180°	4.9	0.1
0°-90°	2856.0	79.4
0°-180°	3596.7	100.0

**Coefficient of Utilization**

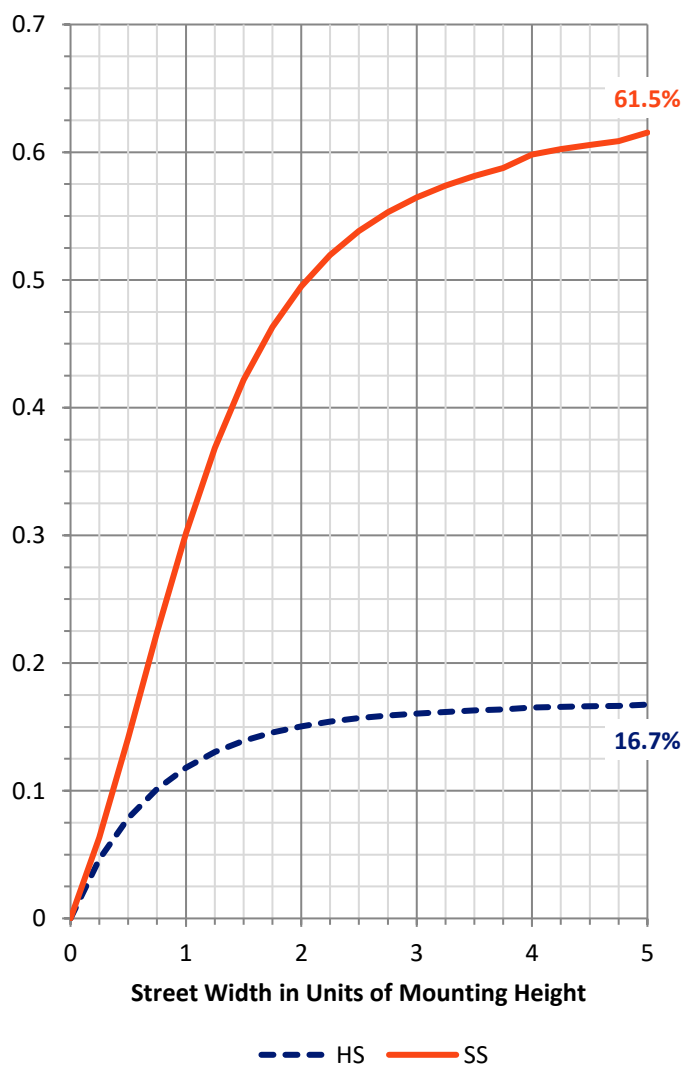


REPORT NUMBER: P833319  
 CATALOG NUMBER: TTN-D1-830-U-DL-UPL3

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	167.1	4.6			
FM (30°-60°)	1066.1	29.6			
FH (60°-80°)	914.3	25.4			G1/1800
FVH (80°-90°)	100.1	2.8			G2/225
BL (0°-30°)	80.9	2.2	B0/110		
BM (30°-60°)	298.5	8.3	B1/1000		
BH (60°-80°)	208.7	5.8	B1/500		G1/500
BVH (80°-90°)	20.5	0.6			G1/100
UL (90°-100°)	16.5	0.5		U2/50	
UH (100°-180°)	724.2	20.1		U4/1000	

**BUG Rating: B1-U4-G2**  
 Type IV Short

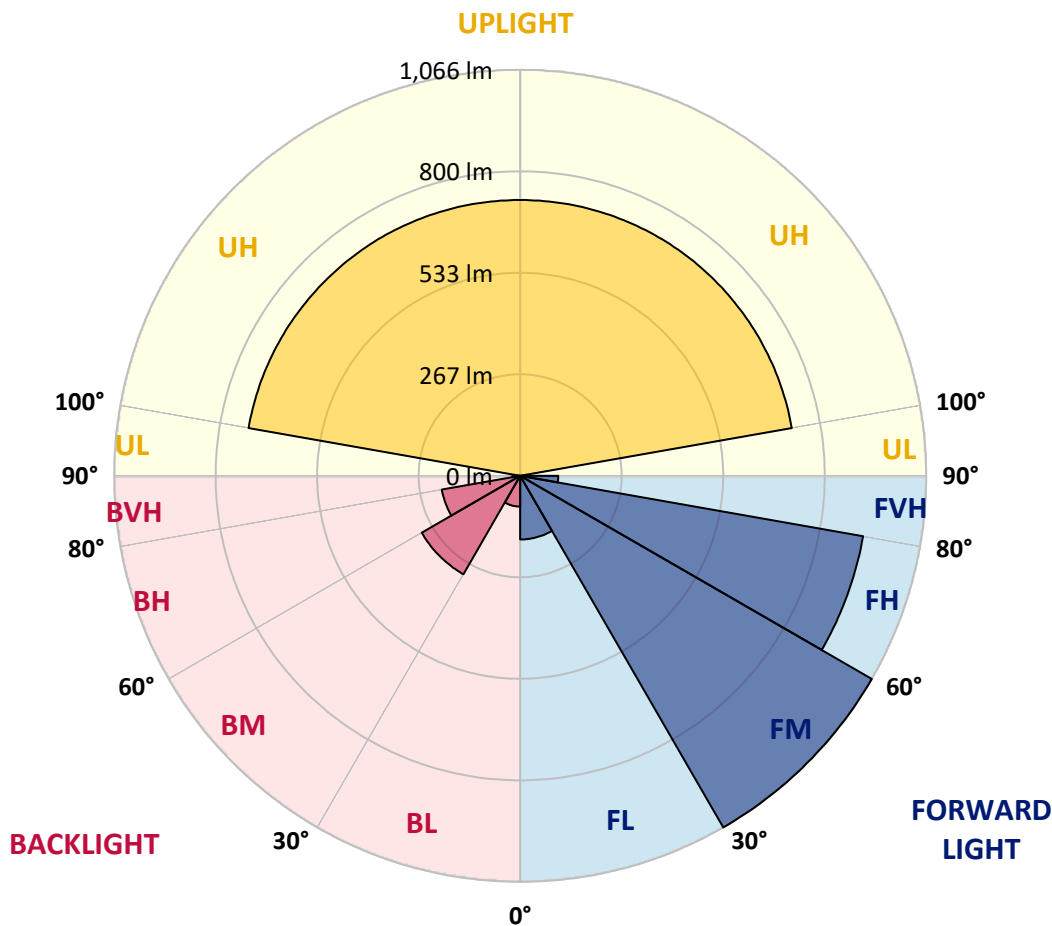



REPORT NUMBER: P833319  
 CATALOG NUMBER: TTN-D1-830-U-DL-UPL3

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	40°	45°	55°	65°	75°	85°
0°	240.5	240.5	240.5	240.5	240.5	240.5	240.5	240.5	240.5	240.5	240.5
2.5°	257.8	257.8	257.8	257.8	255.3	255.3	252.8	250.4	247.9	245.4	240.5
5°	280.1	280.1	277.6	275.2	270.2	267.7	265.2	260.3	255.3	250.4	242.9
7.5°	290.0	290.0	290.0	287.6	280.1	277.6	272.7	265.2	257.8	250.4	240.5
10°	307.4	307.4	304.9	302.4	295.0	292.5	287.6	277.6	265.2	252.8	240.5
12.5°	329.7	327.2	324.7	322.3	314.8	309.9	302.4	292.5	277.6	262.8	247.9
15°	357.0	352.0	352.0	347.0	339.6	332.2	327.2	312.3	297.5	277.6	257.8
17.5°	386.7	384.2	381.8	376.8	369.4	364.4	357.0	339.6	319.8	295.0	272.7
20°	423.9	418.9	421.4	414.0	406.5	404.1	391.7	371.8	347.0	319.8	292.5
22.5°	468.5	463.6	463.6	456.1	451.2	446.2	433.8	411.5	379.3	349.5	314.8
25°	518.1	513.1	513.1	508.2	503.2	498.3	483.4	458.6	421.4	384.2	344.6
27.5°	572.6	567.7	567.7	565.2	552.8	545.4	533.0	505.7	468.5	421.4	374.3
30°	629.6	624.7	629.6	624.7	617.2	602.4	587.5	557.8	515.6	463.6	406.5
32.5°	674.3	674.3	676.7	681.7	676.7	664.3	647.0	622.2	565.2	500.7	436.3
35°	726.3	726.3	731.3	738.7	736.2	723.8	706.5	679.2	619.7	542.9	468.5
37.5°	783.3	783.3	788.3	800.7	795.7	788.3	775.9	741.2	674.3	585.0	503.2
40°	845.3	842.8	847.8	865.1	867.6	857.7	842.8	808.1	731.3	639.6	540.4
42.5°	907.3	904.8	914.7	932.1	934.5	932.1	917.2	877.5	790.8	694.1	577.6
45°	969.3	969.3	984.1	1011.4	1023.8	1018.8	1006.4	956.9	865.1	751.1	627.2
47.5°	1033.7	1033.7	1053.5	1088.2	1103.1	1100.6	1095.7	1036.2	937.0	810.6	669.3
50°	1083.3	1083.3	1115.5	1155.2	1180.0	1189.9	1165.1	1110.6	999.0	862.7	704.0
52.5°	1132.9	1132.9	1165.1	1227.1	1251.8	1266.7	1234.5	1177.5	1068.4	909.8	736.2
55°	1157.6	1162.6	1207.2	1266.7	1306.4	1298.9	1311.3	1234.5	1113.0	944.5	756.1
57.5°	1160.1	1167.6	1217.1	1279.1	1323.7	1321.3	1323.7	1254.3	1130.4	951.9	758.5
60°	1147.7	1160.1	1204.7	1266.7	1308.9	1328.7	1303.9	1241.9	1120.5	944.5	756.1
62.5°	1118.0	1142.8	1189.9	1237.0	1298.9	1306.4	1286.6	1234.5	1093.2	937.0	743.7
65°	1051.1	1078.3	1145.3	1199.8	1249.4	1259.3	1237.0	1192.4	1065.9	902.3	704.0
67.5°	984.1	1001.5	1058.5	1142.8	1177.5	1187.4	1180.0	1127.9	1018.8	832.9	656.9
70°	907.3	929.6	974.2	1061.0	1095.7	1093.2	1115.5	1056.0	946.9	773.4	607.3
72.5°	803.2	835.4	880.0	951.9	994.0	979.2	1013.9	964.3	852.7	699.1	540.4
75°	681.7	709.0	766.0	823.0	870.1	852.7	880.0	845.3	743.7	609.8	463.6
77.5°	545.4	577.6	629.6	681.7	713.9	713.9	726.3	696.6	617.2	500.7	379.3
80°	404.1	433.8	480.9	518.1	547.8	550.3	562.7	547.8	476.0	389.2	290.0
82.5°	267.7	282.6	324.7	354.5	384.2	381.8	401.6	391.7	332.2	267.7	193.4
85°	114.0	123.9	158.7	183.4	210.7	200.8	228.1	225.6	178.5	128.9	86.8
87.5°	5.0	7.4	7.4	5.0	7.4	2.5	7.4	9.9	7.4	5.0	5.0
90°	6.3	6.3	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	6.3
92.5°	6.3	6.3	6.3	8.9	10.1	9.5	8.9	10.1	7.6	7.6	6.3
95°	7.6	7.6	8.9	11.4	13.9	14.6	15.2	15.2	8.9	8.9	7.6
97.5°	10.1	11.4	11.4	13.9	22.8	32.3	41.8	25.3	12.7	12.7	11.4
100°	16.5	17.7	17.7	31.7	67.2	78.6	90.0	64.6	32.9	24.1	17.7
102.5°	53.2	55.8	68.4	102.6	152.1	145.1	138.1	116.6	110.2	76.0	60.8
105°	135.6	134.3	144.5	171.1	212.9	211.0	209.1	192.6	174.9	150.8	139.4
107.5°	178.7	178.7	187.5	210.4	242.0	262.3	282.6	286.4	226.8	198.9	186.3
110°	201.5	201.5	209.1	228.1	269.9	298.4	326.9	324.4	280.0	245.8	229.4



REPORT NUMBER: P833319  
 CATALOG NUMBER: TTN-D1-830-U-DL-UPL3

**CANDELA DISTRIBUTION (continued):**

	0°	5°	15°	25°	35°	40°	45°	55°	65°	75°	85°
112.5°	206.5	207.8	218.0	247.1	292.7	305.4	318.1	306.7	288.9	273.7	261.0
115°	214.2	214.2	225.6	253.4	278.8	283.8	288.9	276.2	262.3	252.2	247.1
117.5°	211.6	215.4	218.0	233.2	249.6	253.4	257.2	250.9	231.9	224.3	221.8
120°	196.4	196.4	198.9	206.5	215.4	217.3	219.2	216.7	204.0	197.7	196.4
122.5°	174.9	176.1	174.9	178.7	185.0	186.9	188.8	186.3	176.1	173.6	173.6
125°	153.3	153.3	152.1	154.6	158.4	157.8	157.1	158.4	153.3	152.1	152.1
127.5°	138.1	136.9	134.3	135.6	136.9	136.9	136.9	138.1	133.1	134.3	135.6
130°	122.9	122.9	120.4	120.4	120.4	119.1	117.8	120.4	117.8	119.1	120.4
132.5°	109.0	109.0	105.2	103.9	103.9	103.9	103.9	105.2	103.9	106.4	109.0
135°	97.6	97.6	93.8	95.0	95.0	94.4	93.8	95.0	93.8	96.3	97.6
137.5°	88.7	88.7	86.2	86.2	86.2	85.6	84.9	86.2	86.2	87.4	90.0
140°	81.1	81.1	79.8	79.8	78.6	79.2	79.8	79.8	79.8	81.1	82.4
142.5°	77.3	76.0	74.8	73.5	74.8	74.8	74.8	74.8	73.5	74.8	77.3
145°	71.0	71.0	69.7	69.7	69.7	70.4	71.0	69.7	69.7	71.0	71.0
147.5°	67.2	67.2	65.9	67.2	67.2	67.2	67.2	67.2	65.9	67.2	67.2
150°	65.9	64.6	63.4	64.6	64.6	64.0	63.4	63.4	63.4	63.4	64.6
152.5°	62.1	62.1	60.8	62.1	60.8	60.8	60.8	60.8	60.8	60.8	62.1
155°	59.6	59.6	58.3	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6
157.5°	57.0	58.3	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	58.3
160°	55.8	55.8	55.8	55.8	54.5	54.5	54.5	54.5	55.8	55.8	55.8
162.5°	54.5	54.5	54.5	54.5	53.2	53.2	53.2	53.2	53.2	54.5	54.5
165°	54.5	53.2	53.2	53.2	52.0	52.0	52.0	52.0	52.0	53.2	54.5
167.5°	52.0	52.0	52.0	52.0	52.0	51.4	50.7	50.7	52.0	52.0	52.0
170°	52.0	52.0	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7
172.5°	52.0	52.0	52.0	52.0	50.7	50.7	50.7	50.7	50.7	50.7	52.0
175°	52.0	52.0	52.0	52.0	50.7	50.7	50.7	50.7	52.0	52.0	52.0
177.5°	52.0	52.0	52.0	52.0	50.7	51.4	52.0	52.0	52.0	52.0	52.0
180°	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0





REPORT NUMBER: P833319  
 CATALOG NUMBER: TTN-D1-830-U-DL-UPL3

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	240.5	240.5	240.5	240.5	240.5	240.5	240.5	240.5	240.5	240.5	240.5
2.5°	240.5	238.0	233.0	230.5	228.1	223.1	223.1	220.6	220.6	220.6	218.1
5°	240.5	235.5	230.5	223.1	218.1	213.2	208.2	203.3	200.8	200.8	198.3
7.5°	235.5	230.5	223.1	215.7	208.2	198.3	193.4	183.4	181.0	178.5	178.5
10°	235.5	230.5	218.1	208.2	198.3	188.4	181.0	171.0	163.6	161.1	161.1
12.5°	238.0	230.5	218.1	205.7	193.4	181.0	171.0	161.1	153.7	148.7	148.7
15°	247.9	238.0	223.1	205.7	190.9	176.0	166.1	153.7	146.3	141.3	141.3
17.5°	260.3	250.4	228.1	208.2	190.9	173.5	161.1	148.7	141.3	136.3	133.9
20°	277.6	262.8	238.0	210.7	190.9	173.5	158.7	146.3	136.3	131.4	131.4
22.5°	297.5	280.1	247.9	215.7	193.4	173.5	158.7	143.8	133.9	128.9	128.9
25°	322.3	299.9	262.8	225.6	198.3	176.0	158.7	143.8	133.9	128.9	128.9
27.5°	349.5	324.7	277.6	235.5	203.3	178.5	158.7	143.8	133.9	128.9	128.9
30°	374.3	347.0	292.5	245.4	210.7	181.0	161.1	146.3	136.3	131.4	128.9
32.5°	401.6	366.9	307.4	255.3	215.7	185.9	163.6	148.7	136.3	131.4	131.4
35°	428.9	391.7	322.3	267.7	223.1	190.9	166.1	151.2	138.8	133.9	133.9
37.5°	458.6	418.9	339.6	277.6	230.5	195.8	171.0	153.7	141.3	136.3	136.3
40°	493.3	446.2	357.0	290.0	238.0	200.8	173.5	158.7	146.3	141.3	141.3
42.5°	525.5	471.0	374.3	299.9	245.4	205.7	178.5	161.1	151.2	146.3	146.3
45°	557.8	500.7	391.7	312.3	252.8	213.2	183.4	168.6	156.2	151.2	151.2
47.5°	594.9	528.0	411.5	322.3	260.3	218.1	188.4	173.5	161.1	158.7	156.2
50°	624.7	547.8	423.9	332.2	265.2	223.1	193.4	176.0	166.1	161.1	161.1
52.5°	652.0	567.7	433.8	337.1	267.7	225.6	198.3	181.0	171.0	166.1	166.1
55°	666.8	575.1	441.2	337.1	270.2	228.1	198.3	181.0	171.0	168.6	166.1
57.5°	666.8	575.1	436.3	332.2	265.2	223.1	195.8	178.5	171.0	166.1	166.1
60°	656.9	567.7	423.9	322.3	257.8	215.7	190.9	173.5	166.1	163.6	163.6
62.5°	642.0	555.3	414.0	309.9	247.9	205.7	183.4	166.1	161.1	161.1	158.7
65°	602.4	518.1	391.7	292.5	233.0	193.4	173.5	158.7	153.7	151.2	148.7
67.5°	560.2	483.4	357.0	272.7	213.2	181.0	161.1	148.7	141.3	141.3	138.8
70°	518.1	446.2	324.7	245.4	190.9	166.1	146.3	133.9	128.9	128.9	128.9
72.5°	461.1	399.1	287.6	215.7	168.6	146.3	131.4	119.0	116.5	116.5	114.0
75°	394.1	339.6	242.9	183.4	141.3	123.9	111.6	99.2	99.2	99.2	99.2
77.5°	322.3	275.2	193.4	146.3	111.6	99.2	91.7	81.8	81.8	81.8	81.8
80°	242.9	203.3	141.3	106.6	81.8	71.9	66.9	62.0	64.5	64.5	62.0
82.5°	158.7	133.9	89.2	66.9	52.1	47.1	47.1	42.1	44.6	44.6	44.6
85°	69.4	59.5	37.2	29.7	24.8	24.8	24.8	22.3	24.8	24.8	24.8
87.5°	5.0	5.0	5.0	5.0	5.0	5.0	5.0	0.0	2.5	5.0	2.5
90°	6.3	6.3	7.6	7.6	7.6	7.6	7.6	7.6	7.6	6.3	6.3
92.5°	6.3	6.3	7.6	7.6	10.1	8.9	10.1	8.9	6.3	6.3	6.3
95°	7.6	7.6	8.9	8.9	15.2	15.2	13.9	11.4	8.9	7.6	7.6
97.5°	10.1	11.4	12.7	12.7	25.3	41.8	22.8	13.9	11.4	11.4	10.1
100°	17.7	17.7	24.1	32.9	64.6	90.0	67.2	31.7	17.7	17.7	16.5
102.5°	58.3	60.8	76.0	110.2	116.6	138.1	152.1	102.6	68.4	55.8	53.2
105°	139.4	139.4	150.8	174.9	192.6	209.1	212.9	171.1	144.5	134.3	135.6
107.5°	185.0	186.3	198.9	226.8	286.4	282.6	242.0	210.4	187.5	178.7	178.7
110°	226.8	229.4	245.8	280.0	324.4	326.9	269.9	228.1	209.1	201.5	201.5



REPORT NUMBER: P833319  
 CATALOG NUMBER: TTN-D1-830-U-DL-UPL3

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
112.5°	258.5	261.0	273.7	288.9	306.7	318.1	292.7	247.1	218.0	207.8	206.5
115°	249.6	247.1	252.2	262.3	276.2	288.9	278.8	253.4	225.6	214.2	214.2
117.5°	218.0	221.8	224.3	231.9	250.9	257.2	249.6	233.2	218.0	215.4	211.6
120°	193.9	196.4	197.7	204.0	216.7	219.2	215.4	206.5	198.9	196.4	196.4
122.5°	171.1	173.6	173.6	176.1	186.3	188.8	185.0	178.7	174.9	176.1	174.9
125°	150.8	152.1	152.1	153.3	158.4	157.1	158.4	154.6	152.1	153.3	153.3
127.5°	134.3	135.6	134.3	133.1	138.1	136.9	136.9	135.6	134.3	136.9	138.1
130°	121.6	120.4	119.1	117.8	120.4	117.8	120.4	120.4	120.4	122.9	122.9
132.5°	109.0	109.0	106.4	103.9	105.2	103.9	103.9	103.9	105.2	109.0	109.0
135°	97.6	97.6	96.3	93.8	95.0	93.8	95.0	95.0	93.8	97.6	97.6
137.5°	91.2	90.0	87.4	86.2	86.2	84.9	86.2	86.2	86.2	88.7	88.7
140°	82.4	82.4	81.1	79.8	79.8	79.8	78.6	79.8	79.8	81.1	81.1
142.5°	77.3	77.3	74.8	73.5	74.8	74.8	74.8	73.5	74.8	76.0	77.3
145°	72.2	71.0	71.0	69.7	69.7	71.0	69.7	69.7	69.7	71.0	71.0
147.5°	68.4	67.2	67.2	65.9	67.2	67.2	67.2	67.2	65.9	67.2	67.2
150°	64.6	64.6	63.4	63.4	63.4	63.4	64.6	64.6	63.4	64.6	65.9
152.5°	63.4	62.1	60.8	60.8	60.8	60.8	60.8	62.1	60.8	62.1	62.1
155°	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	58.3	59.6	59.6
157.5°	58.3	58.3	57.0	57.0	57.0	57.0	57.0	57.0	57.0	58.3	57.0
160°	57.0	55.8	55.8	55.8	54.5	54.5	54.5	55.8	55.8	55.8	55.8
162.5°	55.8	54.5	54.5	53.2	53.2	53.2	53.2	54.5	54.5	54.5	54.5
165°	53.2	54.5	53.2	52.0	52.0	52.0	52.0	53.2	53.2	53.2	54.5
167.5°	53.2	52.0	52.0	52.0	50.7	50.7	52.0	52.0	52.0	52.0	52.0
170°	52.0	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	52.0	52.0
172.5°	52.0	52.0	50.7	50.7	50.7	50.7	50.7	52.0	52.0	52.0	52.0
175°	50.7	52.0	52.0	52.0	50.7	50.7	50.7	52.0	52.0	52.0	52.0
177.5°	52.0	52.0	52.0	52.0	52.0	52.0	50.7	52.0	52.0	52.0	52.0
180°	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

MCGRAW EDISON

Report Number: SP1-2411-284-4

Test Date: 11/22/2024

Luminaire Tested: TTN-D0-830-U-WQ

Data in this report applies to TT and TTN families of products


**Test Information**

Test Method: LM-79-2019  
 Report Number: SP1-2411-284-4  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 11/22/2024  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: MCGRAW EDISON  
 Catalog Number: **TTN-D0-830-U-WQ**  
 Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE. 3000K, 80 CRI LEDS AND WIDE DISTRIBUTION

**Spectral Parameters**

CCT (K): 2963  
 CIE u': 0.2515  
 CIE v': 0.5238  
 Duv: 0.0012  
 CIE x: 0.4414  
 CIE y: 0.4086  
 CIE z: 0.1501  
 Peak Wavelength (nm): 603  
 Dominant Wavelength (nm): 582  
 Purity: 55.12798  
 Rf: 86.1  
 Rg: 94.9

CRI (Ra):	82.9		
R1:	81.4	R9:	3.9
R2:	91.9	R10:	82.5
R3:	95.2	R11:	82.3
R4:	81.6	R12:	76.5
R5:	82.3	R13:	83.9
R6:	91.4	R14:	97.8
R7:	82.0	R15:	72.6
R8:	57.2		

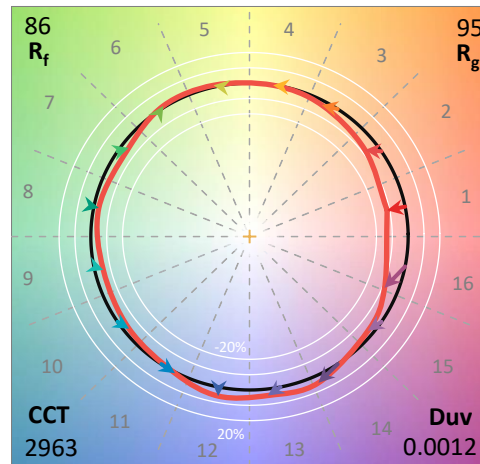

**Test Conditions**


Stabilization Time: 37M  
 Operation Time: 1H 37M  
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2411-284-4


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/22/2024	10/22/2025
DC Power Source	IN0208	10/22/2024	10/22/2025
Sphere Thermometer	IN0085	10/22/2024	10/22/2025
Room Thermometer	IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2411-284-4

CIE 1931 Chromaticity Diagram

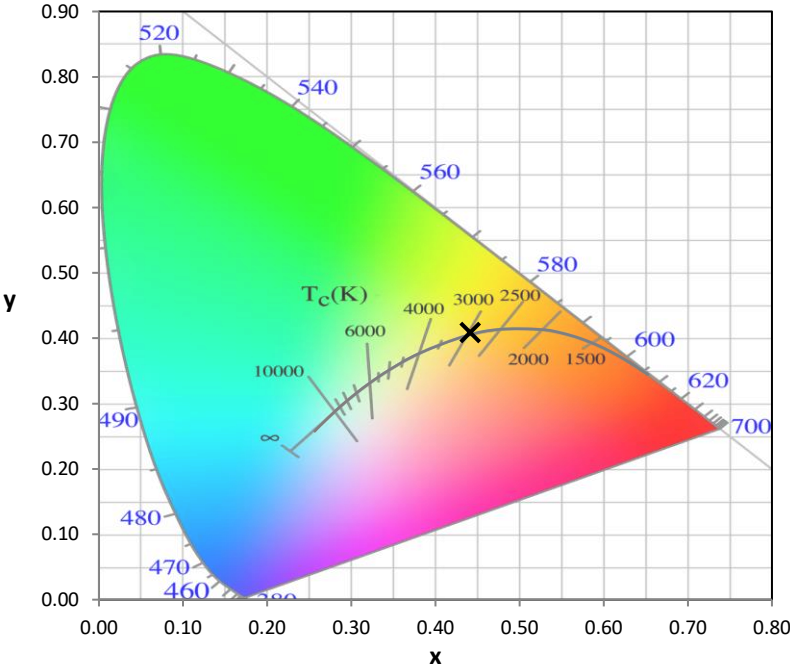


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

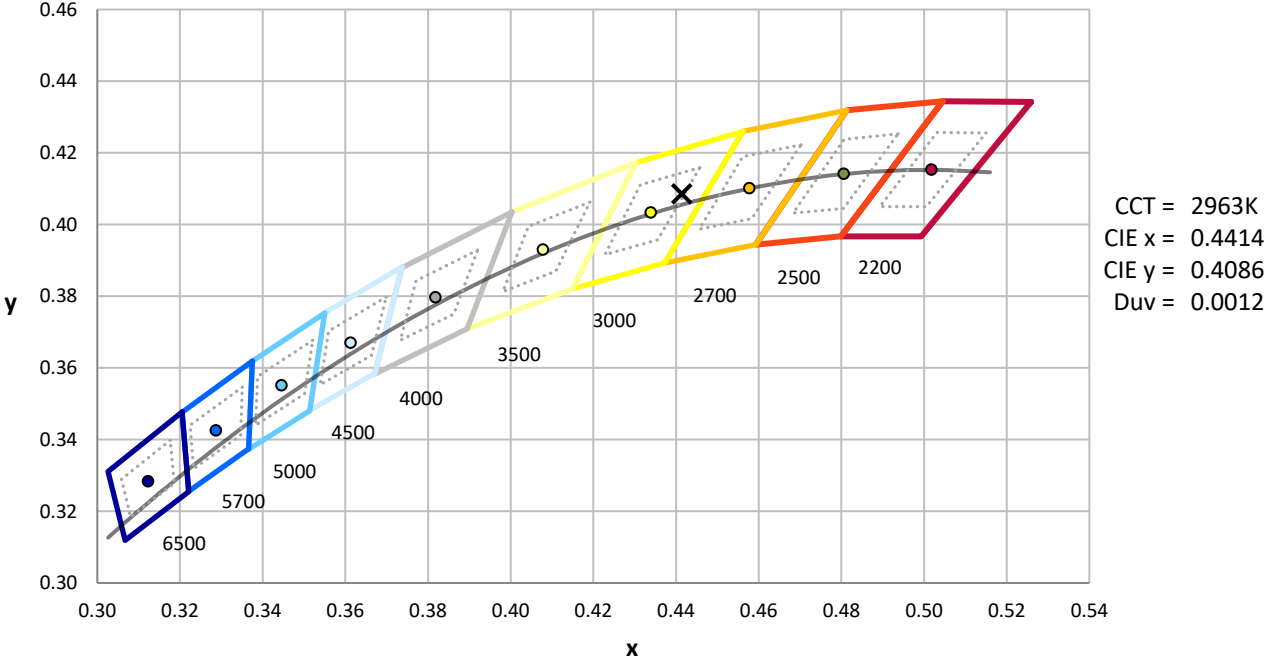

Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-2411-284-4

**Photopic Flux vs. Wavelength**

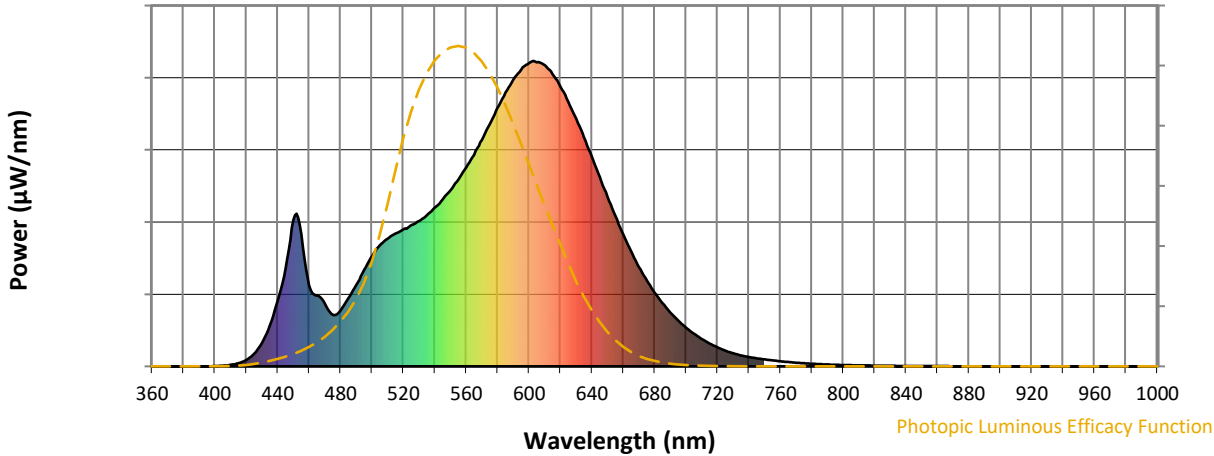


**Photopic Lumens: NR**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	267	NR	620	915	NR	750	23	NR	880	0	NR
365	0	NR	495	315	NR	625	866	NR	755	20	NR	885	0	NR
370	0	NR	500	360	NR	630	811	NR	760	17	NR	890	0	NR
375	0	NR	505	396	NR	635	750	NR	765	14	NR	895	0	NR
380	0	NR	510	418	NR	640	686	NR	770	12	NR	900	0	NR
385	0	NR	515	435	NR	645	619	NR	775	10	NR	905	0	NR
390	0	NR	520	448	NR	650	554	NR	780	9	NR	910	0	NR
395	0	NR	525	462	NR	655	491	NR	785	7	NR	915	0	NR
400	1	NR	530	476	NR	660	431	NR	790	6	NR	920	0	NR
405	2	NR	535	495	NR	665	376	NR	795	5	NR	925	0	NR
410	5	NR	540	520	NR	670	325	NR	800	4	NR	930	0	NR
415	10	NR	545	547	NR	675	280	NR	805	4	NR	935	0	NR
420	21	NR	550	576	NR	680	241	NR	810	3	NR	940	0	NR
425	42	NR	555	612	NR	685	207	NR	815	3	NR	945	0	NR
430	77	NR	560	651	NR	690	176	NR	820	2	NR	950	0	NR
435	135	NR	565	693	NR	695	149	NR	825	2	NR	955	0	NR
440	215	NR	570	741	NR	700	127	NR	830	2	NR	960	0	NR
445	321	NR	575	793	NR	705	107	NR	835	2	NR	965	0	NR
450	479	NR	580	847	NR	710	89	NR	840	1	NR	970	0	NR
455	432	NR	585	897	NR	715	75	NR	845	1	NR	975	0	NR
460	265	NR	590	940	NR	720	62	NR	850	1	NR	980	0	NR
465	231	NR	595	971	NR	725	51	NR	855	1	NR	985	0	NR
470	204	NR	600	993	NR	730	43	NR	860	1	NR	990	0	NR
475	168	NR	605	996	NR	735	36	NR	865	1	NR	995	0	NR
480	183	NR	610	986	NR	740	31	NR	870	1	NR	1000	0	NR
485	223	NR	615	957	NR	745	26	NR	875	0	NR			

REPORT NUMBER: SP1-2411-284-4

**Scotopic Flux vs. Wavelength**

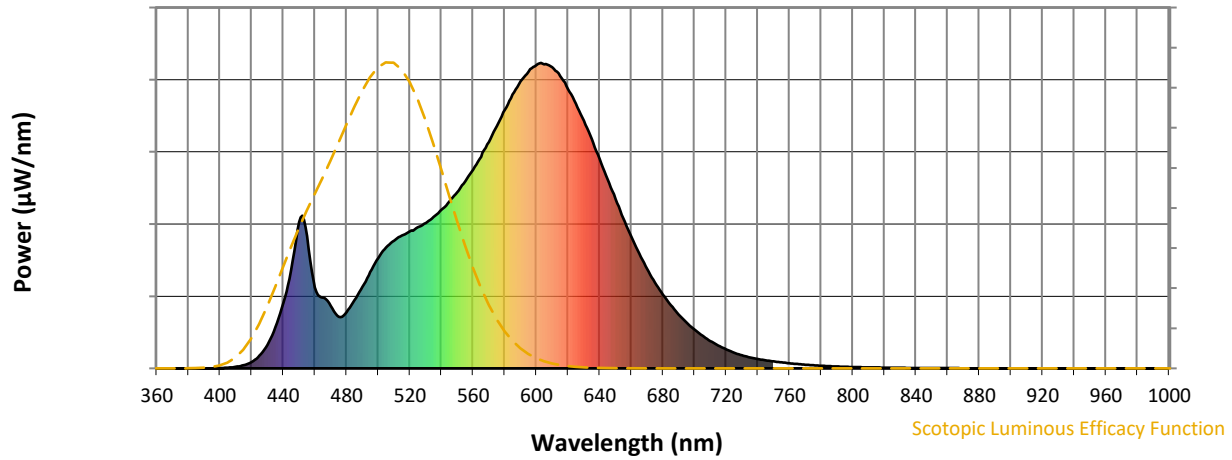

**Scotopic Lumens: NR**


**S/P: 1.34**

λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	267	NR	620	915	NR	750	23	NR	880	0	NR
365	0	NR	495	315	NR	625	866	NR	755	20	NR	885	0	NR
370	0	NR	500	360	NR	630	811	NR	760	17	NR	890	0	NR
375	0	NR	505	396	NR	635	750	NR	765	14	NR	895	0	NR
380	0	NR	510	418	NR	640	686	NR	770	12	NR	900	0	NR
385	0	NR	515	435	NR	645	619	NR	775	10	NR	905	0	NR
390	0	NR	520	448	NR	650	554	NR	780	9	NR	910	0	NR
395	0	NR	525	462	NR	655	491	NR	785	7	NR	915	0	NR
400	1	NR	530	476	NR	660	431	NR	790	6	NR	920	0	NR
405	2	NR	535	495	NR	665	376	NR	795	5	NR	925	0	NR
410	5	NR	540	520	NR	670	325	NR	800	4	NR	930	0	NR
415	10	NR	545	547	NR	675	280	NR	805	4	NR	935	0	NR
420	21	NR	550	576	NR	680	241	NR	810	3	NR	940	0	NR
425	42	NR	555	612	NR	685	207	NR	815	3	NR	945	0	NR
430	77	NR	560	651	NR	690	176	NR	820	2	NR	950	0	NR
435	135	NR	565	693	NR	695	149	NR	825	2	NR	955	0	NR
440	215	NR	570	741	NR	700	127	NR	830	2	NR	960	0	NR
445	321	NR	575	793	NR	705	107	NR	835	2	NR	965	0	NR
450	479	NR	580	847	NR	710	89	NR	840	1	NR	970	0	NR
455	432	NR	585	897	NR	715	75	NR	845	1	NR	975	0	NR
460	265	NR	590	940	NR	720	62	NR	850	1	NR	980	0	NR
465	231	NR	595	971	NR	725	51	NR	855	1	NR	985	0	NR
470	204	NR	600	993	NR	730	43	NR	860	1	NR	990	0	NR
475	168	NR	605	996	NR	735	36	NR	865	1	NR	995	0	NR
480	183	NR	610	986	NR	740	31	NR	870	1	NR	1000	0	NR
485	223	NR	615	957	NR	745	26	NR	875	0	NR			



REPORT NUMBER: SP1-2411-284-4

Melanopic Flux vs. Wavelength

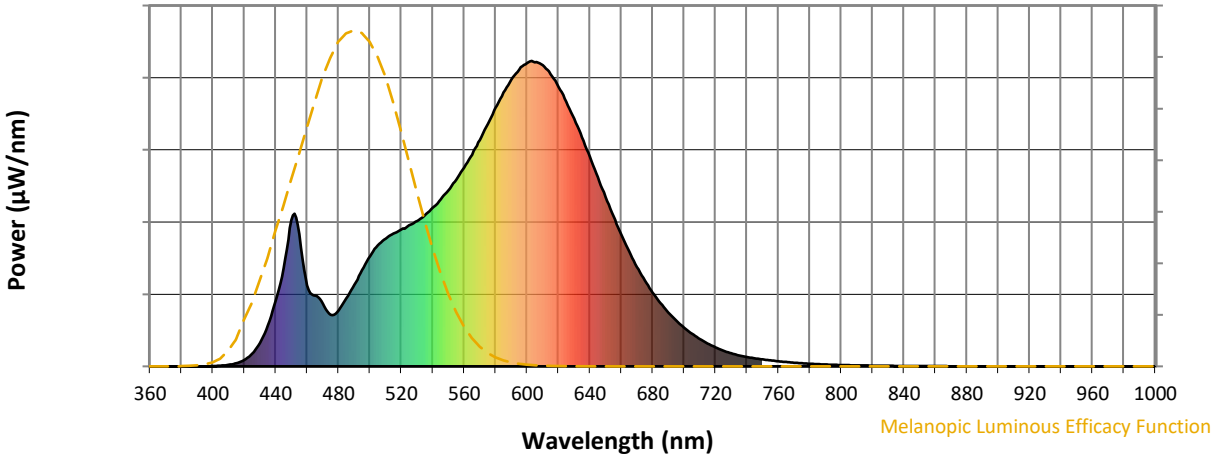


Melanopic Lumens: NR

M/P: 2.58





λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)	λ (nm)	Power W <sup>^</sup> /nm	Lumens (φ/nm)
360	0	NR	490	267	NR	620	915	NR	750	23	NR	880	0	NR
365	0	NR	495	315	NR	625	866	NR	755	20	NR	885	0	NR
370	0	NR	500	360	NR	630	811	NR	760	17	NR	890	0	NR
375	0	NR	505	396	NR	635	750	NR	765	14	NR	895	0	NR
380	0	NR	510	418	NR	640	686	NR	770	12	NR	900	0	NR
385	0	NR	515	435	NR	645	619	NR	775	10	NR	905	0	NR
390	0	NR	520	448	NR	650	554	NR	780	9	NR	910	0	NR
395	0	NR	525	462	NR	655	491	NR	785	7	NR	915	0	NR
400	1	NR	530	476	NR	660	431	NR	790	6	NR	920	0	NR
405	2	NR	535	495	NR	665	376	NR	795	5	NR	925	0	NR
410	5	NR	540	520	NR	670	325	NR	800	4	NR	930	0	NR
415	10	NR	545	547	NR	675	280	NR	805	4	NR	935	0	NR
420	21	NR	550	576	NR	680	241	NR	810	3	NR	940	0	NR
425	42	NR	555	612	NR	685	207	NR	815	3	NR	945	0	NR
430	77	NR	560	651	NR	690	176	NR	820	2	NR	950	0	NR
435	135	NR	565	693	NR	695	149	NR	825	2	NR	955	0	NR
440	215	NR	570	741	NR	700	127	NR	830	2	NR	960	0	NR
445	321	NR	575	793	NR	705	107	NR	835	2	NR	965	0	NR
450	479	NR	580	847	NR	710	89	NR	840	1	NR	970	0	NR
455	432	NR	585	897	NR	715	75	NR	845	1	NR	975	0	NR
460	265	NR	590	940	NR	720	62	NR	850	1	NR	980	0	NR
465	231	NR	595	971	NR	725	51	NR	855	1	NR	985	0	NR
470	204	NR	600	993	NR	730	43	NR	860	1	NR	990	0	NR
475	168	NR	605	996	NR	735	36	NR	865	1	NR	995	0	NR
480	183	NR	610	986	NR	740	31	NR	870	1	NR	1000	0	NR
485	223	NR	615	957	NR	745	26	NR	875	0	NR			

**Summary**

$R_f = 86.1$   
 $R_g = 94.9$   
 CIE  $R_a = 82.9$   
 $R_9 = 3.9$

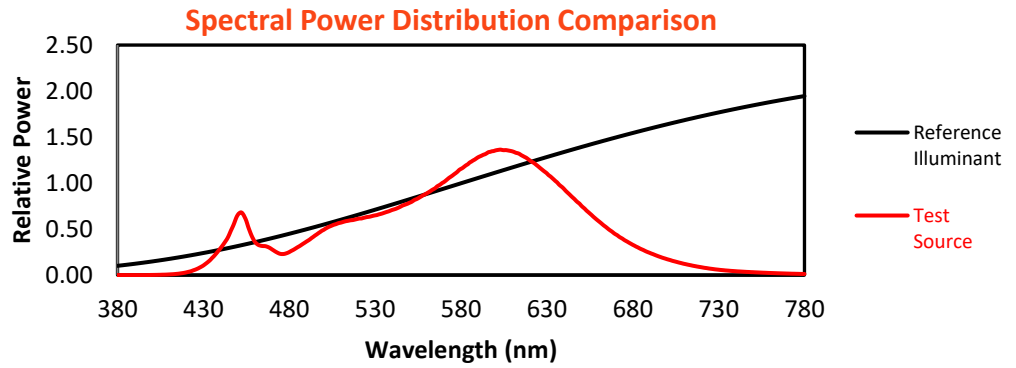


**Color Vector Graphics**

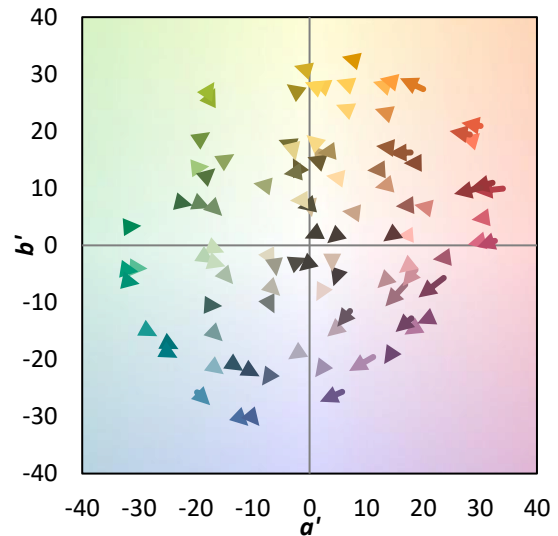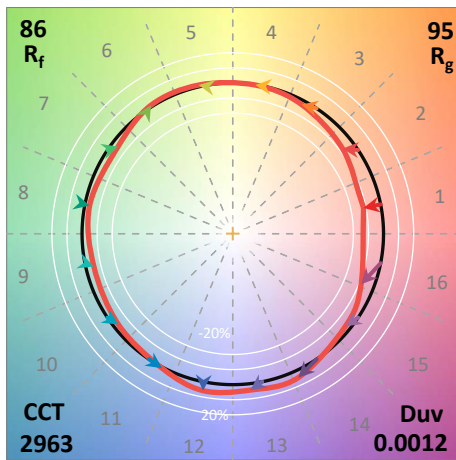
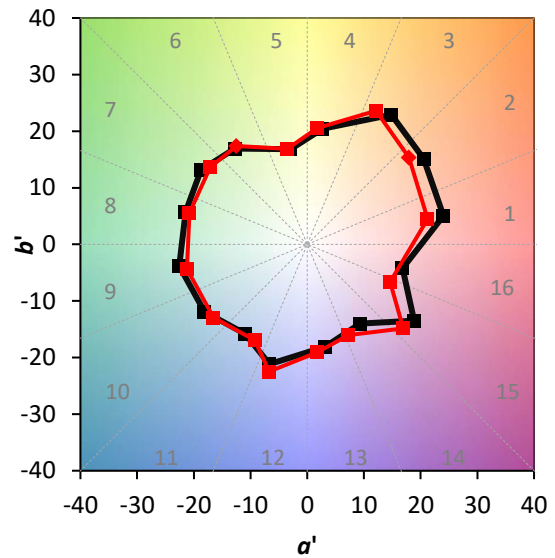
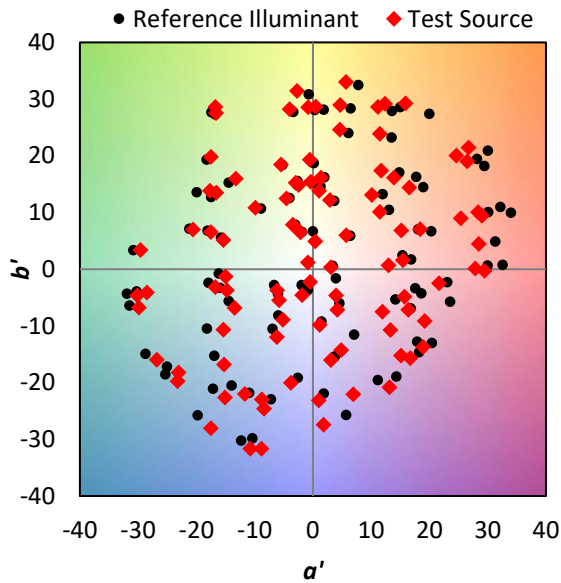


Individual Sample Fidelity Index ( $R_{f,i}$ )



CES01 = 86	CES26 = 87	CES51 = 95	CES76 = 85
CES02 = 63	CES27 = 95	CES52 = 95	CES77 = 85
CES03 = 31	CES28 = 96	CES53 = 91	CES78 = 83
CES04 = 70	CES29 = 90	CES54 = 92	CES79 = 89
CES05 = 50	CES30 = 96	CES55 = 91	CES80 = 89
CES06 = 51	CES31 = 92	CES56 = 88	CES81 = 70
CES07 = 42	CES32 = 86	CES57 = 87	CES82 = 96
CES08 = 41	CES33 = 94	CES58 = 88	CES83 = 94
CES09 = 29	CES34 = 94	CES59 = 92	CES84 = 92
CES10 = 76	CES35 = 97	CES60 = 93	CES85 = 76
CES11 = 59	CES36 = 88	CES61 = 90	CES86 = 66
CES12 = 65	CES37 = 98	CES62 = 92	CES87 = 85
CES13 = 44	CES38 = 95	CES63 = 90	CES88 = 87
CES14 = 74	CES39 = 98	CES64 = 85	CES89 = 75
CES15 = 72	CES40 = 96	CES65 = 81	CES90 = 89
CES16 = 48	CES41 = 97	CES66 = 84	CES91 = 80
CES17 = 50	CES42 = 98	CES67 = 83	CES92 = 64
CES18 = 57	CES43 = 92	CES68 = 85	CES93 = 79
CES19 = 72	CES44 = 99	CES69 = 89	CES94 = 61
CES20 = 67	CES45 = 94	CES70 = 83	CES95 = 75
CES21 = 87	CES46 = 91	CES71 = 81	CES96 = 84
CES22 = 79	CES47 = 92	CES72 = 93	CES97 = 89
CES23 = 92	CES48 = 84	CES73 = 78	CES98 = 85
CES24 = 91	CES49 = 92	CES74 = 91	CES99 = 76
CES25 = 72	CES50 = 95	CES75 = 84	

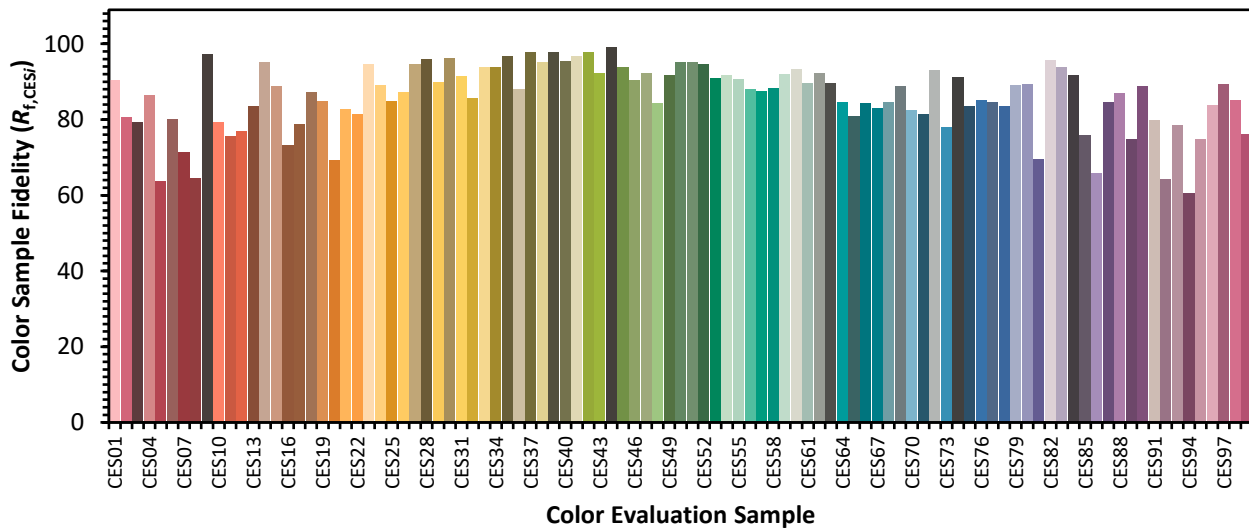

Color Rendition by Hue-Angle Bin

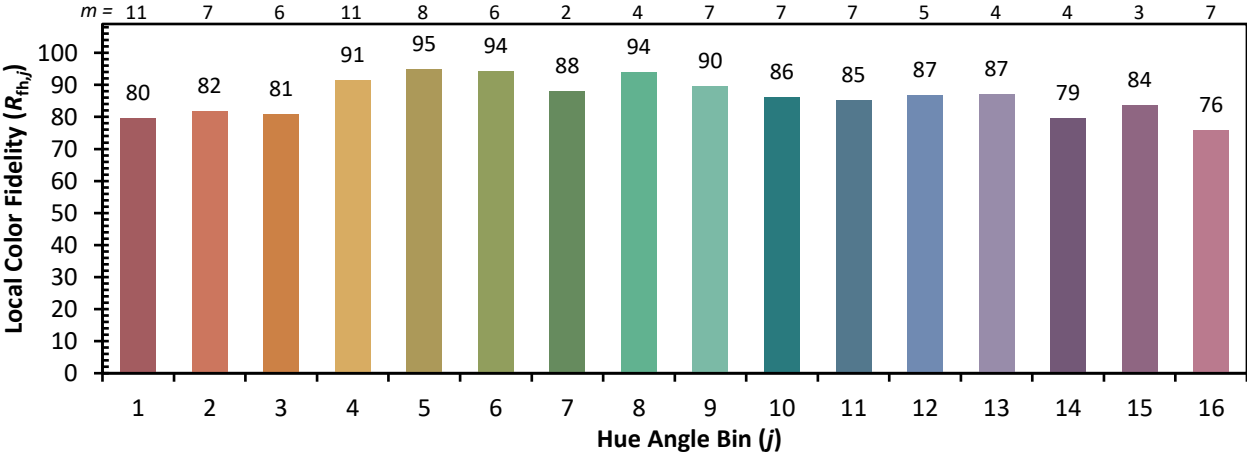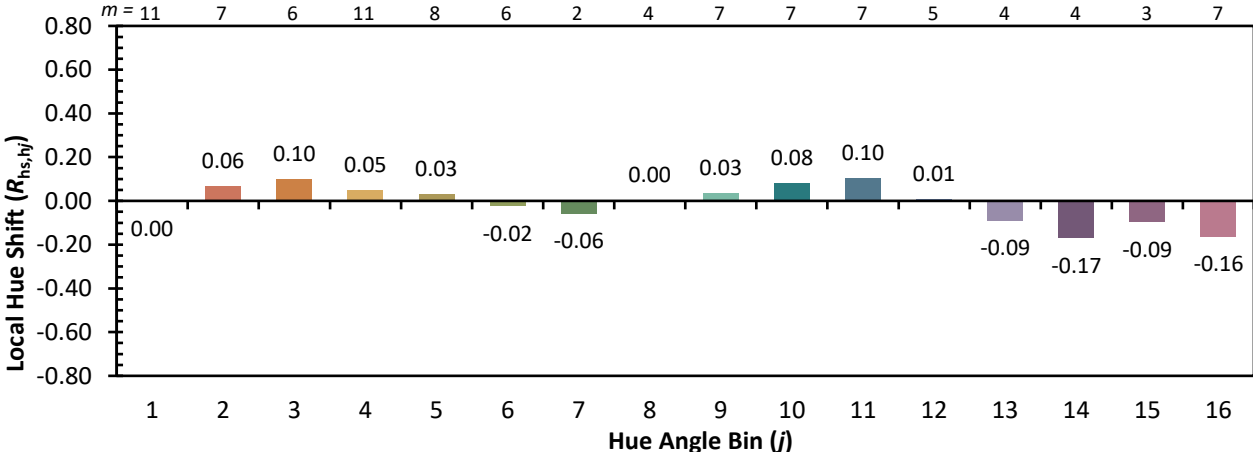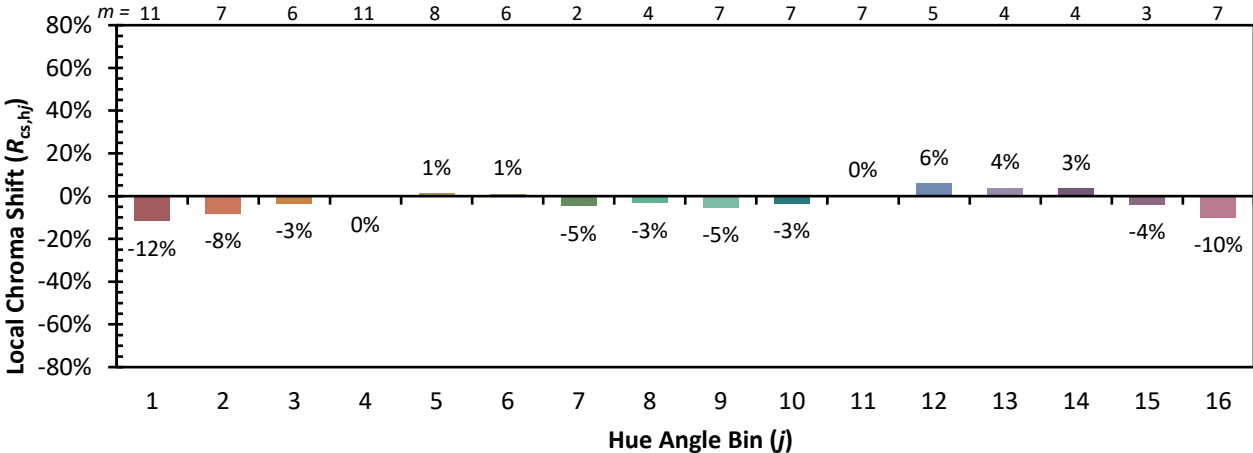

Measure Comparisons

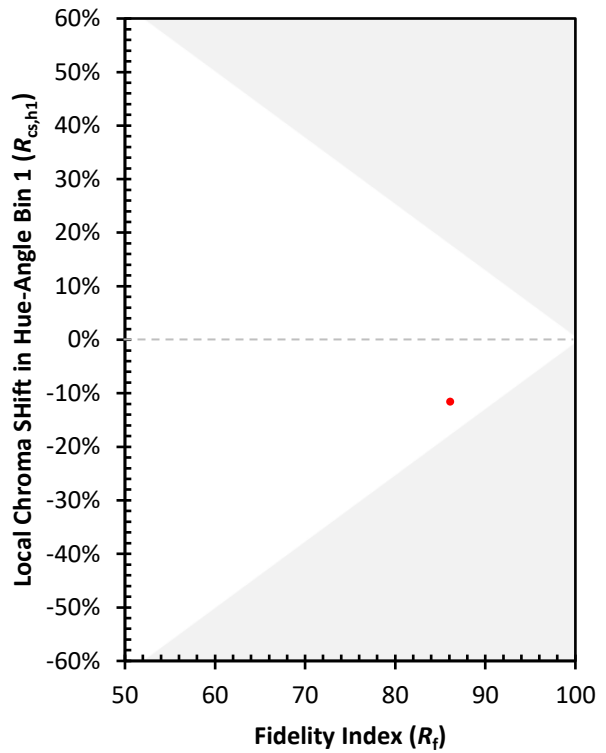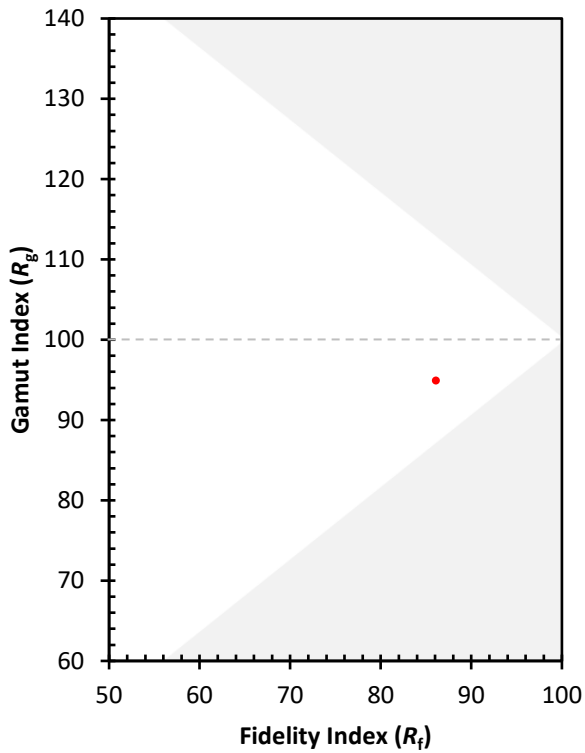

(END OF REPORT)