

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P832621

Luminaire Tested: **TTN-D2-735-U-DL-CG**

Issue Date: 5/14/2024

Test Information

Test Method: LM-79-08
Report Number: P832621
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2312-254-15)
Test Lab: INNOVATION CENTER
Issue Date: 5/14/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: TTN-D2-735-U-DL-CG
Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE
3500K, 70 CRI LEDS AND DRIVE LANE DISTRIBUTION WITH CLEAR GLASS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4710 lumens
Efficiency: N/A
Efficacy: 110.8 lumens/watt
Luminous Opening: Circular (Dia: 0.71' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B1 - U0 - G1


Input Watts (W): 42.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P832621
 CATALOG NUMBER: TTN-D2-735-U-DL-CG

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

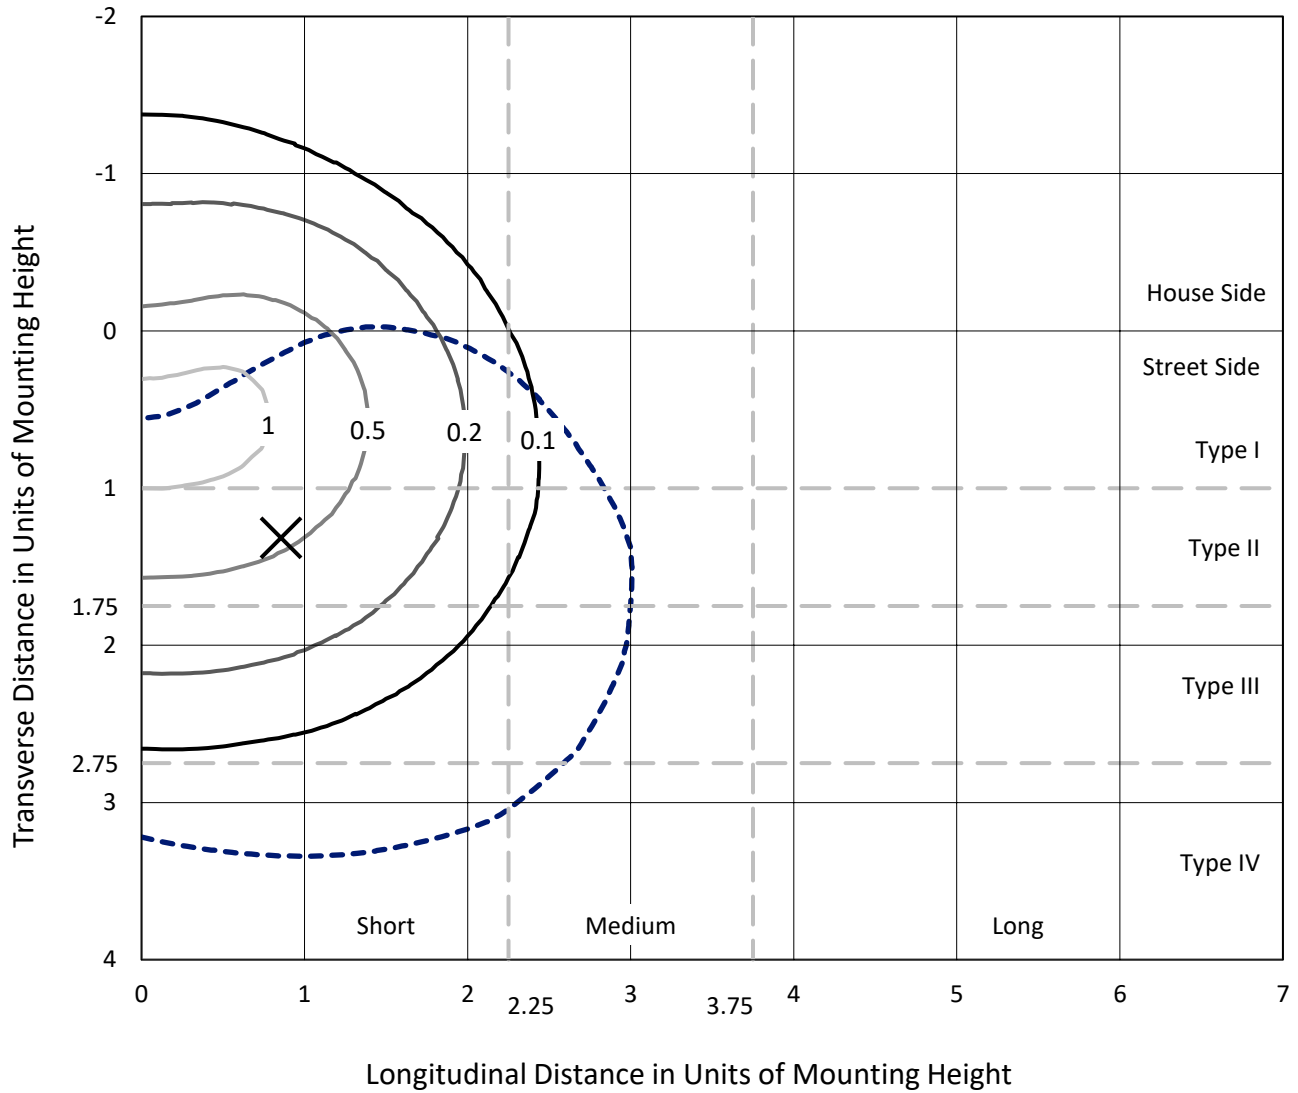

Based on 25 foot mounting height. Maximum calculated value = 1.2 fc
 Type IV - Short - N/A

REPORT NUMBER: P832621
CATALOG NUMBER: TTN-D2-735-U-DL-CG

Luminous Intensity Polar Plot

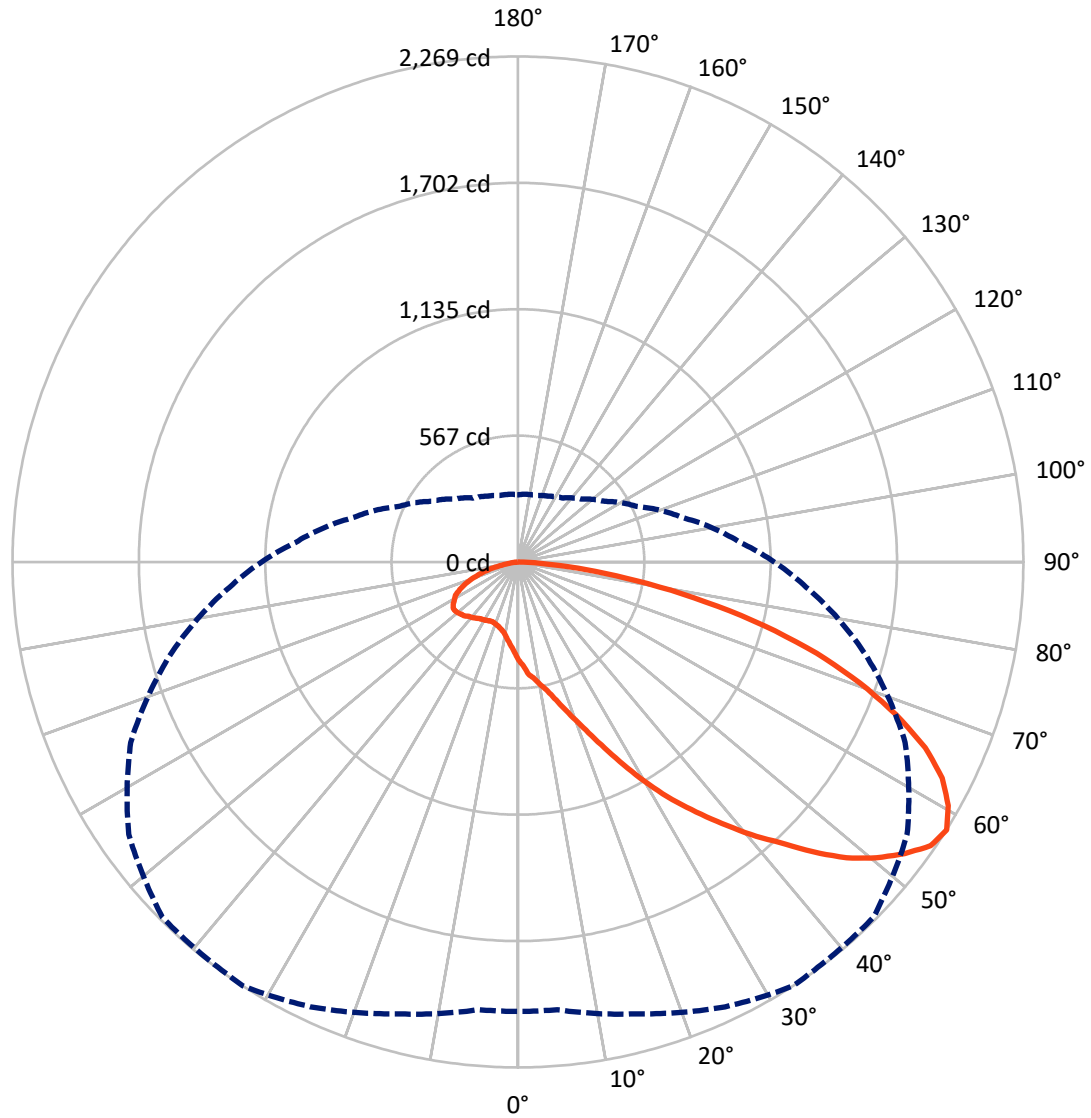

— Vertical Plane Through 33-Deg Lateral - - - Horizontal Cone Through 57.5-Deg Vertical

REPORT NUMBER: P832621
 CATALOG NUMBER: TTN-D2-735-U-DL-CG


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1039.3	0.0	1039.3
	% Fixture	22.1	0.0	22.1
Street Side	Lumens	3670.7	0.0	3670.7
	% Fixture	77.9	0.0	77.9
Total	Lumens	4710.0	0.0	4710.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	42.2	0.9
10°-20°	137.0	2.9
20°-30°	288.8	6.1
30°-40°	524.5	11.1
40°-50°	828.8	17.6
50°-60°	1100.7	23.4
60°-70°	1059.4	22.5
70°-80°	621.9	13.2
80°-90°	106.7	2.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	4710.0	100.0
0°-180°	4710.0	100.0

Coefficient of Utilization

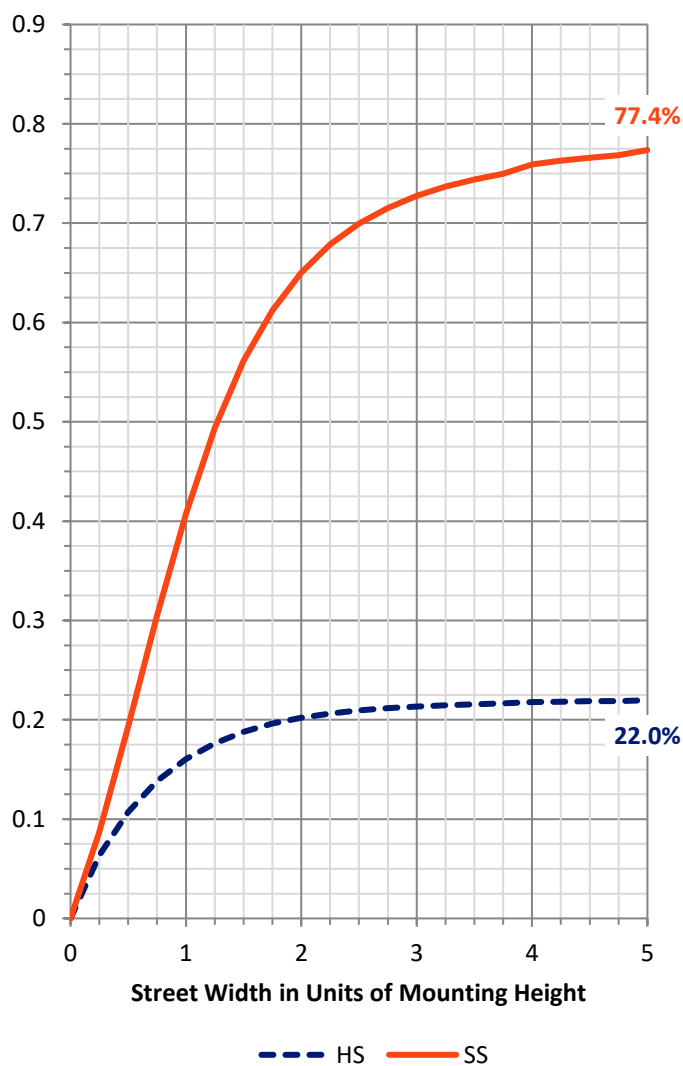

REPORT NUMBER: P832621


CATALOG NUMBER: TTN-D2-735-U-DL-CG

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	315.1	6.7			
FM (30°-60°)	1905.5	40.5			
FH (60°-80°)	1359.9	28.9			G1/1800
FVH (80°-90°)	90.2	1.9			G1/100
BL (0°-30°)	152.9	3.2	B1/500		
BM (30°-60°)	548.4	11.6	B1/1000		
BH (60°-80°)	321.4	6.8	B1/500		G1/500
BVH (80°-90°)	16.6	0.4			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G1

Type IV Short

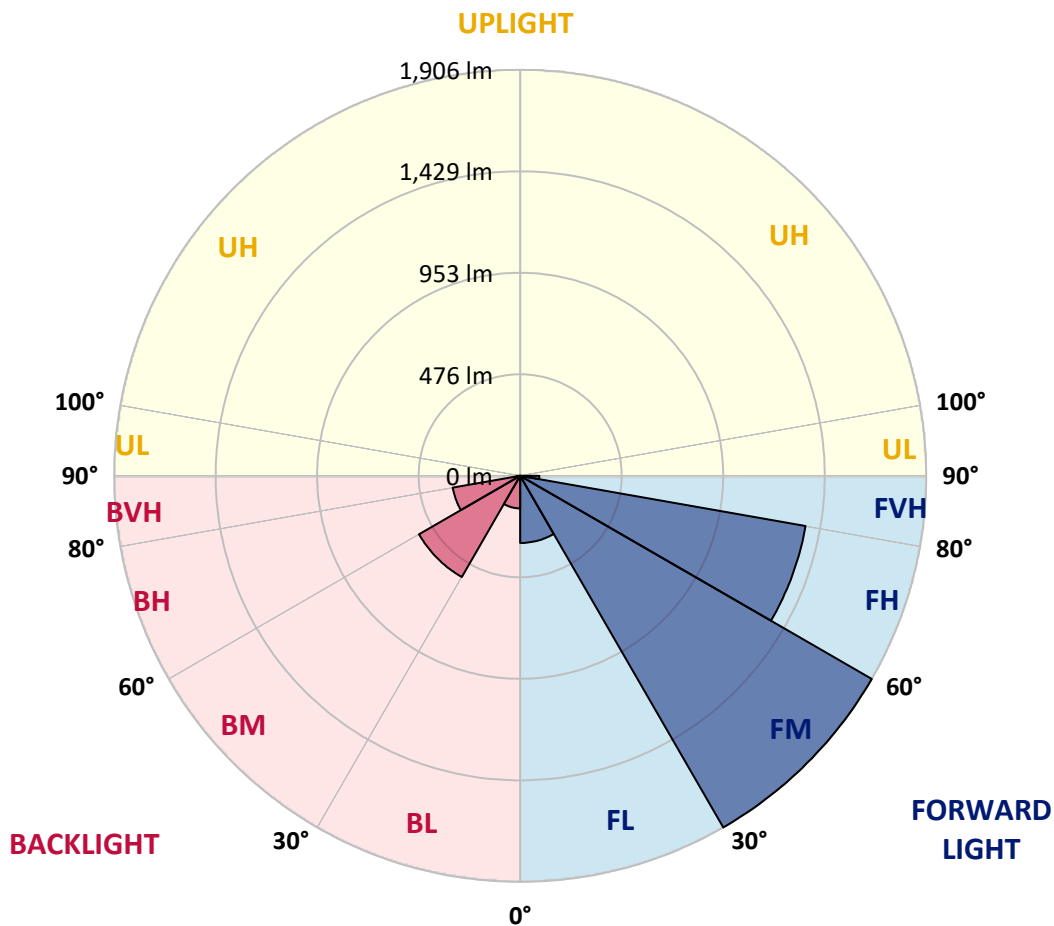



REPORT NUMBER: P832621
 CATALOG NUMBER: TTN-D2-735-U-DL-CG

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	33°	35°	45°	55°	65°	75°	85°
0°	441.4	441.4	441.4	441.4	441.4	441.4	441.4	441.4	441.4	441.4	441.4
2.5°	470.3	474.4	470.3	470.3	466.2	466.2	462.1	457.9	453.8	449.7	441.4
5°	524.0	524.0	519.8	511.6	507.5	503.3	495.1	482.7	474.4	462.1	449.7
7.5°	548.7	548.7	544.6	536.3	528.1	524.0	511.6	495.1	482.7	466.2	449.7
10°	581.7	585.8	577.6	569.3	561.1	557.0	540.5	519.8	499.2	478.6	453.8
12.5°	618.8	623.0	618.8	606.5	594.1	590.0	573.5	548.7	524.0	495.1	466.2
15°	668.4	676.6	664.2	656.0	643.6	639.5	618.8	590.0	561.1	524.0	486.8
17.5°	726.1	730.2	722.0	709.6	701.4	697.2	676.6	643.6	602.3	561.1	515.7
20°	792.1	796.2	792.1	775.6	767.4	763.2	742.6	705.5	656.0	610.6	552.8
22.5°	870.5	878.8	866.4	854.0	845.8	845.8	821.0	779.7	722.0	664.2	598.2
25°	961.3	973.6	957.1	948.9	940.6	936.5	915.9	866.4	800.4	730.2	647.7
27.5°	1072.7	1080.9	1068.5	1064.4	1047.9	1047.9	1014.9	957.1	887.0	804.5	709.6
30°	1171.7	1179.9	1171.7	1171.7	1159.3	1155.2	1122.2	1064.4	977.8	878.8	763.2
32.5°	1266.6	1274.8	1270.7	1274.8	1270.7	1266.6	1225.3	1163.4	1076.8	948.9	816.9
35°	1361.5	1373.8	1369.7	1382.1	1378.0	1373.8	1340.8	1266.6	1163.4	1035.5	874.6
37.5°	1460.5	1472.8	1472.8	1485.2	1489.3	1489.3	1452.2	1373.8	1258.3	1113.9	940.6
40°	1567.7	1580.1	1580.1	1600.7	1609.0	1609.0	1567.7	1489.3	1361.5	1200.6	1010.8
42.5°	1670.9	1683.3	1687.4	1708.0	1720.4	1724.5	1691.5	1600.7	1452.2	1287.2	1076.8
45°	1769.9	1782.3	1794.6	1835.9	1856.5	1852.4	1827.6	1732.8	1567.7	1378.0	1146.9
47.5°	1864.8	1881.3	1901.9	1955.5	1984.4	1980.3	1963.8	1856.5	1675.0	1464.6	1208.8
50°	1939.0	1951.4	1992.7	2050.4	2087.6	2091.7	2066.9	1963.8	1765.8	1530.6	1254.2
52.5°	1996.8	2013.3	2062.8	2145.3	2174.2	2186.6	2157.7	2054.6	1856.5	1588.4	1291.3
55°	2038.1	2038.1	2112.3	2207.2	2248.5	2256.7	2256.7	2128.8	1910.2	1625.5	1311.9
57.5°	2017.4	2017.4	2099.9	2203.1	2269.1	2265.0	2256.7	2132.9	1918.4	1617.2	1299.6
60°	1959.7	1972.0	2050.4	2153.6	2219.6	2215.5	2190.7	2079.3	1877.2	1584.2	1274.8
62.5°	1881.3	1901.9	1984.4	2062.8	2137.1	2149.4	2116.4	2017.4	1807.0	1534.7	1229.4
65°	1732.8	1761.6	1864.8	1951.4	2009.2	2033.9	1992.7	1901.9	1712.1	1439.8	1134.5
67.5°	1567.7	1588.4	1675.0	1798.8	1831.8	1856.5	1835.9	1741.0	1580.1	1287.2	1027.3
70°	1378.0	1411.0	1468.7	1592.5	1629.6	1654.4	1654.4	1559.5	1406.8	1130.4	899.4
72.5°	1155.2	1192.3	1262.4	1353.2	1402.7	1419.2	1415.1	1336.7	1200.6	957.1	759.1
75°	911.8	940.6	1023.2	1089.2	1142.8	1155.2	1151.0	1085.0	961.3	771.5	602.3
77.5°	672.5	701.4	763.2	812.7	862.3	854.0	854.0	804.5	726.1	573.5	457.9
80°	441.4	466.2	519.8	536.3	590.0	585.8	585.8	548.7	495.1	383.7	305.3
82.5°	243.4	264.0	301.2	317.7	350.7	342.4	346.6	321.8	288.8	214.5	173.3
85°	86.6	103.1	123.8	136.1	152.6	152.6	152.6	132.0	123.8	82.5	70.1
87.5°	4.1	8.3	16.5	16.5	24.8	24.8	24.8	16.5	16.5	4.1	4.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P832621
 CATALOG NUMBER: TTN-D2-735-U-DL-CG

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	441.4	441.4	441.4	441.4	441.4	441.4	441.4	441.4	441.4	441.4	441.4
2.5°	437.3	433.2	429.1	420.8	416.7	412.6	408.4	404.3	404.3	404.3	404.3
5°	441.4	437.3	424.9	412.6	400.2	387.8	379.6	375.4	371.3	367.2	367.2
7.5°	441.4	433.2	416.7	400.2	387.8	371.3	358.9	346.6	338.3	334.2	334.2
10°	445.6	433.2	412.6	396.1	375.4	354.8	338.3	321.8	313.5	305.3	305.3
12.5°	453.8	441.4	412.6	391.9	367.2	342.4	321.8	305.3	292.9	284.7	284.7
15°	470.3	453.8	420.8	391.9	363.1	334.2	313.5	292.9	280.5	272.3	272.3
17.5°	495.1	474.4	433.2	391.9	358.9	330.0	305.3	284.7	268.2	259.9	259.9
20°	524.0	499.2	449.7	400.2	358.9	325.9	301.2	276.4	259.9	251.7	251.7
22.5°	565.2	528.1	470.3	412.6	367.2	330.0	297.0	272.3	255.8	247.5	247.5
25°	610.6	569.3	495.1	429.1	375.4	330.0	297.0	272.3	255.8	247.5	243.4
27.5°	660.1	614.7	524.0	445.6	383.7	338.3	301.2	272.3	255.8	247.5	247.5
30°	705.5	651.8	552.8	466.2	396.1	342.4	305.3	276.4	255.8	247.5	247.5
32.5°	755.0	693.1	581.7	486.8	408.4	350.7	309.4	280.5	259.9	251.7	247.5
35°	804.5	734.4	610.6	503.3	420.8	358.9	313.5	284.7	264.0	255.8	255.8
37.5°	858.1	779.7	639.5	524.0	433.2	367.2	321.8	288.8	268.2	259.9	259.9
40°	915.9	825.1	668.4	540.5	445.6	375.4	330.0	297.0	276.4	268.2	268.2
42.5°	973.6	874.6	701.4	561.1	457.9	383.7	334.2	305.3	284.7	276.4	276.4
45°	1031.4	915.9	730.2	581.7	470.3	396.1	346.6	313.5	292.9	284.7	284.7
47.5°	1085.0	961.3	755.0	594.1	482.7	404.3	350.7	321.8	301.2	297.0	292.9
50°	1122.2	990.1	771.5	606.5	486.8	408.4	358.9	325.9	309.4	301.2	301.2
52.5°	1151.0	1019.0	783.9	614.7	490.9	412.6	363.1	334.2	317.7	309.4	305.3
55°	1167.5	1023.2	783.9	606.5	486.8	412.6	363.1	334.2	317.7	309.4	309.4
57.5°	1151.0	1002.5	767.4	590.0	474.4	400.2	350.7	325.9	309.4	305.3	301.2
60°	1118.0	969.5	734.4	565.2	453.8	379.6	334.2	313.5	301.2	297.0	292.9
62.5°	1072.7	928.3	701.4	532.2	424.9	354.8	321.8	297.0	288.8	284.7	280.5
65°	981.9	849.9	647.7	490.9	387.8	325.9	292.9	276.4	268.2	259.9	255.8
67.5°	882.9	763.2	573.5	441.4	342.4	292.9	264.0	247.5	235.2	235.2	231.0
70°	775.6	672.5	495.1	375.4	297.0	255.8	226.9	214.5	206.3	206.3	202.2
72.5°	647.7	565.2	412.6	305.3	243.4	210.4	189.8	177.4	173.3	173.3	169.2
75°	519.8	445.6	325.9	239.3	189.8	165.0	148.5	140.3	136.1	136.1	132.0
77.5°	383.7	325.9	235.2	173.3	136.1	119.6	107.3	103.1	99.0	99.0	94.9
80°	255.8	214.5	152.6	111.4	82.5	74.3	66.0	66.0	61.9	66.0	61.9
82.5°	140.3	115.5	82.5	57.8	41.3	37.1	33.0	33.0	37.1	37.1	33.0
85°	53.6	41.3	28.9	16.5	12.4	12.4	12.4	12.4	12.4	12.4	8.3
87.5°	4.1	4.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)