

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P833528

Luminaire Tested: **TTN-D2-735-U-DL-UPL2**

Issue Date: 5/15/2024

Test Information

Test Method: LM-79-08
Report Number: P833528
REPORT IS FROM IESNA LM-79-08 TEST DATA - UPLIGHT (G3-2308-121-4) AND
Test Lab: INNOVATION CENTER
Issue Date: 5/15/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: TTN-D2-735-U-DL-UPL2
Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE WITH UPLIGHT
3500K, 70 CRI LEDS AND DRIVE LANE DISTRIBUTION
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5294.8 lumens
Efficiency: N/A
Efficacy: 112.7 lumens/watt
Luminous Opening: Vertical Cylinder (Dia: 0.71' x H: 0.1')
IES Classification: Type IV - Short
BUG Rating: B1 - U4 - G2


Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P833528
 CATALOG NUMBER: TTN-D2-735-U-DL-UPL2

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

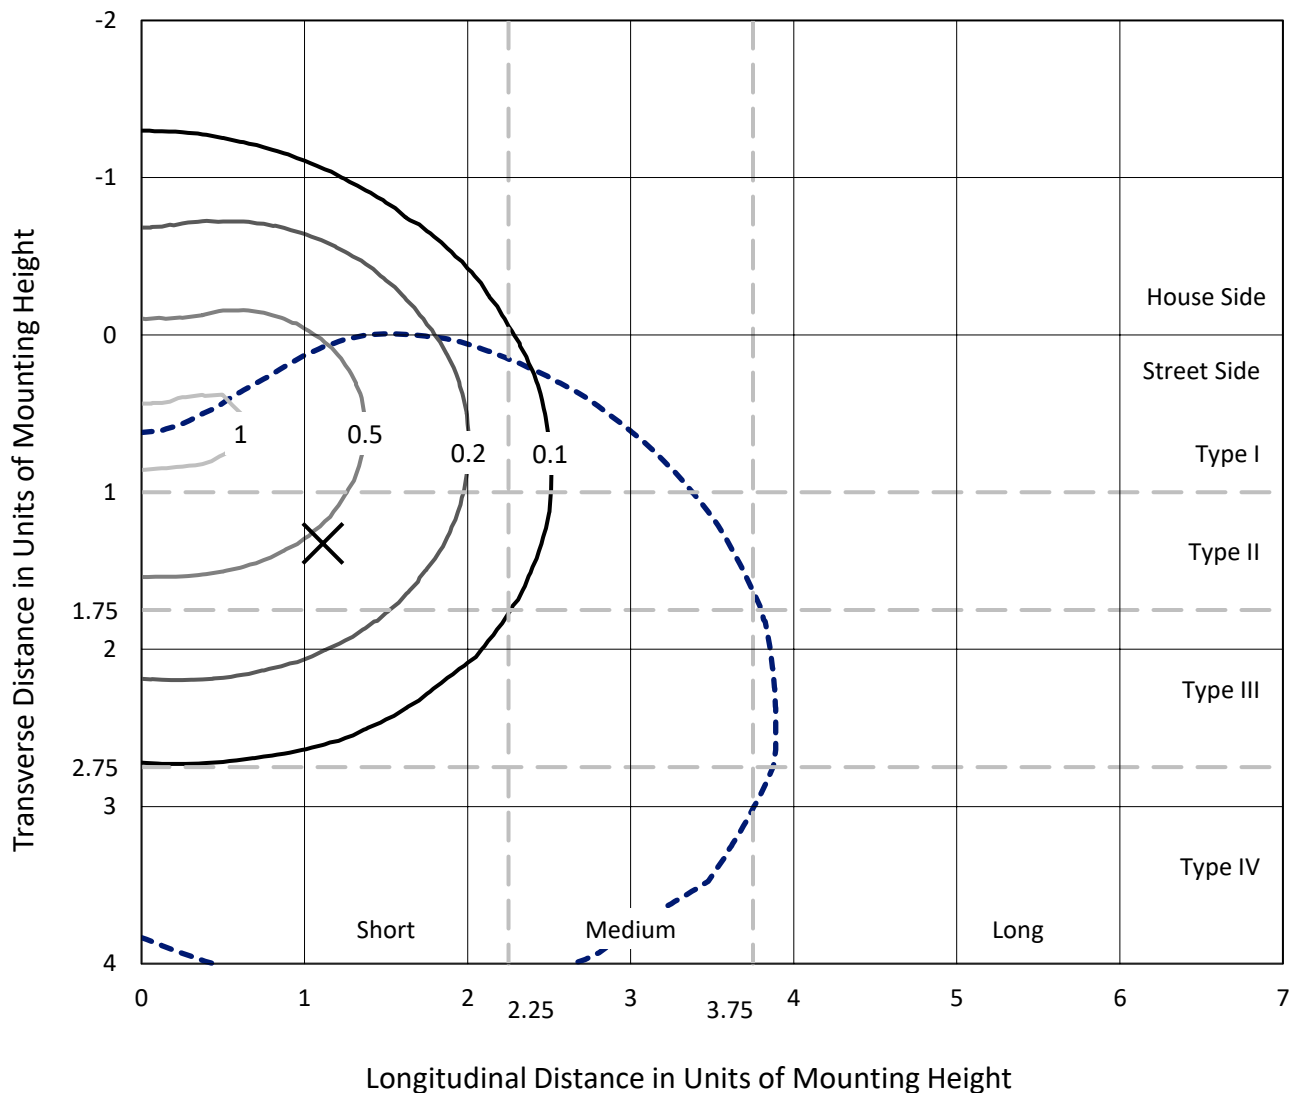

Based on 25 foot mounting height. Maximum calculated value = 1.1 fc
 Type IV - Short - N/A

REPORT NUMBER: P833528
CATALOG NUMBER: TTN-D2-735-U-DL-UPL2

Luminous Intensity Polar Plot

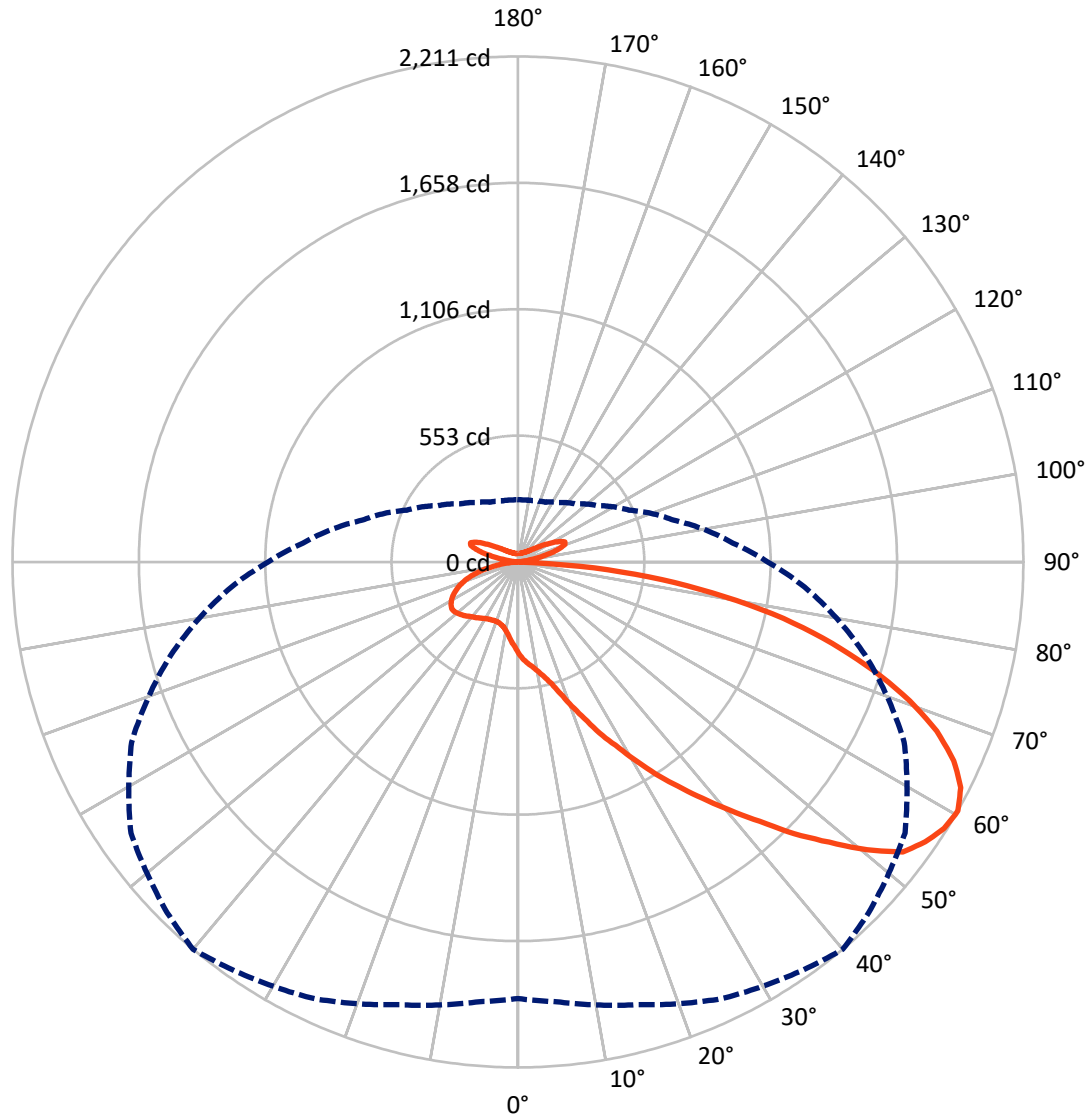

— Vertical Plane Through 40-Deg Lateral - - - Horizontal Cone Through 60-Deg Vertical

REPORT NUMBER: P833528
 CATALOG NUMBER: TTN-D2-735-U-DL-UPL2


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1012.1	271.5	1283.6
	% Fixture	19.1	5.1	24.2
Street Side	Lumens	3739.6	271.5	4011.2
	% Fixture	70.6	5.1	75.8
Total	Lumens	4751.8	543.0	5294.8
	% Fixture	89.7	10.3	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.7	0.7
10°-20°	120.4	2.3
20°-30°	254.4	4.8
30°-40°	465.0	8.8
40°-50°	755.6	14.3
50°-60°	1050.2	19.8
60°-70°	1088.7	20.6
70°-80°	780.1	14.7
80°-90°	199.7	3.8
90°-100°	12.1	0.2
100°-110°	123.2	2.3
110°-120°	180.1	3.4
120°-130°	104.5	2.0
130°-140°	55.4	1.0
140°-150°	32.9	0.6
150°-160°	20.2	0.4
160°-170°	11.0	0.2
170°-180°	3.6	0.1
0°-90°	4751.8	89.7
0°-180°	5294.8	100.0

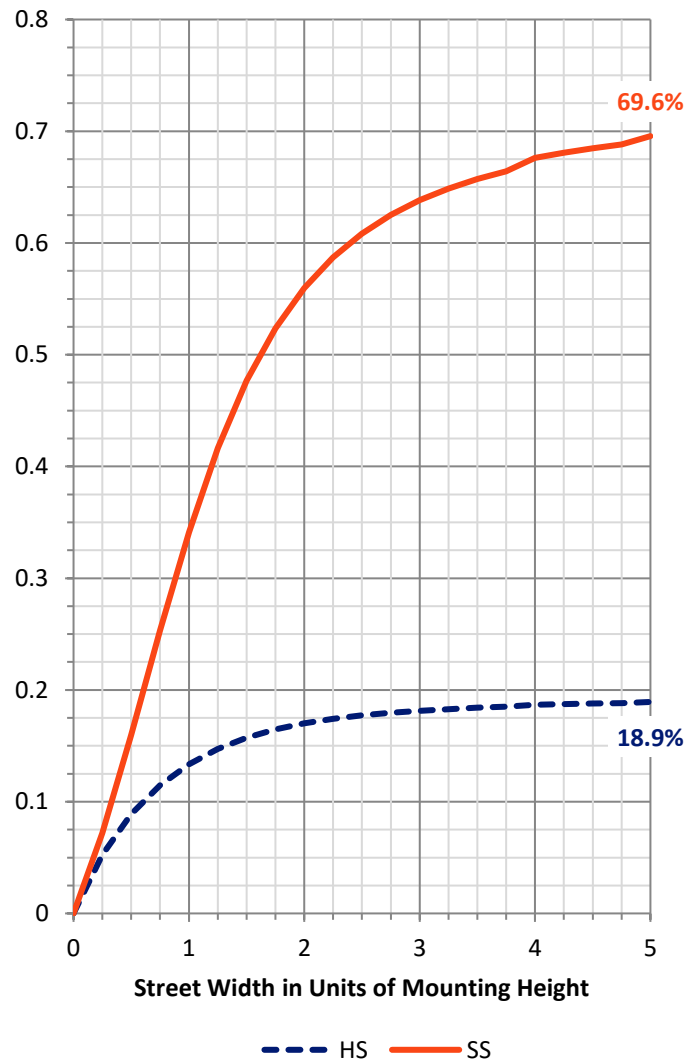

REPORT NUMBER: P833528


CATALOG NUMBER: TTN-D2-735-U-DL-UPL2

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	278.0	5.3			
FM (30°-60°)	1774.0	33.5			
FH (60°-80°)	1521.5	28.7			G1/1800
FVH (80°-90°)	166.1	3.1			G2/225
BL (0°-30°)	134.6	2.5	B1/500		
BM (30°-60°)	496.7	9.4	B1/1000		
BH (60°-80°)	347.3	6.6	B1/500		G1/500
BVH (80°-90°)	33.6	0.6			G1/100
UL (90°-100°)	12.1	0.2		U2/50	
UH (100°-180°)	530.9	10.0		U4/1000	

BUG Rating: B1-U4-G2

Type IV Short

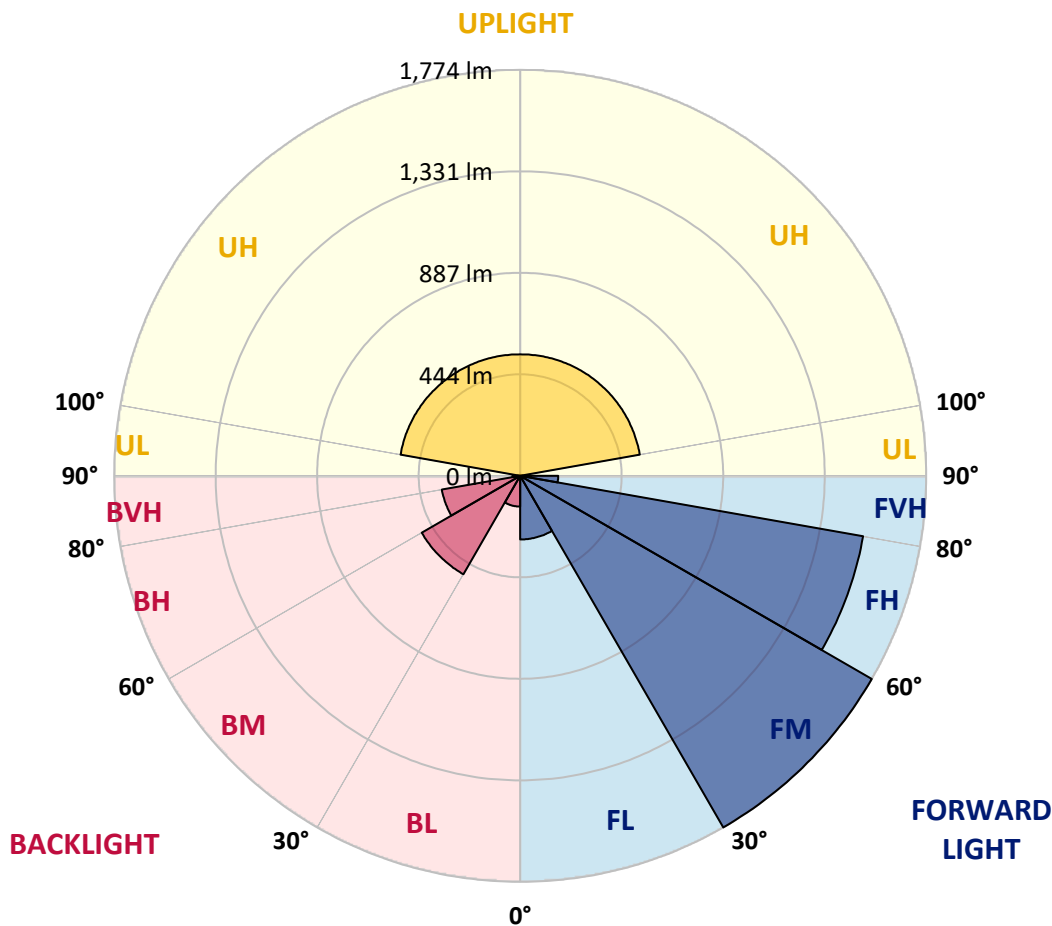



REPORT NUMBER: P833528

CATALOG NUMBER: TTN-D2-735-U-DL-UPL2

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	40°	45°	55°	65°	75°	85°
0°	400.1	400.1	400.1	400.1	400.1	400.1	400.1	400.1	400.1	400.1	400.1
2.5°	429.0	429.0	429.0	429.0	424.9	424.9	420.8	416.6	412.5	408.4	400.1
5°	466.1	466.1	462.0	457.9	449.6	445.5	441.4	433.1	424.9	416.6	404.3
7.5°	482.6	482.6	482.6	478.5	466.1	462.0	453.8	441.4	429.0	416.6	400.1
10°	511.5	511.5	507.4	503.3	490.9	486.8	478.5	462.0	441.4	420.8	400.1
12.5°	548.6	544.5	540.4	536.3	523.9	515.6	503.3	486.8	462.0	437.3	412.5
15°	594.0	585.8	585.8	577.5	565.1	552.8	544.5	519.8	495.0	462.0	429.0
17.5°	643.5	639.4	635.3	627.0	614.6	606.4	594.0	565.1	532.1	490.9	453.8
20°	705.4	697.1	701.3	688.9	676.5	672.4	651.8	618.8	577.5	532.1	486.8
22.5°	779.7	771.4	771.4	759.0	750.8	742.5	721.9	684.8	631.1	581.6	523.9
25°	862.2	853.9	853.9	845.7	837.4	829.2	804.4	763.2	701.3	639.4	573.4
27.5°	952.9	944.7	944.7	940.5	919.9	907.5	886.9	841.5	779.7	701.3	622.9
30°	1047.8	1039.5	1047.8	1039.5	1027.2	1002.4	977.7	928.2	858.0	771.4	676.5
32.5°	1122.0	1122.0	1126.2	1134.4	1126.2	1105.5	1076.7	1035.4	940.5	833.3	726.0
35°	1208.7	1208.7	1216.9	1229.3	1225.2	1204.5	1175.7	1130.3	1031.3	903.4	779.7
37.5°	1303.5	1303.5	1311.8	1332.4	1324.2	1311.8	1291.2	1233.4	1122.0	973.5	837.4
40°	1406.7	1402.5	1410.8	1439.7	1443.8	1427.3	1402.5	1344.8	1216.9	1064.3	899.3
42.5°	1509.8	1505.7	1522.2	1551.1	1555.2	1551.1	1526.3	1460.3	1315.9	1155.0	961.2
45°	1612.9	1612.9	1637.7	1683.1	1703.7	1695.4	1674.8	1592.3	1439.7	1249.9	1043.7
47.5°	1720.2	1720.2	1753.2	1810.9	1835.7	1831.6	1823.3	1724.3	1559.3	1348.9	1113.8
50°	1802.7	1802.7	1856.3	1922.3	1963.6	1980.1	1938.8	1848.1	1662.4	1435.6	1171.5
52.5°	1885.2	1885.2	1938.8	2041.9	2083.2	2107.9	2054.3	1959.4	1777.9	1513.9	1225.2
55°	1926.4	1934.7	2008.9	2107.9	2174.0	2161.6	2182.2	2054.3	1852.2	1571.7	1258.2
57.5°	1930.6	1942.9	2025.4	2128.6	2202.8	2198.7	2202.8	2087.3	1881.1	1584.1	1262.3
60°	1909.9	1930.6	2004.8	2107.9	2178.1	2211.1	2169.8	2066.7	1864.6	1571.7	1258.2
62.5°	1860.4	1901.7	1980.1	2058.4	2161.6	2174.0	2140.9	2054.3	1819.2	1559.3	1237.5
65°	1749.1	1794.4	1905.8	1996.6	2079.1	2095.6	2058.4	1984.2	1773.8	1501.6	1171.5
67.5°	1637.7	1666.6	1761.4	1901.7	1959.4	1975.9	1963.6	1876.9	1695.4	1386.0	1093.2
70°	1509.8	1546.9	1621.2	1765.6	1823.3	1819.2	1856.3	1757.3	1575.8	1287.0	1010.7
72.5°	1336.5	1390.2	1464.4	1584.1	1654.2	1629.4	1687.2	1604.7	1419.0	1163.3	899.3
75°	1134.4	1179.8	1274.7	1369.5	1447.9	1419.0	1464.4	1406.7	1237.5	1014.8	771.4
77.5°	907.5	961.2	1047.8	1134.4	1188.0	1188.0	1208.7	1159.2	1027.2	833.3	631.1
80°	672.4	721.9	800.3	862.2	911.7	915.8	936.4	911.7	792.0	647.6	482.6
82.5°	445.5	470.3	540.4	589.9	639.4	635.3	668.3	651.8	552.8	445.5	321.8
85°	189.8	206.3	264.0	305.3	350.6	334.1	379.5	375.4	297.0	214.5	144.4
87.5°	8.3	12.4	12.4	8.3	12.4	4.1	12.4	16.5	12.4	8.3	8.3
90°	4.6	4.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	4.6
92.5°	4.6	4.6	4.6	6.5	7.4	7.0	6.5	7.4	5.6	5.6	4.6
95°	5.6	5.6	6.5	8.4	10.2	10.6	11.1	11.1	6.5	6.5	5.6
97.5°	7.4	8.4	8.4	10.2	16.7	23.7	30.7	18.6	9.3	9.3	8.4
100°	12.1	13.0	13.0	23.2	49.2	57.6	66.0	47.4	24.2	17.7	13.0
102.5°	39.0	40.9	50.2	75.3	111.5	106.4	101.3	85.5	80.8	55.7	44.6
105°	99.4	98.5	105.9	125.4	156.1	154.7	153.3	141.2	128.2	110.6	102.2
107.5°	131.0	131.0	137.5	154.2	177.4	192.3	207.2	210.0	166.3	145.9	136.6
110°	147.7	147.7	153.3	167.2	197.9	218.8	239.7	237.8	205.3	180.2	168.2



REPORT NUMBER: P833528
 CATALOG NUMBER: TTN-D2-735-U-DL-UPL2

CANDELA DISTRIBUTION (continued):

	0°	5°	15°	25°	35°	40°	45°	55°	65°	75°	85°
112.5°	151.4	152.4	159.8	181.2	214.6	223.9	233.2	224.8	211.8	200.7	191.4
115°	157.0	157.0	165.4	185.8	204.4	208.1	211.8	202.5	192.3	184.9	181.2
117.5°	155.1	157.9	159.8	170.9	183.0	185.8	188.6	183.9	170.0	164.4	162.6
120°	144.0	144.0	145.9	151.4	157.9	159.3	160.7	158.9	149.6	144.9	144.0
122.5°	128.2	129.1	128.2	131.0	135.6	137.0	138.4	136.6	129.1	127.3	127.3
125°	112.4	112.4	111.5	113.3	116.1	115.6	115.2	116.1	112.4	111.5	111.5
127.5°	101.3	100.3	98.5	99.4	100.3	100.3	100.3	101.3	97.5	98.5	99.4
130°	90.1	90.1	88.3	88.3	88.3	87.4	86.4	88.3	86.4	87.3	88.3
132.5°	79.9	79.9	77.1	76.2	76.2	76.2	76.2	77.1	76.2	78.0	79.9
135°	71.5	71.5	68.7	69.7	69.7	69.2	68.7	69.7	68.7	70.6	71.5
137.5°	65.0	65.0	63.2	63.2	63.2	62.7	62.2	63.2	63.2	64.1	66.0
140°	59.5	59.5	58.5	58.5	57.6	58.0	58.5	58.5	58.5	59.5	60.4
142.5°	56.7	55.7	54.8	53.9	54.8	54.8	54.8	54.8	53.9	54.8	56.7
145°	52.0	52.0	51.1	51.1	51.1	51.6	52.0	51.1	51.1	52.0	52.0
147.5°	49.2	49.2	48.3	49.2	49.2	49.2	49.2	49.2	48.3	49.2	49.2
150°	48.3	47.4	46.5	47.4	47.4	47.0	46.5	46.5	46.5	46.5	47.4
152.5°	45.5	45.5	44.6	45.5	44.6	44.6	44.6	44.6	44.6	44.6	45.5
155°	43.7	43.7	42.7	43.7	43.7	43.7	43.7	43.7	43.7	43.7	43.7
157.5°	41.8	42.7	41.8	41.8	41.8	41.8	41.8	41.8	41.8	41.8	42.7
160°	40.9	40.9	40.9	40.9	39.9	39.9	39.9	39.9	40.9	40.9	40.9
162.5°	39.9	39.9	39.9	39.9	39.0	39.0	39.0	39.0	39.0	39.9	39.9
165°	39.9	39.0	39.0	39.0	38.1	38.1	38.1	38.1	38.1	39.0	39.9
167.5°	38.1	38.1	38.1	38.1	38.1	37.7	37.2	37.2	38.1	38.1	38.1
170°	38.1	38.1	37.2	37.2	37.2	37.2	37.2	37.2	37.2	37.2	37.2
172.5°	38.1	38.1	38.1	38.1	37.2	37.2	37.2	37.2	37.2	37.2	38.1
175°	38.1	38.1	38.1	38.1	37.2	37.2	37.2	37.2	38.1	38.1	38.1
177.5°	38.1	38.1	38.1	38.1	37.2	37.7	38.1	38.1	38.1	38.1	38.1
180°	38.1	38.1	38.1	38.1	38.1	38.1	38.1	38.1	38.1	38.1	38.1



REPORT NUMBER: P833528

CATALOG NUMBER: TTN-D2-735-U-DL-UPL2

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	400.1	400.1	400.1	400.1	400.1	400.1	400.1	400.1	400.1	400.1	400.1
2.5°	400.1	396.0	387.8	383.6	379.5	371.3	371.3	367.1	367.1	367.1	363.0
5°	400.1	391.9	383.6	371.3	363.0	354.8	346.5	338.3	334.1	334.1	330.0
7.5°	391.9	383.6	371.3	358.9	346.5	330.0	321.8	305.3	301.1	297.0	297.0
10°	391.9	383.6	363.0	346.5	330.0	313.5	301.1	284.6	272.3	268.1	268.1
12.5°	396.0	383.6	363.0	342.4	321.8	301.1	284.6	268.1	255.8	247.5	247.5
15°	412.5	396.0	371.3	342.4	317.6	292.9	276.4	255.8	243.4	235.1	235.1
17.5°	433.1	416.6	379.5	346.5	317.6	288.8	268.1	247.5	235.1	226.9	222.8
20°	462.0	437.3	396.0	350.6	317.6	288.8	264.0	243.4	226.9	218.6	218.6
22.5°	495.0	466.1	412.5	358.9	321.8	288.8	264.0	239.3	222.8	214.5	214.5
25°	536.3	499.1	437.3	375.4	330.0	292.9	264.0	239.3	222.8	214.5	214.5
27.5°	581.6	540.4	462.0	391.9	338.3	297.0	264.0	239.3	222.8	214.5	214.5
30°	622.9	577.5	486.8	408.4	350.6	301.1	268.1	243.4	226.9	218.6	214.5
32.5°	668.3	610.5	511.5	424.9	358.9	309.4	272.3	247.5	226.9	218.6	218.6
35°	713.6	651.8	536.3	445.5	371.3	317.6	276.4	251.6	231.0	222.8	222.8
37.5°	763.2	697.1	565.1	462.0	383.6	325.9	284.6	255.8	235.1	226.9	226.9
40°	820.9	742.5	594.0	482.6	396.0	334.1	288.8	264.0	243.4	235.1	235.1
42.5°	874.5	783.8	622.9	499.1	408.4	342.4	297.0	268.1	251.6	243.4	243.4
45°	928.2	833.3	651.8	519.8	420.8	354.8	305.3	280.5	259.9	251.6	251.6
47.5°	990.0	878.7	684.8	536.3	433.1	363.0	313.5	288.8	268.1	264.0	259.9
50°	1039.5	911.7	705.4	552.8	441.4	371.3	321.8	292.9	276.4	268.1	268.1
52.5°	1084.9	944.7	721.9	561.0	445.5	375.4	330.0	301.1	284.6	276.4	276.4
55°	1109.7	957.0	734.3	561.0	449.6	379.5	330.0	301.1	284.6	280.5	276.4
57.5°	1109.7	957.0	726.0	552.8	441.4	371.3	325.9	297.0	284.6	276.4	276.4
60°	1093.2	944.7	705.4	536.3	429.0	358.9	317.6	288.8	276.4	272.3	272.3
62.5°	1068.4	924.0	688.9	515.6	412.5	342.4	305.3	276.4	268.1	268.1	264.0
65°	1002.4	862.2	651.8	486.8	387.8	321.8	288.8	264.0	255.8	251.6	247.5
67.5°	932.3	804.4	594.0	453.8	354.8	301.1	268.1	247.5	235.1	235.1	231.0
70°	862.2	742.5	540.4	408.4	317.6	276.4	243.4	222.8	214.5	214.5	214.5
72.5°	767.3	664.1	478.5	358.9	280.5	243.4	218.6	198.0	193.9	193.9	189.8
75°	655.9	565.1	404.3	305.3	235.1	206.3	185.6	165.0	165.0	165.0	165.0
77.5°	536.3	457.9	321.8	243.4	185.6	165.0	152.6	136.1	136.1	136.1	136.1
80°	404.3	338.3	235.1	177.4	136.1	119.6	111.4	103.1	107.3	107.3	103.1
82.5°	264.0	222.8	148.5	111.4	86.6	78.4	78.4	70.1	74.3	74.3	74.3
85°	115.5	99.0	61.9	49.5	41.3	41.3	41.3	37.1	41.3	41.3	41.3
87.5°	8.3	8.3	8.3	8.3	8.3	8.3	8.3	0.0	4.1	8.3	4.1
90°	4.6	4.6	5.6	5.6	5.6	5.6	5.6	5.6	5.6	4.6	4.6
92.5°	4.6	4.6	5.6	5.6	7.4	6.5	7.4	6.5	4.6	4.6	4.6
95°	5.6	5.6	6.5	6.5	11.1	11.1	10.2	8.4	6.5	5.6	5.6
97.5°	7.4	8.4	9.3	9.3	18.6	30.7	16.7	10.2	8.4	8.4	7.4
100°	13.0	13.0	17.7	24.2	47.4	66.0	49.2	23.2	13.0	13.0	12.1
102.5°	42.7	44.6	55.7	80.8	85.5	101.3	111.5	75.3	50.2	40.9	39.0
105°	102.2	102.2	110.6	128.2	141.2	153.3	156.1	125.4	105.9	98.5	99.4
107.5°	135.6	136.6	145.9	166.3	210.0	207.2	177.4	154.2	137.5	131.0	131.0
110°	166.3	168.2	180.2	205.3	237.8	239.7	197.9	167.2	153.3	147.7	147.7



REPORT NUMBER: P833528
 CATALOG NUMBER: TTN-D2-735-U-DL-UPL2

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
112.5°	189.5	191.4	200.7	211.8	224.8	233.2	214.6	181.2	159.8	152.4	151.4
115°	183.0	181.2	184.9	192.3	202.5	211.8	204.4	185.8	165.4	157.0	157.0
117.5°	159.8	162.6	164.4	170.0	183.9	188.6	183.0	170.9	159.8	157.9	155.1
120°	142.1	144.0	144.9	149.6	158.9	160.7	157.9	151.4	145.9	144.0	144.0
122.5°	125.4	127.3	127.3	129.1	136.6	138.4	135.6	131.0	128.2	129.1	128.2
125°	110.6	111.5	111.5	112.4	116.1	115.2	116.1	113.3	111.5	112.4	112.4
127.5°	98.5	99.4	98.5	97.5	101.3	100.3	100.3	99.4	98.5	100.3	101.3
130°	89.2	88.3	87.3	86.4	88.3	86.4	88.3	88.3	88.3	90.1	90.1
132.5°	79.9	79.9	78.0	76.2	77.1	76.2	76.2	76.2	77.1	79.9	79.9
135°	71.5	71.5	70.6	68.7	69.7	68.7	69.7	69.7	68.7	71.5	71.5
137.5°	66.9	66.0	64.1	63.2	63.2	62.2	63.2	63.2	63.2	65.0	65.0
140°	60.4	60.4	59.5	58.5	58.5	58.5	57.6	58.5	58.5	59.5	59.5
142.5°	56.7	56.7	54.8	53.9	54.8	54.8	54.8	53.9	54.8	55.7	56.7
145°	53.0	52.0	52.0	51.1	51.1	52.0	51.1	51.1	51.1	52.0	52.0
147.5°	50.2	49.2	49.2	48.3	49.2	49.2	49.2	49.2	48.3	49.2	49.2
150°	47.4	47.4	46.5	46.5	46.5	46.5	47.4	47.4	46.5	47.4	48.3
152.5°	46.5	45.5	44.6	44.6	44.6	44.6	44.6	45.5	44.6	45.5	45.5
155°	43.7	43.7	43.7	43.7	43.7	43.7	43.7	43.7	42.7	43.7	43.7
157.5°	42.7	42.7	41.8	41.8	41.8	41.8	41.8	41.8	41.8	42.7	41.8
160°	41.8	40.9	40.9	40.9	39.9	39.9	39.9	40.9	40.9	40.9	40.9
162.5°	40.9	39.9	39.9	39.0	39.0	39.0	39.0	39.9	39.9	39.9	39.9
165°	39.0	39.9	39.0	38.1	38.1	38.1	38.1	39.0	39.0	39.0	39.9
167.5°	39.0	38.1	38.1	38.1	37.2	37.2	38.1	38.1	38.1	38.1	38.1
170°	38.1	37.2	37.2	37.2	37.2	37.2	37.2	37.2	37.2	38.1	38.1
172.5°	38.1	38.1	37.2	37.2	37.2	37.2	37.2	38.1	38.1	38.1	38.1
175°	37.2	38.1	38.1	38.1	37.2	37.2	37.2	38.1	38.1	38.1	38.1
177.5°	38.1	38.1	38.1	38.1	38.1	38.1	37.2	38.1	38.1	38.1	38.1
180°	38.1	38.1	38.1	38.1	38.1	38.1	38.1	38.1	38.1	38.1	38.1

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

MCGRAW EDISON

Report Number: SP1-2411-284-1

Test Date: 11/15/2024

Luminaire Tested: TTN-D0-735-U-WQ

Data in this report applies to TT and TTN families of products


Test Information

Test Method: LM-79-2019
 Report Number: SP1-2411-284-1
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 11/15/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: MCGRAW EDISON
 Catalog Number: **TTN-D0-735-U-WQ**
 Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE. 3500K, 70 CRI LEDS AND WIDE DISTRIBUTION

Spectral Parameters

CCT (K): 3405
 CIE u': 0.2365
 CIE v': 0.5180
 Duv: 0.0036
 CIE x: 0.4148
 CIE y: 0.4038
 CIE z: 0.1814
 Peak Wavelength (nm): 596
 Dominant Wavelength (nm): 579
 Purity: 45.70672
 Rf: 76.6
 Rg: 95.4

CRI (Ra):	73.9		
R1:	71.3	R9:	-18.0
R2:	80.3	R10:	53.1
R3:	87.8	R11:	68.6
R4:	73.2	R12:	42.6
R5:	69.8	R13:	72.5
R6:	71.8	R14:	92.7
R7:	82.8	R15:	64.3
R8:	54.1		

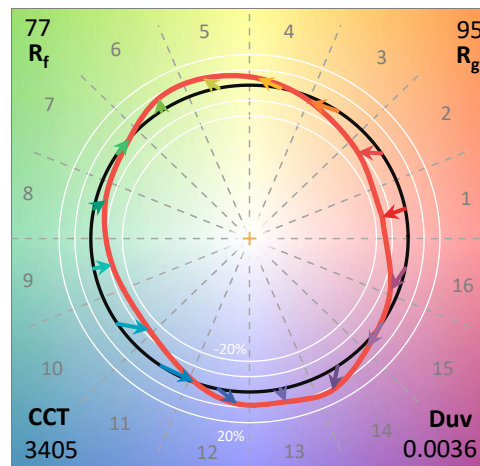

Test Conditions


Stabilization Time: 38M
 Operation Time: 1H 38M
 Sphere Temperature (°C): 24.9

REPORT NUMBER: SP1-2411-284-1


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/22/2024	10/22/2025
DC Power Source	IN0208	10/22/2024	10/22/2025
Sphere Thermometer	IN0085	10/22/2024	10/22/2025
Room Thermometer	IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2411-284-1

CIE 1931 Chromaticity Diagram

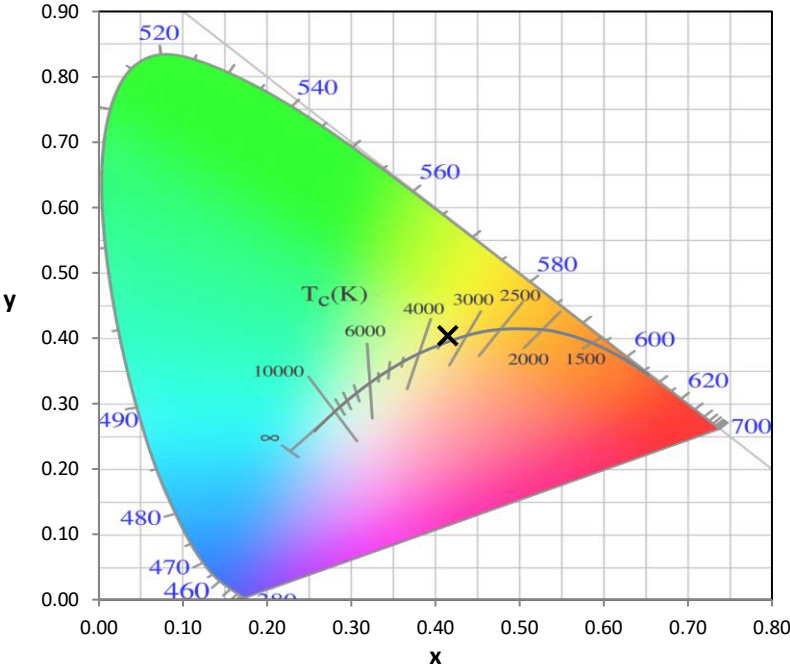


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

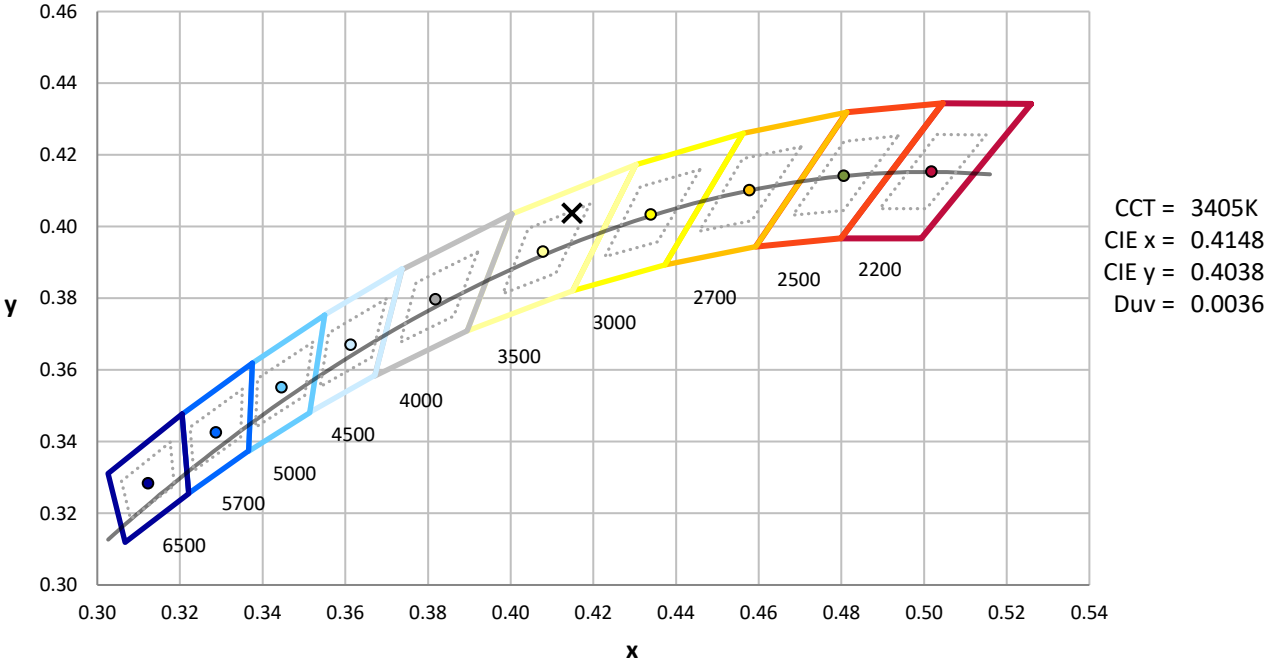

Point lies inside the ANSI 3500K 4-step quadrangle

REPORT NUMBER: SP1-2411-284-1

Photopic Flux vs. Wavelength

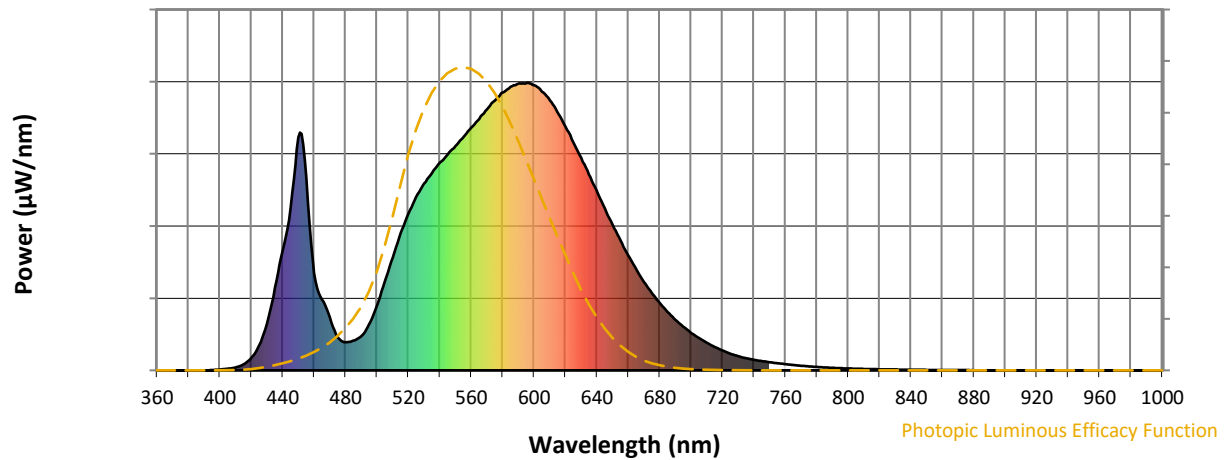


Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)
360	0	NR	490	119	NR	620	846	NR	750	28	NR	880	1	NR
365	0	NR	495	160	NR	625	793	NR	755	25	NR	885	0	NR
370	0	NR	500	225	NR	630	739	NR	760	22	NR	890	0	NR
375	0	NR	505	308	NR	635	681	NR	765	19	NR	895	0	NR
380	0	NR	510	392	NR	640	623	NR	770	16	NR	900	0	NR
385	0	NR	515	474	NR	645	563	NR	775	14	NR	905	0	NR
390	0	NR	520	545	NR	650	506	NR	780	12	NR	910	0	NR
395	1	NR	525	603	NR	655	451	NR	785	10	NR	915	0	NR
400	3	NR	530	649	NR	660	399	NR	790	9	NR	920	0	NR
405	5	NR	535	687	NR	665	352	NR	795	8	NR	925	0	NR
410	11	NR	540	721	NR	670	307	NR	800	6	NR	930	0	NR
415	21	NR	545	751	NR	675	268	NR	805	6	NR	935	0	NR
420	43	NR	550	779	NR	680	234	NR	810	5	NR	940	0	NR
425	88	NR	555	811	NR	685	203	NR	815	4	NR	945	0	NR
430	163	NR	560	843	NR	690	176	NR	820	4	NR	950	0	NR
435	288	NR	565	873	NR	695	152	NR	825	3	NR	955	0	NR
440	416	NR	570	907	NR	700	131	NR	830	3	NR	960	0	NR
445	566	NR	575	938	NR	705	112	NR	835	3	NR	965	0	NR
450	810	NR	580	965	NR	710	96	NR	840	2	NR	970	0	NR
455	669	NR	585	986	NR	715	81	NR	845	2	NR	975	0	NR
460	338	NR	590	997	NR	720	69	NR	850	2	NR	980	0	NR
465	246	NR	595	997	NR	725	58	NR	855	1	NR	985	0	NR
470	182	NR	600	991	NR	730	49	NR	860	1	NR	990	0	NR
475	115	NR	605	968	NR	735	42	NR	865	1	NR	995	0	NR
480	97	NR	610	939	NR	740	37	NR	870	1	NR	1000	0	NR
485	103	NR	615	896	NR	745	32	NR	875	1	NR			

REPORT NUMBER: SP1-2411-284-1

Scotopic Flux vs. Wavelength

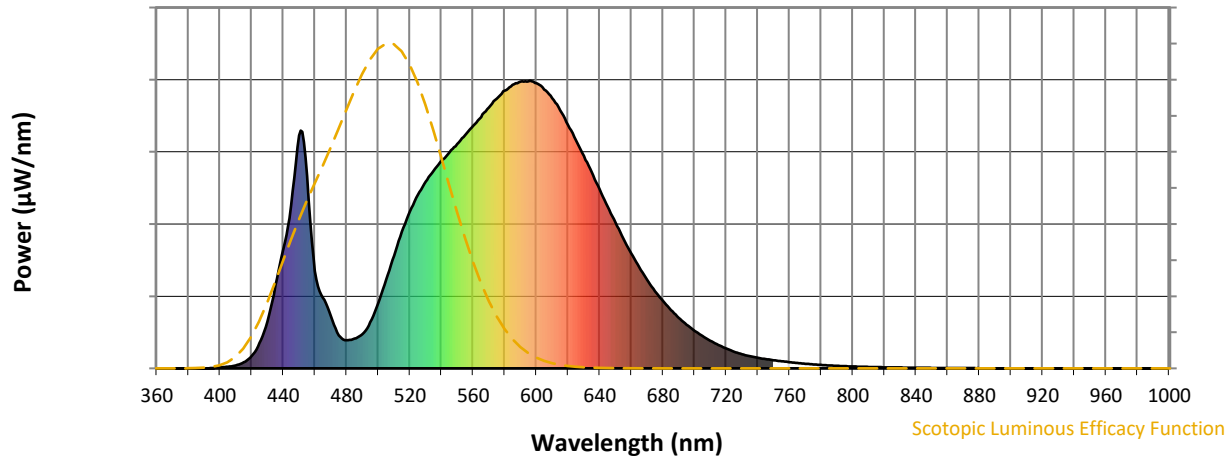


Scotopic Lumens: NR

S/P: 1.33

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	119	NR	620	846	NR	750	28	NR	880	1	NR
365	0	NR	495	160	NR	625	793	NR	755	25	NR	885	0	NR
370	0	NR	500	225	NR	630	739	NR	760	22	NR	890	0	NR
375	0	NR	505	308	NR	635	681	NR	765	19	NR	895	0	NR
380	0	NR	510	392	NR	640	623	NR	770	16	NR	900	0	NR
385	0	NR	515	474	NR	645	563	NR	775	14	NR	905	0	NR
390	0	NR	520	545	NR	650	506	NR	780	12	NR	910	0	NR
395	1	NR	525	603	NR	655	451	NR	785	10	NR	915	0	NR
400	3	NR	530	649	NR	660	399	NR	790	9	NR	920	0	NR
405	5	NR	535	687	NR	665	352	NR	795	8	NR	925	0	NR
410	11	NR	540	721	NR	670	307	NR	800	6	NR	930	0	NR
415	21	NR	545	751	NR	675	268	NR	805	6	NR	935	0	NR
420	43	NR	550	779	NR	680	234	NR	810	5	NR	940	0	NR
425	88	NR	555	811	NR	685	203	NR	815	4	NR	945	0	NR
430	163	NR	560	843	NR	690	176	NR	820	4	NR	950	0	NR
435	288	NR	565	873	NR	695	152	NR	825	3	NR	955	0	NR
440	416	NR	570	907	NR	700	131	NR	830	3	NR	960	0	NR
445	566	NR	575	938	NR	705	112	NR	835	3	NR	965	0	NR
450	810	NR	580	965	NR	710	96	NR	840	2	NR	970	0	NR
455	669	NR	585	986	NR	715	81	NR	845	2	NR	975	0	NR
460	338	NR	590	997	NR	720	69	NR	850	2	NR	980	0	NR
465	246	NR	595	997	NR	725	58	NR	855	1	NR	985	0	NR
470	182	NR	600	991	NR	730	49	NR	860	1	NR	990	0	NR
475	115	NR	605	968	NR	735	42	NR	865	1	NR	995	0	NR
480	97	NR	610	939	NR	740	37	NR	870	1	NR	1000	0	NR
485	103	NR	615	896	NR	745	32	NR	875	1	NR			

REPORT NUMBER: SP1-2411-284-1

Melanopic Flux vs. Wavelength

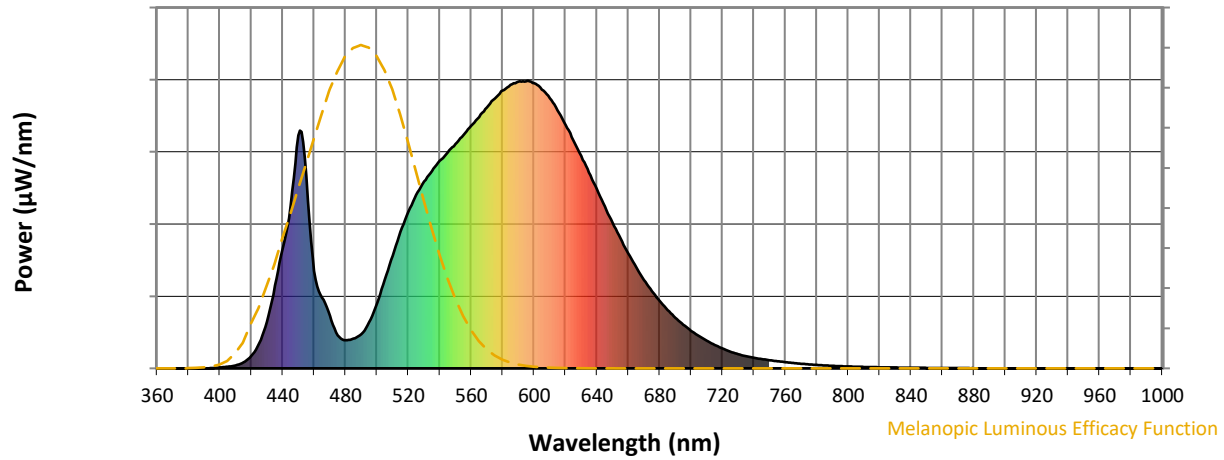


Melanopic Lumens: NR

M/P: 2.47





λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)
360	0	NR	490	119	NR	620	846	NR	750	28	NR	880	1	NR
365	0	NR	495	160	NR	625	793	NR	755	25	NR	885	0	NR
370	0	NR	500	225	NR	630	739	NR	760	22	NR	890	0	NR
375	0	NR	505	308	NR	635	681	NR	765	19	NR	895	0	NR
380	0	NR	510	392	NR	640	623	NR	770	16	NR	900	0	NR
385	0	NR	515	474	NR	645	563	NR	775	14	NR	905	0	NR
390	0	NR	520	545	NR	650	506	NR	780	12	NR	910	0	NR
395	1	NR	525	603	NR	655	451	NR	785	10	NR	915	0	NR
400	3	NR	530	649	NR	660	399	NR	790	9	NR	920	0	NR
405	5	NR	535	687	NR	665	352	NR	795	8	NR	925	0	NR
410	11	NR	540	721	NR	670	307	NR	800	6	NR	930	0	NR
415	21	NR	545	751	NR	675	268	NR	805	6	NR	935	0	NR
420	43	NR	550	779	NR	680	234	NR	810	5	NR	940	0	NR
425	88	NR	555	811	NR	685	203	NR	815	4	NR	945	0	NR
430	163	NR	560	843	NR	690	176	NR	820	4	NR	950	0	NR
435	288	NR	565	873	NR	695	152	NR	825	3	NR	955	0	NR
440	416	NR	570	907	NR	700	131	NR	830	3	NR	960	0	NR
445	566	NR	575	938	NR	705	112	NR	835	3	NR	965	0	NR
450	810	NR	580	965	NR	710	96	NR	840	2	NR	970	0	NR
455	669	NR	585	986	NR	715	81	NR	845	2	NR	975	0	NR
460	338	NR	590	997	NR	720	69	NR	850	2	NR	980	0	NR
465	246	NR	595	997	NR	725	58	NR	855	1	NR	985	0	NR
470	182	NR	600	991	NR	730	49	NR	860	1	NR	990	0	NR
475	115	NR	605	968	NR	735	42	NR	865	1	NR	995	0	NR
480	97	NR	610	939	NR	740	37	NR	870	1	NR	1000	0	NR
485	103	NR	615	896	NR	745	32	NR	875	1	NR			

Summary

$R_f = 76.6$
 $R_g = 95.4$
 $CIE R_a = 73.9$
 $R_9 = -18.0$

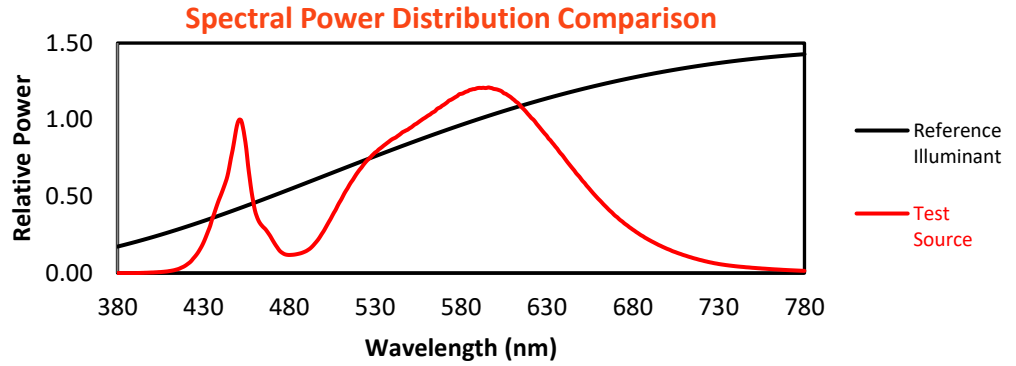


Color Vector Graphics

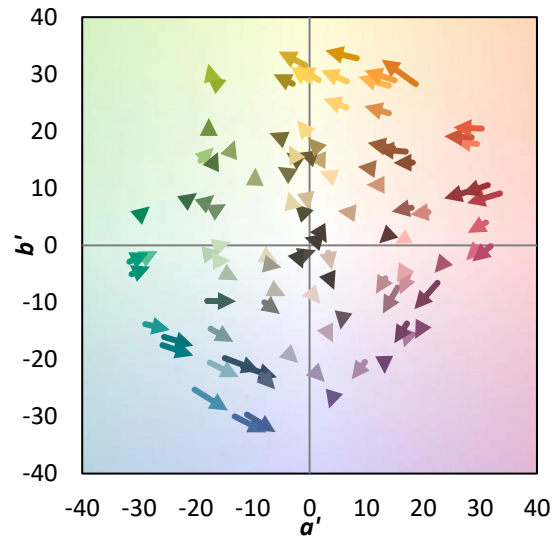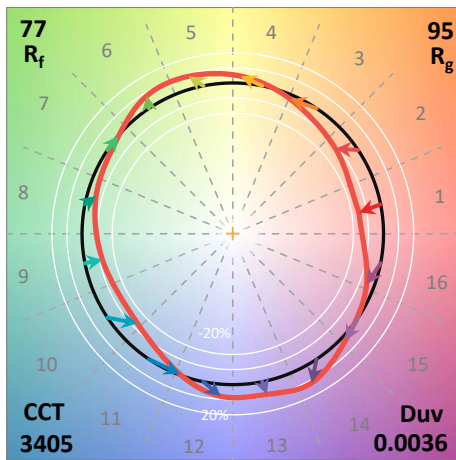
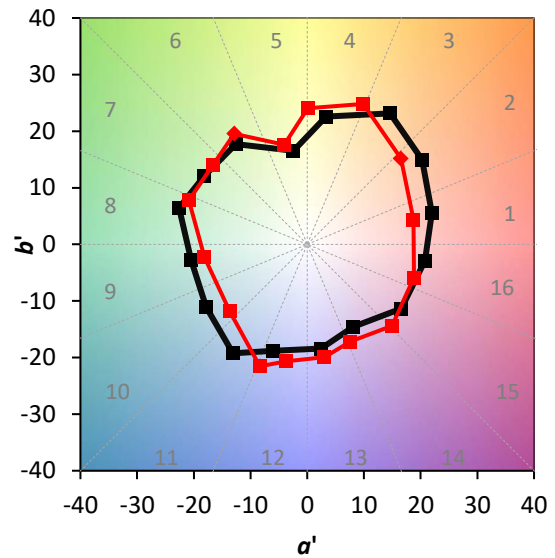
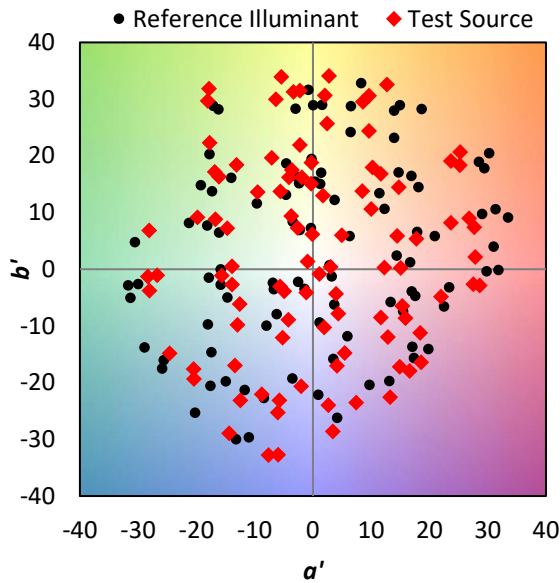


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 86	CES26 = 67	CES51 = 88	CES76 = 56
CES02 = 62	CES27 = 89	CES52 = 88	CES77 = 75
CES03 = 31	CES28 = 83	CES53 = 78	CES78 = 60
CES04 = 70	CES29 = 69	CES54 = 86	CES79 = 85
CES05 = 48	CES30 = 83	CES55 = 85	CES80 = 82
CES06 = 51	CES31 = 72	CES56 = 75	CES81 = 78
CES07 = 41	CES32 = 65	CES57 = 75	CES82 = 92
CES08 = 40	CES33 = 78	CES58 = 76	CES83 = 90
CES09 = 29	CES34 = 74	CES59 = 87	CES84 = 88
CES10 = 75	CES35 = 86	CES60 = 91	CES85 = 79
CES11 = 58	CES36 = 93	CES61 = 84	CES86 = 72
CES12 = 64	CES37 = 81	CES62 = 88	CES87 = 79
CES13 = 43	CES38 = 92	CES63 = 74	CES88 = 82
CES14 = 74	CES39 = 96	CES64 = 69	CES89 = 72
CES15 = 71	CES40 = 92	CES65 = 66	CES90 = 82
CES16 = 47	CES41 = 93	CES66 = 62	CES91 = 79
CES17 = 50	CES42 = 83	CES67 = 60	CES92 = 63
CES18 = 56	CES43 = 79	CES68 = 68	CES93 = 77
CES19 = 72	CES44 = 99	CES69 = 76	CES94 = 56
CES20 = 65	CES45 = 86	CES70 = 61	CES95 = 70
CES21 = 86	CES46 = 83	CES71 = 55	CES96 = 79
CES22 = 79	CES47 = 85	CES72 = 85	CES97 = 85
CES23 = 92	CES48 = 78	CES73 = 53	CES98 = 78
CES24 = 91	CES49 = 81	CES74 = 95	CES99 = 68
CES25 = 72	CES50 = 88	CES75 = 57	

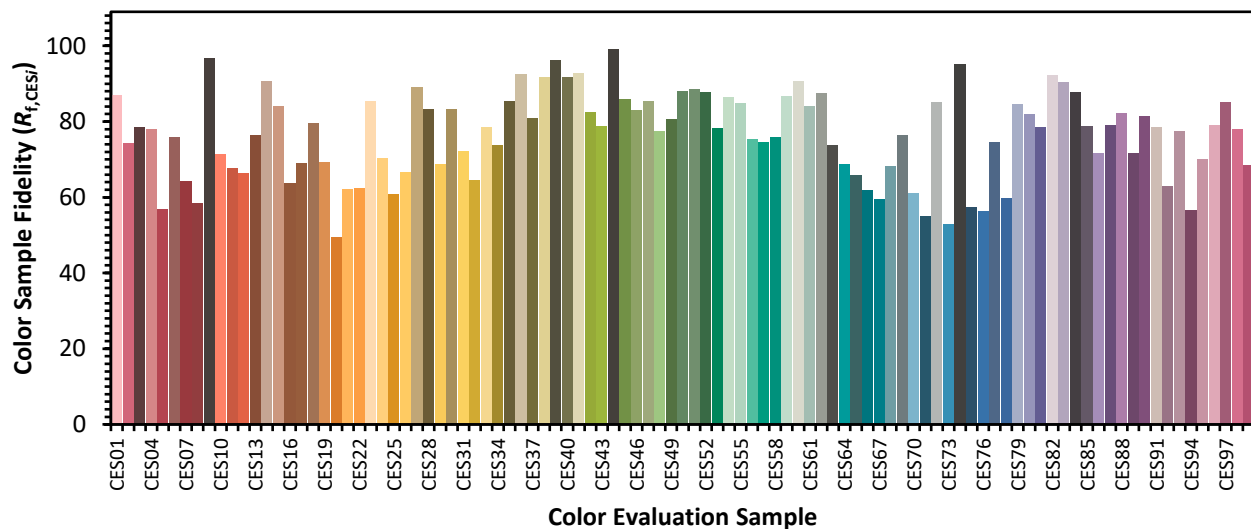

Color Rendition by Hue-Angle Bin

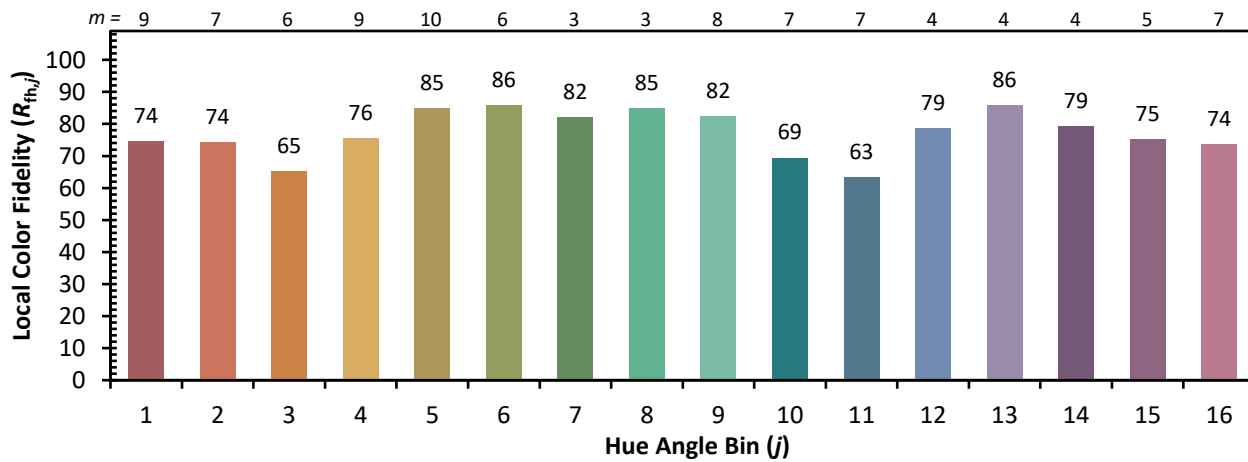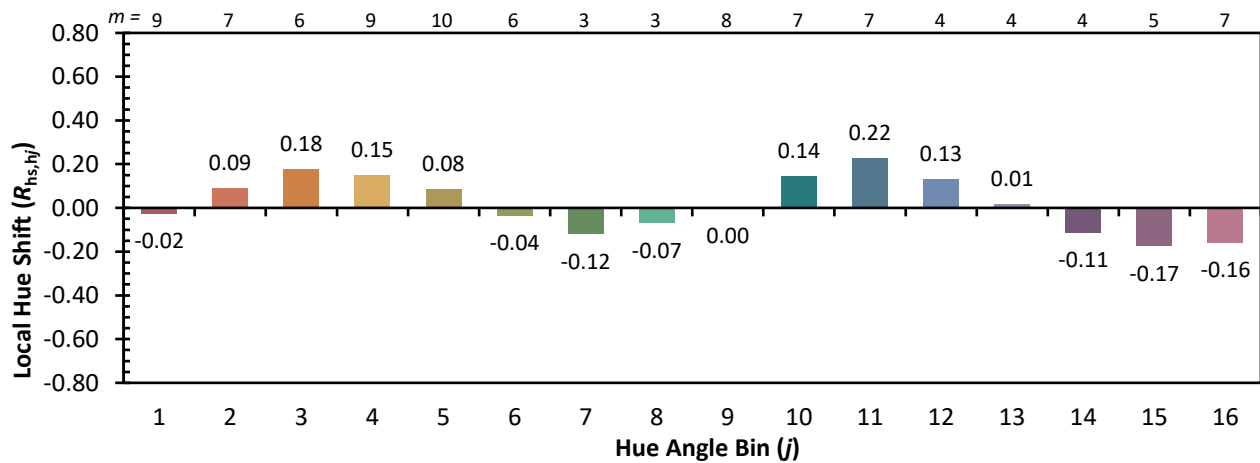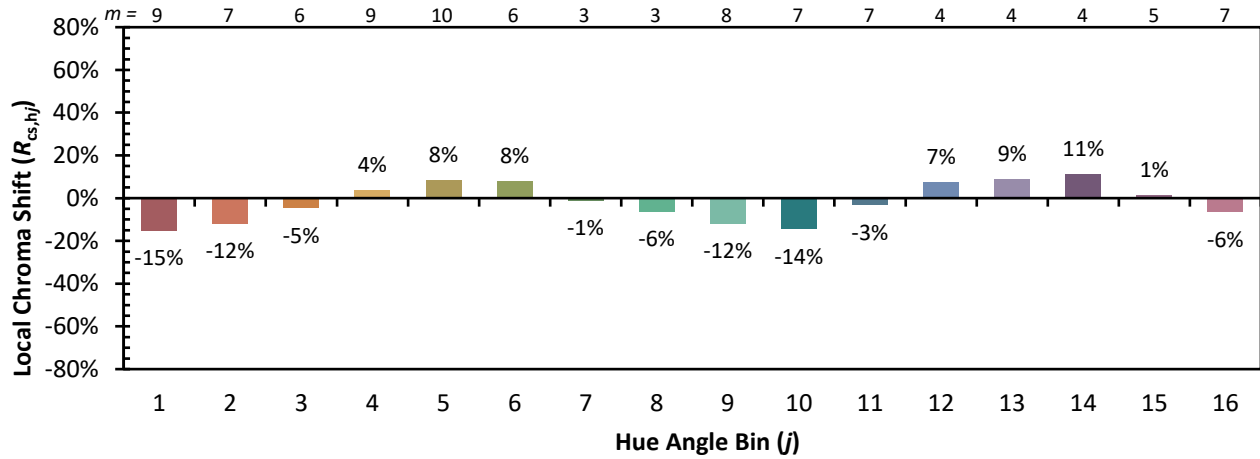

Measure Comparisons

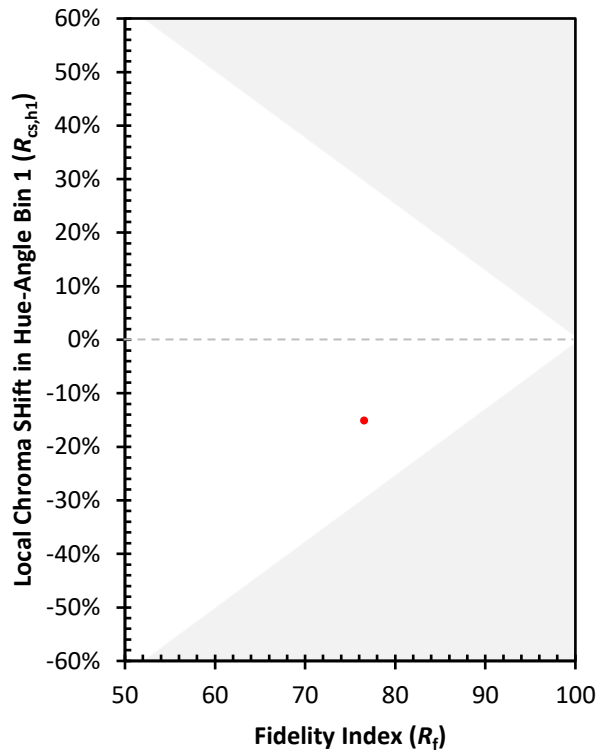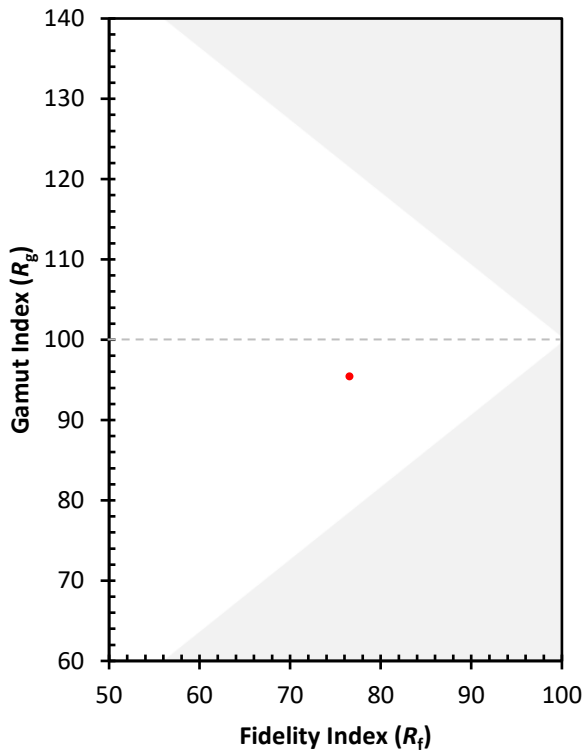

(END OF REPORT)