

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P823267

Luminaire Tested: **TTN-D0-740-U-DL**

Issue Date: 4/16/2024

Test Information

Test Method: LM-79-08
Report Number: P823267
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2312-254-11)
Test Lab: INNOVATION CENTER
Issue Date: 4/16/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: TTN-D0-740-U-DL
Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE
4000K, 70 CRI LEDS AND DRIVE LANE DISTRIBUTION
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1151.9 lumens
Efficiency: N/A
Efficacy: 107.7 lumens/watt
Luminous Opening: Circular (Dia: 0.71' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B0 - U0 - G1


Input Watts (W): 10.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P823267
 CATALOG NUMBER: TTN-D0-740-U-DL

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

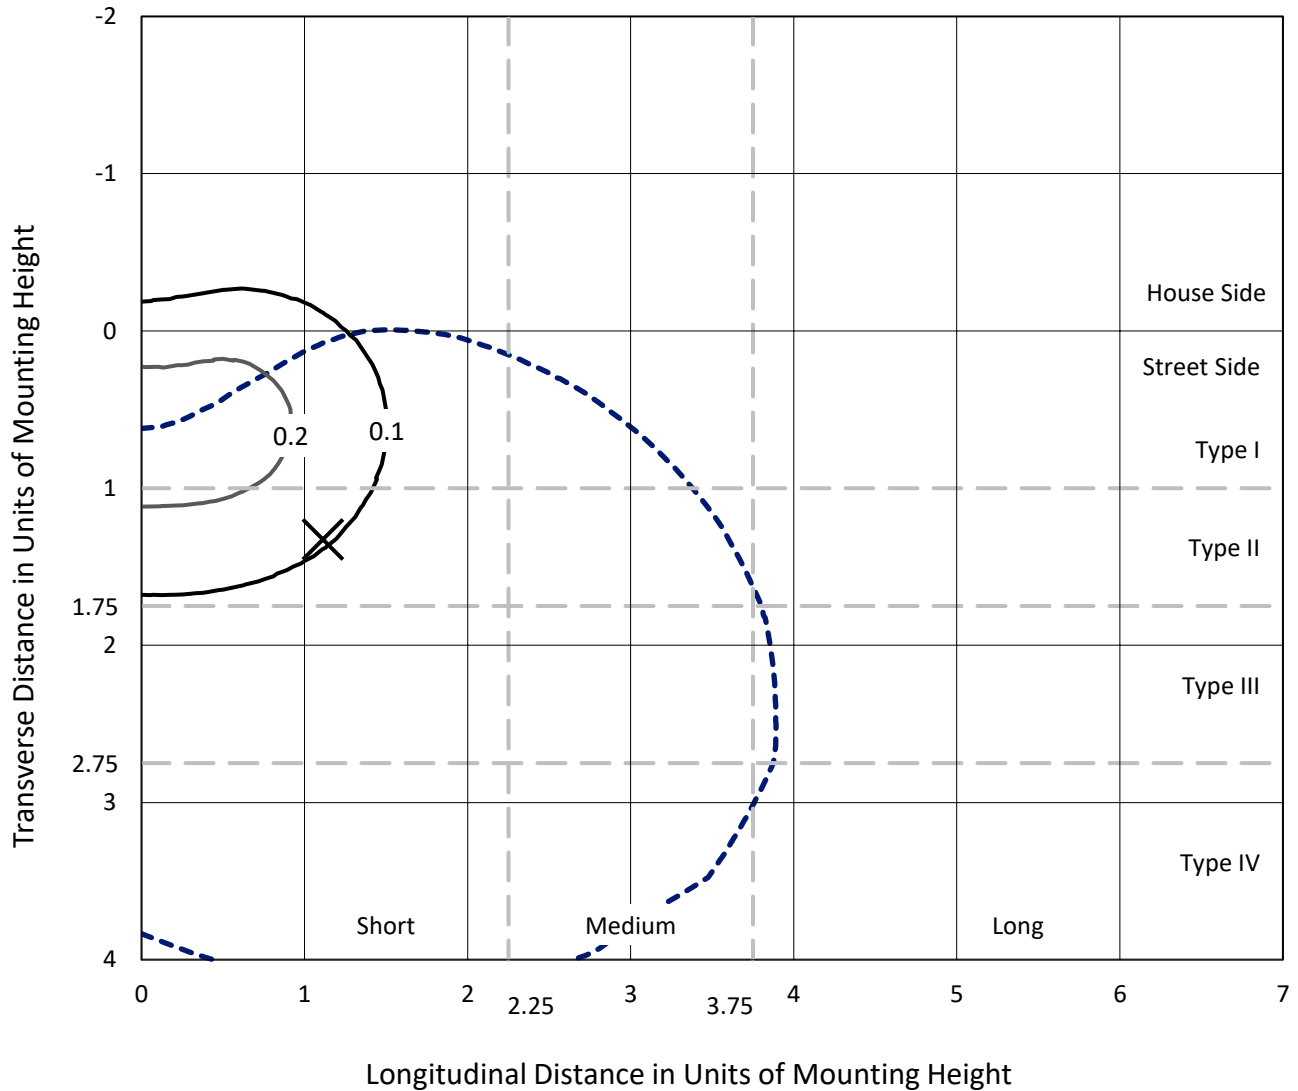

Based on 25 foot mounting height. Maximum calculated value = 0.3 fc
 Type IV - Short - N/A

REPORT NUMBER: P823267
CATALOG NUMBER: TTN-D0-740-U-DL

Luminous Intensity Polar Plot

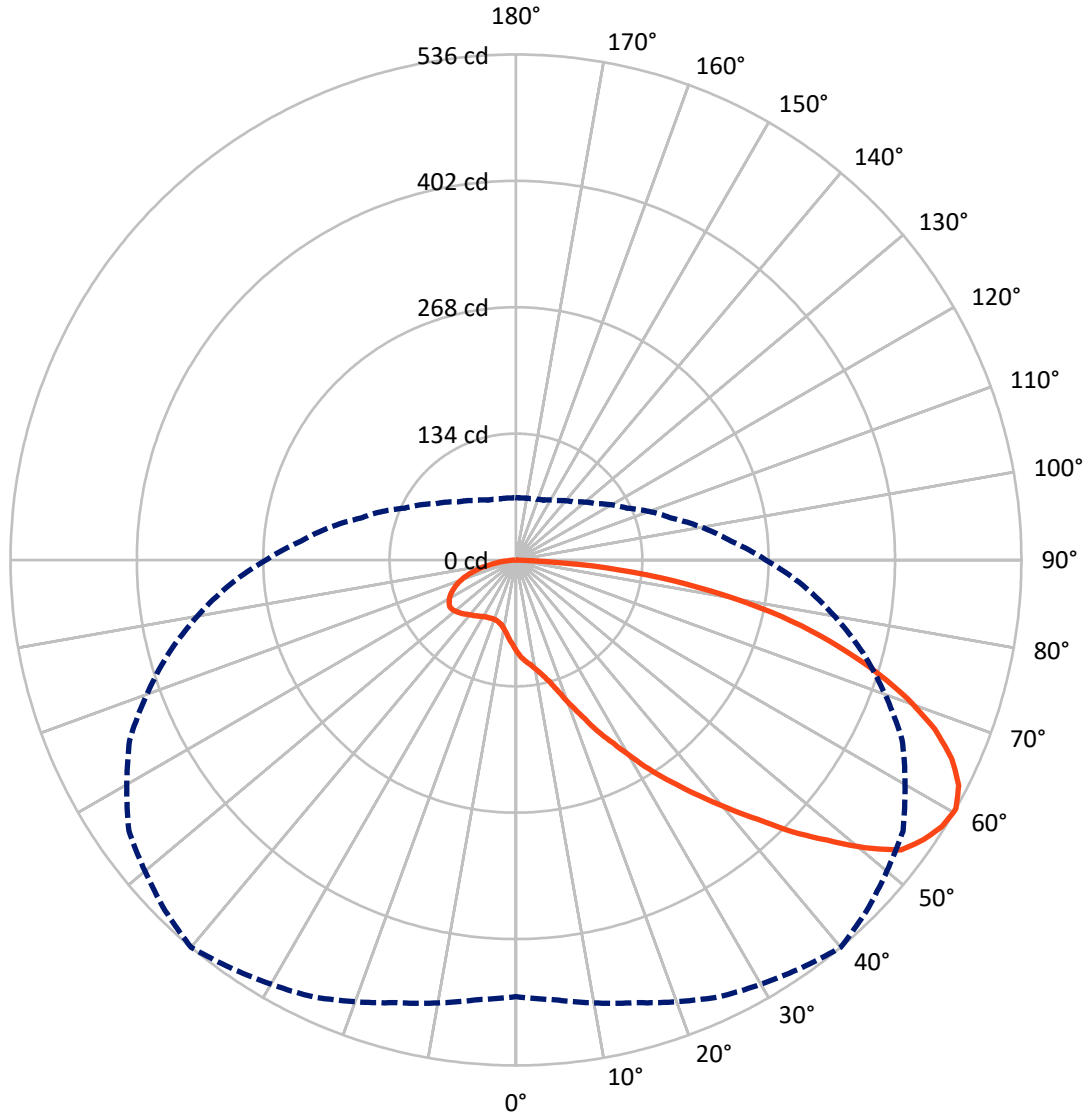

— Vertical Plane Through 40-Deg Lateral - - - Horizontal Cone Through 60-Deg Vertical

REPORT NUMBER: P823267
 CATALOG NUMBER: TTN-D0-740-U-DL


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	245.3	0.0	245.3
	% Fixture	21.3	0.0	21.3
Street Side	Lumens	906.7	0.0	906.7
	% Fixture	78.7	0.0	78.7
Total	Lumens	1151.9	0.0	1151.9
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	9.1	0.8
10°-20°	29.2	2.5
20°-30°	61.7	5.4
30°-40°	112.7	9.8
40°-50°	183.2	15.9
50°-60°	254.6	22.1
60°-70°	264.0	22.9
70°-80°	189.2	16.4
80°-90°	48.2	4.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	1151.9	100.0
0°-180°	1151.9	100.0

Coefficient of Utilization

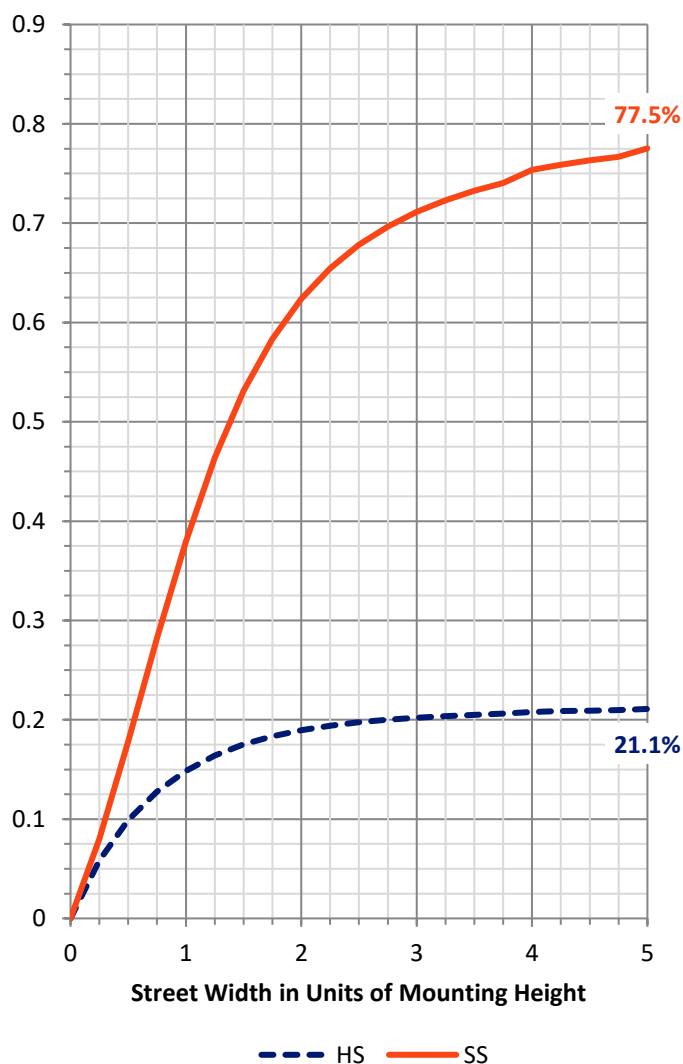

REPORT NUMBER: P823267


CATALOG NUMBER: TTN-D0-740-U-DL

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	67.4	5.9			
FM (30°-60°)	430.2	37.3			
FH (60°-80°)	368.9	32.0			G0/660
FVH (80°-90°)	40.2	3.5			G1/100
BL (0°-30°)	32.6	2.8	B0/110		
BM (30°-60°)	120.4	10.5	B0/220		
BH (60°-80°)	84.2	7.3	B0/110		G0/110
BVH (80°-90°)	8.1	0.7			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G1

Type IV Short

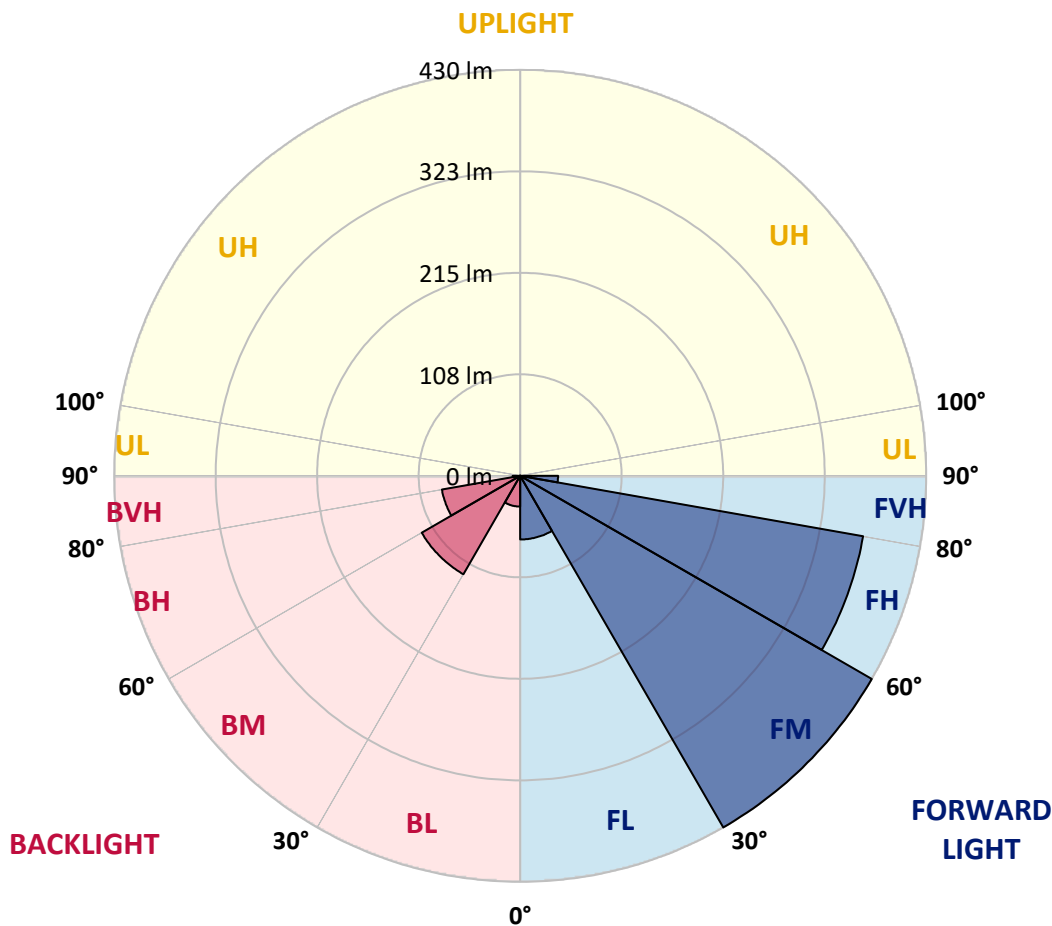



REPORT NUMBER: P823267
 CATALOG NUMBER: TTN-D0-740-U-DL

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	40°	45°	55°	65°	75°	85°
0°	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
2.5°	104.0	104.0	104.0	104.0	103.0	103.0	102.0	101.0	100.0	99.0	97.0
5°	113.0	113.0	112.0	111.0	109.0	108.0	107.0	105.0	103.0	101.0	98.0
7.5°	117.0	117.0	117.0	116.0	113.0	112.0	110.0	107.0	104.0	101.0	97.0
10°	124.0	124.0	123.0	122.0	119.0	118.0	116.0	112.0	107.0	102.0	97.0
12.5°	133.0	132.0	131.0	130.0	127.0	125.0	122.0	118.0	112.0	106.0	100.0
15°	144.0	142.0	142.0	140.0	137.0	134.0	132.0	126.0	120.0	112.0	104.0
17.5°	156.0	155.0	154.0	152.0	149.0	147.0	144.0	137.0	129.0	119.0	110.0
20°	171.0	169.0	170.0	167.0	164.0	163.0	158.0	150.0	140.0	129.0	118.0
22.5°	189.0	187.0	187.0	184.0	182.0	180.0	175.0	166.0	153.0	141.0	127.0
25°	209.1	207.1	207.1	205.1	203.0	201.0	195.0	185.0	170.0	155.0	139.0
27.5°	231.1	229.1	229.1	228.1	223.1	220.1	215.1	204.1	189.0	170.0	151.0
30°	254.1	252.1	254.1	252.1	249.1	243.1	237.1	225.1	208.1	187.0	164.0
32.5°	272.1	272.1	273.1	275.1	273.1	268.1	261.1	251.1	228.1	202.0	176.0
35°	293.1	293.1	295.1	298.1	297.1	292.1	285.1	274.1	250.1	219.1	189.0
37.5°	316.1	316.1	318.1	323.1	321.1	318.1	313.1	299.1	272.1	236.1	203.0
40°	341.1	340.1	342.1	349.1	350.1	346.1	340.1	326.1	295.1	258.1	218.1
42.5°	366.1	365.1	369.1	376.1	377.1	376.1	370.1	354.1	319.1	280.1	233.1
45°	391.1	391.1	397.1	408.1	413.1	411.1	406.1	386.1	349.1	303.1	253.1
47.5°	417.1	417.1	425.1	439.1	445.1	444.1	442.1	418.1	378.1	327.1	270.1
50°	437.1	437.1	450.1	466.1	476.1	480.1	470.1	448.1	403.1	348.1	284.1
52.5°	457.1	457.1	470.1	495.1	505.1	511.1	498.1	475.1	431.1	367.1	297.1
55°	467.1	469.1	487.1	511.1	527.1	524.1	529.1	498.1	449.1	381.1	305.1
57.5°	468.1	471.1	491.1	516.1	534.1	533.1	534.1	506.1	456.1	384.1	306.1
60°	463.1	468.1	486.1	511.1	528.1	536.1	526.1	501.1	452.1	381.1	305.1
62.5°	451.1	461.1	480.1	499.1	524.1	527.1	519.1	498.1	441.1	378.1	300.1
65°	424.1	435.1	462.1	484.1	504.1	508.1	499.1	481.1	430.1	364.1	284.1
67.5°	397.1	404.1	427.1	461.1	475.1	479.1	476.1	455.1	411.1	336.1	265.1
70°	366.1	375.1	393.1	428.1	442.1	441.1	450.1	426.1	382.1	312.1	245.1
72.5°	324.1	337.1	355.1	384.1	401.1	395.1	409.1	389.1	344.1	282.1	218.1
75°	275.1	286.1	309.1	332.1	351.1	344.1	355.1	341.1	300.1	246.1	187.0
77.5°	220.1	233.1	254.1	275.1	288.1	288.1	293.1	281.1	249.1	202.0	153.0
80°	163.0	175.0	194.0	209.1	221.1	222.1	227.1	221.1	192.0	157.0	117.0
82.5°	108.0	114.0	131.0	143.0	155.0	154.0	162.0	158.0	134.0	108.0	78.0
85°	46.0	50.0	64.0	74.0	85.0	81.0	92.0	91.0	72.0	52.0	35.0
87.5°	2.0	3.0	3.0	2.0	3.0	1.0	3.0	4.0	3.0	2.0	2.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P823267
 CATALOG NUMBER: TTN-D0-740-U-DL

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
2.5°	97.0	96.0	94.0	93.0	92.0	90.0	90.0	89.0	89.0	89.0	88.0
5°	97.0	95.0	93.0	90.0	88.0	86.0	84.0	82.0	81.0	81.0	80.0
7.5°	95.0	93.0	90.0	87.0	84.0	80.0	78.0	74.0	73.0	72.0	72.0
10°	95.0	93.0	88.0	84.0	80.0	76.0	73.0	69.0	66.0	65.0	65.0
12.5°	96.0	93.0	88.0	83.0	78.0	73.0	69.0	65.0	62.0	60.0	60.0
15°	100.0	96.0	90.0	83.0	77.0	71.0	67.0	62.0	59.0	57.0	57.0
17.5°	105.0	101.0	92.0	84.0	77.0	70.0	65.0	60.0	57.0	55.0	54.0
20°	112.0	106.0	96.0	85.0	77.0	70.0	64.0	59.0	55.0	53.0	53.0
22.5°	120.0	113.0	100.0	87.0	78.0	70.0	64.0	58.0	54.0	52.0	52.0
25°	130.0	121.0	106.0	91.0	80.0	71.0	64.0	58.0	54.0	52.0	52.0
27.5°	141.0	131.0	112.0	95.0	82.0	72.0	64.0	58.0	54.0	52.0	52.0
30°	151.0	140.0	118.0	99.0	85.0	73.0	65.0	59.0	55.0	53.0	52.0
32.5°	162.0	148.0	124.0	103.0	87.0	75.0	66.0	60.0	55.0	53.0	53.0
35°	173.0	158.0	130.0	108.0	90.0	77.0	67.0	61.0	56.0	54.0	54.0
37.5°	185.0	169.0	137.0	112.0	93.0	79.0	69.0	62.0	57.0	55.0	55.0
40°	199.0	180.0	144.0	117.0	96.0	81.0	70.0	64.0	59.0	57.0	57.0
42.5°	212.1	190.0	151.0	121.0	99.0	83.0	72.0	65.0	61.0	59.0	59.0
45°	225.1	202.0	158.0	126.0	102.0	86.0	74.0	68.0	63.0	61.0	61.0
47.5°	240.1	213.1	166.0	130.0	105.0	88.0	76.0	70.0	65.0	64.0	63.0
50°	252.1	221.1	171.0	134.0	107.0	90.0	78.0	71.0	67.0	65.0	65.0
52.5°	263.1	229.1	175.0	136.0	108.0	91.0	80.0	73.0	69.0	67.0	67.0
55°	269.1	232.1	178.0	136.0	109.0	92.0	80.0	73.0	69.0	68.0	67.0
57.5°	269.1	232.1	176.0	134.0	107.0	90.0	79.0	72.0	69.0	67.0	67.0
60°	265.1	229.1	171.0	130.0	104.0	87.0	77.0	70.0	67.0	66.0	66.0
62.5°	259.1	224.1	167.0	125.0	100.0	83.0	74.0	67.0	65.0	65.0	64.0
65°	243.1	209.1	158.0	118.0	94.0	78.0	70.0	64.0	62.0	61.0	60.0
67.5°	226.1	195.0	144.0	110.0	86.0	73.0	65.0	60.0	57.0	57.0	56.0
70°	209.1	180.0	131.0	99.0	77.0	67.0	59.0	54.0	52.0	52.0	52.0
72.5°	186.0	161.0	116.0	87.0	68.0	59.0	53.0	48.0	47.0	47.0	46.0
75°	159.0	137.0	98.0	74.0	57.0	50.0	45.0	40.0	40.0	40.0	40.0
77.5°	130.0	111.0	78.0	59.0	45.0	40.0	37.0	33.0	33.0	33.0	33.0
80°	98.0	82.0	57.0	43.0	33.0	29.0	27.0	25.0	26.0	26.0	25.0
82.5°	64.0	54.0	36.0	27.0	21.0	19.0	19.0	17.0	18.0	18.0	18.0
85°	28.0	24.0	15.0	12.0	10.0	10.0	10.0	9.0	10.0	10.0	10.0
87.5°	2.0	2.0	2.0	2.0	2.0	2.0	2.0	0.0	1.0	2.0	1.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

MCGRAW EDISON

Report Number: SP1-2411-284-2

Test Date: 11/20/2024

Luminaire Tested: TTN-D0-740-U-WQ

Data in this report applies to TT and TTN families of products

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2411-284-2
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 11/20/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: MCGRAW EDISON
 Catalog Number: **TTN-D0-740-U-WQ**
 Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE. 4000K, 70 CRI LEDS AND WIDE DISTRIBUTION

Spectral Parameters

CCT (K): 3863
 CIE u': 0.2247
 CIE v': 0.5111
 Duv: 0.0055
 CIE x: 0.3911
 CIE y: 0.3954
 CIE z: 0.2136
 Peak Wavelength (nm): 448
 Dominant Wavelength (nm): 577
 Purity: 36.03443
 Rf: 74.7
 Rg: 95.4

CRI (Ra):	71.9		
R1:	69.4	R9:	-23.5
R2:	76.9	R10:	45.4
R3:	83.3	R11:	68.7
R4:	72.7	R12:	38.7
R5:	68.4	R13:	70.0
R6:	67.5	R14:	90.3
R7:	82.0	R15:	62.1
R8:	55.3		



Test Conditions


Stabilization Time: 37M
 Operation Time: 1H 37M
 Sphere Temperature (°C): 25.0

REPORT NUMBER: SP1-2411-284-2

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	IN0058	6/18/2024	12/18/2024
Power Meter	INXT2011004	2/8/2024	2/8/2025
AC Power Source	IN0063	10/22/2024	10/22/2025
DC Power Source	IN0208	10/22/2024	10/22/2025
Sphere Thermometer	IN0085	10/22/2024	10/22/2025
Room Thermometer	IN0046	10/22/2024	10/22/2025

REPORT NUMBER: SP1-2411-284-2

CIE 1931 Chromaticity Diagram

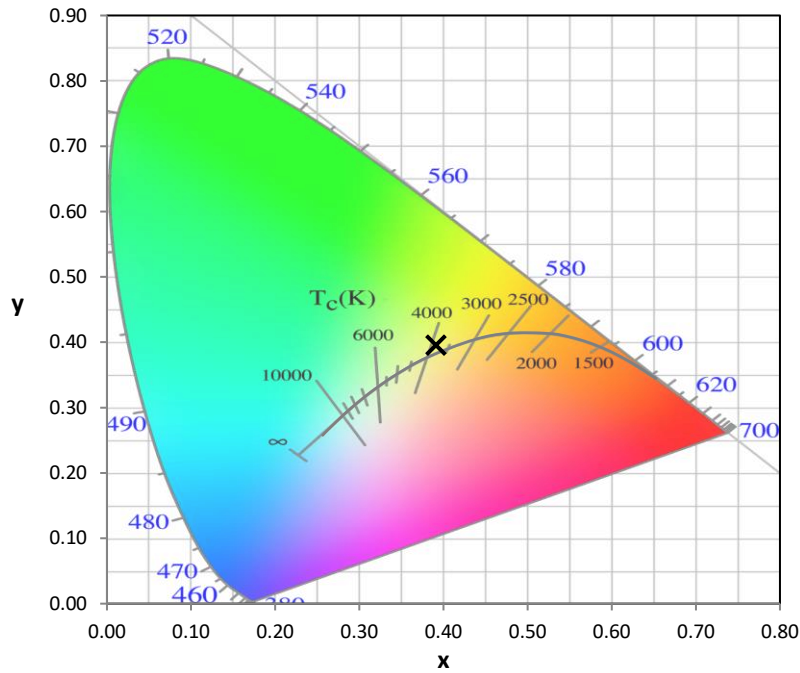

CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 4000K 7-step quadrangle

REPORT NUMBER: SP1-2411-284-2

Photopic Flux vs. Wavelength




Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	118	NR	620	730	NR	750	25	NR	880	1	NR
365	0	NR	495	170	NR	625	680	NR	755	22	NR	885	0	NR
370	0	NR	500	245	NR	630	630	NR	760	19	NR	890	0	NR
375	0	NR	505	338	NR	635	579	NR	765	17	NR	895	0	NR
380	0	NR	510	431	NR	640	529	NR	770	14	NR	900	0	NR
385	0	NR	515	521	NR	645	477	NR	775	13	NR	905	0	NR
390	1	NR	520	596	NR	650	429	NR	780	11	NR	910	0	NR
395	3	NR	525	655	NR	655	383	NR	785	9	NR	915	0	NR
400	6	NR	530	701	NR	660	338	NR	790	8	NR	920	0	NR
405	9	NR	535	739	NR	665	298	NR	795	7	NR	925	0	NR
410	16	NR	540	766	NR	670	261	NR	800	6	NR	930	0	NR
415	32	NR	545	791	NR	675	228	NR	805	5	NR	935	0	NR
420	65	NR	550	813	NR	680	200	NR	810	5	NR	940	0	NR
425	131	NR	555	833	NR	685	173	NR	815	4	NR	945	0	NR
430	245	NR	560	852	NR	690	151	NR	820	3	NR	950	0	NR
435	432	NR	565	870	NR	695	130	NR	825	3	NR	955	0	NR
440	622	NR	570	885	NR	700	112	NR	830	3	NR	960	0	NR
445	870	NR	575	900	NR	705	97	NR	835	2	NR	965	0	NR
450	969	NR	580	911	NR	710	83	NR	840	2	NR	970	0	NR
455	544	NR	585	916	NR	715	71	NR	845	2	NR	975	0	NR
460	304	NR	590	912	NR	720	60	NR	850	1	NR	980	0	NR
465	231	NR	595	901	NR	725	51	NR	855	1	NR	985	0	NR
470	142	NR	600	882	NR	730	43	NR	860	1	NR	990	0	NR
475	96	NR	605	855	NR	735	37	NR	865	1	NR	995	0	NR
480	92	NR	610	820	NR	740	32	NR	870	1	NR	1000	0	NR
485	96	NR	615	776	NR	745	29	NR	875	1	NR			

REPORT NUMBER: SP1-2411-284-2

Scotopic Flux vs. Wavelength

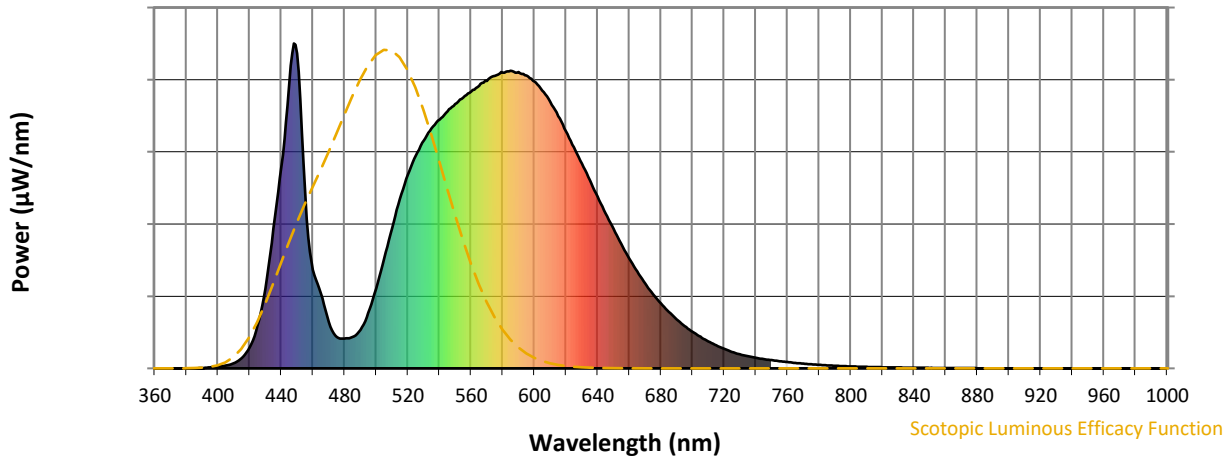

Scotopic Lumens: NR

S/P: 1.45

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	118	NR	620	730	NR	750	25	NR	880	1	NR
365	0	NR	495	170	NR	625	680	NR	755	22	NR	885	0	NR
370	0	NR	500	245	NR	630	630	NR	760	19	NR	890	0	NR
375	0	NR	505	338	NR	635	579	NR	765	17	NR	895	0	NR
380	0	NR	510	431	NR	640	529	NR	770	14	NR	900	0	NR
385	0	NR	515	521	NR	645	477	NR	775	13	NR	905	0	NR
390	1	NR	520	596	NR	650	429	NR	780	11	NR	910	0	NR
395	3	NR	525	655	NR	655	383	NR	785	9	NR	915	0	NR
400	6	NR	530	701	NR	660	338	NR	790	8	NR	920	0	NR
405	9	NR	535	739	NR	665	298	NR	795	7	NR	925	0	NR
410	16	NR	540	766	NR	670	261	NR	800	6	NR	930	0	NR
415	32	NR	545	791	NR	675	228	NR	805	5	NR	935	0	NR
420	65	NR	550	813	NR	680	200	NR	810	5	NR	940	0	NR
425	131	NR	555	833	NR	685	173	NR	815	4	NR	945	0	NR
430	245	NR	560	852	NR	690	151	NR	820	3	NR	950	0	NR
435	432	NR	565	870	NR	695	130	NR	825	3	NR	955	0	NR
440	622	NR	570	885	NR	700	112	NR	830	3	NR	960	0	NR
445	870	NR	575	900	NR	705	97	NR	835	2	NR	965	0	NR
450	969	NR	580	911	NR	710	83	NR	840	2	NR	970	0	NR
455	544	NR	585	916	NR	715	71	NR	845	2	NR	975	0	NR
460	304	NR	590	912	NR	720	60	NR	850	1	NR	980	0	NR
465	231	NR	595	901	NR	725	51	NR	855	1	NR	985	0	NR
470	142	NR	600	882	NR	730	43	NR	860	1	NR	990	0	NR
475	96	NR	605	855	NR	735	37	NR	865	1	NR	995	0	NR
480	92	NR	610	820	NR	740	32	NR	870	1	NR	1000	0	NR
485	96	NR	615	776	NR	745	29	NR	875	1	NR			

REPORT NUMBER: SP1-2411-284-2

Melanopic Flux vs. Wavelength




Melanopic Lumens: NR

M/P: 2.72





λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	118	NR	620	730	NR	750	25	NR	880	1	NR
365	0	NR	495	170	NR	625	680	NR	755	22	NR	885	0	NR
370	0	NR	500	245	NR	630	630	NR	760	19	NR	890	0	NR
375	0	NR	505	338	NR	635	579	NR	765	17	NR	895	0	NR
380	0	NR	510	431	NR	640	529	NR	770	14	NR	900	0	NR
385	0	NR	515	521	NR	645	477	NR	775	13	NR	905	0	NR
390	1	NR	520	596	NR	650	429	NR	780	11	NR	910	0	NR
395	3	NR	525	655	NR	655	383	NR	785	9	NR	915	0	NR
400	6	NR	530	701	NR	660	338	NR	790	8	NR	920	0	NR
405	9	NR	535	739	NR	665	298	NR	795	7	NR	925	0	NR
410	16	NR	540	766	NR	670	261	NR	800	6	NR	930	0	NR
415	32	NR	545	791	NR	675	228	NR	805	5	NR	935	0	NR
420	65	NR	550	813	NR	680	200	NR	810	5	NR	940	0	NR
425	131	NR	555	833	NR	685	173	NR	815	4	NR	945	0	NR
430	245	NR	560	852	NR	690	151	NR	820	3	NR	950	0	NR
435	432	NR	565	870	NR	695	130	NR	825	3	NR	955	0	NR
440	622	NR	570	885	NR	700	112	NR	830	3	NR	960	0	NR
445	870	NR	575	900	NR	705	97	NR	835	2	NR	965	0	NR
450	969	NR	580	911	NR	710	83	NR	840	2	NR	970	0	NR
455	544	NR	585	916	NR	715	71	NR	845	2	NR	975	0	NR
460	304	NR	590	912	NR	720	60	NR	850	1	NR	980	0	NR
465	231	NR	595	901	NR	725	51	NR	855	1	NR	985	0	NR
470	142	NR	600	882	NR	730	43	NR	860	1	NR	990	0	NR
475	96	NR	605	855	NR	735	37	NR	865	1	NR	995	0	NR
480	92	NR	610	820	NR	740	32	NR	870	1	NR	1000	0	NR
485	96	NR	615	776	NR	745	29	NR	875	1	NR			

Summary

$R_f = 74.7$
 $R_g = 95.4$
 $CIE R_a = 71.9$
 $R_9 = -23.5$

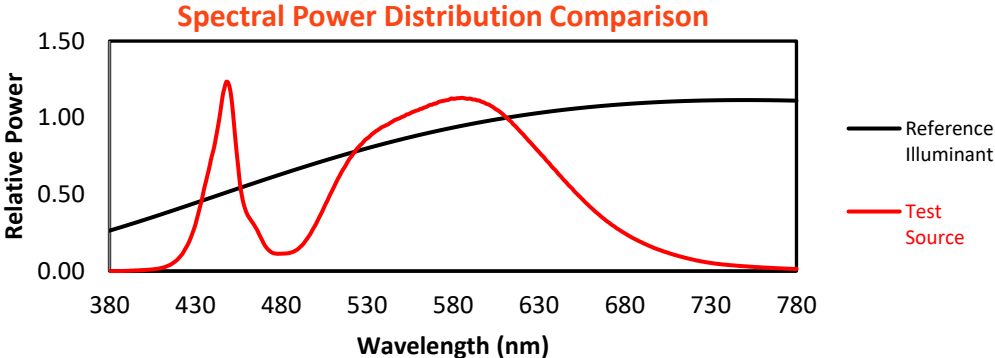


Color Vector Graphics

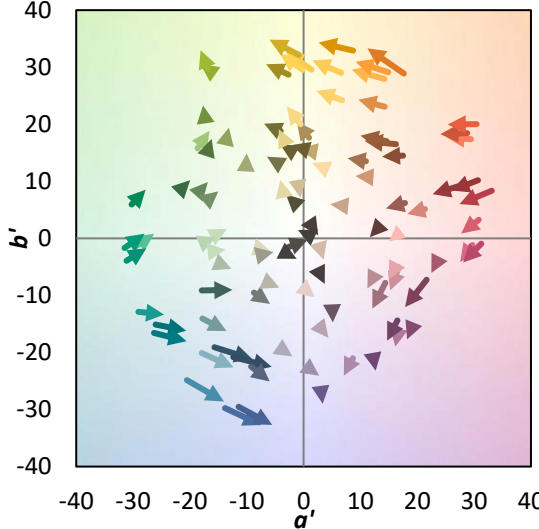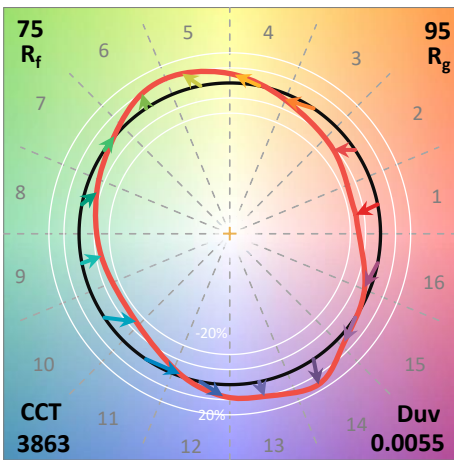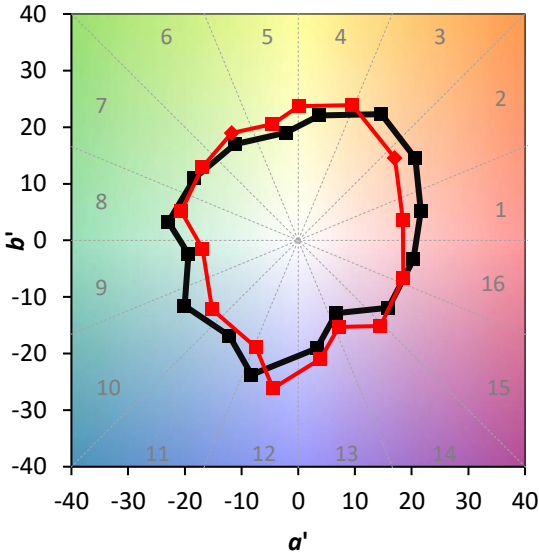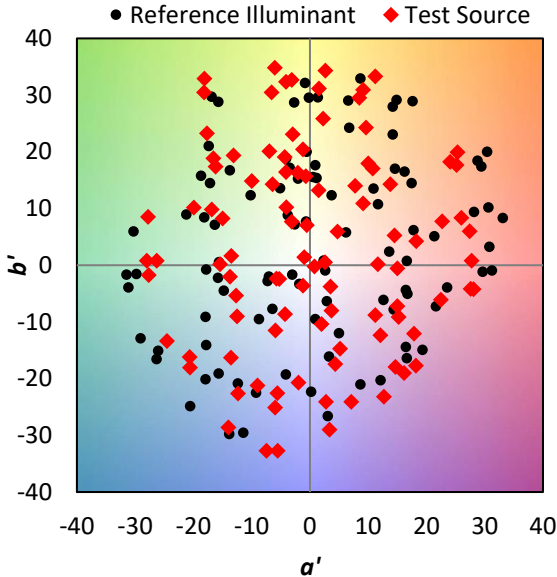

Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 63	CES51 = 88	CES76 = 51
CES02 = 61	CES27 = 87	CES52 = 88	CES77 = 70
CES03 = 30	CES28 = 81	CES53 = 76	CES78 = 54
CES04 = 70	CES29 = 63	CES54 = 84	CES79 = 81
CES05 = 47	CES30 = 76	CES55 = 83	CES80 = 78
CES06 = 50	CES31 = 67	CES56 = 72	CES81 = 79
CES07 = 40	CES32 = 61	CES57 = 71	CES82 = 91
CES08 = 39	CES33 = 73	CES58 = 72	CES83 = 88
CES09 = 29	CES34 = 70	CES59 = 86	CES84 = 87
CES10 = 74	CES35 = 83	CES60 = 91	CES85 = 80
CES11 = 57	CES36 = 96	CES61 = 85	CES86 = 74
CES12 = 63	CES37 = 77	CES62 = 86	CES87 = 78
CES13 = 42	CES38 = 85	CES63 = 72	CES88 = 80
CES14 = 74	CES39 = 95	CES64 = 68	CES89 = 72
CES15 = 71	CES40 = 89	CES65 = 64	CES90 = 79
CES16 = 46	CES41 = 90	CES66 = 61	CES91 = 80
CES17 = 49	CES42 = 78	CES67 = 58	CES92 = 64
CES18 = 56	CES43 = 76	CES68 = 67	CES93 = 78
CES19 = 71	CES44 = 99	CES69 = 76	CES94 = 57
CES20 = 65	CES45 = 84	CES70 = 58	CES95 = 69
CES21 = 86	CES46 = 81	CES71 = 52	CES96 = 78
CES22 = 78	CES47 = 82	CES72 = 84	CES97 = 84
CES23 = 92	CES48 = 75	CES73 = 49	CES98 = 75
CES24 = 91	CES49 = 79	CES74 = 95	CES99 = 66
CES25 = 72	CES50 = 87	CES75 = 52	

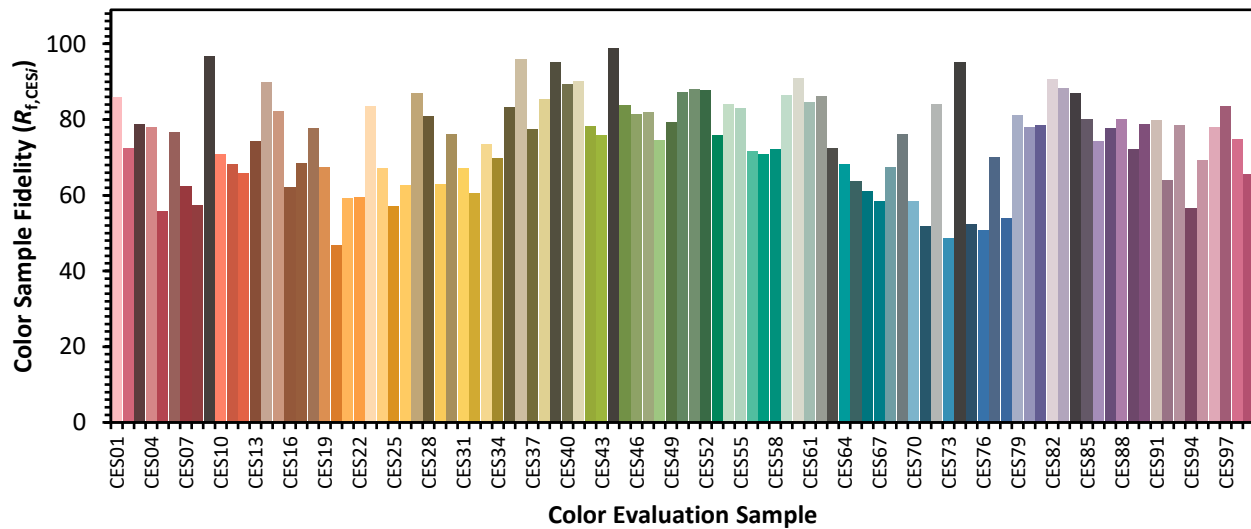

Color Rendition by Hue-Angle Bin



Measure Comparisons

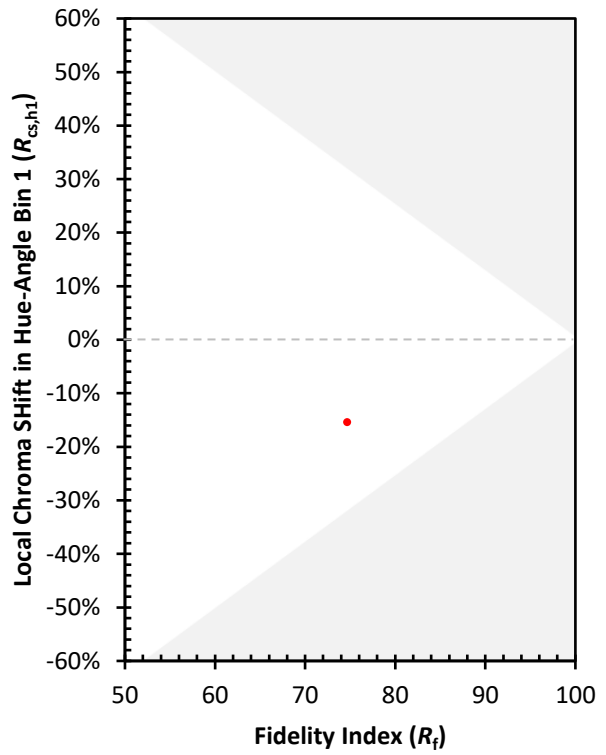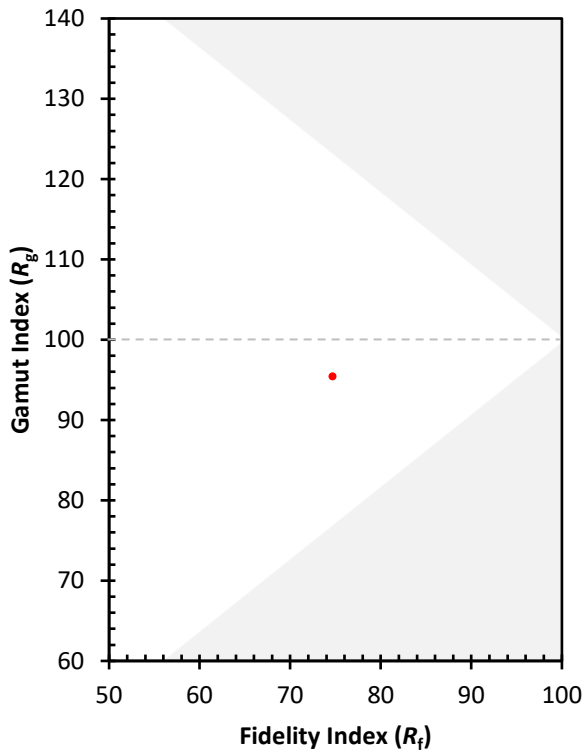

(END OF REPORT)