

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P832850

Luminaire Tested: **TTN-D0-740-U-RW-UPL2**

Issue Date: 5/15/2024

**Test Information**

Test Method: LM-79-08  
Report Number: P832850  
REPORT IS FROM IESNA LM-79-08 TEST DATA - UPLIGHT (G3-2308-121-4) AND  
Test Lab: INNOVATION CENTER  
Issue Date: 5/15/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: McGRAW-EDISON  
Catalog Number: TTN-D0-740-U-RW-UPL2  
Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE WITH UPLIGHT  
4000K, 70 CRI LEDS AND RECTANGULAR DISTRIBUTION  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1770.7 lumens  
Efficiency: N/A  
Efficacy: 116.5 lumens/watt  
Luminous Opening: Vertical Cylinder (Dia: 0.71' x H: 0.1')  
IES Classification: Type II - Short  
BUG Rating: B1 - U4 - G1  
  
Input Watts (W): 15.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



REPORT NUMBER: P832850  
 CATALOG NUMBER: TTN-D0-740-U-RW-UPL2

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

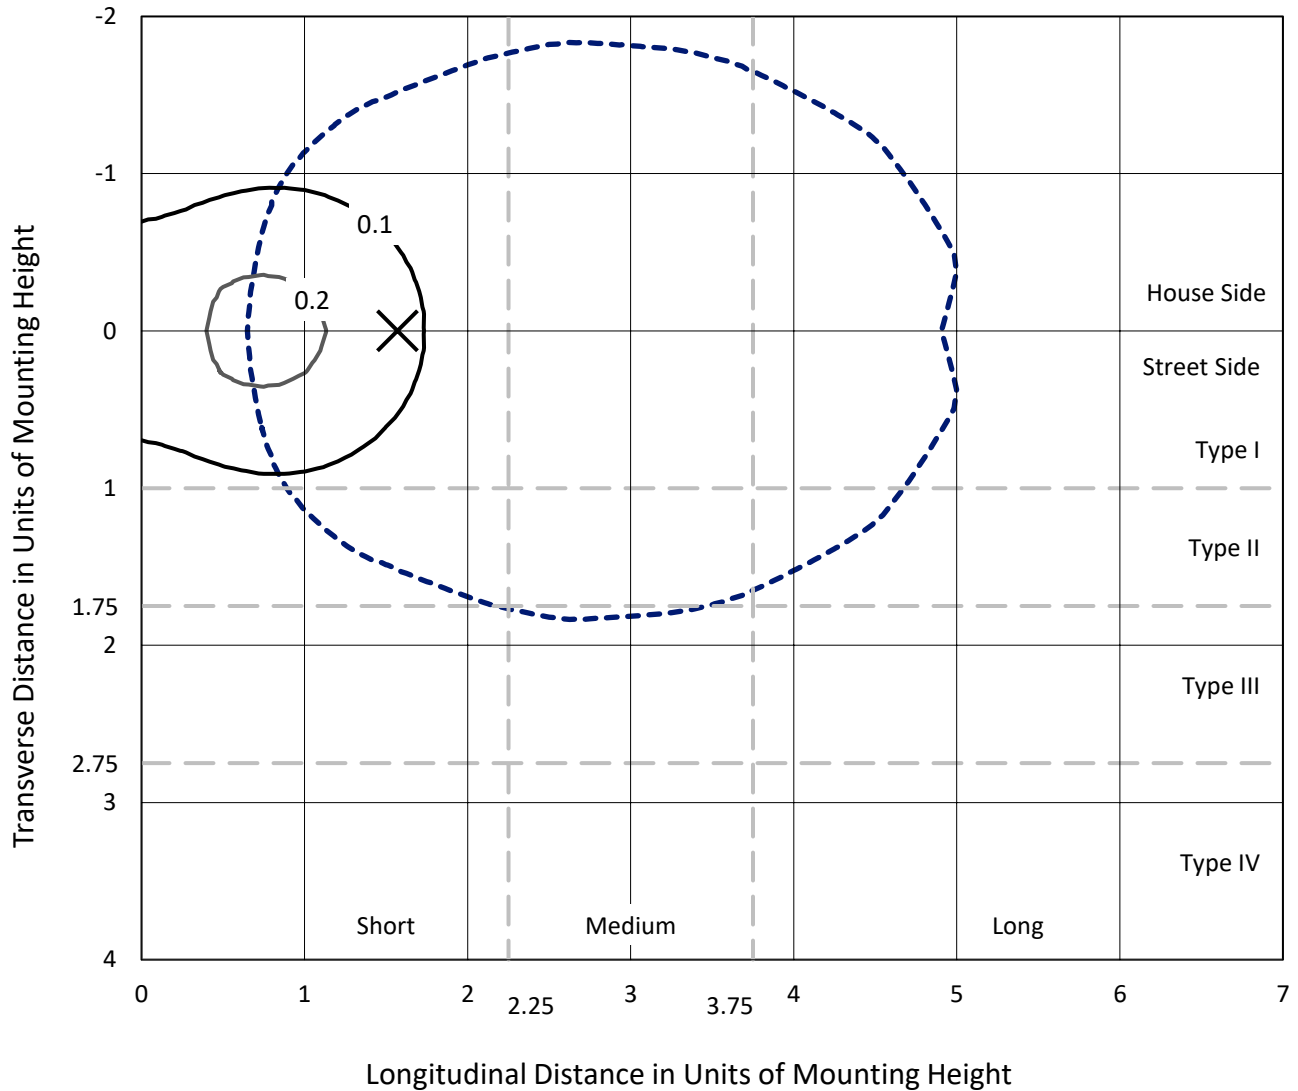

Based on 25 foot mounting height. Maximum calculated value = 0.2 fc  
 Type II - Short - N/A

REPORT NUMBER: P832850  
CATALOG NUMBER: TTN-D0-740-U-RW-UPL2

### Luminous Intensity Polar Plot

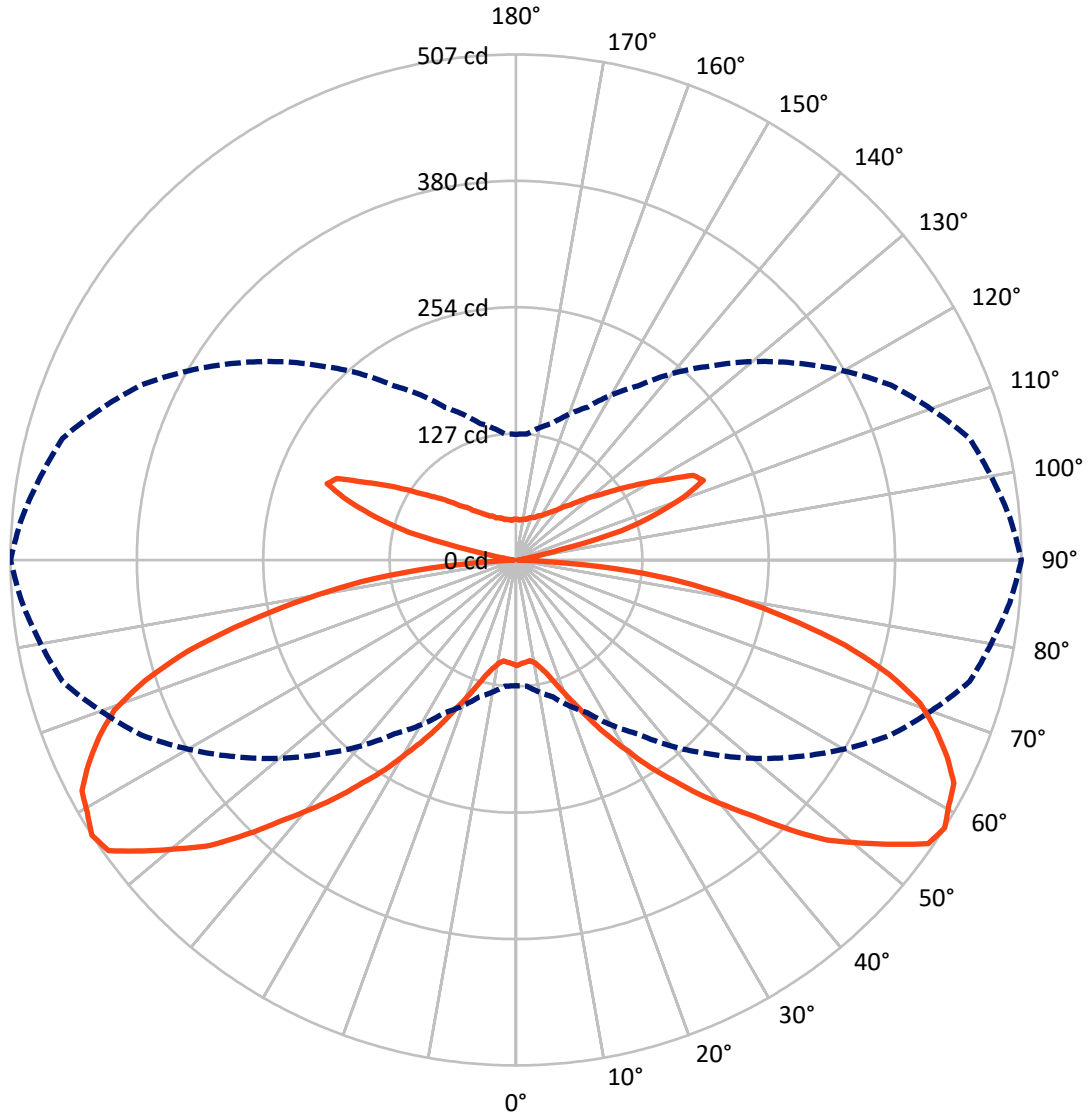

— Vertical Plane Through 90-Deg Lateral      - - - Horizontal Cone Through 57.5-Deg Vertical

REPORT NUMBER: P832850

CATALOG NUMBER: TTN-D0-740-U-RW-UPL2


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	592.9	292.5	885.3
	% Fixture	33.5	16.5	50.0
<b>Street Side</b>	Lumens	592.9	292.5	885.3
	% Fixture	33.5	16.5	50.0
<b>Total</b>	Lumens	1185.8	584.9	1770.7
	% Fixture	67.0	33.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	9.9	0.6
10°-20°	31.8	1.8
20°-30°	66.3	3.7
30°-40°	118.9	6.7
40°-50°	190.0	10.7
50°-60°	260.1	14.7
60°-70°	268.3	15.2
70°-80°	190.8	10.8
80°-90°	49.6	2.8
90°-100°	13.1	0.7
100°-110°	132.7	7.5
110°-120°	194.0	11.0
120°-130°	112.6	6.4
130°-140°	59.7	3.4
140°-150°	35.4	2.0
150°-160°	21.8	1.2
160°-170°	11.9	0.7
170°-180°	3.9	0.2
0°-90°	1185.8	67.0
0°-180°	1770.7	100.0

**Coefficient of Utilization**

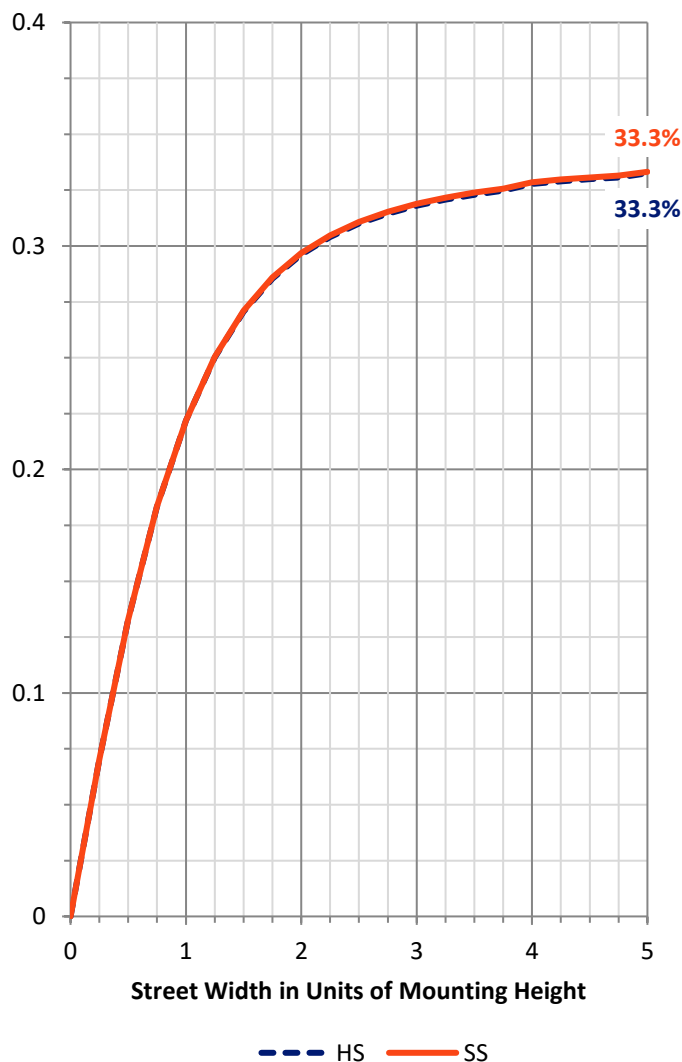

REPORT NUMBER: P832850


CATALOG NUMBER: TTN-D0-740-U-RW-UPL2

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	54.0	3.1			
FM (30°-60°)	284.5	16.1			
FH (60°-80°)	229.6	13.0			G0/660
FVH (80°-90°)	24.8	1.4			G1/100
BL (0°-30°)	54.0	3.1	B0/110		
BM (30°-60°)	284.5	16.1	B1/1000		
BH (60°-80°)	229.6	13.0	B1/500		G1/500
BVH (80°-90°)	24.8	1.4			G1/100
UL (90°-100°)	13.1	0.7		U2/50	
UH (100°-180°)	571.8	32.3		U4/1000	

**BUG Rating: B1-U4-G1**

Type II Short

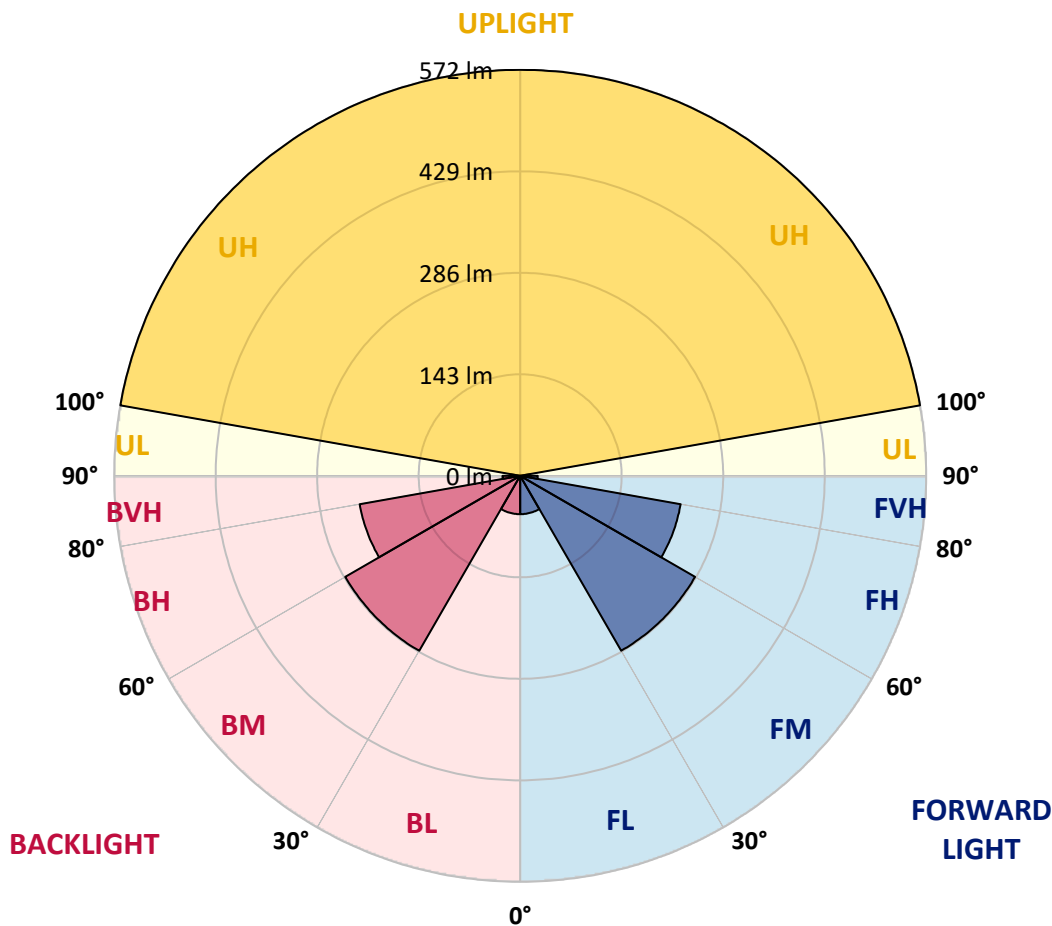



REPORT NUMBER: P832850  
 CATALOG NUMBER: TTN-D0-740-U-RW-UPL2

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0
2.5°	106.0	106.0	105.0	105.0	105.0	104.0	104.0	104.0	104.0	103.0	104.0
5°	106.0	106.0	106.0	106.0	105.0	104.0	104.0	104.0	103.0	103.0	103.0
7.5°	105.0	105.0	105.0	105.0	104.0	103.0	103.0	103.0	102.0	102.0	102.0
10°	104.0	105.0	104.0	104.0	103.0	103.0	104.0	104.0	105.0	105.0	105.0
12.5°	103.0	103.0	103.0	104.0	104.0	105.0	107.0	109.0	110.0	111.0	111.0
15°	103.0	103.0	104.0	105.0	107.0	109.0	112.0	115.0	117.0	119.0	119.0
17.5°	103.0	103.0	104.0	107.0	110.0	114.0	119.0	123.0	127.0	130.0	131.0
20°	103.0	103.0	105.0	109.0	115.0	121.0	128.0	134.0	140.0	145.0	145.0
22.5°	104.0	105.0	107.0	112.0	121.0	130.0	139.0	148.0	155.0	161.0	161.0
25°	106.0	106.0	109.0	117.0	128.0	140.0	153.0	164.0	173.0	181.0	181.0
27.5°	107.0	108.0	112.0	122.0	136.0	151.0	169.0	182.0	194.0	201.0	202.0
30°	109.0	110.0	116.0	126.0	143.0	162.0	183.0	201.0	214.0	221.0	223.0
32.5°	110.0	111.0	119.0	131.0	150.0	172.0	196.0	219.0	237.0	245.0	248.0
35°	113.0	114.0	122.0	136.0	158.0	183.0	211.0	238.0	259.0	269.0	271.0
37.5°	116.0	117.0	125.0	141.0	166.0	195.0	227.0	258.0	282.0	294.0	298.0
40°	118.0	119.0	128.0	147.0	175.0	208.0	245.0	279.0	306.0	321.0	324.0
42.5°	121.0	122.0	132.0	152.0	183.0	221.0	264.0	302.0	331.0	348.0	352.0
45°	124.0	125.0	136.0	158.0	192.0	235.0	283.0	329.0	362.0	382.0	386.0
47.5°	127.0	128.0	140.0	164.0	201.0	249.0	303.0	353.0	393.0	412.0	420.0
50°	128.0	130.0	142.0	168.0	207.0	261.0	320.0	377.0	419.0	444.0	446.0
52.5°	129.0	131.0	144.0	171.0	212.0	270.0	334.0	397.0	446.0	476.0	474.0
55°	130.0	130.0	144.0	171.0	214.0	276.0	344.0	410.0	464.0	488.0	502.0
57.5°	126.0	127.0	142.0	169.0	213.0	275.0	344.0	415.0	471.0	497.0	507.0
60°	121.0	123.0	137.0	164.0	209.0	272.0	342.0	413.0	474.0	502.0	499.0
62.5°	114.0	118.0	130.0	157.0	203.0	265.0	339.0	408.0	467.0	496.0	493.0
65°	106.0	110.0	121.0	150.0	190.0	248.0	323.0	398.0	448.0	481.0	475.0
67.5°	98.0	101.0	112.0	138.0	175.0	230.0	302.0	376.0	421.0	457.0	454.0
70°	89.0	90.0	101.0	124.0	160.0	212.0	282.0	345.0	397.0	424.0	430.0
72.5°	78.0	78.0	89.0	109.0	142.0	188.0	255.0	310.0	359.0	382.0	391.0
75°	64.0	65.0	74.0	92.0	119.0	161.0	217.0	273.0	314.0	338.0	341.0
77.5°	50.0	51.0	58.0	73.0	96.0	130.0	179.0	223.0	262.0	283.0	277.0
80°	36.0	37.0	42.0	53.0	71.0	97.0	138.0	177.0	205.0	222.0	214.0
82.5°	22.0	23.0	26.0	33.0	45.0	63.0	94.0	123.0	145.0	159.0	156.0
85°	11.0	11.0	13.0	15.0	19.0	28.0	45.0	62.0	79.0	89.0	86.0
87.5°	2.0	3.0	3.0	3.0	3.0	2.0	3.0	3.0	3.0	5.0	2.0
90°	5.0	5.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	5.0	5.0
92.5°	5.0	5.0	5.0	7.0	8.0	7.0	8.0	6.0	6.0	5.0	5.0
95°	6.0	6.0	7.0	9.0	11.0	12.0	12.0	7.0	7.0	6.0	6.0
97.5°	8.0	9.0	9.0	11.0	18.0	33.0	20.0	10.0	10.0	9.0	8.0
100°	13.0	14.0	14.0	25.0	53.0	71.1	51.0	26.0	19.0	14.0	14.0
102.5°	42.0	44.0	54.0	81.1	120.1	109.1	92.1	87.1	60.0	48.0	46.0
105°	107.1	106.1	114.1	135.1	168.1	165.1	152.1	138.1	119.1	110.1	110.1
107.5°	141.1	141.1	148.1	166.1	191.1	223.2	226.2	179.1	157.1	147.1	146.1
110°	159.1	159.1	165.1	180.1	213.2	258.2	256.2	221.2	194.1	181.1	179.1



REPORT NUMBER: P832850  
 CATALOG NUMBER: TTN-D0-740-U-RW-UPL2

**CANDELA DISTRIBUTION (continued):**

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
112.5°	163.1	164.1	172.1	195.1	231.2	251.2	242.2	228.2	216.2	206.2	204.2
115°	169.1	169.1	178.1	200.2	220.2	228.2	218.2	207.2	199.2	195.1	197.1
117.5°	167.1	170.1	172.1	184.1	197.1	203.2	198.1	183.1	177.1	175.1	172.1
120°	155.1	155.1	157.1	163.1	170.1	173.1	171.1	161.1	156.1	155.1	153.1
122.5°	138.1	139.1	138.1	141.1	146.1	149.1	147.1	139.1	137.1	137.1	135.1
125°	121.1	121.1	120.1	122.1	125.1	124.1	125.1	121.1	120.1	120.1	119.1
127.5°	109.1	108.1	106.1	107.1	108.1	108.1	109.1	105.1	106.1	107.1	106.1
130°	97.1	97.1	95.1	95.1	95.1	93.1	95.1	93.1	94.1	95.1	96.1
132.5°	86.1	86.1	83.1	82.1	82.1	82.1	83.1	82.1	84.1	86.1	86.1
135°	77.1	77.1	74.1	75.1	75.1	74.1	75.1	74.1	76.1	77.1	77.1
137.5°	70.1	70.1	68.1	68.1	68.1	67.1	68.1	68.1	69.1	71.1	72.1
140°	64.0	64.0	63.0	63.0	62.0	63.0	63.0	63.0	64.0	65.0	65.0
142.5°	61.0	60.0	59.0	58.0	59.0	59.0	59.0	58.0	59.0	61.0	61.0
145°	56.0	56.0	55.0	55.0	55.0	56.0	55.0	55.0	56.0	56.0	57.0
147.5°	53.0	53.0	52.0	53.0	53.0	53.0	53.0	52.0	53.0	53.0	54.0
150°	52.0	51.0	50.0	51.0	51.0	50.0	50.0	50.0	50.0	51.0	51.0
152.5°	49.0	49.0	48.0	49.0	48.0	48.0	48.0	48.0	48.0	49.0	50.0
155°	47.0	47.0	46.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0
157.5°	45.0	46.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	46.0	46.0
160°	44.0	44.0	44.0	44.0	43.0	43.0	43.0	44.0	44.0	44.0	45.0
162.5°	43.0	43.0	43.0	43.0	42.0	42.0	42.0	42.0	43.0	43.0	44.0
165°	43.0	42.0	42.0	42.0	41.0	41.0	41.0	41.0	42.0	43.0	42.0
167.5°	41.0	41.0	41.0	41.0	41.0	40.0	40.0	41.0	41.0	41.0	42.0
170°	41.0	41.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	41.0
172.5°	41.0	41.0	41.0	41.0	40.0	40.0	40.0	40.0	40.0	41.0	41.0
175°	41.0	41.0	41.0	41.0	40.0	40.0	40.0	41.0	41.0	41.0	40.0
177.5°	41.0	41.0	41.0	41.0	40.0	41.0	41.0	41.0	41.0	41.0	41.0
180°	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0

(END OF REPORT)