

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P832867

Luminaire Tested: **TTN-D0-750-U-DL-UPL1**

Issue Date: 5/15/2024

**Test Information**

Test Method: LM-79-08  
Report Number: P832867  
REPORT IS FROM IESNA LM-79-08 TEST DATA - UPLIGHT (G3-2308-121-4) AND  
Test Lab: INNOVATION CENTER  
Issue Date: 5/15/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: MCGRAW-EDISON  
Catalog Number: TTN-D0-750-U-DL-UPL1  
Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE WITH UPLIGHT  
5000K, 70 CRI LEDS AND DRIVE LANE DISTRIBUTION  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1475.8 lumens  
Efficiency: N/A  
Efficacy: 111.0 lumens/watt  
Luminous Opening: Vertical Cylinder (Dia: 0.71' x H: 0.1')  
IES Classification: Type IV - Short  
BUG Rating: B0 - U3 - G1  
  
Input Watts (W): 13.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



REPORT NUMBER: P832867  
 CATALOG NUMBER: TTN-D0-750-U-DL-UPL1

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

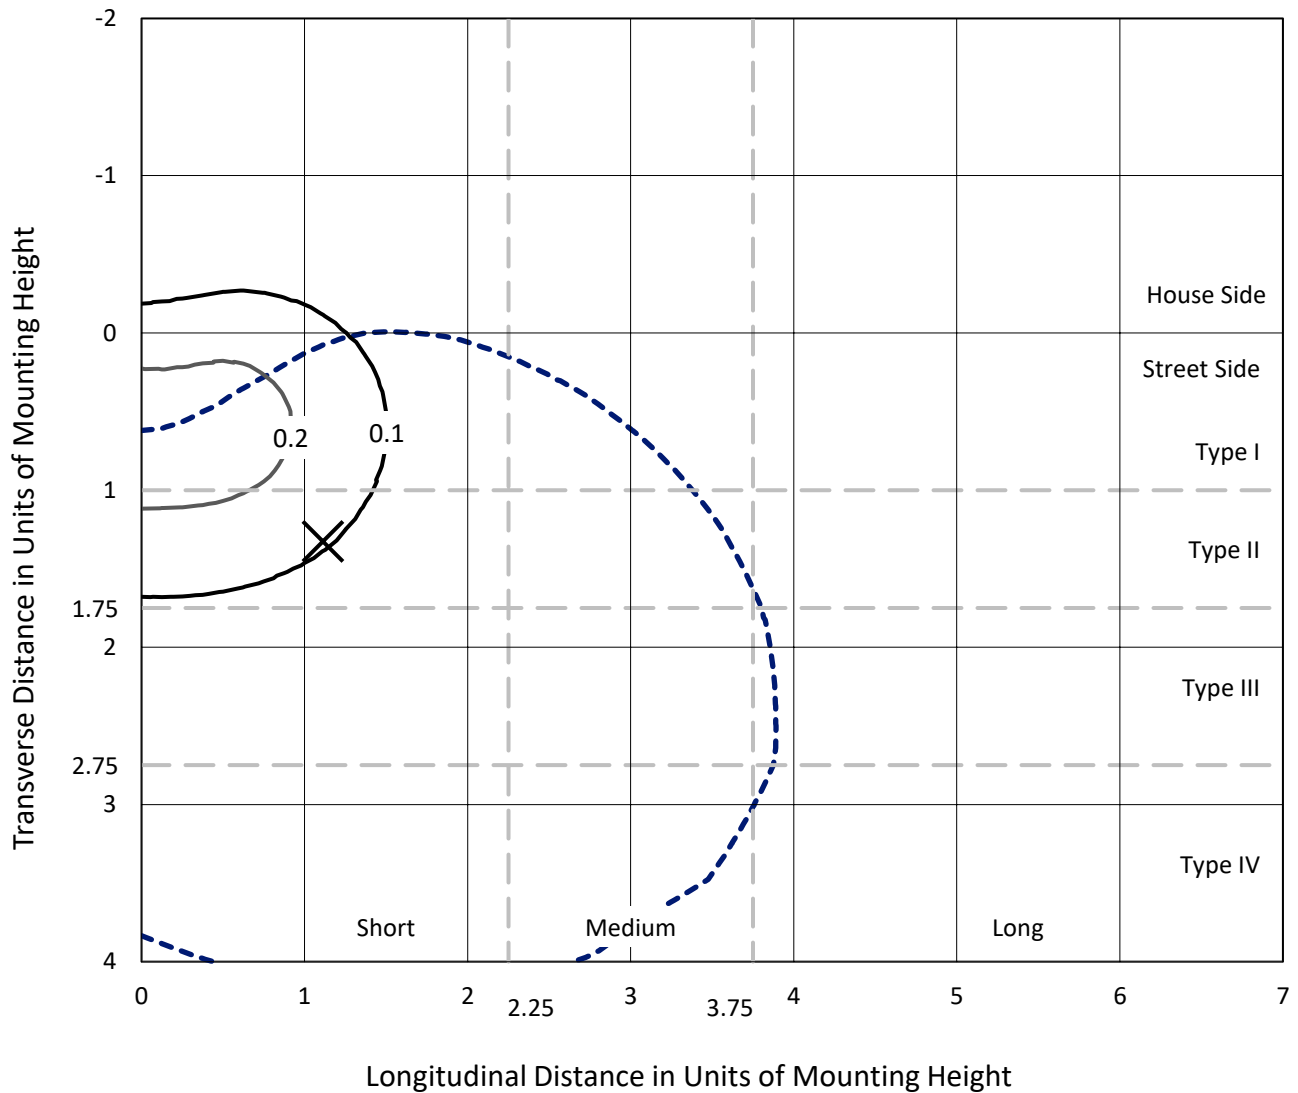

Based on 25 foot mounting height. Maximum calculated value = 0.3 fc  
 Type IV - Short - N/A

REPORT NUMBER: P832867  
CATALOG NUMBER: TTN-D0-750-U-DL-UPL1

### Luminous Intensity Polar Plot

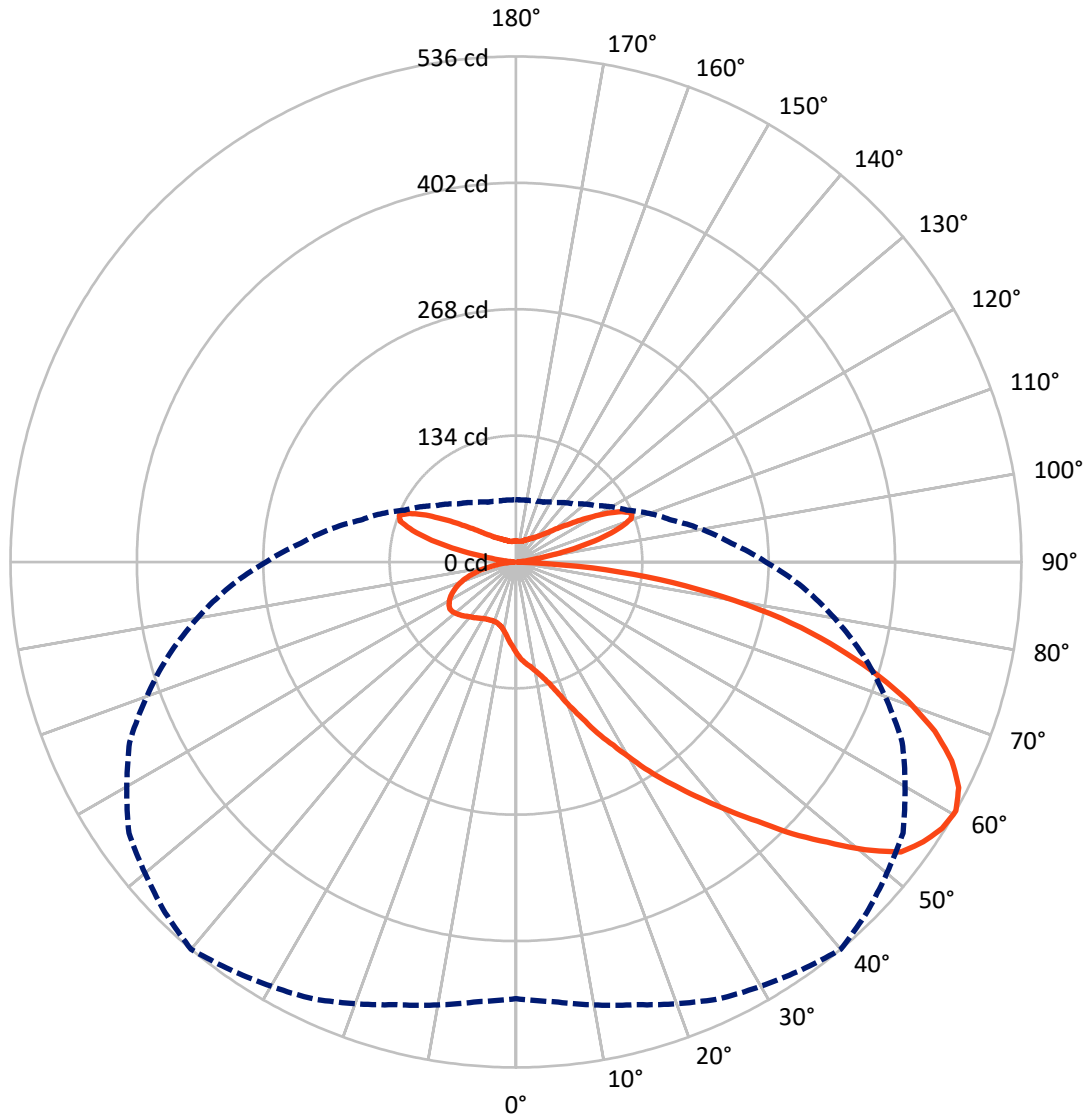

— Vertical Plane Through 40-Deg Lateral      - - - Horizontal Cone Through 60-Deg Vertical

REPORT NUMBER: P832867  
 CATALOG NUMBER: TTN-D0-750-U-DL-UPL1


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	245.5	161.7	407.2
	% Fixture	16.6	11.0	27.6
<b>Street Side</b>	Lumens	906.9	161.7	1068.6
	% Fixture	61.5	11.0	72.4
<b>Total</b>	Lumens	1152.4	323.4	1475.8
	% Fixture	78.1	21.9	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	9.1	0.6
10°-20°	29.2	2.0
20°-30°	61.7	4.2
30°-40°	112.7	7.6
40°-50°	183.2	12.4
50°-60°	254.6	17.3
60°-70°	264.0	17.9
70°-80°	189.2	12.8
80°-90°	48.7	3.3
90°-100°	7.2	0.5
100°-110°	73.4	5.0
110°-120°	107.3	7.3
120°-130°	62.3	4.2
130°-140°	33.0	2.2
140°-150°	19.6	1.3
150°-160°	12.1	0.8
160°-170°	6.6	0.4
170°-180°	2.1	0.1
0°-90°	1152.4	78.1
0°-180°	1475.8	100.0

**Coefficient of Utilization**

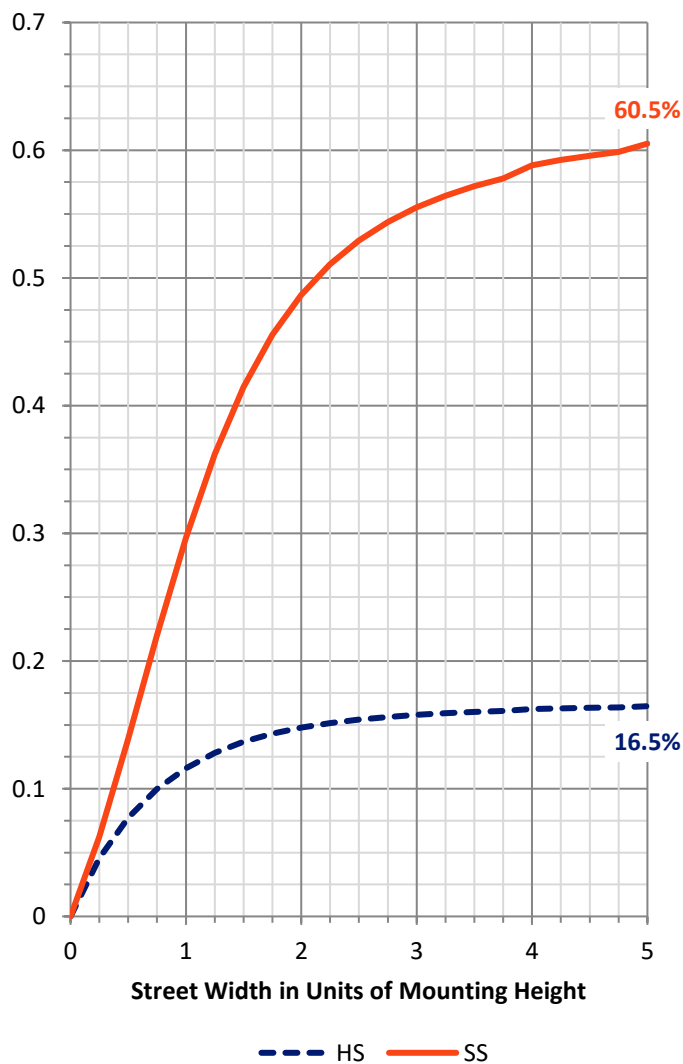

REPORT NUMBER: P832867


CATALOG NUMBER: TTN-D0-750-U-DL-UPL1

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	67.4	4.6			
FM (30°-60°)	430.2	29.1			
FH (60°-80°)	368.9	25.0			G0/660
FVH (80°-90°)	40.4	2.7			G1/100
BL (0°-30°)	32.6	2.2	B0/110		
BM (30°-60°)	120.4	8.2	B0/220		
BH (60°-80°)	84.2	5.7	B0/110		G0/110
BVH (80°-90°)	8.3	0.6			G0/10
UL (90°-100°)	7.2	0.5		U1/10	
UH (100°-180°)	316.2	21.4		U3/500	

**BUG Rating: B0-U3-G1**

Type IV Short

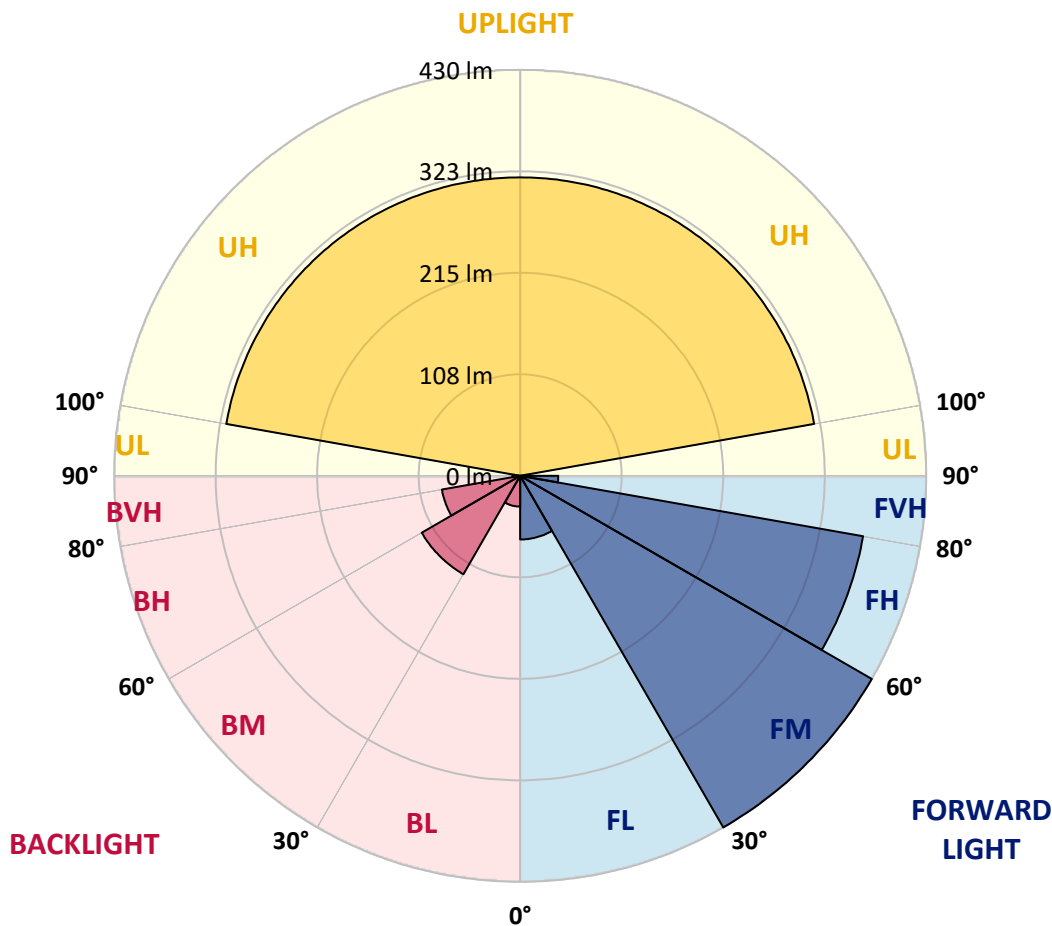



REPORT NUMBER: P832867  
 CATALOG NUMBER: TTN-D0-750-U-DL-UPL1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	40°	45°	55°	65°	75°	85°
0°	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
2.5°	104.0	104.0	104.0	104.0	103.0	103.0	102.0	101.0	100.0	99.0	97.0
5°	113.0	113.0	112.0	111.0	109.0	108.0	107.0	105.0	103.0	101.0	98.0
7.5°	117.0	117.0	117.0	116.0	113.0	112.0	110.0	107.0	104.0	101.0	97.0
10°	124.0	124.0	123.0	122.0	119.0	118.0	116.0	112.0	107.0	102.0	97.0
12.5°	133.0	132.0	131.0	130.0	127.0	125.0	122.0	118.0	112.0	106.0	100.0
15°	144.0	142.0	142.0	140.0	137.0	134.0	132.0	126.0	120.0	112.0	104.0
17.5°	156.0	155.0	154.0	152.0	149.0	147.0	144.0	137.0	129.0	119.0	110.0
20°	171.0	169.0	170.0	167.0	164.0	163.0	158.0	150.0	140.0	129.0	118.0
22.5°	189.0	187.0	187.0	184.0	182.0	180.0	175.0	166.0	153.0	141.0	127.0
25°	209.1	207.1	207.1	205.1	203.0	201.0	195.0	185.0	170.0	155.0	139.0
27.5°	231.1	229.1	229.1	228.1	223.1	220.1	215.1	204.1	189.0	170.0	151.0
30°	254.1	252.1	254.1	252.1	249.1	243.1	237.1	225.1	208.1	187.0	164.0
32.5°	272.1	272.1	273.1	275.1	273.1	268.1	261.1	251.1	228.1	202.0	176.0
35°	293.1	293.1	295.1	298.1	297.1	292.1	285.1	274.1	250.1	219.1	189.0
37.5°	316.1	316.1	318.1	323.1	321.1	318.1	313.1	299.1	272.1	236.1	203.0
40°	341.1	340.1	342.1	349.1	350.1	346.1	340.1	326.1	295.1	258.1	218.1
42.5°	366.1	365.1	369.1	376.1	377.1	376.1	370.1	354.1	319.1	280.1	233.1
45°	391.1	391.1	397.1	408.1	413.1	411.1	406.1	386.1	349.1	303.1	253.1
47.5°	417.1	417.1	425.1	439.1	445.1	444.1	442.1	418.1	378.1	327.1	270.1
50°	437.1	437.1	450.1	466.1	476.1	480.1	470.1	448.1	403.1	348.1	284.1
52.5°	457.1	457.1	470.1	495.1	505.1	511.1	498.1	475.1	431.1	367.1	297.1
55°	467.1	469.1	487.1	511.1	527.1	524.1	529.1	498.1	449.1	381.1	305.1
57.5°	468.1	471.1	491.1	516.1	534.1	533.1	534.1	506.1	456.1	384.1	306.1
60°	463.1	468.1	486.1	511.1	528.1	536.1	526.1	501.1	452.1	381.1	305.1
62.5°	451.1	461.1	480.1	499.1	524.1	527.1	519.1	498.1	441.1	378.1	300.1
65°	424.1	435.1	462.1	484.1	504.1	508.1	499.1	481.1	430.1	364.1	284.1
67.5°	397.1	404.1	427.1	461.1	475.1	479.1	476.1	455.1	411.1	336.1	265.1
70°	366.1	375.1	393.1	428.1	442.1	441.1	450.1	426.1	382.1	312.1	245.1
72.5°	324.1	337.1	355.1	384.1	401.1	395.1	409.1	389.1	344.1	282.1	218.1
75°	275.1	286.1	309.1	332.1	351.1	344.1	355.1	341.1	300.1	246.1	187.0
77.5°	220.1	233.1	254.1	275.1	288.1	288.1	293.1	281.1	249.1	202.0	153.0
80°	163.0	175.0	194.0	209.1	221.1	222.1	227.1	221.1	192.0	157.0	117.0
82.5°	108.0	114.0	131.0	143.0	155.0	154.0	162.0	158.0	134.0	108.0	78.0
85°	46.0	50.0	64.0	74.0	85.0	81.0	92.0	91.0	72.0	52.0	35.0
87.5°	2.0	3.0	3.0	2.0	3.0	1.0	3.0	4.0	3.0	2.0	2.0
90°	2.8	2.8	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.8
92.5°	2.8	2.8	2.8	3.9	4.4	4.2	3.9	4.4	3.3	3.3	2.8
95°	3.3	3.3	3.9	5.0	6.1	6.4	6.6	6.6	3.9	3.9	3.3
97.5°	4.4	5.0	5.0	6.1	10.0	14.2	18.3	11.1	5.5	5.5	5.0
100°	7.2	7.7	7.7	13.8	29.3	34.3	39.3	28.2	14.4	10.5	7.7
102.5°	23.2	24.3	29.9	44.8	66.4	63.4	60.3	50.9	48.1	33.2	26.6
105°	59.2	58.7	63.1	74.7	93.0	92.2	91.3	84.1	76.4	65.8	60.9
107.5°	78.0	78.0	81.9	91.9	105.7	114.6	123.4	125.1	99.0	86.9	81.3
110°	88.0	88.0	91.3	99.6	117.9	130.4	142.8	141.6	122.3	107.3	100.2



REPORT NUMBER: P832867  
 CATALOG NUMBER: TTN-D0-750-U-DL-UPL1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	15°	25°	35°	40°	45°	55°	65°	75°	85°
112.5°	90.2	90.7	95.2	107.9	127.8	133.4	138.9	133.9	126.2	119.5	114.0
115°	93.5	93.5	98.5	110.7	121.7	124.0	126.2	120.6	114.5	110.1	107.9
117.5°	92.4	94.1	95.2	101.8	109.0	110.6	112.3	109.6	101.3	97.9	96.8
120°	85.8	85.8	86.9	90.2	94.1	94.9	95.7	94.6	89.1	86.3	85.8
122.5°	76.4	76.9	76.4	78.0	80.8	81.6	82.4	81.3	76.9	75.8	75.8
125°	67.0	67.0	66.4	67.5	69.2	68.9	68.6	69.2	67.0	66.4	66.4
127.5°	60.3	59.8	58.7	59.2	59.8	59.8	59.8	60.3	58.1	58.7	59.2
130°	53.7	53.7	52.6	52.6	52.6	52.0	51.5	52.6	51.5	52.0	52.6
132.5°	47.6	47.6	45.9	45.4	45.4	45.4	45.4	45.9	45.4	46.5	47.6
135°	42.6	42.6	40.9	41.5	41.5	41.2	40.9	41.5	40.9	42.1	42.6
137.5°	38.7	38.7	37.6	37.6	37.6	37.4	37.1	37.6	37.6	38.2	39.3
140°	35.4	35.4	34.9	34.9	34.3	34.6	34.9	34.9	34.9	35.4	36.0
142.5°	33.8	33.2	32.6	32.1	32.6	32.6	32.6	32.6	32.1	32.6	33.8
145°	31.0	31.0	30.4	30.4	30.4	30.7	31.0	30.4	30.4	31.0	31.0
147.5°	29.3	29.3	28.8	29.3	29.3	29.3	29.3	29.3	28.8	29.3	29.3
150°	28.8	28.2	27.7	28.2	28.2	28.0	27.7	27.7	27.7	27.7	28.2
152.5°	27.1	27.1	26.6	27.1	26.6	26.6	26.6	26.6	26.6	26.6	27.1
155°	26.0	26.0	25.5	26.0	26.0	26.0	26.0	26.0	26.0	26.0	26.0
157.5°	24.9	25.5	24.9	24.9	24.9	24.9	24.9	24.9	24.9	24.9	25.5
160°	24.3	24.3	24.3	24.3	23.8	23.8	23.8	23.8	24.3	24.3	24.3
162.5°	23.8	23.8	23.8	23.8	23.2	23.2	23.2	23.2	23.2	23.8	23.8
165°	23.8	23.2	23.2	23.2	22.7	22.7	22.7	22.7	22.7	23.2	23.8
167.5°	22.7	22.7	22.7	22.7	22.7	22.4	22.1	22.1	22.7	22.7	22.7
170°	22.7	22.7	22.1	22.1	22.1	22.1	22.1	22.1	22.1	22.1	22.1
172.5°	22.7	22.7	22.7	22.7	22.1	22.1	22.1	22.1	22.1	22.1	22.7
175°	22.7	22.7	22.7	22.7	22.1	22.1	22.1	22.1	22.7	22.7	22.7
177.5°	22.7	22.7	22.7	22.7	22.1	22.4	22.7	22.7	22.7	22.7	22.7
180°	22.7	22.7	22.7	22.7	22.7	22.7	22.7	22.7	22.7	22.7	22.7





REPORT NUMBER: P832867  
 CATALOG NUMBER: TTN-D0-750-U-DL-UPL1

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
2.5°	97.0	96.0	94.0	93.0	92.0	90.0	90.0	89.0	89.0	89.0	88.0
5°	97.0	95.0	93.0	90.0	88.0	86.0	84.0	82.0	81.0	81.0	80.0
7.5°	95.0	93.0	90.0	87.0	84.0	80.0	78.0	74.0	73.0	72.0	72.0
10°	95.0	93.0	88.0	84.0	80.0	76.0	73.0	69.0	66.0	65.0	65.0
12.5°	96.0	93.0	88.0	83.0	78.0	73.0	69.0	65.0	62.0	60.0	60.0
15°	100.0	96.0	90.0	83.0	77.0	71.0	67.0	62.0	59.0	57.0	57.0
17.5°	105.0	101.0	92.0	84.0	77.0	70.0	65.0	60.0	57.0	55.0	54.0
20°	112.0	106.0	96.0	85.0	77.0	70.0	64.0	59.0	55.0	53.0	53.0
22.5°	120.0	113.0	100.0	87.0	78.0	70.0	64.0	58.0	54.0	52.0	52.0
25°	130.0	121.0	106.0	91.0	80.0	71.0	64.0	58.0	54.0	52.0	52.0
27.5°	141.0	131.0	112.0	95.0	82.0	72.0	64.0	58.0	54.0	52.0	52.0
30°	151.0	140.0	118.0	99.0	85.0	73.0	65.0	59.0	55.0	53.0	52.0
32.5°	162.0	148.0	124.0	103.0	87.0	75.0	66.0	60.0	55.0	53.0	53.0
35°	173.0	158.0	130.0	108.0	90.0	77.0	67.0	61.0	56.0	54.0	54.0
37.5°	185.0	169.0	137.0	112.0	93.0	79.0	69.0	62.0	57.0	55.0	55.0
40°	199.0	180.0	144.0	117.0	96.0	81.0	70.0	64.0	59.0	57.0	57.0
42.5°	212.1	190.0	151.0	121.0	99.0	83.0	72.0	65.0	61.0	59.0	59.0
45°	225.1	202.0	158.0	126.0	102.0	86.0	74.0	68.0	63.0	61.0	61.0
47.5°	240.1	213.1	166.0	130.0	105.0	88.0	76.0	70.0	65.0	64.0	63.0
50°	252.1	221.1	171.0	134.0	107.0	90.0	78.0	71.0	67.0	65.0	65.0
52.5°	263.1	229.1	175.0	136.0	108.0	91.0	80.0	73.0	69.0	67.0	67.0
55°	269.1	232.1	178.0	136.0	109.0	92.0	80.0	73.0	69.0	68.0	67.0
57.5°	269.1	232.1	176.0	134.0	107.0	90.0	79.0	72.0	69.0	67.0	67.0
60°	265.1	229.1	171.0	130.0	104.0	87.0	77.0	70.0	67.0	66.0	66.0
62.5°	259.1	224.1	167.0	125.0	100.0	83.0	74.0	67.0	65.0	65.0	64.0
65°	243.1	209.1	158.0	118.0	94.0	78.0	70.0	64.0	62.0	61.0	60.0
67.5°	226.1	195.0	144.0	110.0	86.0	73.0	65.0	60.0	57.0	57.0	56.0
70°	209.1	180.0	131.0	99.0	77.0	67.0	59.0	54.0	52.0	52.0	52.0
72.5°	186.0	161.0	116.0	87.0	68.0	59.0	53.0	48.0	47.0	47.0	46.0
75°	159.0	137.0	98.0	74.0	57.0	50.0	45.0	40.0	40.0	40.0	40.0
77.5°	130.0	111.0	78.0	59.0	45.0	40.0	37.0	33.0	33.0	33.0	33.0
80°	98.0	82.0	57.0	43.0	33.0	29.0	27.0	25.0	26.0	26.0	25.0
82.5°	64.0	54.0	36.0	27.0	21.0	19.0	19.0	17.0	18.0	18.0	18.0
85°	28.0	24.0	15.0	12.0	10.0	10.0	10.0	9.0	10.0	10.0	10.0
87.5°	2.0	2.0	2.0	2.0	2.0	2.0	2.0	0.0	1.0	2.0	1.0
90°	2.8	2.8	3.3	3.3	3.3	3.3	3.3	3.3	3.3	2.8	2.8
92.5°	2.8	2.8	3.3	3.3	4.4	3.9	4.4	3.9	2.8	2.8	2.8
95°	3.3	3.3	3.9	3.9	6.6	6.6	6.1	5.0	3.9	3.3	3.3
97.5°	4.4	5.0	5.5	5.5	11.1	18.3	10.0	6.1	5.0	5.0	4.4
100°	7.7	7.7	10.5	14.4	28.2	39.3	29.3	13.8	7.7	7.7	7.2
102.5°	25.5	26.6	33.2	48.1	50.9	60.3	66.4	44.8	29.9	24.3	23.2
105°	60.9	60.9	65.8	76.4	84.1	91.3	93.0	74.7	63.1	58.7	59.2
107.5°	80.8	81.3	86.9	99.0	125.1	123.4	105.7	91.9	81.9	78.0	78.0
110°	99.0	100.2	107.3	122.3	141.6	142.8	117.9	99.6	91.3	88.0	88.0



REPORT NUMBER: P832867  
 CATALOG NUMBER: TTN-D0-750-U-DL-UPL1

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
112.5°	112.9	114.0	119.5	126.2	133.9	138.9	127.8	107.9	95.2	90.7	90.2
115°	109.0	107.9	110.1	114.5	120.6	126.2	121.7	110.7	98.5	93.5	93.5
117.5°	95.2	96.8	97.9	101.3	109.6	112.3	109.0	101.8	95.2	94.1	92.4
120°	84.7	85.8	86.3	89.1	94.6	95.7	94.1	90.2	86.9	85.8	85.8
122.5°	74.7	75.8	75.8	76.9	81.3	82.4	80.8	78.0	76.4	76.9	76.4
125°	65.8	66.4	66.4	67.0	69.2	68.6	69.2	67.5	66.4	67.0	67.0
127.5°	58.7	59.2	58.7	58.1	60.3	59.8	59.8	59.2	58.7	59.8	60.3
130°	53.1	52.6	52.0	51.5	52.6	51.5	52.6	52.6	52.6	53.7	53.7
132.5°	47.6	47.6	46.5	45.4	45.9	45.4	45.4	45.4	45.9	47.6	47.6
135°	42.6	42.6	42.1	40.9	41.5	40.9	41.5	41.5	40.9	42.6	42.6
137.5°	39.8	39.3	38.2	37.6	37.6	37.1	37.6	37.6	37.6	38.7	38.7
140°	36.0	36.0	35.4	34.9	34.9	34.9	34.3	34.9	34.9	35.4	35.4
142.5°	33.8	33.8	32.6	32.1	32.6	32.6	32.6	32.1	32.6	33.2	33.8
145°	31.5	31.0	31.0	30.4	30.4	31.0	30.4	30.4	30.4	31.0	31.0
147.5°	29.9	29.3	29.3	28.8	29.3	29.3	29.3	29.3	28.8	29.3	29.3
150°	28.2	28.2	27.7	27.7	27.7	27.7	28.2	28.2	27.7	28.2	28.8
152.5°	27.7	27.1	26.6	26.6	26.6	26.6	26.6	27.1	26.6	27.1	27.1
155°	26.0	26.0	26.0	26.0	26.0	26.0	26.0	26.0	25.5	26.0	26.0
157.5°	25.5	25.5	24.9	24.9	24.9	24.9	24.9	24.9	24.9	25.5	24.9
160°	24.9	24.3	24.3	24.3	23.8	23.8	23.8	24.3	24.3	24.3	24.3
162.5°	24.3	23.8	23.8	23.2	23.2	23.2	23.2	23.8	23.8	23.8	23.8
165°	23.2	23.8	23.2	22.7	22.7	22.7	22.7	23.2	23.2	23.2	23.8
167.5°	23.2	22.7	22.7	22.7	22.1	22.1	22.7	22.7	22.7	22.7	22.7
170°	22.7	22.1	22.1	22.1	22.1	22.1	22.1	22.1	22.1	22.7	22.7
172.5°	22.7	22.7	22.1	22.1	22.1	22.1	22.1	22.7	22.7	22.7	22.7
175°	22.1	22.7	22.7	22.7	22.1	22.1	22.1	22.7	22.7	22.7	22.7
177.5°	22.7	22.7	22.7	22.7	22.7	22.7	22.1	22.7	22.7	22.7	22.7
180°	22.7	22.7	22.7	22.7	22.7	22.7	22.7	22.7	22.7	22.7	22.7

(END OF REPORT)