

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P631804

Luminaire Tested: GWS-SA2B-740-U-5WQ-W-GRSBK

Issue Date: 1/10/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P631804  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-2)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/10/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: McGRAW-EDISON  
Catalog Number: GWS-SA2B-740-U-5WQ-W-GRSBK  
Description: GALLEON WALL SLIM LUMINAIRE. (2) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE V WIDE OPTICS W/ FACTORY INSTALLED GLARE SHIELD, BK  
Light Source: (32) 4000K CCT, 70 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3631.8 lumens  
Efficiency: N/A  
Efficacy: 78.3 lumens/watt  
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')  
IES Classification: Type V - Short  
BUG Rating: B2 - U0 - G0  
  
Input Watts (W): 46.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 0  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT



REPORT NUMBER: P631804  
 CATALOG NUMBER: GWS-SA2B-740-U-5WQ-W-GRSBK

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

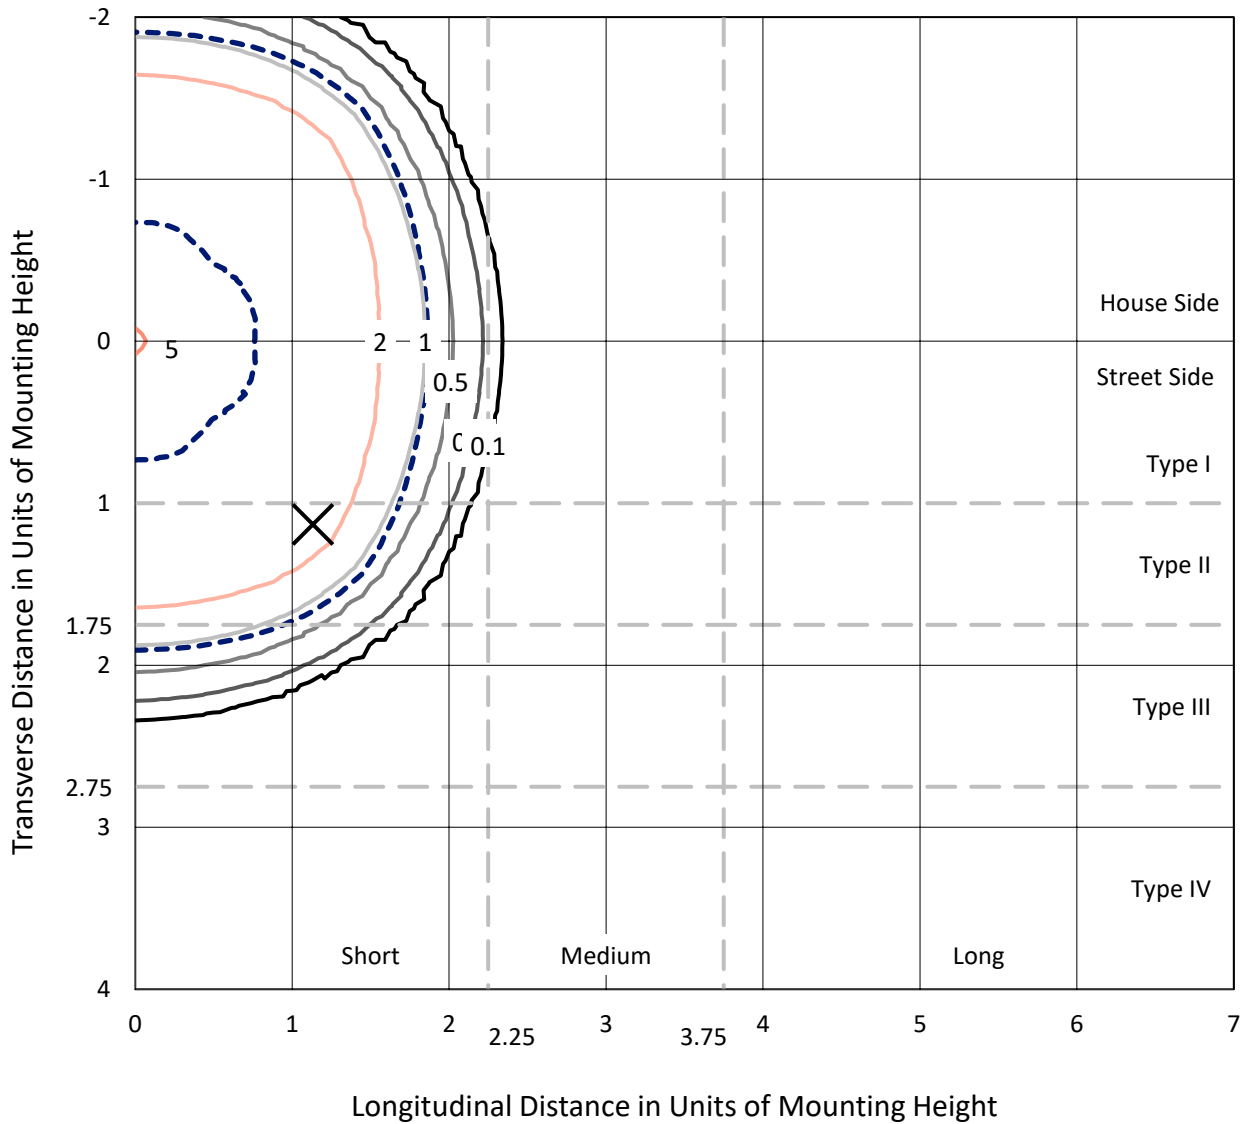

Based on 10 foot mounting height. Maximum calculated value = 5.2 fc  
 Type V - Short - N/A

REPORT NUMBER: P631804  
CATALOG NUMBER: GWS-SA2B-740-U-5WQ-W-GRSBK

### Luminous Intensity Polar Plot

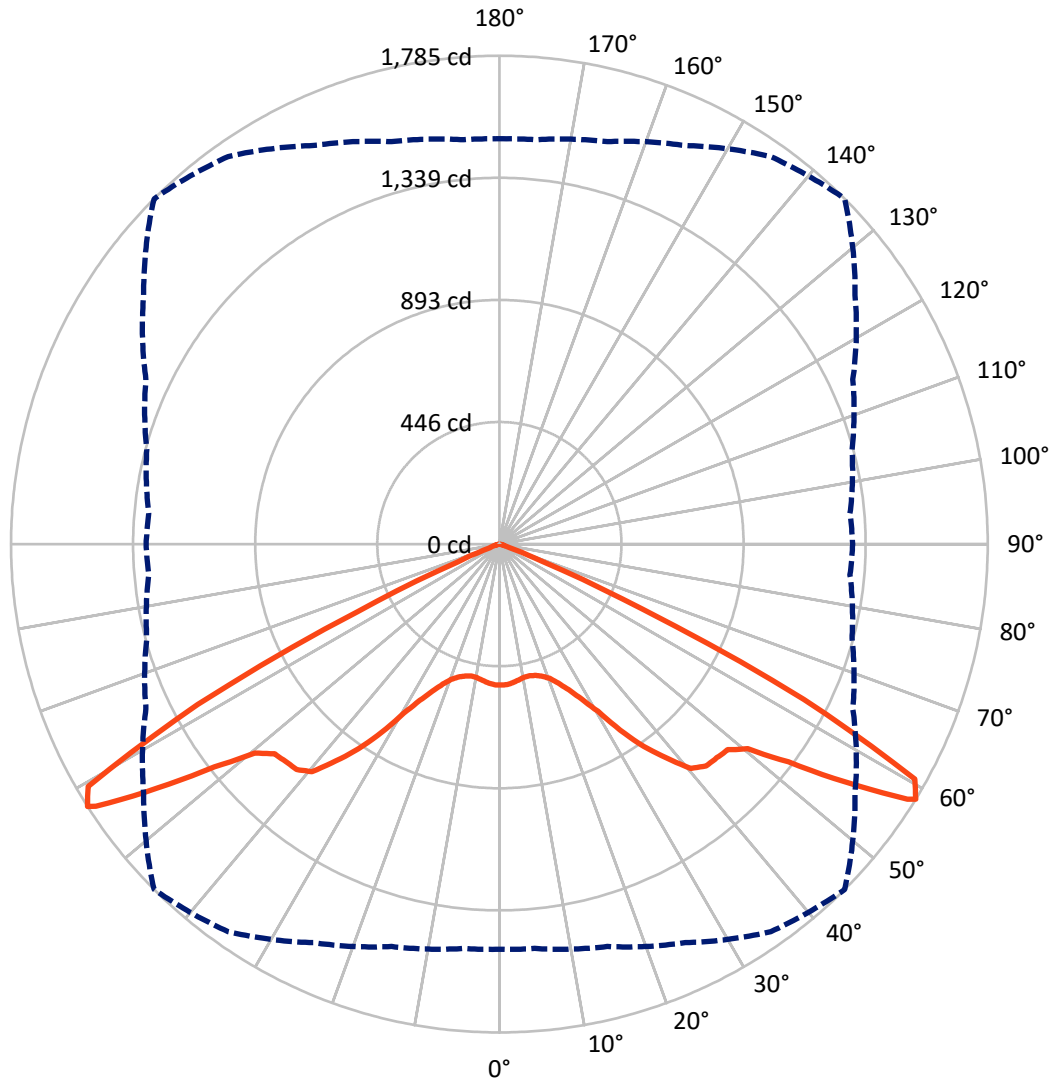

— Vertical Plane Through 45-Deg Lateral    - - - Horizontal Cone Through 58-Deg Vertical

REPORT NUMBER: P631804

CATALOG NUMBER: GWS-SA2B-740-U-5WQ-W-GRSBK

**FLUX DISTRIBUTION:**

|                    |           | Downward | Upward | Total  |
|--------------------|-----------|----------|--------|--------|
| <b>House Side</b>  | Lumens    | 1815.9   | 0.0    | 1815.9 |
|                    | % Fixture | 50.0     | 0.0    | 50.0   |
| <b>Street Side</b> | Lumens    | 1815.9   | 0.0    | 1815.9 |
|                    | % Fixture | 50.0     | 0.0    | 50.0   |
| <b>Total</b>       | Lumens    | 3631.8   | 0.0    | 3631.8 |
|                    | % Fixture | 100.0    | 0.0    | 100.0  |

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 48.1   | 1.3       |
| 10°-20°   | 142.2  | 3.9       |
| 20°-30°   | 268.9  | 7.4       |
| 30°-40°   | 530.4  | 14.6      |
| 40°-50°   | 839.3  | 23.1      |
| 50°-60°   | 1233.7 | 34.0      |
| 60°-70°   | 550.7  | 15.2      |
| 70°-80°   | 18.4   | 0.5       |
| 80°-90°   | 0.2    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-90°    | 3631.8 | 100.0     |
| 0°-180°   | 3631.8 | 100.0     |

**Coefficient of Utilization**



REPORT NUMBER: P631804


CATALOG NUMBER: GWS-SA2B-740-U-5WQ-W-GRSBK

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

| Zone           | Lumens | % Fixture | Zone Rating/Lumen Limit |      |        |
|----------------|--------|-----------|-------------------------|------|--------|
|                |        |           | B                       | U    | G      |
| FL (0°-30°)    | 229.6  | 6.3       |                         |      |        |
| FM (30°-60°)   | 1301.7 | 35.8      |                         |      |        |
| FH (60°-80°)   | 284.6  | 7.8       |                         |      | G0/660 |
| FVH (80°-90°)  | 0.1    | 0.0       |                         |      | G0/10  |
| BL (0°-30°)    | 229.6  | 6.3       | B1/500                  |      |        |
| BM (30°-60°)   | 1301.7 | 35.8      | B2/2500                 |      |        |
| BH (60°-80°)   | 284.6  | 7.8       | B1/500                  |      | G0/660 |
| BVH (80°-90°)  | 0.1    | 0.0       |                         |      | G0/10  |
| UL (90°-100°)  | 0.0    | 0.0       |                         | U0/0 |        |
| UH (100°-180°) | 0.0    | 0.0       |                         | U0/0 |        |

**BUG Rating: B2-U0-G0**

Type V Short

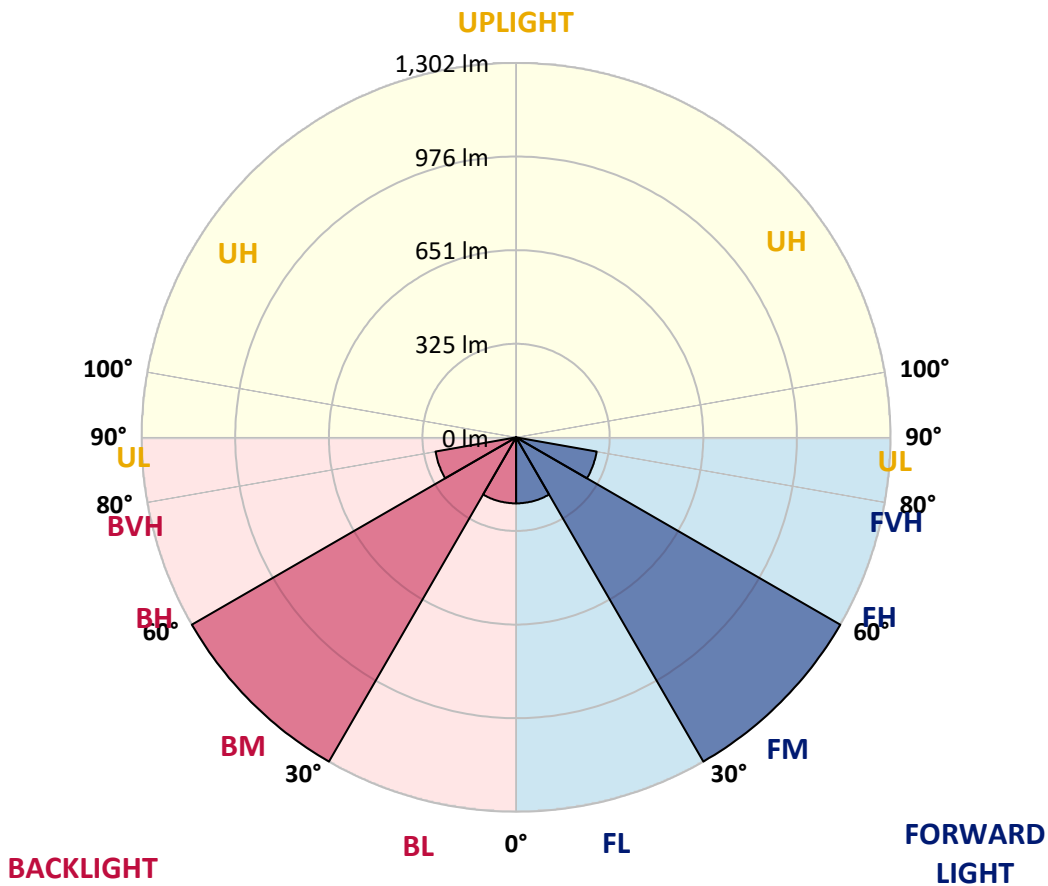



REPORT NUMBER: P631804

CATALOG NUMBER: GWS-SA2B-740-U-5WQ-W-GRSBK

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     | 5°     | 15°    | 25°    | 35°    | 45°    | 55°    | 65°    | 75°    | 85°    | 90°    |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°    | 515.0  | 515.0  | 515.0  | 515.0  | 515.0  | 515.0  | 515.0  | 515.0  | 515.0  | 515.0  | 515.0  |
| 2.5°  | 510.1  | 511.1  | 512.1  | 512.6  | 513.1  | 514.5  | 515.0  | 513.6  | 513.6  | 510.6  | 514.0  |
| 5°    | 507.6  | 508.6  | 509.6  | 509.1  | 509.1  | 509.1  | 508.6  | 506.6  | 506.1  | 503.2  | 506.6  |
| 7.5°  | 503.2  | 504.2  | 504.2  | 502.7  | 501.7  | 501.7  | 501.2  | 498.7  | 498.2  | 495.2  | 498.7  |
| 10°   | 499.7  | 500.2  | 499.7  | 496.7  | 494.8  | 494.8  | 494.3  | 493.3  | 493.8  | 491.8  | 494.8  |
| 12.5° | 501.7  | 502.2  | 500.2  | 496.2  | 493.8  | 493.3  | 491.8  | 490.3  | 491.8  | 491.3  | 494.3  |
| 15°   | 508.1  | 508.6  | 505.1  | 500.2  | 498.2  | 498.2  | 494.3  | 490.3  | 492.3  | 492.8  | 496.2  |
| 17.5° | 516.0  | 516.0  | 511.6  | 507.1  | 507.6  | 507.6  | 501.2  | 494.3  | 494.8  | 496.7  | 500.2  |
| 20°   | 525.4  | 525.4  | 521.0  | 520.0  | 523.4  | 523.9  | 516.0  | 505.1  | 502.7  | 504.2  | 508.1  |
| 22.5° | 542.2  | 542.2  | 538.8  | 541.3  | 549.2  | 551.6  | 539.8  | 524.4  | 518.5  | 519.5  | 523.4  |
| 25°   | 568.5  | 568.5  | 567.5  | 573.4  | 584.8  | 590.2  | 574.4  | 554.1  | 544.2  | 542.7  | 547.2  |
| 27.5° | 612.5  | 613.0  | 611.5  | 620.4  | 634.8  | 641.2  | 619.4  | 592.7  | 580.8  | 578.4  | 582.8  |
| 30°   | 669.4  | 669.4  | 669.9  | 682.3  | 701.1  | 709.5  | 680.8  | 649.6  | 635.8  | 627.8  | 633.8  |
| 32.5° | 732.7  | 733.7  | 738.7  | 759.4  | 792.6  | 809.9  | 767.9  | 724.3  | 702.1  | 693.6  | 700.1  |
| 35°   | 837.1  | 827.7  | 821.8  | 837.1  | 885.1  | 907.9  | 853.9  | 803.0  | 786.2  | 785.2  | 801.5  |
| 37.5° | 940.5  | 935.1  | 922.7  | 938.5  | 981.6  | 992.0  | 932.6  | 890.1  | 878.2  | 884.6  | 900.9  |
| 40°   | 1022.7 | 1012.8 | 996.4  | 1011.3 | 1067.7 | 1078.1 | 1004.8 | 962.8  | 958.3  | 972.7  | 994.9  |
| 42.5° | 1087.5 | 1073.6 | 1051.8 | 1055.3 | 1100.8 | 1108.2 | 1043.4 | 1011.8 | 1014.7 | 1032.5 | 1057.8 |
| 45°   | 1116.7 | 1105.8 | 1086.5 | 1085.0 | 1113.7 | 1114.2 | 1063.2 | 1046.9 | 1054.8 | 1068.7 | 1088.5 |
| 47.5° | 1129.0 | 1124.1 | 1113.2 | 1110.7 | 1127.0 | 1123.1 | 1091.4 | 1084.5 | 1091.9 | 1095.9 | 1107.3 |
| 50°   | 1159.7 | 1159.7 | 1161.2 | 1163.2 | 1180.0 | 1176.0 | 1153.8 | 1145.8 | 1136.4 | 1122.6 | 1126.1 |
| 52.5° | 1245.8 | 1249.3 | 1263.6 | 1279.4 | 1310.1 | 1323.0 | 1286.9 | 1240.8 | 1195.8 | 1165.6 | 1165.6 |
| 55°   | 1401.1 | 1404.6 | 1421.4 | 1448.1 | 1504.5 | 1535.2 | 1451.1 | 1349.7 | 1287.8 | 1246.8 | 1252.2 |
| 57.5° | 1486.7 | 1490.7 | 1525.3 | 1597.6 | 1706.9 | 1758.8 | 1578.3 | 1427.9 | 1341.3 | 1294.3 | 1298.2 |
| 58°   | 1481.3 | 1483.8 | 1522.8 | 1607.5 | 1729.2 | 1785.1 | 1587.2 | 1425.4 | 1334.3 | 1286.4 | 1291.3 |
| 60°   | 1316.0 | 1312.6 | 1374.9 | 1495.6 | 1667.3 | 1744.5 | 1498.6 | 1301.2 | 1195.3 | 1146.3 | 1148.8 |
| 62.5° | 860.4  | 862.4  | 916.3  | 1042.4 | 1176.0 | 1248.8 | 1046.9 | 900.0  | 814.9  | 785.2  | 777.8  |
| 65°   | 359.2  | 352.8  | 385.9  | 456.2  | 536.3  | 576.9  | 495.7  | 419.6  | 367.1  | 347.3  | 352.8  |
| 67.5° | 92.5   | 90.0   | 92.0   | 115.3  | 141.0  | 166.7  | 140.0  | 106.9  | 93.0   | 94.0   | 94.0   |
| 70°   | 52.4   | 49.5   | 40.1   | 37.1   | 36.1   | 36.1   | 36.1   | 36.1   | 41.6   | 49.0   | 50.5   |
| 72.5° | 39.6   | 37.1   | 29.2   | 25.2   | 22.3   | 20.8   | 21.8   | 25.2   | 30.2   | 36.6   | 37.6   |
| 75°   | 19.8   | 19.8   | 17.8   | 16.8   | 14.8   | 13.9   | 14.3   | 15.8   | 18.3   | 20.8   | 20.3   |
| 77.5° | 4.0    | 4.5    | 4.9    | 5.9    | 4.9    | 4.9    | 4.9    | 5.9    | 5.9    | 6.4    | 5.9    |
| 80°   | 0.5    | 0.5    | 0.5    | 0.5    | 0.5    | 0.5    | 0.5    | 0.5    | 0.5    | 0.5    | 0.5    |
| 82.5° | 0.0    | 0.5    | 0.5    | 0.0    | 0.0    | 0.0    | 0.0    | 0.5    | 0.5    | 0.5    | 0.5    |
| 85°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.5    | 0.5    |
| 87.5° | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |
| 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

LM-79-08: Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

MCGRAW, INVUE, LUMARK AND STREETWORKS

DATA VALID FOR LUMINAIRES UTILIZING SA LIGHT ENGINES

Report Number: SP1-2101-121-2

Luminaire Tested: IFLD-S-SA2A-740-U-T3R-HSS

Test Date: 03/05/2021



**Test Information**

Test Method: LM-79-08  
 Report Number: SP1-2101-121-2  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1  
 Measurement Geometry: 4π  
 Issue Date: 03/05/2021  
 Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
 Product Line: STREETWORKS  
 Catalog Number: **IFLD-S-SA2A-740-U-T3R-HSS**  
 Description: STREETWORKS INF FLOOD

SHIELD, DRIVER PROGRAMMED @ 615mA.

**Spectral Parameters**

|                           |         |           |      |      |       |
|---------------------------|---------|-----------|------|------|-------|
| CCT (K):                  | 3905    | CRI (Ra): | 71.2 | R9:  | -29.7 |
| CIE u':                   | 0.2273  | R1:       | 68.9 | R10: | 46.2  |
| CIE v':                   | 0.5024  | R2:       | 77.0 | R11: | 68.8  |
| Duv:                      | -0.0008 | R3:       | 84.0 | R12: | 45.6  |
| CIE x:                    | 0.3841  | R4:       | 71.6 | R13: | 69.5  |
| CIE y:                    | 0.3774  | R5:       | 68.9 | R14: | 90.7  |
| CIE z:                    | 0.2385  | R6:       | 68.3 |      |       |
| Peak Wavelength (nm):     | 443     | R7:       | 78.7 |      |       |
| Dominant Wavelength (nm): | 579     | R8:       | 52.2 |      |       |
| Purity:                   | 28.7    |           |      |      |       |
| Rf:                       | 71.7    |           |      |      |       |
| Rg:                       | 96.9    |           |      |      |       |



**Test Conditions**


Stabilization Time: 211M  
 Operation Time: 12H  
 Room Temperature (°C) / RH%: 24.8/312%  
 Sphere Temperature (°C): 24.1

REPORT NUMBER: SP1-2101-121-2


| Measurement and Test Equipment |                       |                  |                      |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument                     | Identification Number | Calibration Date | Calibration Due Date |
| Photometer                     | IN0058                | 1/31/2021        | 7/31/2021            |
| Power Meter                    | IN0071                | 12/1/2020        | 12/1/2021            |
| AC Power Source                | IN0063                | 12/1/2020        | 12/1/2021            |
| DC Power Source                | IN0208                | 12/1/2020        | 12/1/2021            |
| Sphere Thermometer             | IN0085                | 12/1/2020        | 12/1/2021            |
| Room Thermometer               | IN0046                | 12/1/2020        | 12/1/2021            |

REPORT NUMBER: SP1-2101-121-2

**CIE 1931 Chromaticity Diagram**

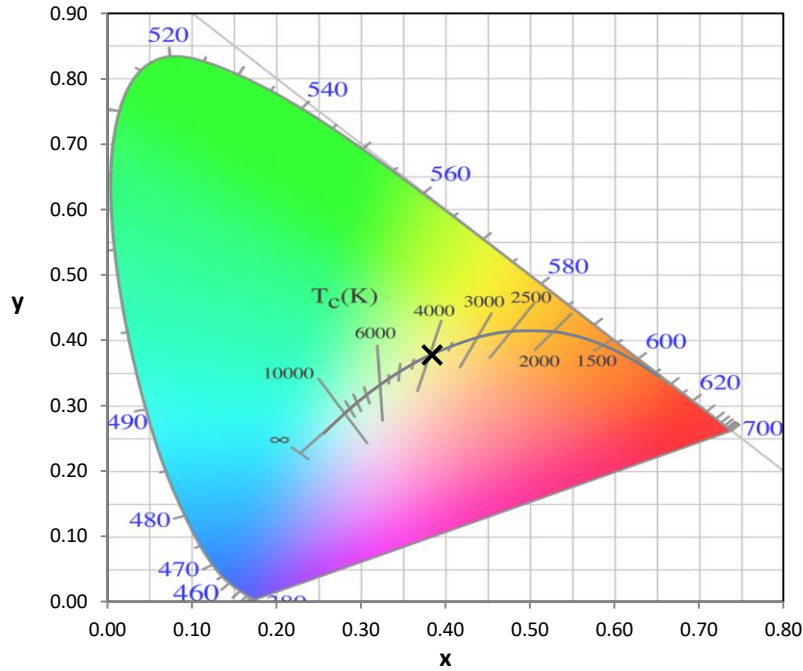

**CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles**

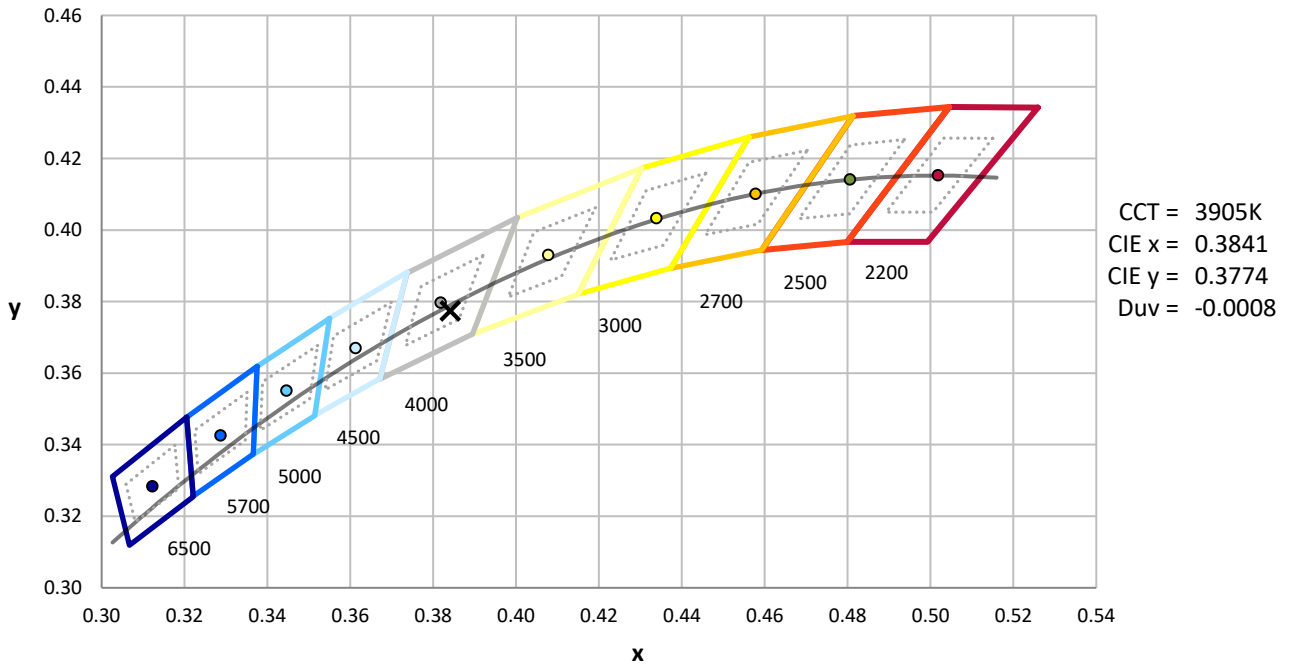

Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2101-121-2

**Photopic Flux vs. Wavelength**



#####

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360    | 2304          | 0.0           | 490    | 19043         | 2.7           | 620    | 97577         | 25.4          | 750    | 4830          | 0.0           | 880    | 3505          | 0.0           |
| 365    | 2150          | 0.0           | 495    | 26606         | 4.8           | 625    | 90158         | 19.9          | 755    | 4664          | 0.0           | 885    | 2991          | 0.0           |
| 370    | 2146          | 0.0           | 500    | 36376         | 8.0           | 630    | 82240         | 14.9          | 760    | 4006          | 0.0           | 890    | 2327          | 0.0           |
| 375    | 2332          | 0.0           | 505    | 47714         | 13.3          | 635    | 74361         | 11.2          | 765    | 3715          | 0.0           | 895    | 2775          | 0.0           |
| 380    | 2527          | 0.0           | 510    | 58741         | 20.2          | 640    | 66994         | 8.0           | 770    | 3696          | 0.0           | 900    | 2141          | 0.0           |
| 385    | 2304          | 0.0           | 515    | 68716         | 28.5          | 645    | 60405         | 5.8           | 775    | 3117          | 0.0           | 905    | 2421          | 0.0           |
| 390    | 2064          | 0.0           | 520    | 77136         | 37.4          | 650    | 53806         | 3.9           | 780    | 3062          | 0.0           | 910    | 2200          | 0.0           |
| 395    | 1856          | 0.0           | 525    | 83567         | 44.9          | 655    | 47610         | 2.7           | 785    | 2907          | 0.0           | 915    | 2716          | 0.0           |
| 400    | 1856          | 0.0           | 530    | 89283         | 52.6          | 660    | 42018         | 1.8           | 790    | 2655          | 0.0           | 920    | 2656          | 0.0           |
| 405    | 2374          | 0.0           | 535    | 94097         | 58.4          | 665    | 36742         | 1.2           | 795    | 2467          | 0.0           | 925    | 2671          | 0.0           |
| 410    | 4084          | 0.0           | 540    | 96845         | 63.1          | 670    | 32105         | 0.7           | 800    | 2609          | 0.0           | 930    | 3292          | 0.0           |
| 415    | 8543          | 0.0           | 545    | 100829        | 67.1          | 675    | 27946         | 0.5           | 805    | 2293          | 0.0           | 935    | 3188          | 0.0           |
| 420    | 18394         | 0.1           | 550    | 105648        | 71.8          | 680    | 24146         | 0.3           | 810    | 2188          | 0.0           | 940    | 1997          | 0.0           |
| 425    | 37987         | 0.2           | 555    | 110017        | 75.1          | 685    | 21191         | 0.2           | 815    | 2386          | 0.0           | 945    | 2623          | 0.0           |
| 430    | 67605         | 0.5           | 560    | 114586        | 77.9          | 690    | 18544         | 0.1           | 820    | 2712          | 0.0           | 950    | 2969          | 0.0           |
| 435    | 102160        | 1.2           | 565    | 118987        | 79.1          | 695    | 16058         | 0.1           | 825    | 2473          | 0.0           | 955    | 2277          | 0.0           |
| 440    | 135103        | 2.1           | 570    | 122326        | 79.5          | 700    | 14133         | 0.0           | 830    | 1969          | 0.0           | 960    | 4267          | 0.0           |
| 445    | 140126        | 2.9           | 575    | 125968        | 78.4          | 705    | 12309         | 0.0           | 835    | 1917          | 0.0           | 965    | 2034          | 0.0           |
| 450    | 102339        | 2.7           | 580    | 127613        | 75.8          | 710    | 11142         | 0.0           | 840    | 2248          | 0.0           | 970    | 3586          | 0.0           |
| 455    | 58751         | 2.0           | 585    | 129466        | 71.9          | 715    | 10143         | 0.0           | 845    | 2266          | 0.0           | 975    | 2505          | 0.0           |
| 460    | 36892         | 1.5           | 590    | 128813        | 66.6          | 720    | 9072          | 0.0           | 850    | 2558          | 0.0           | 980    | 2666          | 0.0           |
| 465    | 24637         | 1.3           | 595    | 126387        | 59.9          | 725    | 8130          | 0.0           | 855    | 2767          | 0.0           | 985    | 2934          | 0.0           |
| 470    | 16738         | 1.0           | 600    | 123477        | 53.2          | 730    | 7149          | 0.0           | 860    | 2826          | 0.0           | 990    | 4120          | 0.0           |
| 475    | 13456         | 1.1           | 605    | 118718        | 46.0          | 735    | 6311          | 0.0           | 865    | 2385          | 0.0           | 995    | 3858          | 0.0           |
| 480    | 13081         | 1.2           | 610    | 112091        | 38.5          | 740    | 5711          | 0.0           | 870    | 3194          | 0.0           | 1000   | 3405          | 0.0           |
| 485    | 14734         | 1.7           | 615    | 105039        | 31.7          | 745    | 5111          | 0.0           | 875    | 3189          | 0.0           |        |               |               |

REPORT NUMBER: SP1-2101-121-2

**Scotopic Flux vs. Wavelength**



**Scotopic Lumens: 10425.8 S/P: 1.47**

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360    | 2304          | 0.0           | 490    | 19043         | 29.3          | 620    | 97577         | 1.2           | 750    | 4830          | 0.0           | 880    | 3505          | 0.0           |
| 365    | 2150          | 0.0           | 495    | 26606         | 43.0          | 625    | 90158         | 0.8           | 755    | 4664          | 0.0           | 885    | 2991          | 0.0           |
| 370    | 2146          | 0.0           | 500    | 36376         | 60.8          | 630    | 82240         | 0.5           | 760    | 4006          | 0.0           | 890    | 2327          | 0.0           |
| 375    | 2332          | 0.0           | 505    | 47714         | 81.1          | 635    | 74361         | 0.3           | 765    | 3715          | 0.0           | 895    | 2775          | 0.0           |
| 380    | 2527          | 0.0           | 510    | 58741         | 99.6          | 640    | 66994         | 0.2           | 770    | 3696          | 0.0           | 900    | 2141          | 0.0           |
| 385    | 2304          | 0.0           | 515    | 68716         | 113.9         | 645    | 60405         | 0.1           | 775    | 3117          | 0.0           | 905    | 2421          | 0.0           |
| 390    | 2064          | 0.0           | 520    | 77136         | 122.6         | 650    | 53806         | 0.1           | 780    | 3062          | 0.0           | 910    | 2200          | 0.0           |
| 395    | 1856          | 0.0           | 525    | 83567         | 125.0         | 655    | 47610         | 0.0           | 785    | 2907          | 0.0           | 915    | 2716          | 0.0           |
| 400    | 1856          | 0.0           | 530    | 89283         | 123.1         | 660    | 42018         | 0.0           | 790    | 2655          | 0.0           | 920    | 2656          | 0.0           |
| 405    | 2374          | 0.1           | 535    | 94097         | 117.3         | 665    | 36742         | 0.0           | 795    | 2467          | 0.0           | 925    | 2671          | 0.0           |
| 410    | 4084          | 0.2           | 540    | 96845         | 107.0         | 670    | 32105         | 0.0           | 800    | 2609          | 0.0           | 930    | 3292          | 0.0           |
| 415    | 8543          | 0.9           | 545    | 100829        | 96.7          | 675    | 27946         | 0.0           | 805    | 2293          | 0.0           | 935    | 3188          | 0.0           |
| 420    | 18394         | 3.0           | 550    | 105648        | 86.4          | 680    | 24146         | 0.0           | 810    | 2188          | 0.0           | 940    | 1997          | 0.0           |
| 425    | 37987         | 9.3           | 555    | 110017        | 75.2          | 685    | 21191         | 0.0           | 815    | 2386          | 0.0           | 945    | 2623          | 0.0           |
| 430    | 67605         | 23.0          | 560    | 114586        | 64.0          | 690    | 18544         | 0.0           | 820    | 2712          | 0.0           | 950    | 2969          | 0.0           |
| 435    | 102160        | 45.7          | 565    | 118987        | 53.4          | 695    | 16058         | 0.0           | 825    | 2473          | 0.0           | 955    | 2277          | 0.0           |
| 440    | 135103        | 75.5          | 570    | 122326        | 43.2          | 700    | 14133         | 0.0           | 830    | 1969          | 0.0           | 960    | 4267          | 0.0           |
| 445    | 140126        | 93.8          | 575    | 125968        | 34.3          | 705    | 12309         | 0.0           | 835    | 1917          | 0.0           | 965    | 2034          | 0.0           |
| 450    | 102339        | 79.3          | 580    | 127613        | 26.3          | 710    | 11142         | 0.0           | 840    | 2248          | 0.0           | 970    | 3586          | 0.0           |
| 455    | 58751         | 51.3          | 585    | 129466        | 19.8          | 715    | 10143         | 0.0           | 845    | 2266          | 0.0           | 975    | 2505          | 0.0           |
| 460    | 36892         | 35.6          | 590    | 128813        | 14.3          | 720    | 9072          | 0.0           | 850    | 2558          | 0.0           | 980    | 2666          | 0.0           |
| 465    | 24637         | 26.0          | 595    | 126387        | 10.1          | 725    | 8130          | 0.0           | 855    | 2767          | 0.0           | 985    | 2934          | 0.0           |
| 470    | 16738         | 19.3          | 600    | 123477        | 7.0           | 730    | 7149          | 0.0           | 860    | 2826          | 0.0           | 990    | 4120          | 0.0           |
| 475    | 13456         | 16.8          | 605    | 118718        | 4.7           | 735    | 6311          | 0.0           | 865    | 2385          | 0.0           | 995    | 3858          | 0.0           |
| 480    | 13081         | 17.7          | 610    | 112091        | 3.0           | 740    | 5711          | 0.0           | 870    | 3194          | 0.0           | 1000   | 3405          | 0.0           |
| 485    | 14734         | 21.4          | 615    | 105039        | 1.9           | 745    | 5111          | 0.0           | 875    | 3189          | 0.0           |        |               |               |

REPORT NUMBER: SP1-2101-121-2

**Melanopic Flux vs. Wavelength**



**Melanopic Lumens: 3927.2 M/P: 0.55**

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360    | 2304          | 0.0           | 490    | 19043         | 15.8          | 620    | 97577         | 0.1           | 750    | 4830          | 0.0           | 880    | 3505          | 0.0           |
| 365    | 2150          | 0.0           | 495    | 26606         | 22.0          | 625    | 90158         | 0.0           | 755    | 4664          | 0.0           | 885    | 2991          | 0.0           |
| 370    | 2146          | 0.0           | 500    | 36376         | 29.2          | 630    | 82240         | 0.0           | 760    | 4006          | 0.0           | 890    | 2327          | 0.0           |
| 375    | 2332          | 0.0           | 505    | 47714         | 36.6          | 635    | 74361         | 0.0           | 765    | 3715          | 0.0           | 895    | 2775          | 0.0           |
| 380    | 2527          | 0.0           | 510    | 58741         | 42.2          | 640    | 66994         | 0.0           | 770    | 3696          | 0.0           | 900    | 2141          | 0.0           |
| 385    | 2304          | 0.0           | 515    | 68716         | 44.9          | 645    | 60405         | 0.0           | 775    | 3117          | 0.0           | 905    | 2421          | 0.0           |
| 390    | 2064          | 0.0           | 520    | 77136         | 44.9          | 650    | 53806         | 0.0           | 780    | 3062          | 0.0           | 910    | 2200          | 0.0           |
| 395    | 1856          | 0.0           | 525    | 83567         | 42.4          | 655    | 47610         | 0.0           | 785    | 2907          | 0.0           | 915    | 2716          | 0.0           |
| 400    | 1856          | 0.0           | 530    | 89283         | 38.6          | 660    | 42018         | 0.0           | 790    | 2655          | 0.0           | 920    | 2656          | 0.0           |
| 405    | 2374          | 0.0           | 535    | 94097         | 33.9          | 665    | 36742         | 0.0           | 795    | 2467          | 0.0           | 925    | 2671          | 0.0           |
| 410    | 4084          | 0.2           | 540    | 96845         | 28.3          | 670    | 32105         | 0.0           | 800    | 2609          | 0.0           | 930    | 3292          | 0.0           |
| 415    | 8543          | 0.6           | 545    | 100829        | 23.4          | 675    | 27946         | 0.0           | 805    | 2293          | 0.0           | 935    | 3188          | 0.0           |
| 420    | 18394         | 2.1           | 550    | 105648        | 19.0          | 680    | 24146         | 0.0           | 810    | 2188          | 0.0           | 940    | 1997          | 0.0           |
| 425    | 37987         | 5.9           | 555    | 110017        | 14.8          | 685    | 21191         | 0.0           | 815    | 2386          | 0.0           | 945    | 2623          | 0.0           |
| 430    | 67605         | 14.3          | 560    | 114586        | 11.3          | 690    | 18544         | 0.0           | 820    | 2712          | 0.0           | 950    | 2969          | 0.0           |
| 435    | 102160        | 27.3          | 565    | 118987        | 8.4           | 695    | 16058         | 0.0           | 825    | 2473          | 0.0           | 955    | 2277          | 0.0           |
| 440    | 135103        | 45.1          | 570    | 122326        | 6.0           | 700    | 14133         | 0.0           | 830    | 1969          | 0.0           | 960    | 4267          | 0.0           |
| 445    | 140126        | 55.3          | 575    | 125968        | 4.2           | 705    | 12309         | 0.0           | 835    | 1917          | 0.0           | 965    | 2034          | 0.0           |
| 450    | 102339        | 47.2          | 580    | 127613        | 2.9           | 710    | 11142         | 0.0           | 840    | 2248          | 0.0           | 970    | 3586          | 0.0           |
| 455    | 58751         | 30.8          | 585    | 129466        | 1.9           | 715    | 10143         | 0.0           | 845    | 2266          | 0.0           | 975    | 2505          | 0.0           |
| 460    | 36892         | 21.7          | 590    | 128813        | 1.3           | 720    | 9072          | 0.0           | 850    | 2558          | 0.0           | 980    | 2666          | 0.0           |
| 465    | 24637         | 16.1          | 595    | 126387        | 0.8           | 725    | 8130          | 0.0           | 855    | 2767          | 0.0           | 985    | 2934          | 0.0           |
| 470    | 16738         | 12.0          | 600    | 123477        | 0.5           | 730    | 7149          | 0.0           | 860    | 2826          | 0.0           | 990    | 4120          | 0.0           |
| 475    | 13456         | 10.3          | 605    | 118718        | 0.3           | 735    | 6311          | 0.0           | 865    | 2385          | 0.0           | 995    | 3858          | 0.0           |
| 480    | 13081         | 10.5          | 610    | 112091        | 0.2           | 740    | 5711          | 0.0           | 870    | 3194          | 0.0           | 1000   | 3405          | 0.0           |
| 485    | 14734         | 12.1          | 615    | 105039        | 0.1           | 745    | 5111          | 0.0           | 875    | 3189          | 0.0           |        |               |               |

**Summary**

$R_f = 71.7$   
 $R_g = 96.9$   
 CIE  $R_a = 71.2$   
 $R_g = -29.7$



**Color Vector Graphics**



**Individual Sample Fidelity Index ( $R_{f,i}$ )**

|            |            |            |            |
|------------|------------|------------|------------|
| CES01 = 85 | CES26 = 55 | CES51 = 86 | CES76 = 45 |
| CES02 = 61 | CES27 = 80 | CES52 = 87 | CES77 = 68 |
| CES03 = 30 | CES28 = 79 | CES53 = 74 | CES78 = 49 |
| CES04 = 70 | CES29 = 51 | CES54 = 81 | CES79 = 77 |
| CES05 = 47 | CES30 = 60 | CES55 = 80 | CES80 = 75 |
| CES06 = 50 | CES31 = 56 | CES56 = 69 | CES81 = 75 |
| CES07 = 40 | CES32 = 52 | CES57 = 67 | CES82 = 90 |
| CES08 = 39 | CES33 = 62 | CES58 = 69 | CES83 = 85 |
| CES09 = 29 | CES34 = 65 | CES59 = 86 | CES84 = 87 |
| CES10 = 74 | CES35 = 81 | CES60 = 91 | CES85 = 83 |
| CES11 = 57 | CES36 = 92 | CES61 = 85 | CES86 = 72 |
| CES12 = 63 | CES37 = 74 | CES62 = 81 | CES87 = 77 |
| CES13 = 42 | CES38 = 69 | CES63 = 72 | CES88 = 77 |
| CES14 = 74 | CES39 = 92 | CES64 = 69 | CES89 = 72 |
| CES15 = 71 | CES40 = 86 | CES65 = 64 | CES90 = 75 |
| CES16 = 46 | CES41 = 84 | CES66 = 63 | CES91 = 91 |
| CES17 = 49 | CES42 = 75 | CES67 = 60 | CES92 = 66 |
| CES18 = 56 | CES43 = 70 | CES68 = 67 | CES93 = 80 |
| CES19 = 72 | CES44 = 98 | CES69 = 77 | CES94 = 56 |
| CES20 = 65 | CES45 = 80 | CES70 = 57 | CES95 = 72 |
| CES21 = 86 | CES46 = 77 | CES71 = 53 | CES96 = 78 |
| CES22 = 78 | CES47 = 74 | CES72 = 84 | CES97 = 83 |
| CES23 = 92 | CES48 = 66 | CES73 = 47 | CES98 = 73 |
| CES24 = 91 | CES49 = 76 | CES74 = 96 | CES99 = 63 |
| CES25 = 72 | CES50 = 85 | CES75 = 52 |            |





Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)