

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P636811

Luminaire Tested: GWS-SA4B-750-U-5WQ-W

Issue Date: 1/10/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P636811  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-1)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/10/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: McGRAW-EDISON  
Catalog Number: GWS-SA4B-750-U-5WQ-W  
Description: GALLEON WALL SLIM LUMINAIRE. (4) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE V WIDE OPTICS  
Light Source: (64) 5000K CCT, 70 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 15010.3 lumens  
Efficiency: N/A  
Efficacy: 159.0 lumens/watt  
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')  
IES Classification: Type V - Short  
BUG Rating: B4 - U0 - G2  
  
Input Watts (W): 94.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 0  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT



REPORT NUMBER: P636811  
 CATALOG NUMBER: GWS-SA4B-750-U-5WQ-W

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

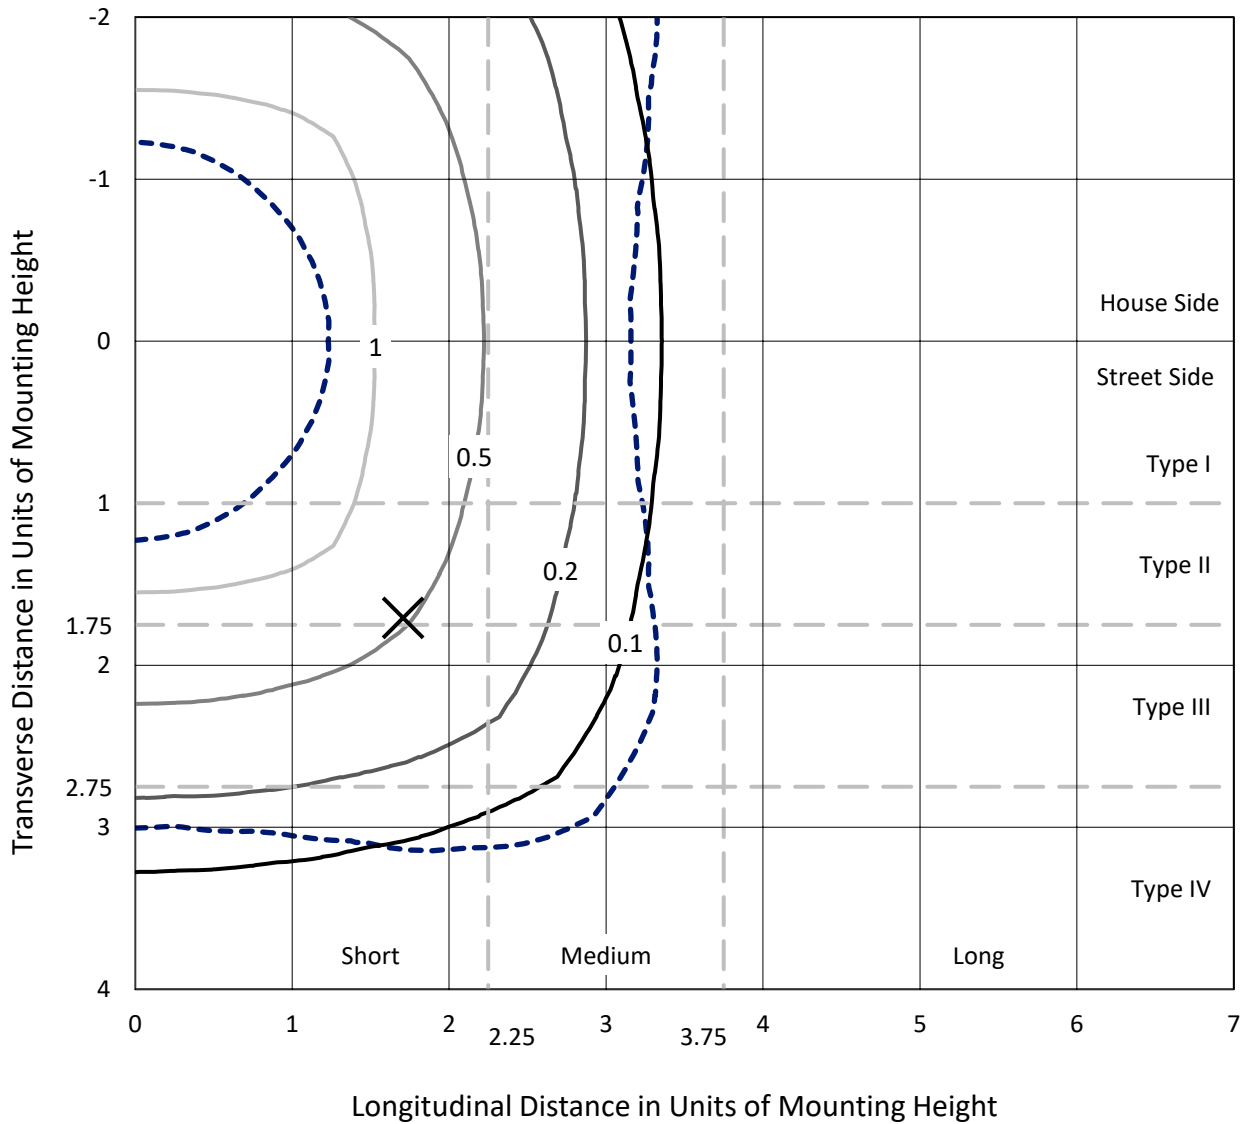

Based on 25 foot mounting height. Maximum calculated value = 1.9 fc  
 Type V - Short - N/A

REPORT NUMBER: P636811  
CATALOG NUMBER: GWS-SA4B-750-U-5WQ-W

### Luminous Intensity Polar Plot

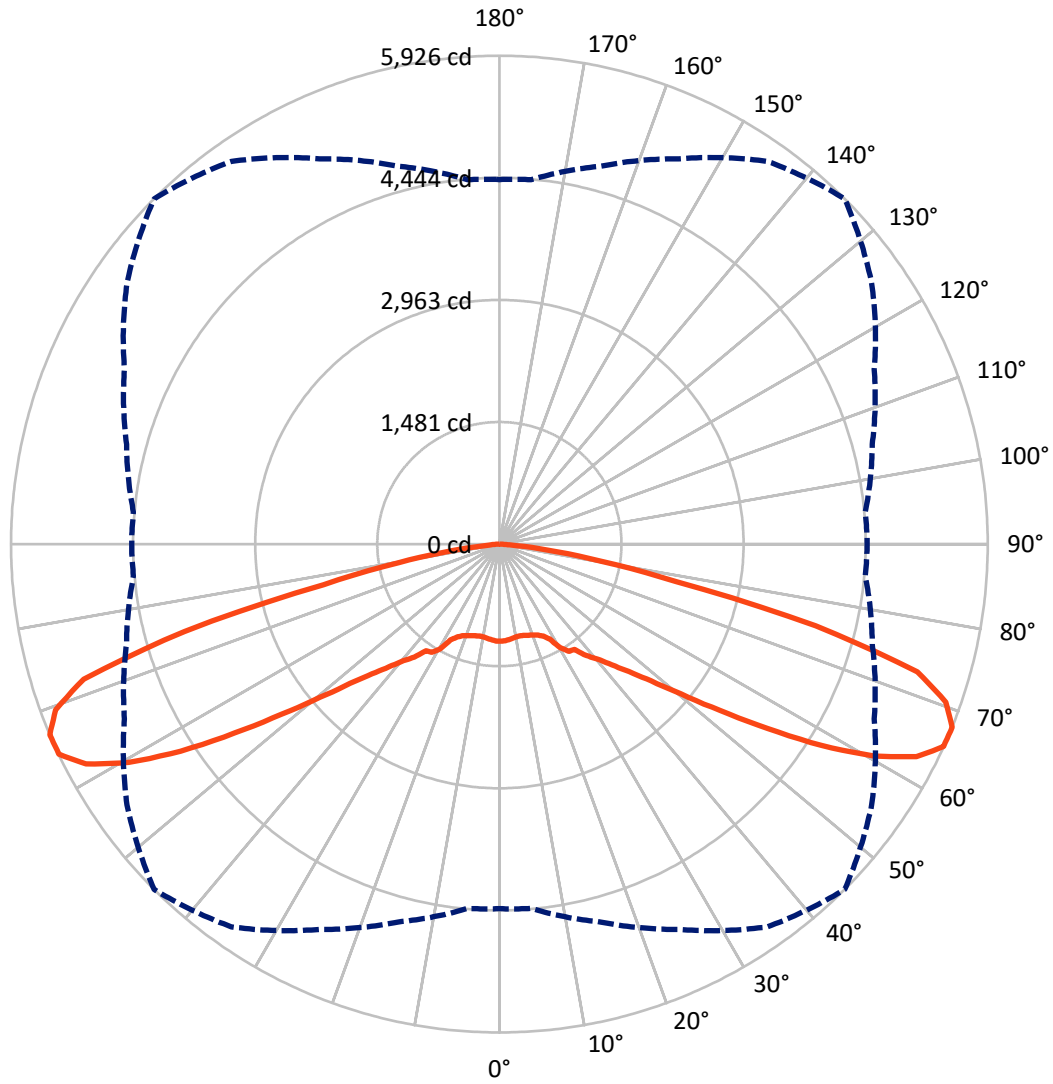

— Vertical Plane Through 45-Deg Lateral    - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P636811  
 CATALOG NUMBER: GWS-SA4B-750-U-5WQ-W


**FLUX DISTRIBUTION:**

|                    |           | Downward | Upward | Total   |
|--------------------|-----------|----------|--------|---------|
| <b>House Side</b>  | Lumens    | 7505.2   | 0.0    | 7505.2  |
|                    | % Fixture | 50.0     | 0.0    | 50.0    |
| <b>Street Side</b> | Lumens    | 7505.2   | 0.0    | 7505.2  |
|                    | % Fixture | 50.0     | 0.0    | 50.0    |
| <b>Total</b>       | Lumens    | 15010.3  | 0.0    | 15010.3 |
|                    | % Fixture | 100.0    | 0.0    | 100.0   |

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 110.5   | 0.7       |
| 10°-20°   | 328.0   | 2.2       |
| 20°-30°   | 588.4   | 3.9       |
| 30°-40°   | 993.9   | 6.6       |
| 40°-50°   | 1746.3  | 11.6      |
| 50°-60°   | 3368.6  | 22.4      |
| 60°-70°   | 4887.4  | 32.6      |
| 70°-80°   | 2796.4  | 18.6      |
| 80°-90°   | 190.9   | 1.3       |
| 90°-100°  | 0.0     | 0.0       |
| 100°-110° | 0.0     | 0.0       |
| 110°-120° | 0.0     | 0.0       |
| 120°-130° | 0.0     | 0.0       |
| 130°-140° | 0.0     | 0.0       |
| 140°-150° | 0.0     | 0.0       |
| 150°-160° | 0.0     | 0.0       |
| 160°-170° | 0.0     | 0.0       |
| 170°-180° | 0.0     | 0.0       |
| 0°-90°    | 15010.3 | 100.0     |
| 0°-180°   | 15010.3 | 100.0     |

**Coefficient of Utilization**

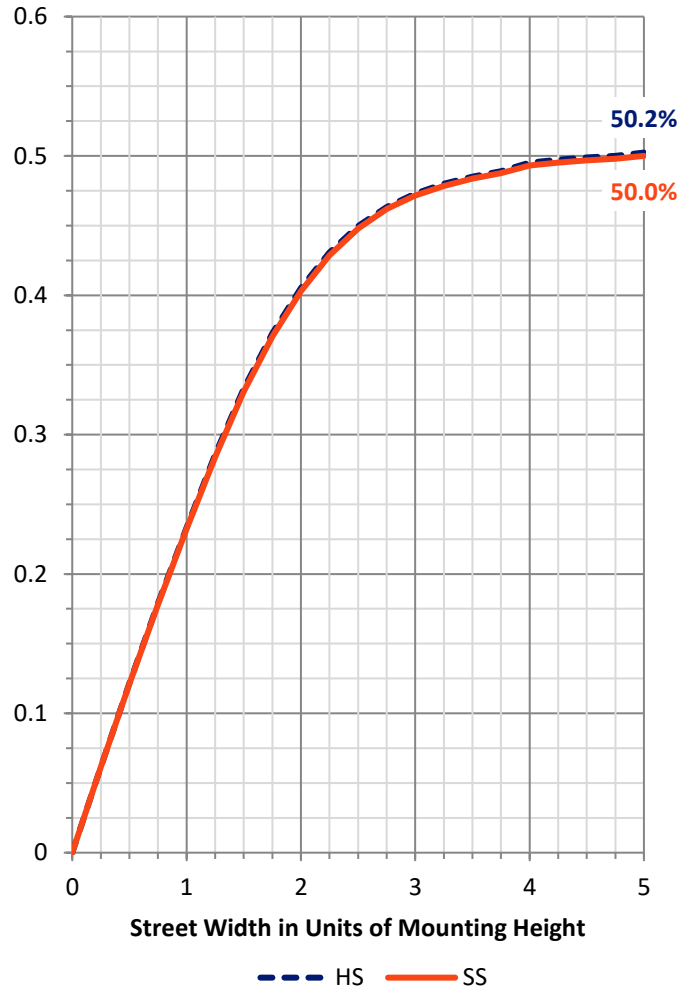


REPORT NUMBER: P636811  
 CATALOG NUMBER: GWS-SA4B-750-U-5WQ-W

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

| Zone           | Lumens | % Fixture | Zone Rating/Lumen Limit |      |         |
|----------------|--------|-----------|-------------------------|------|---------|
|                |        |           | B                       | U    | G       |
| FL (0°-30°)    | 513.4  | 3.4       |                         |      |         |
| FM (30°-60°)   | 3054.4 | 20.3      |                         |      |         |
| FH (60°-80°)   | 3841.9 | 25.6      |                         |      | G2/5000 |
| FVH (80°-90°)  | 95.4   | 0.6       |                         |      | G1/100  |
| BL (0°-30°)    | 513.4  | 3.4       | B2/1000                 |      |         |
| BM (30°-60°)   | 3054.4 | 20.3      | B3/5000                 |      |         |
| BH (60°-80°)   | 3841.9 | 25.6      | B4/5000                 |      | G2/5000 |
| BVH (80°-90°)  | 95.4   | 0.6       |                         |      | G1/100  |
| UL (90°-100°)  | 0.0    | 0.0       |                         | U0/0 |         |
| UH (100°-180°) | 0.0    | 0.0       |                         | U0/0 |         |

**BUG Rating: B4-U0-G2**  
 Type V Short

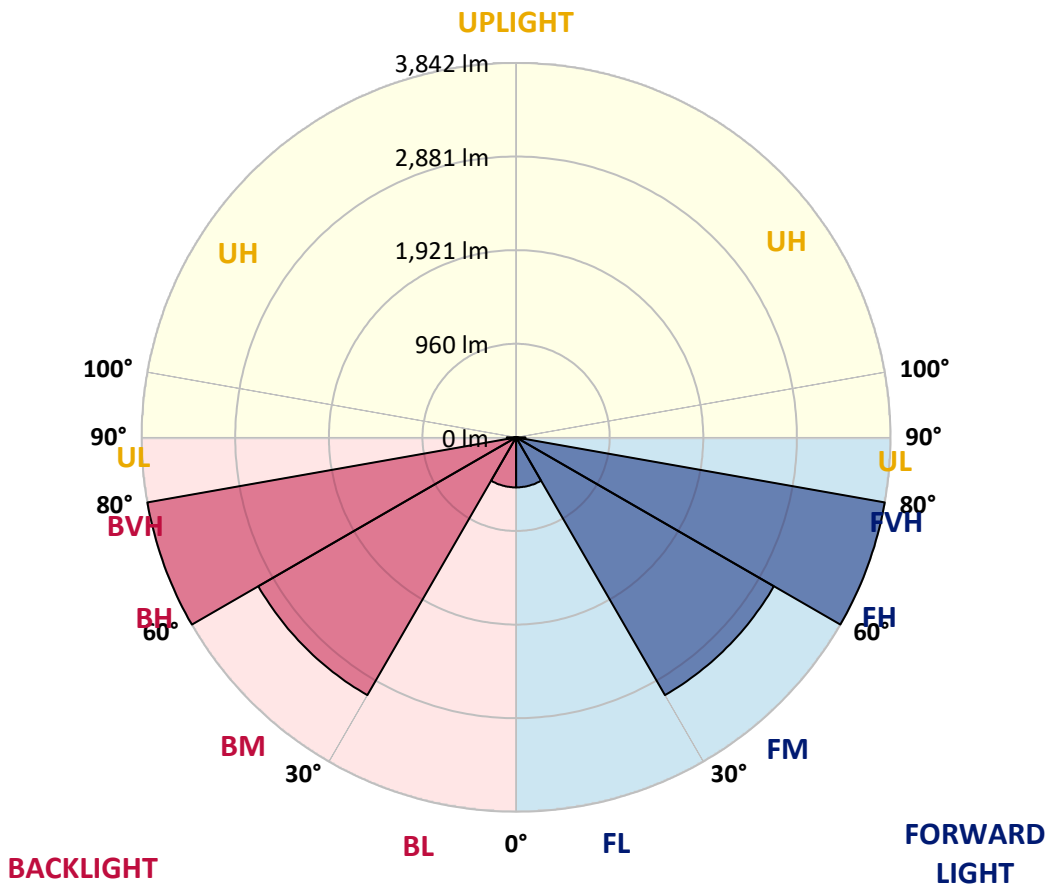



REPORT NUMBER: P636811  
 CATALOG NUMBER: GWS-SA4B-750-U-5WQ-W

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     | 5°     | 15°    | 25°    | 35°    | 45°    | 55°    | 65°    | 75°    | 85°    | 90°    |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°    | 1177.1 | 1177.1 | 1177.1 | 1177.1 | 1177.1 | 1177.1 | 1177.1 | 1177.1 | 1177.1 | 1177.1 | 1177.1 |
| 2.5°  | 1167.6 | 1168.6 | 1170.7 | 1170.7 | 1172.9 | 1176.1 | 1177.1 | 1175.0 | 1176.1 | 1170.7 | 1176.1 |
| 5°    | 1164.4 | 1165.4 | 1166.5 | 1164.4 | 1164.4 | 1165.4 | 1165.4 | 1163.3 | 1164.4 | 1159.1 | 1164.4 |
| 7.5°  | 1156.9 | 1158.0 | 1158.0 | 1154.8 | 1151.6 | 1153.8 | 1153.8 | 1151.6 | 1152.7 | 1147.4 | 1153.8 |
| 10°   | 1150.6 | 1150.6 | 1149.5 | 1143.1 | 1140.0 | 1143.1 | 1144.2 | 1145.3 | 1149.5 | 1145.3 | 1152.7 |
| 12.5° | 1154.8 | 1154.8 | 1151.6 | 1143.1 | 1137.8 | 1140.0 | 1142.1 | 1144.2 | 1151.6 | 1150.6 | 1159.1 |
| 15°   | 1166.5 | 1167.6 | 1159.1 | 1149.5 | 1146.3 | 1149.5 | 1147.4 | 1146.3 | 1155.9 | 1159.1 | 1168.6 |
| 17.5° | 1176.1 | 1176.1 | 1165.4 | 1155.9 | 1156.9 | 1162.3 | 1158.0 | 1152.7 | 1162.3 | 1168.6 | 1179.2 |
| 20°   | 1184.5 | 1183.5 | 1171.8 | 1165.4 | 1169.7 | 1177.1 | 1173.9 | 1166.5 | 1172.9 | 1180.3 | 1189.9 |
| 22.5° | 1205.8 | 1204.7 | 1192.0 | 1188.8 | 1193.0 | 1200.5 | 1197.3 | 1190.9 | 1198.3 | 1209.0 | 1220.6 |
| 25°   | 1266.3 | 1264.2 | 1245.0 | 1234.4 | 1232.3 | 1237.6 | 1236.6 | 1234.4 | 1246.1 | 1258.8 | 1272.6 |
| 27.5° | 1346.9 | 1345.9 | 1332.1 | 1321.5 | 1307.7 | 1303.4 | 1306.6 | 1316.2 | 1333.1 | 1342.7 | 1354.4 |
| 30°   | 1387.3 | 1387.3 | 1385.2 | 1402.1 | 1431.9 | 1460.5 | 1438.2 | 1402.1 | 1387.3 | 1383.0 | 1394.7 |
| 32.5° | 1440.3 | 1445.7 | 1438.2 | 1457.3 | 1507.2 | 1549.7 | 1507.2 | 1448.8 | 1438.2 | 1438.2 | 1451.0 |
| 35°   | 1562.4 | 1564.5 | 1552.9 | 1549.7 | 1565.6 | 1570.9 | 1550.7 | 1529.5 | 1541.2 | 1543.3 | 1559.2 |
| 37.5° | 1660.1 | 1660.1 | 1654.8 | 1663.2 | 1696.1 | 1716.3 | 1683.4 | 1645.2 | 1648.4 | 1650.5 | 1670.7 |
| 40°   | 1810.8 | 1815.0 | 1802.3 | 1801.2 | 1814.0 | 1832.0 | 1797.0 | 1772.6 | 1789.6 | 1794.9 | 1825.6 |
| 42.5° | 1998.7 | 1998.7 | 1979.5 | 1974.2 | 1982.7 | 2001.8 | 1968.9 | 1953.0 | 1975.3 | 1979.5 | 1997.6 |
| 45°   | 2222.6 | 2227.9 | 2202.4 | 2192.9 | 2197.1 | 2203.5 | 2180.2 | 2172.7 | 2194.0 | 2203.5 | 2235.3 |
| 47.5° | 2495.4 | 2500.7 | 2478.4 | 2477.4 | 2473.1 | 2477.4 | 2455.1 | 2450.8 | 2467.8 | 2460.4 | 2494.3 |
| 50°   | 2831.9 | 2841.4 | 2822.3 | 2848.8 | 2845.7 | 2858.4 | 2827.6 | 2805.3 | 2805.3 | 2785.2 | 2804.3 |
| 52.5° | 3208.7 | 3227.8 | 3237.3 | 3281.9 | 3315.9 | 3347.7 | 3296.8 | 3261.7 | 3210.8 | 3169.4 | 3221.4 |
| 55°   | 3619.4 | 3614.1 | 3674.6 | 3772.3 | 3872.1 | 3947.4 | 3847.6 | 3737.3 | 3654.5 | 3568.5 | 3588.7 |
| 57.5° | 3979.3 | 3997.3 | 4076.9 | 4255.2 | 4452.7 | 4611.9 | 4432.5 | 4220.2 | 4032.3 | 3909.2 | 3926.2 |
| 60°   | 4278.6 | 4293.4 | 4399.6 | 4656.4 | 5001.4 | 5221.1 | 4936.7 | 4586.4 | 4313.6 | 4143.8 | 4161.8 |
| 62.5° | 4554.5 | 4568.3 | 4675.6 | 4959.0 | 5394.1 | 5680.7 | 5313.5 | 4834.8 | 4531.2 | 4360.3 | 4370.9 |
| 65°   | 4713.8 | 4722.3 | 4868.7 | 5167.0 | 5625.5 | 5921.7 | 5507.7 | 5014.1 | 4715.9 | 4541.8 | 4548.2 |
| 67.5° | 4424.0 | 4437.8 | 4746.7 | 5158.5 | 5670.1 | 5925.9 | 5516.2 | 5019.5 | 4684.0 | 4456.9 | 4462.2 |
| 70°   | 3489.9 | 3478.3 | 3846.6 | 4554.5 | 5414.3 | 5747.6 | 5271.0 | 4642.6 | 4124.7 | 3807.3 | 3802.0 |
| 72.5° | 2661.0 | 2664.2 | 2869.0 | 3354.1 | 4414.4 | 5303.9 | 4651.1 | 3738.3 | 3180.0 | 2939.1 | 2929.5 |
| 75°   | 1929.7 | 1959.4 | 2126.0 | 2481.6 | 3087.7 | 3964.4 | 3501.6 | 2770.3 | 2396.7 | 2252.3 | 2231.1 |
| 77.5° | 869.3  | 907.5  | 1140.0 | 1558.2 | 2064.5 | 2190.8 | 2199.3 | 1880.8 | 1419.1 | 1179.2 | 1142.1 |
| 80°   | 253.7  | 271.7  | 349.2  | 597.6  | 961.6  | 1242.9 | 987.1  | 830.0  | 516.9  | 405.5  | 386.4  |
| 82.5° | 107.2  | 122.1  | 149.7  | 165.6  | 279.2  | 576.4  | 358.8  | 228.2  | 212.3  | 171.9  | 157.1  |
| 85°   | 45.6   | 48.8   | 62.6   | 66.9   | 90.2   | 123.1  | 113.6  | 103.0  | 98.7   | 76.4   | 70.1   |
| 87.5° | 19.1   | 19.1   | 19.1   | 17.0   | 15.9   | 17.0   | 23.4   | 29.7   | 39.3   | 30.8   | 28.7   |
| 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



LM-79-2008: Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGRAW-EDISON

Report Number: SP1-1908-441-4-R4

Test Date: 10/02/2019

Luminaire Tested: SA1C-750-U-5WQ

Data in this report applies to families of products SA1C-760-U-5WQ .



**Test Information**

Test Method: LM-79-2008  
 Report Number: SP1-1908-441-4-R4  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 10/28/2024  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: McGRAW-EDISON  
 Catalog Number: **SA1C-750-U-5WQ**  
 Description: McGRAW EDISON ROADWAY AND AREA LUMINAIRE

\*\*\*THIS IS A REVISION OF SP1-1908-441-4-R3. TO UPDATE THE CATALOG INFORMATION.\*\*\*TESTED IN SITU. ROADWAY AND AREA LUMINAIRE. (1) 70 CRI, 5000K, 1050MA LIGHTSQUARE WITH 16 LEDS AND TYPE V WIDE OPTICS.

**Spectral Parameters**

|                           |        |           |      |      |       |
|---------------------------|--------|-----------|------|------|-------|
| CCT (K):                  | 4884   | CRI (Ra): | 73.5 | R9:  | -28.4 |
| CIE u':                   | 0.2101 | R1:       | 70.5 | R10: | 48.6  |
| CIE v':                   | 0.4904 | R2:       | 77.7 | R11: | 73.2  |
| Duv:                      | 0.0037 | R3:       | 84.6 | R12: | 50.7  |
| CIE x:                    | 0.3493 | R4:       | 74.7 | R13: | 71.2  |
| CIE y:                    | 0.3624 | R5:       | 71.9 | R14: | 91.4  |
| CIE z:                    | 0.2884 | R6:       | 70.7 |      |       |
| Peak Wavelength (nm):     | 444    | R7:       | 81.2 |      |       |
| Dominant Wavelength (nm): | 571    | R8:       | 56.9 |      |       |
| Purity:                   | 13.7   |           |      |      |       |
| Rf:                       | 74.9   |           |      |      |       |
| Rg:                       | 96.3   |           |      |      |       |



**Test Conditions**  
 Stabilization Time: 240M  
 Operation Time: 12H  
 Room Temperature (°C) / RH%: 25.0./44%  
 Sphere Temperature (°C): 25.7

REPORT NUMBER: SP1-1908-441-4-R4

| Measurement and Test Equipment |                       |                  |                      |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument                     | Identification Number | Calibration Date | Calibration Due Date |
| Photometer                     | IN0058                | 6/28/2019        | 12/28/2019           |
| Power Meter                    | IN0071                | 12/5/2018        | 12/5/2019            |
| AC Power Source                | IN0063                | 12/5/2018        | 12/5/2019            |
| DC Power Source                | IN0208                | 12/5/2018        | 12/5/2019            |
| Sphere Thermometer             | IN0085                | 12/5/2018        | 12/5/2019            |
| Room Thermometer               | IN0046                | 12/5/2018        | 12/5/2019            |

REPORT NUMBER: SP1-1908-441-4-R4

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-1908-441-4-R4

**Photopic Flux vs. Wavelength**



#####

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360    | 2945          | NR            | 490    | 37941         | NR            | 620    | 88803         | NR            | 750    | 3908          | NR            | 880    | 2997          | NR            |
| 365    | 2596          | NR            | 495    | 48525         | NR            | 625    | 80578         | NR            | 755    | 3988          | NR            | 885    | 2927          | NR            |
| 370    | 2732          | NR            | 500    | 60609         | NR            | 630    | 73127         | NR            | 760    | 3335          | NR            | 890    | 2649          | NR            |
| 375    | 2894          | NR            | 505    | 72036         | NR            | 635    | 66244         | NR            | 765    | 3438          | NR            | 895    | 2828          | NR            |
| 380    | 2822          | NR            | 510    | 82168         | NR            | 640    | 59440         | NR            | 770    | 3427          | NR            | 900    | 1407          | NR            |
| 385    | 2394          | NR            | 515    | 90898         | NR            | 645    | 52864         | NR            | 775    | 2759          | NR            | 905    | 2224          | NR            |
| 390    | 2370          | NR            | 520    | 97142         | NR            | 650    | 47085         | NR            | 780    | 2340          | NR            | 910    | 2905          | NR            |
| 395    | 2267          | NR            | 525    | 103255        | NR            | 655    | 41789         | NR            | 785    | 2412          | NR            | 915    | 3350          | NR            |
| 400    | 2262          | NR            | 530    | 106697        | NR            | 660    | 37064         | NR            | 790    | 1999          | NR            | 920    | 3114          | NR            |
| 405    | 3000          | NR            | 535    | 110081        | NR            | 665    | 32299         | NR            | 795    | 2054          | NR            | 925    | 2834          | NR            |
| 410    | 5324          | NR            | 540    | 112494        | NR            | 670    | 28142         | NR            | 800    | 2331          | NR            | 930    | 2271          | NR            |
| 415    | 10725         | NR            | 545    | 115513        | NR            | 675    | 24505         | NR            | 805    | 2648          | NR            | 935    | 2228          | NR            |
| 420    | 22128         | NR            | 550    | 117203        | NR            | 680    | 21162         | NR            | 810    | 2485          | NR            | 940    | 2833          | NR            |
| 425    | 44095         | NR            | 555    | 119753        | NR            | 685    | 18400         | NR            | 815    | 2409          | NR            | 945    | 2941          | NR            |
| 430    | 77002         | NR            | 560    | 122602        | NR            | 690    | 16065         | NR            | 820    | 2221          | NR            | 950    | 2323          | NR            |
| 435    | 119881        | NR            | 565    | 124314        | NR            | 695    | 13860         | NR            | 825    | 1562          | NR            | 955    | 1667          | NR            |
| 440    | 164454        | NR            | 570    | 126775        | NR            | 700    | 12177         | NR            | 830    | 2249          | NR            | 960    | 749           | NR            |
| 445    | 179997        | NR            | 575    | 127511        | NR            | 705    | 10757         | NR            | 835    | 2573          | NR            | 965    | 2669          | NR            |
| 450    | 142822        | NR            | 580    | 127577        | NR            | 710    | 9601          | NR            | 840    | 2764          | NR            | 970    | 3968          | NR            |
| 455    | 90008         | NR            | 585    | 126153        | NR            | 715    | 8944          | NR            | 845    | 3109          | NR            | 975    | 3886          | NR            |
| 460    | 60557         | NR            | 590    | 123678        | NR            | 720    | 7947          | NR            | 850    | 2963          | NR            | 980    | 2788          | NR            |
| 465    | 43305         | NR            | 595    | 119774        | NR            | 725    | 7062          | NR            | 855    | 2336          | NR            | 985    | 3496          | NR            |
| 470    | 31089         | NR            | 600    | 115733        | NR            | 730    | 6004          | NR            | 860    | 2118          | NR            | 990    | 2913          | NR            |
| 475    | 26278         | NR            | 605    | 109231        | NR            | 735    | 5594          | NR            | 865    | 3144          | NR            | 995    | 4659          | NR            |
| 480    | 27060         | NR            | 610    | 102408        | NR            | 740    | 5165          | NR            | 870    | 3069          | NR            | 1000   | 1308          | NR            |
| 485    | 30698         | NR            | 615    | 96015         | NR            | 745    | 4687          | NR            | 875    | 3311          | NR            |        |               |               |

REPORT NUMBER: SP1-1908-441-4-R4

Scotopic Flux vs. Wavelength



Scotopic Lumens: 13493.5 S/P: 1.77

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360    | 2945          | NR            | 490    | 37941         | NR            | 620    | 88803         | NR            | 750    | 3908          | NR            | 880    | 2997          | NR            |
| 365    | 2596          | NR            | 495    | 48525         | NR            | 625    | 80578         | NR            | 755    | 3988          | NR            | 885    | 2927          | NR            |
| 370    | 2732          | NR            | 500    | 60609         | NR            | 630    | 73127         | NR            | 760    | 3335          | NR            | 890    | 2649          | NR            |
| 375    | 2894          | NR            | 505    | 72036         | NR            | 635    | 66244         | NR            | 765    | 3438          | NR            | 895    | 2828          | NR            |
| 380    | 2822          | NR            | 510    | 82168         | NR            | 640    | 59440         | NR            | 770    | 3427          | NR            | 900    | 1407          | NR            |
| 385    | 2394          | NR            | 515    | 90898         | NR            | 645    | 52864         | NR            | 775    | 2759          | NR            | 905    | 2224          | NR            |
| 390    | 2370          | NR            | 520    | 97142         | NR            | 650    | 47085         | NR            | 780    | 2340          | NR            | 910    | 2905          | NR            |
| 395    | 2267          | NR            | 525    | 103255        | NR            | 655    | 41789         | NR            | 785    | 2412          | NR            | 915    | 3350          | NR            |
| 400    | 2262          | NR            | 530    | 106697        | NR            | 660    | 37064         | NR            | 790    | 1999          | NR            | 920    | 3114          | NR            |
| 405    | 3000          | NR            | 535    | 110081        | NR            | 665    | 32299         | NR            | 795    | 2054          | NR            | 925    | 2834          | NR            |
| 410    | 5324          | NR            | 540    | 112494        | NR            | 670    | 28142         | NR            | 800    | 2331          | NR            | 930    | 2271          | NR            |
| 415    | 10725         | NR            | 545    | 115513        | NR            | 675    | 24505         | NR            | 805    | 2648          | NR            | 935    | 2228          | NR            |
| 420    | 22128         | NR            | 550    | 117203        | NR            | 680    | 21162         | NR            | 810    | 2485          | NR            | 940    | 2833          | NR            |
| 425    | 44095         | NR            | 555    | 119753        | NR            | 685    | 18400         | NR            | 815    | 2409          | NR            | 945    | 2941          | NR            |
| 430    | 77002         | NR            | 560    | 122602        | NR            | 690    | 16065         | NR            | 820    | 2221          | NR            | 950    | 2323          | NR            |
| 435    | 119881        | NR            | 565    | 124314        | NR            | 695    | 13860         | NR            | 825    | 1562          | NR            | 955    | 1667          | NR            |
| 440    | 164454        | NR            | 570    | 126775        | NR            | 700    | 12177         | NR            | 830    | 2249          | NR            | 960    | 749           | NR            |
| 445    | 179997        | NR            | 575    | 127511        | NR            | 705    | 10757         | NR            | 835    | 2573          | NR            | 965    | 2669          | NR            |
| 450    | 142822        | NR            | 580    | 127577        | NR            | 710    | 9601          | NR            | 840    | 2764          | NR            | 970    | 3968          | NR            |
| 455    | 90008         | NR            | 585    | 126153        | NR            | 715    | 8944          | NR            | 845    | 3109          | NR            | 975    | 3886          | NR            |
| 460    | 60557         | NR            | 590    | 123678        | NR            | 720    | 7947          | NR            | 850    | 2963          | NR            | 980    | 2788          | NR            |
| 465    | 43305         | NR            | 595    | 119774        | NR            | 725    | 7062          | NR            | 855    | 2336          | NR            | 985    | 3496          | NR            |
| 470    | 31089         | NR            | 600    | 115733        | NR            | 730    | 6004          | NR            | 860    | 2118          | NR            | 990    | 2913          | NR            |
| 475    | 26278         | NR            | 605    | 109231        | NR            | 735    | 5594          | NR            | 865    | 3144          | NR            | 995    | 4659          | NR            |
| 480    | 27060         | NR            | 610    | 102408        | NR            | 740    | 5165          | NR            | 870    | 3069          | NR            | 1000   | 1308          | NR            |
| 485    | 30698         | NR            | 615    | 96015         | NR            | 745    | 4687          | NR            | 875    | 3311          | NR            |        |               |               |

REPORT NUMBER: SP1-1908-441-4-R4

**Melanopic Flux vs. Wavelength**



**Melanopic Lumens: 5378.9 M/P: 0.71**


| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360    | 2945          | NR            | 490    | 37941         | NR            | 620    | 88803         | NR            | 750    | 3908          | NR            | 880    | 2997          | NR            |
| 365    | 2596          | NR            | 495    | 48525         | NR            | 625    | 80578         | NR            | 755    | 3988          | NR            | 885    | 2927          | NR            |
| 370    | 2732          | NR            | 500    | 60609         | NR            | 630    | 73127         | NR            | 760    | 3335          | NR            | 890    | 2649          | NR            |
| 375    | 2894          | NR            | 505    | 72036         | NR            | 635    | 66244         | NR            | 765    | 3438          | NR            | 895    | 2828          | NR            |
| 380    | 2822          | NR            | 510    | 82168         | NR            | 640    | 59440         | NR            | 770    | 3427          | NR            | 900    | 1407          | NR            |
| 385    | 2394          | NR            | 515    | 90898         | NR            | 645    | 52864         | NR            | 775    | 2759          | NR            | 905    | 2224          | NR            |
| 390    | 2370          | NR            | 520    | 97142         | NR            | 650    | 47085         | NR            | 780    | 2340          | NR            | 910    | 2905          | NR            |
| 395    | 2267          | NR            | 525    | 103255        | NR            | 655    | 41789         | NR            | 785    | 2412          | NR            | 915    | 3350          | NR            |
| 400    | 2262          | NR            | 530    | 106697        | NR            | 660    | 37064         | NR            | 790    | 1999          | NR            | 920    | 3114          | NR            |
| 405    | 3000          | NR            | 535    | 110081        | NR            | 665    | 32299         | NR            | 795    | 2054          | NR            | 925    | 2834          | NR            |
| 410    | 5324          | NR            | 540    | 112494        | NR            | 670    | 28142         | NR            | 800    | 2331          | NR            | 930    | 2271          | NR            |
| 415    | 10725         | NR            | 545    | 115513        | NR            | 675    | 24505         | NR            | 805    | 2648          | NR            | 935    | 2228          | NR            |
| 420    | 22128         | NR            | 550    | 117203        | NR            | 680    | 21162         | NR            | 810    | 2485          | NR            | 940    | 2833          | NR            |
| 425    | 44095         | NR            | 555    | 119753        | NR            | 685    | 18400         | NR            | 815    | 2409          | NR            | 945    | 2941          | NR            |
| 430    | 77002         | NR            | 560    | 122602        | NR            | 690    | 16065         | NR            | 820    | 2221          | NR            | 950    | 2323          | NR            |
| 435    | 119881        | NR            | 565    | 124314        | NR            | 695    | 13860         | NR            | 825    | 1562          | NR            | 955    | 1667          | NR            |
| 440    | 164454        | NR            | 570    | 126775        | NR            | 700    | 12177         | NR            | 830    | 2249          | NR            | 960    | 749           | NR            |
| 445    | 179997        | NR            | 575    | 127511        | NR            | 705    | 10757         | NR            | 835    | 2573          | NR            | 965    | 2669          | NR            |
| 450    | 142822        | NR            | 580    | 127577        | NR            | 710    | 9601          | NR            | 840    | 2764          | NR            | 970    | 3968          | NR            |
| 455    | 90008         | NR            | 585    | 126153        | NR            | 715    | 8944          | NR            | 845    | 3109          | NR            | 975    | 3886          | NR            |
| 460    | 60557         | NR            | 590    | 123678        | NR            | 720    | 7947          | NR            | 850    | 2963          | NR            | 980    | 2788          | NR            |
| 465    | 43305         | NR            | 595    | 119774        | NR            | 725    | 7062          | NR            | 855    | 2336          | NR            | 985    | 3496          | NR            |
| 470    | 31089         | NR            | 600    | 115733        | NR            | 730    | 6004          | NR            | 860    | 2118          | NR            | 990    | 2913          | NR            |
| 475    | 26278         | NR            | 605    | 109231        | NR            | 735    | 5594          | NR            | 865    | 3144          | NR            | 995    | 4659          | NR            |
| 480    | 27060         | NR            | 610    | 102408        | NR            | 740    | 5165          | NR            | 870    | 3069          | NR            | 1000   | 1308          | NR            |
| 485    | 30698         | NR            | 615    | 96015         | NR            | 745    | 4687          | NR            | 875    | 3311          | NR            |        |               |               |

REPORT NUMBER: SP1-1908-441-4-R4


TM-30-18

**Summary**

$R_f = 74.9$   
 $R_g = 96.3$   
 CIE  $R_a = 73.5$   
 $R_g = -28.4$

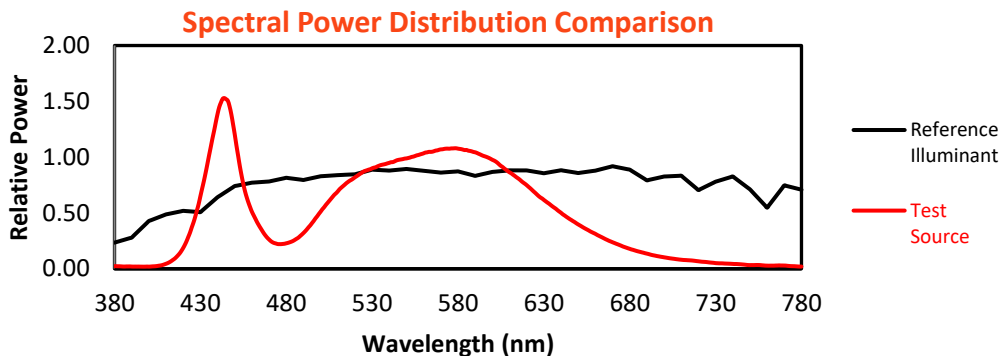

**Color Vector Graphics**

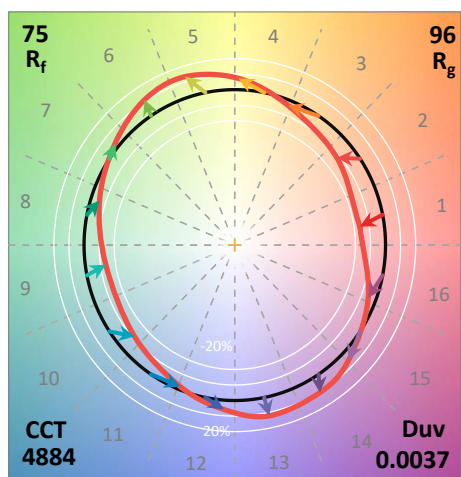

REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

**Individual Sample Fidelity Index ( $R_{f,i}$ )**

|            |            |            |            |
|------------|------------|------------|------------|
| CES01 = 85 | CES26 = 61 | CES51 = 90 | CES76 = 52 |
| CES02 = 60 | CES27 = 84 | CES52 = 91 | CES77 = 71 |
| CES03 = 30 | CES28 = 81 | CES53 = 79 | CES78 = 54 |
| CES04 = 69 | CES29 = 58 | CES54 = 83 | CES79 = 80 |
| CES05 = 46 | CES30 = 67 | CES55 = 83 | CES80 = 77 |
| CES06 = 50 | CES31 = 63 | CES56 = 73 | CES81 = 77 |
| CES07 = 39 | CES32 = 59 | CES57 = 72 | CES82 = 90 |
| CES08 = 38 | CES33 = 69 | CES58 = 73 | CES83 = 86 |
| CES09 = 29 | CES34 = 69 | CES59 = 88 | CES84 = 88 |
| CES10 = 73 | CES35 = 83 | CES60 = 93 | CES85 = 84 |
| CES11 = 56 | CES36 = 95 | CES61 = 88 | CES86 = 75 |
| CES12 = 61 | CES37 = 78 | CES62 = 85 | CES87 = 78 |
| CES13 = 41 | CES38 = 76 | CES63 = 77 | CES88 = 79 |
| CES14 = 74 | CES39 = 93 | CES64 = 74 | CES89 = 75 |
| CES15 = 70 | CES40 = 86 | CES65 = 67 | CES90 = 77 |
| CES16 = 46 | CES41 = 87 | CES66 = 69 | CES91 = 89 |
| CES17 = 49 | CES42 = 78 | CES67 = 67 | CES92 = 66 |
| CES18 = 55 | CES43 = 75 | CES68 = 73 | CES93 = 80 |
| CES19 = 71 | CES44 = 99 | CES69 = 81 | CES94 = 57 |
| CES20 = 64 | CES45 = 83 | CES70 = 63 | CES95 = 71 |
| CES21 = 85 | CES46 = 81 | CES71 = 60 | CES96 = 78 |
| CES22 = 77 | CES47 = 80 | CES72 = 86 | CES97 = 85 |
| CES23 = 91 | CES48 = 72 | CES73 = 53 | CES98 = 75 |
| CES24 = 90 | CES49 = 81 | CES74 = 96 | CES99 = 62 |
| CES25 = 71 | CES50 = 89 | CES75 = 58 |            |







REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

Color Rendition by Hue-Angle Bin

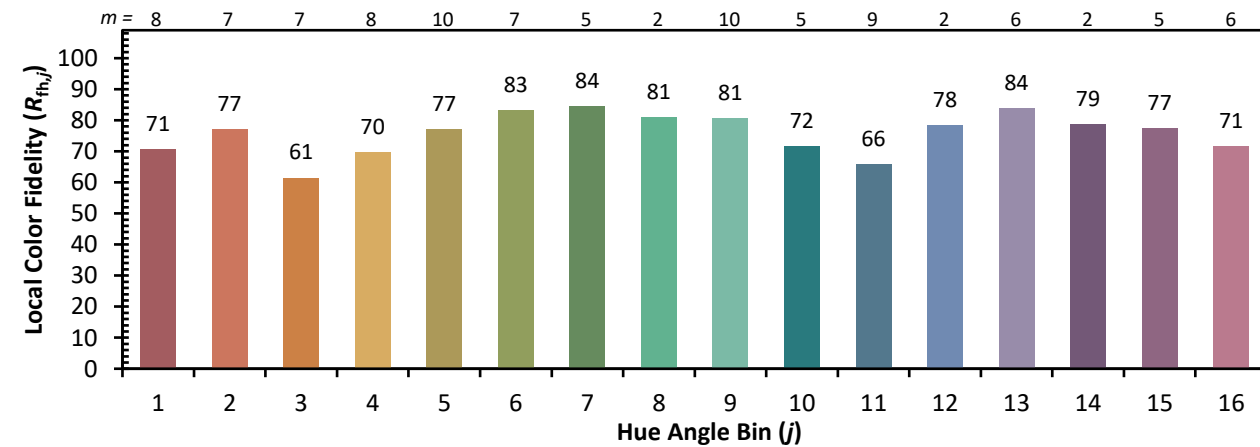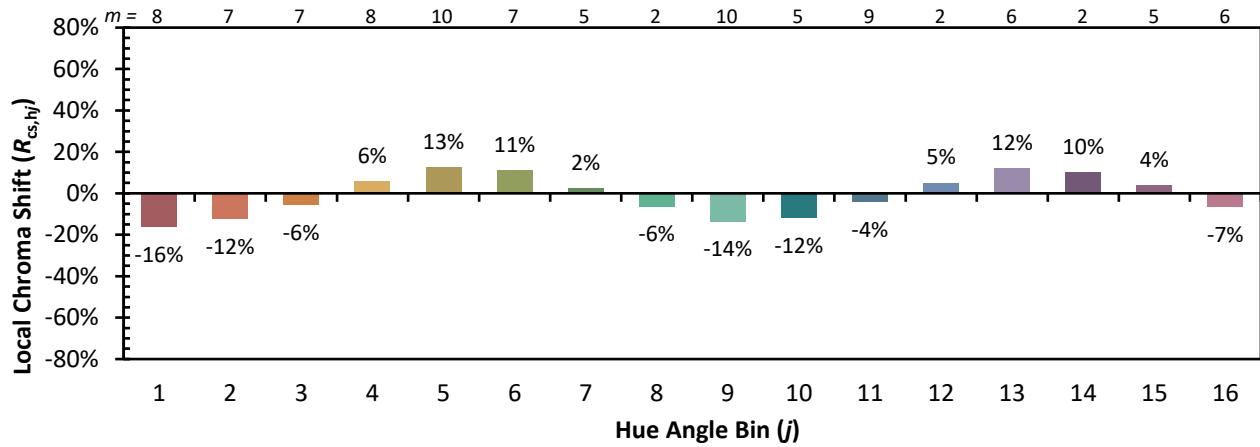

REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

Measure Comparisons



(END OF REPORT)