

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P632350

Luminaire Tested: GWS-SA2C-750-U-5MQ-W

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P632350
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA2C-750-U-5MQ-W
Description: GALLEON WALL SLIM LUMINAIRE. (2) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE V MEDIUM OPTICS
Light Source: (32) 5000K CCT, 70 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9804.3 lumens
Efficiency: N/A
Efficacy: 155.1 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')
IES Classification: Type V - Short
BUG Rating: B3 - U0 - G2


Input Watts (W): 63.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P632350
 CATALOG NUMBER: GWS-SA2C-750-U-5MQ-W

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

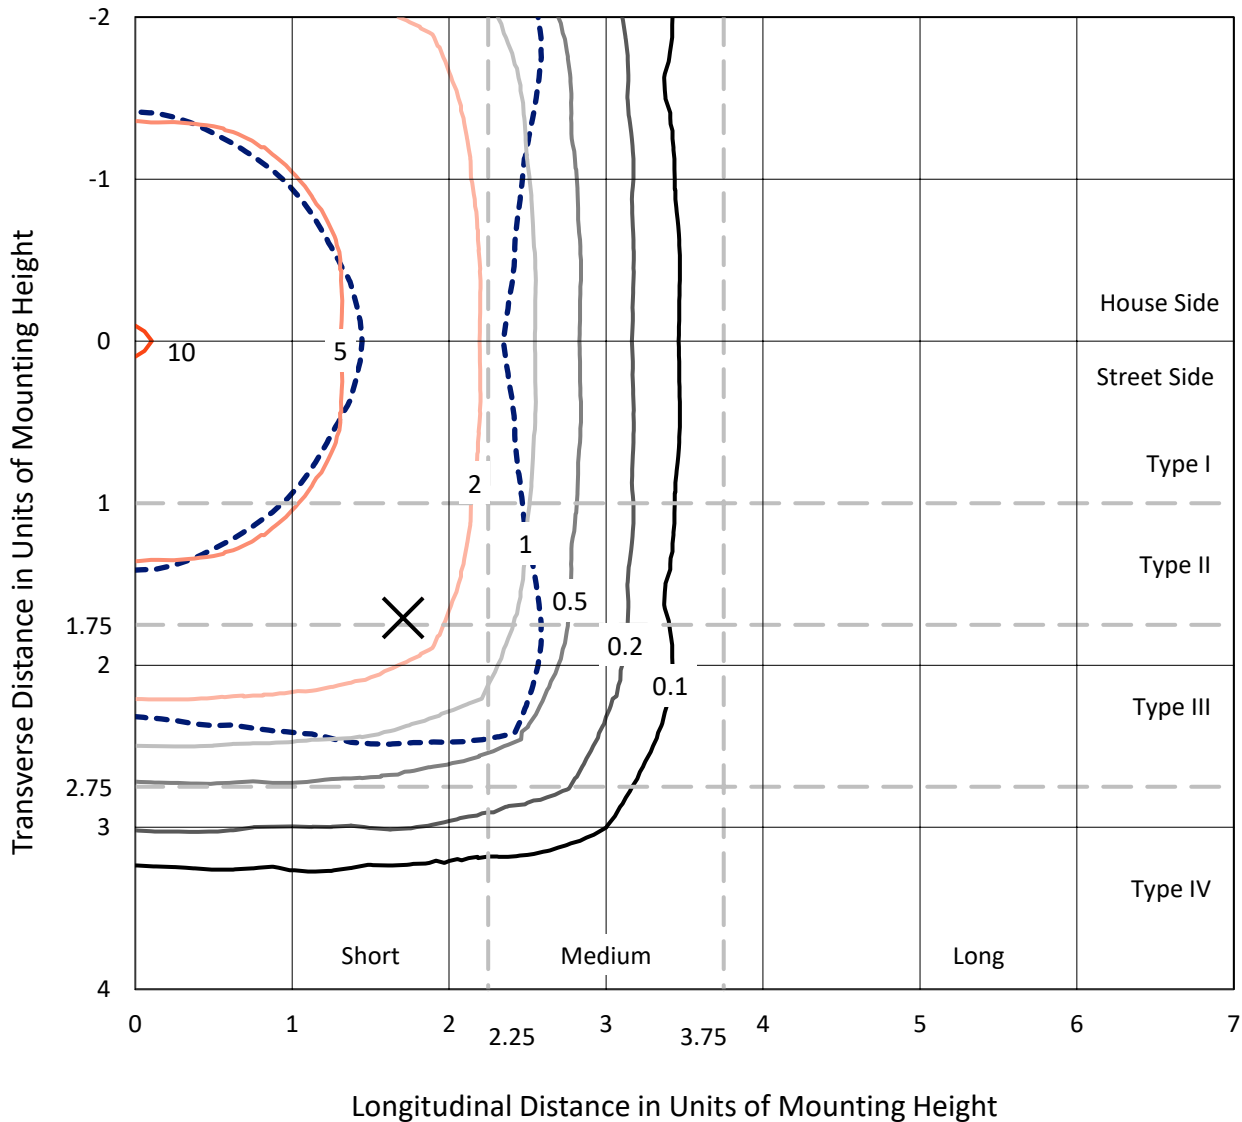

Based on 10 foot mounting height. Maximum calculated value = 10.3 fc
 Type V - Short - N/A

REPORT NUMBER: P632350
CATALOG NUMBER: GWS-SA2C-750-U-5MQ-W

Luminous Intensity Polar Plot

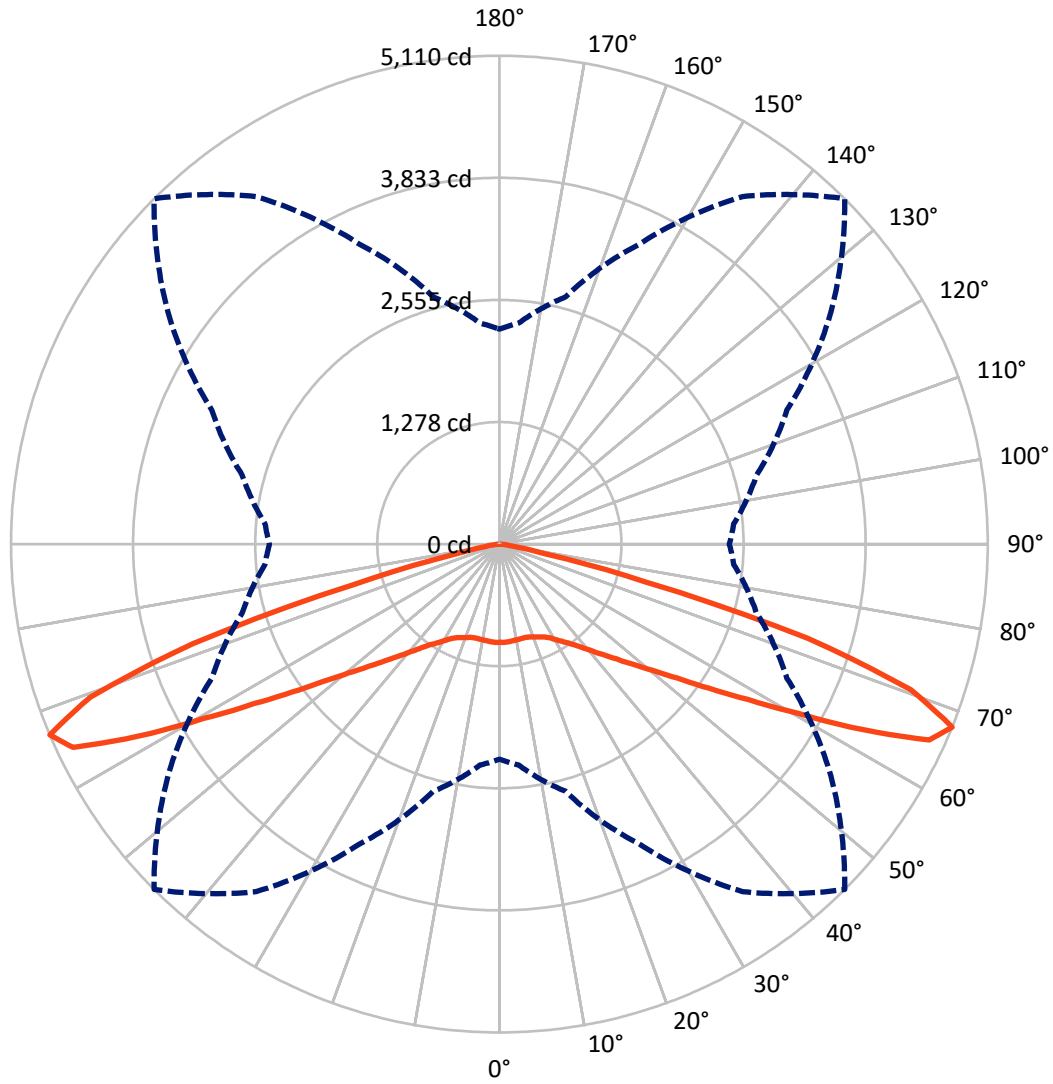

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P632350

CATALOG NUMBER: GWS-SA2C-750-U-5MQ-W

FLUX DISTRIBUTION:

| | | Downward | Upward | Total |
|--------------------|-----------|----------|--------|--------|
| House Side | Lumens | 4902.1 | 0.0 | 4902.1 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Street Side | Lumens | 4902.1 | 0.0 | 4902.1 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Total | Lumens | 9804.3 | 0.0 | 9804.3 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 97.2 | 1.0 |
| 10°-20° | 285.4 | 2.9 |
| 20°-30° | 492.3 | 5.0 |
| 30°-40° | 800.5 | 8.2 |
| 40°-50° | 1347.9 | 13.7 |
| 50°-60° | 2388.2 | 24.4 |
| 60°-70° | 3413.8 | 34.8 |
| 70°-80° | 936.9 | 9.6 |
| 80°-90° | 42.0 | 0.4 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 9804.3 | 100.0 |
| 0°-180° | 9804.3 | 100.0 |

Coefficient of Utilization



REPORT NUMBER: P632350


CATALOG NUMBER: GWS-SA2C-750-U-5MQ-W

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | Lumens | % Fixture | Zone Rating/Lumen Limit | | |
|----------------|--------|-----------|-------------------------|------|---------|
| | | | B | U | G |
| FL (0°-30°) | 437.5 | 4.5 | | | |
| FM (30°-60°) | 2268.3 | 23.1 | | | |
| FH (60°-80°) | 2175.4 | 22.2 | | | G2/5000 |
| FVH (80°-90°) | 21.0 | 0.2 | | | G1/100 |
| BL (0°-30°) | 437.5 | 4.5 | B1/500 | | |
| BM (30°-60°) | 2268.3 | 23.1 | B2/2500 | | |
| BH (60°-80°) | 2175.4 | 22.2 | B3/2500 | | G2/5000 |
| BVH (80°-90°) | 21.0 | 0.2 | | | G1/100 |
| UL (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH (100°-180°) | 0.0 | 0.0 | | U0/0 | |

BUG Rating: B3-U0-G2

Type V Short

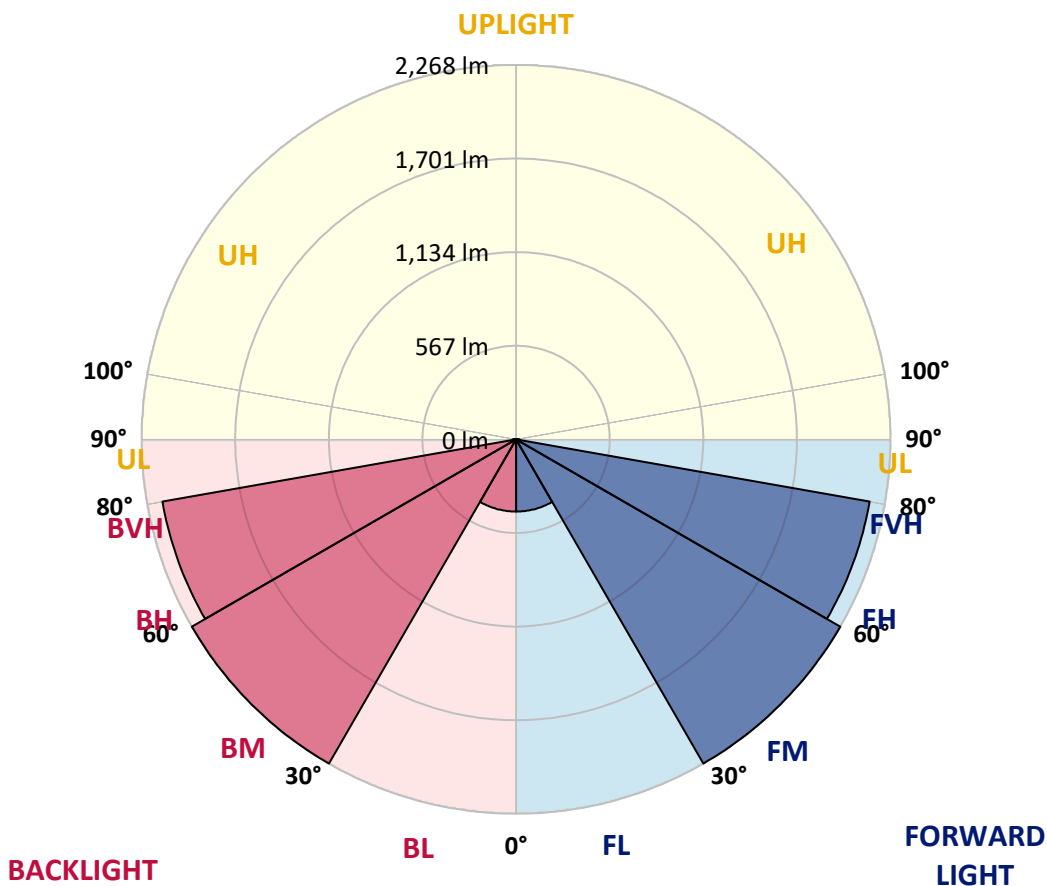



REPORT NUMBER: P632350
 CATALOG NUMBER: GWS-SA2C-750-U-5MQ-W

CANDELA DISTRIBUTION (FULL):

| | 0° | 5° | 15° | 25° | 35° | 45° | 55° | 65° | 75° | 85° | 90° |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1026.8 | 1026.8 | 1026.8 | 1026.8 | 1026.8 | 1026.8 | 1026.8 | 1026.8 | 1026.8 | 1026.8 | 1026.8 |
| 2.5° | 1020.0 | 1019.4 | 1022.8 | 1024.8 | 1024.1 | 1028.9 | 1028.2 | 1026.8 | 1026.8 | 1024.8 | 1030.2 |
| 5° | 1020.0 | 1019.4 | 1022.1 | 1022.8 | 1021.4 | 1025.5 | 1024.1 | 1022.8 | 1022.8 | 1020.0 | 1024.8 |
| 7.5° | 1014.6 | 1015.3 | 1017.3 | 1018.7 | 1017.3 | 1020.7 | 1018.7 | 1016.0 | 1015.3 | 1012.6 | 1017.3 |
| 10° | 1004.4 | 1005.1 | 1007.1 | 1010.5 | 1011.2 | 1017.3 | 1013.9 | 1009.2 | 1007.1 | 1004.4 | 1009.2 |
| 12.5° | 998.3 | 999.0 | 1001.0 | 1005.1 | 1006.5 | 1014.6 | 1011.2 | 1003.8 | 1000.4 | 997.6 | 1002.4 |
| 15° | 997.0 | 997.6 | 1000.4 | 1004.4 | 1006.5 | 1014.6 | 1011.2 | 1002.4 | 997.6 | 994.3 | 998.3 |
| 17.5° | 997.0 | 998.3 | 1002.4 | 1008.5 | 1012.6 | 1020.7 | 1016.6 | 1006.5 | 999.7 | 993.6 | 997.6 |
| 20° | 997.6 | 999.7 | 1005.8 | 1014.6 | 1024.8 | 1036.3 | 1030.9 | 1017.3 | 1007.8 | 1000.4 | 1003.1 |
| 22.5° | 1003.8 | 1007.1 | 1014.6 | 1026.1 | 1041.1 | 1054.7 | 1049.9 | 1031.6 | 1018.0 | 1007.8 | 1010.5 |
| 25° | 1024.8 | 1026.1 | 1035.7 | 1050.6 | 1064.8 | 1076.4 | 1071.6 | 1054.7 | 1037.7 | 1025.5 | 1028.9 |
| 27.5° | 1062.1 | 1065.5 | 1073.7 | 1089.3 | 1101.5 | 1107.6 | 1106.9 | 1095.4 | 1078.4 | 1067.5 | 1070.3 |
| 30° | 1106.9 | 1110.3 | 1121.2 | 1138.8 | 1151.0 | 1157.8 | 1155.8 | 1147.0 | 1131.3 | 1116.4 | 1119.1 |
| 32.5° | 1159.2 | 1160.5 | 1173.4 | 1193.1 | 1206.0 | 1216.2 | 1209.4 | 1199.9 | 1180.2 | 1162.6 | 1163.9 |
| 35° | 1225.7 | 1227.7 | 1241.3 | 1259.6 | 1269.8 | 1277.9 | 1276.6 | 1267.1 | 1246.0 | 1227.0 | 1231.8 |
| 37.5° | 1309.2 | 1310.5 | 1322.7 | 1345.8 | 1353.9 | 1360.1 | 1361.4 | 1356.7 | 1334.9 | 1310.5 | 1315.3 |
| 40° | 1413.0 | 1413.7 | 1427.2 | 1447.6 | 1456.4 | 1460.5 | 1461.2 | 1461.9 | 1439.5 | 1421.1 | 1419.8 |
| 42.5° | 1533.8 | 1537.2 | 1556.2 | 1575.9 | 1579.9 | 1577.9 | 1584.7 | 1591.5 | 1569.8 | 1544.7 | 1546.7 |
| 45° | 1678.4 | 1680.4 | 1706.2 | 1727.9 | 1720.4 | 1713.6 | 1726.5 | 1740.1 | 1720.4 | 1687.9 | 1678.4 |
| 47.5° | 1849.4 | 1853.4 | 1881.3 | 1903.0 | 1890.8 | 1878.6 | 1899.6 | 1913.8 | 1882.0 | 1847.3 | 1838.5 |
| 50° | 2042.8 | 2045.5 | 2084.9 | 2112.0 | 2097.8 | 2075.4 | 2101.8 | 2116.8 | 2074.0 | 2031.3 | 2012.3 |
| 52.5° | 2271.5 | 2266.1 | 2318.3 | 2365.8 | 2357.0 | 2327.8 | 2349.6 | 2352.3 | 2288.5 | 2228.1 | 2209.1 |
| 55° | 2550.4 | 2545.0 | 2597.3 | 2649.5 | 2671.2 | 2663.8 | 2653.6 | 2637.3 | 2543.0 | 2478.5 | 2460.9 |
| 57.5° | 2875.5 | 2858.6 | 2931.9 | 3002.4 | 3049.9 | 3063.5 | 3020.1 | 2982.1 | 2907.4 | 2828.0 | 2807.7 |
| 60° | 3177.5 | 3176.9 | 3292.9 | 3415.1 | 3545.4 | 3599.7 | 3489.7 | 3386.6 | 3218.9 | 3074.4 | 3045.2 |
| 62.5° | 3262.4 | 3276.6 | 3466.6 | 3769.3 | 4091.0 | 4283.1 | 3993.3 | 3651.9 | 3328.2 | 3110.3 | 3071.7 |
| 65° | 3053.3 | 3088.6 | 3358.7 | 3836.5 | 4471.8 | 4941.4 | 4287.2 | 3658.0 | 3206.7 | 2935.2 | 2894.5 |
| 67.5° | 2250.5 | 2321.1 | 2678.7 | 3461.9 | 4439.2 | 5110.4 | 4234.9 | 3319.4 | 2785.3 | 2462.2 | 2405.9 |
| 70° | 1110.3 | 1177.5 | 1461.2 | 2277.6 | 3652.6 | 4568.1 | 3664.1 | 2501.6 | 1881.3 | 1570.4 | 1518.9 |
| 72.5° | 408.6 | 435.7 | 547.0 | 974.6 | 2015.6 | 3374.3 | 2505.6 | 1397.4 | 911.5 | 725.5 | 690.9 |
| 75° | 200.2 | 205.0 | 221.9 | 327.1 | 743.8 | 1588.1 | 1177.5 | 536.1 | 335.3 | 291.8 | 282.3 |
| 77.5° | 127.6 | 129.6 | 137.8 | 156.1 | 238.9 | 500.2 | 357.0 | 211.7 | 164.2 | 157.5 | 157.5 |
| 80° | 71.3 | 73.3 | 84.2 | 97.0 | 112.0 | 171.7 | 128.3 | 126.9 | 107.9 | 94.3 | 92.3 |
| 82.5° | 33.9 | 37.3 | 53.6 | 52.9 | 59.0 | 86.2 | 75.3 | 68.5 | 69.2 | 52.3 | 49.5 |
| 85° | 15.6 | 15.6 | 21.0 | 25.1 | 26.5 | 29.2 | 34.6 | 39.4 | 38.7 | 26.5 | 28.5 |
| 87.5° | 7.5 | 7.5 | 7.5 | 6.8 | 6.1 | 5.4 | 7.5 | 12.2 | 17.6 | 12.2 | 11.5 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2008: Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGRAW-EDISON

Report Number: SP1-1908-441-4-R4

Test Date: 10/02/2019

Luminaire Tested: SA1C-750-U-5WQ

Data in this report applies to families of products SA1C-760-U-5WQ .

Test Information

Test Method: LM-79-2008
 Report Number: SP1-1908-441-4-R4
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/28/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: MCGRAW-EDISON
 Catalog Number: **SA1C-750-U-5WQ**
 Description: MCGRAW EDISON ROADWAY AND AREA LUMINAIRE

THIS IS A REVISION OF SP1-1908-441-4-R3. TO UPDATE THE CATALOG INFORMATION.TESTED IN SITU. ROADWAY AND AREA LUMINAIRE. (1) 70 CRI, 5000K, 1050MA LIGHTSQUARE WITH 16 LEDS AND TYPE V WIDE OPTICS.

Spectral Parameters

| | | | | | |
|---------------------------|--------|-----------|------|------|-------|
| CCT (K): | 4884 | CRI (Ra): | 73.5 | R9: | -28.4 |
| CIE u': | 0.2101 | R1: | 70.5 | R10: | 48.6 |
| CIE v': | 0.4904 | R2: | 77.7 | R11: | 73.2 |
| Duv: | 0.0037 | R3: | 84.6 | R12: | 50.7 |
| CIE x: | 0.3493 | R4: | 74.7 | R13: | 71.2 |
| CIE y: | 0.3624 | R5: | 71.9 | R14: | 91.4 |
| CIE z: | 0.2884 | R6: | 70.7 | | |
| Peak Wavelength (nm): | 444 | R7: | 81.2 | | |
| Dominant Wavelength (nm): | 571 | R8: | 56.9 | | |
| Purity: | 13.7 | | | | |
| Rf: | 74.9 | | | | |
| Rg: | 96.3 | | | | |



Test Conditions

Stabilization Time: 240M
 Operation Time: 12H
 Room Temperature (°C) / RH%: 25.0./44%
 Sphere Temperature (°C): 25.7

REPORT NUMBER: SP1-1908-441-4-R4

| Measurement and Test Equipment | | | |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/28/2019 | 12/28/2019 |
| Power Meter | IN0071 | 12/5/2018 | 12/5/2019 |
| AC Power Source | IN0063 | 12/5/2018 | 12/5/2019 |
| DC Power Source | IN0208 | 12/5/2018 | 12/5/2019 |
| Sphere Thermometer | IN0085 | 12/5/2018 | 12/5/2019 |
| Room Thermometer | IN0046 | 12/5/2018 | 12/5/2019 |

REPORT NUMBER: SP1-1908-441-4-R4

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-1908-441-4-R4

Photopic Flux vs. Wavelength



#####

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360 | 2945 | NR | 490 | 37941 | NR | 620 | 88803 | NR | 750 | 3908 | NR | 880 | 2997 | NR |
| 365 | 2596 | NR | 495 | 48525 | NR | 625 | 80578 | NR | 755 | 3988 | NR | 885 | 2927 | NR |
| 370 | 2732 | NR | 500 | 60609 | NR | 630 | 73127 | NR | 760 | 3335 | NR | 890 | 2649 | NR |
| 375 | 2894 | NR | 505 | 72036 | NR | 635 | 66244 | NR | 765 | 3438 | NR | 895 | 2828 | NR |
| 380 | 2822 | NR | 510 | 82168 | NR | 640 | 59440 | NR | 770 | 3427 | NR | 900 | 1407 | NR |
| 385 | 2394 | NR | 515 | 90898 | NR | 645 | 52864 | NR | 775 | 2759 | NR | 905 | 2224 | NR |
| 390 | 2370 | NR | 520 | 97142 | NR | 650 | 47085 | NR | 780 | 2340 | NR | 910 | 2905 | NR |
| 395 | 2267 | NR | 525 | 103255 | NR | 655 | 41789 | NR | 785 | 2412 | NR | 915 | 3350 | NR |
| 400 | 2262 | NR | 530 | 106697 | NR | 660 | 37064 | NR | 790 | 1999 | NR | 920 | 3114 | NR |
| 405 | 3000 | NR | 535 | 110081 | NR | 665 | 32299 | NR | 795 | 2054 | NR | 925 | 2834 | NR |
| 410 | 5324 | NR | 540 | 112494 | NR | 670 | 28142 | NR | 800 | 2331 | NR | 930 | 2271 | NR |
| 415 | 10725 | NR | 545 | 115513 | NR | 675 | 24505 | NR | 805 | 2648 | NR | 935 | 2228 | NR |
| 420 | 22128 | NR | 550 | 117203 | NR | 680 | 21162 | NR | 810 | 2485 | NR | 940 | 2833 | NR |
| 425 | 44095 | NR | 555 | 119753 | NR | 685 | 18400 | NR | 815 | 2409 | NR | 945 | 2941 | NR |
| 430 | 77002 | NR | 560 | 122602 | NR | 690 | 16065 | NR | 820 | 2221 | NR | 950 | 2323 | NR |
| 435 | 119881 | NR | 565 | 124314 | NR | 695 | 13860 | NR | 825 | 1562 | NR | 955 | 1667 | NR |
| 440 | 164454 | NR | 570 | 126775 | NR | 700 | 12177 | NR | 830 | 2249 | NR | 960 | 749 | NR |
| 445 | 179997 | NR | 575 | 127511 | NR | 705 | 10757 | NR | 835 | 2573 | NR | 965 | 2669 | NR |
| 450 | 142822 | NR | 580 | 127577 | NR | 710 | 9601 | NR | 840 | 2764 | NR | 970 | 3968 | NR |
| 455 | 90008 | NR | 585 | 126153 | NR | 715 | 8944 | NR | 845 | 3109 | NR | 975 | 3886 | NR |
| 460 | 60557 | NR | 590 | 123678 | NR | 720 | 7947 | NR | 850 | 2963 | NR | 980 | 2788 | NR |
| 465 | 43305 | NR | 595 | 119774 | NR | 725 | 7062 | NR | 855 | 2336 | NR | 985 | 3496 | NR |
| 470 | 31089 | NR | 600 | 115733 | NR | 730 | 6004 | NR | 860 | 2118 | NR | 990 | 2913 | NR |
| 475 | 26278 | NR | 605 | 109231 | NR | 735 | 5594 | NR | 865 | 3144 | NR | 995 | 4659 | NR |
| 480 | 27060 | NR | 610 | 102408 | NR | 740 | 5165 | NR | 870 | 3069 | NR | 1000 | 1308 | NR |
| 485 | 30698 | NR | 615 | 96015 | NR | 745 | 4687 | NR | 875 | 3311 | NR | | | |

REPORT NUMBER: SP1-1908-441-4-R4

Scotopic Flux vs. Wavelength



Scotopic Lumens: 13493.5 S/P: 1.77

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360 | 2945 | NR | 490 | 37941 | NR | 620 | 88803 | NR | 750 | 3908 | NR | 880 | 2997 | NR |
| 365 | 2596 | NR | 495 | 48525 | NR | 625 | 80578 | NR | 755 | 3988 | NR | 885 | 2927 | NR |
| 370 | 2732 | NR | 500 | 60609 | NR | 630 | 73127 | NR | 760 | 3335 | NR | 890 | 2649 | NR |
| 375 | 2894 | NR | 505 | 72036 | NR | 635 | 66244 | NR | 765 | 3438 | NR | 895 | 2828 | NR |
| 380 | 2822 | NR | 510 | 82168 | NR | 640 | 59440 | NR | 770 | 3427 | NR | 900 | 1407 | NR |
| 385 | 2394 | NR | 515 | 90898 | NR | 645 | 52864 | NR | 775 | 2759 | NR | 905 | 2224 | NR |
| 390 | 2370 | NR | 520 | 97142 | NR | 650 | 47085 | NR | 780 | 2340 | NR | 910 | 2905 | NR |
| 395 | 2267 | NR | 525 | 103255 | NR | 655 | 41789 | NR | 785 | 2412 | NR | 915 | 3350 | NR |
| 400 | 2262 | NR | 530 | 106697 | NR | 660 | 37064 | NR | 790 | 1999 | NR | 920 | 3114 | NR |
| 405 | 3000 | NR | 535 | 110081 | NR | 665 | 32299 | NR | 795 | 2054 | NR | 925 | 2834 | NR |
| 410 | 5324 | NR | 540 | 112494 | NR | 670 | 28142 | NR | 800 | 2331 | NR | 930 | 2271 | NR |
| 415 | 10725 | NR | 545 | 115513 | NR | 675 | 24505 | NR | 805 | 2648 | NR | 935 | 2228 | NR |
| 420 | 22128 | NR | 550 | 117203 | NR | 680 | 21162 | NR | 810 | 2485 | NR | 940 | 2833 | NR |
| 425 | 44095 | NR | 555 | 119753 | NR | 685 | 18400 | NR | 815 | 2409 | NR | 945 | 2941 | NR |
| 430 | 77002 | NR | 560 | 122602 | NR | 690 | 16065 | NR | 820 | 2221 | NR | 950 | 2323 | NR |
| 435 | 119881 | NR | 565 | 124314 | NR | 695 | 13860 | NR | 825 | 1562 | NR | 955 | 1667 | NR |
| 440 | 164454 | NR | 570 | 126775 | NR | 700 | 12177 | NR | 830 | 2249 | NR | 960 | 749 | NR |
| 445 | 179997 | NR | 575 | 127511 | NR | 705 | 10757 | NR | 835 | 2573 | NR | 965 | 2669 | NR |
| 450 | 142822 | NR | 580 | 127577 | NR | 710 | 9601 | NR | 840 | 2764 | NR | 970 | 3968 | NR |
| 455 | 90008 | NR | 585 | 126153 | NR | 715 | 8944 | NR | 845 | 3109 | NR | 975 | 3886 | NR |
| 460 | 60557 | NR | 590 | 123678 | NR | 720 | 7947 | NR | 850 | 2963 | NR | 980 | 2788 | NR |
| 465 | 43305 | NR | 595 | 119774 | NR | 725 | 7062 | NR | 855 | 2336 | NR | 985 | 3496 | NR |
| 470 | 31089 | NR | 600 | 115733 | NR | 730 | 6004 | NR | 860 | 2118 | NR | 990 | 2913 | NR |
| 475 | 26278 | NR | 605 | 109231 | NR | 735 | 5594 | NR | 865 | 3144 | NR | 995 | 4659 | NR |
| 480 | 27060 | NR | 610 | 102408 | NR | 740 | 5165 | NR | 870 | 3069 | NR | 1000 | 1308 | NR |
| 485 | 30698 | NR | 615 | 96015 | NR | 745 | 4687 | NR | 875 | 3311 | NR | | | |

REPORT NUMBER: SP1-1908-441-4-R4

Melanopic Flux vs. Wavelength



Melanopic Lumens: 5378.9 M/P: 0.71

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360 | 2945 | NR | 490 | 37941 | NR | 620 | 88803 | NR | 750 | 3908 | NR | 880 | 2997 | NR |
| 365 | 2596 | NR | 495 | 48525 | NR | 625 | 80578 | NR | 755 | 3988 | NR | 885 | 2927 | NR |
| 370 | 2732 | NR | 500 | 60609 | NR | 630 | 73127 | NR | 760 | 3335 | NR | 890 | 2649 | NR |
| 375 | 2894 | NR | 505 | 72036 | NR | 635 | 66244 | NR | 765 | 3438 | NR | 895 | 2828 | NR |
| 380 | 2822 | NR | 510 | 82168 | NR | 640 | 59440 | NR | 770 | 3427 | NR | 900 | 1407 | NR |
| 385 | 2394 | NR | 515 | 90898 | NR | 645 | 52864 | NR | 775 | 2759 | NR | 905 | 2224 | NR |
| 390 | 2370 | NR | 520 | 97142 | NR | 650 | 47085 | NR | 780 | 2340 | NR | 910 | 2905 | NR |
| 395 | 2267 | NR | 525 | 103255 | NR | 655 | 41789 | NR | 785 | 2412 | NR | 915 | 3350 | NR |
| 400 | 2262 | NR | 530 | 106697 | NR | 660 | 37064 | NR | 790 | 1999 | NR | 920 | 3114 | NR |
| 405 | 3000 | NR | 535 | 110081 | NR | 665 | 32299 | NR | 795 | 2054 | NR | 925 | 2834 | NR |
| 410 | 5324 | NR | 540 | 112494 | NR | 670 | 28142 | NR | 800 | 2331 | NR | 930 | 2271 | NR |
| 415 | 10725 | NR | 545 | 115513 | NR | 675 | 24505 | NR | 805 | 2648 | NR | 935 | 2228 | NR |
| 420 | 22128 | NR | 550 | 117203 | NR | 680 | 21162 | NR | 810 | 2485 | NR | 940 | 2833 | NR |
| 425 | 44095 | NR | 555 | 119753 | NR | 685 | 18400 | NR | 815 | 2409 | NR | 945 | 2941 | NR |
| 430 | 77002 | NR | 560 | 122602 | NR | 690 | 16065 | NR | 820 | 2221 | NR | 950 | 2323 | NR |
| 435 | 119881 | NR | 565 | 124314 | NR | 695 | 13860 | NR | 825 | 1562 | NR | 955 | 1667 | NR |
| 440 | 164454 | NR | 570 | 126775 | NR | 700 | 12177 | NR | 830 | 2249 | NR | 960 | 749 | NR |
| 445 | 179997 | NR | 575 | 127511 | NR | 705 | 10757 | NR | 835 | 2573 | NR | 965 | 2669 | NR |
| 450 | 142822 | NR | 580 | 127577 | NR | 710 | 9601 | NR | 840 | 2764 | NR | 970 | 3968 | NR |
| 455 | 90008 | NR | 585 | 126153 | NR | 715 | 8944 | NR | 845 | 3109 | NR | 975 | 3886 | NR |
| 460 | 60557 | NR | 590 | 123678 | NR | 720 | 7947 | NR | 850 | 2963 | NR | 980 | 2788 | NR |
| 465 | 43305 | NR | 595 | 119774 | NR | 725 | 7062 | NR | 855 | 2336 | NR | 985 | 3496 | NR |
| 470 | 31089 | NR | 600 | 115733 | NR | 730 | 6004 | NR | 860 | 2118 | NR | 990 | 2913 | NR |
| 475 | 26278 | NR | 605 | 109231 | NR | 735 | 5594 | NR | 865 | 3144 | NR | 995 | 4659 | NR |
| 480 | 27060 | NR | 610 | 102408 | NR | 740 | 5165 | NR | 870 | 3069 | NR | 1000 | 1308 | NR |
| 485 | 30698 | NR | 615 | 96015 | NR | 745 | 4687 | NR | 875 | 3311 | NR | | | |

REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

Summary

$R_f = 74.9$
 $R_g = 96.3$
 CIE $R_a = 73.5$
 $R_g = -28.4$



Color Vector Graphics



REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

Individual Sample Fidelity Index ($R_{f,i}$)

| | | | |
|------------|------------|------------|------------|
| CES01 = 85 | CES26 = 61 | CES51 = 90 | CES76 = 52 |
| CES02 = 60 | CES27 = 84 | CES52 = 91 | CES77 = 71 |
| CES03 = 30 | CES28 = 81 | CES53 = 79 | CES78 = 54 |
| CES04 = 69 | CES29 = 58 | CES54 = 83 | CES79 = 80 |
| CES05 = 46 | CES30 = 67 | CES55 = 83 | CES80 = 77 |
| CES06 = 50 | CES31 = 63 | CES56 = 73 | CES81 = 77 |
| CES07 = 39 | CES32 = 59 | CES57 = 72 | CES82 = 90 |
| CES08 = 38 | CES33 = 69 | CES58 = 73 | CES83 = 86 |
| CES09 = 29 | CES34 = 69 | CES59 = 88 | CES84 = 88 |
| CES10 = 73 | CES35 = 83 | CES60 = 93 | CES85 = 84 |
| CES11 = 56 | CES36 = 95 | CES61 = 88 | CES86 = 75 |
| CES12 = 61 | CES37 = 78 | CES62 = 85 | CES87 = 78 |
| CES13 = 41 | CES38 = 76 | CES63 = 77 | CES88 = 79 |
| CES14 = 74 | CES39 = 93 | CES64 = 74 | CES89 = 75 |
| CES15 = 70 | CES40 = 86 | CES65 = 67 | CES90 = 77 |
| CES16 = 46 | CES41 = 87 | CES66 = 69 | CES91 = 89 |
| CES17 = 49 | CES42 = 78 | CES67 = 67 | CES92 = 66 |
| CES18 = 55 | CES43 = 75 | CES68 = 73 | CES93 = 80 |
| CES19 = 71 | CES44 = 99 | CES69 = 81 | CES94 = 57 |
| CES20 = 64 | CES45 = 83 | CES70 = 63 | CES95 = 71 |
| CES21 = 85 | CES46 = 81 | CES71 = 60 | CES96 = 78 |
| CES22 = 77 | CES47 = 80 | CES72 = 86 | CES97 = 85 |
| CES23 = 91 | CES48 = 72 | CES73 = 53 | CES98 = 75 |
| CES24 = 90 | CES49 = 81 | CES74 = 96 | CES99 = 62 |
| CES25 = 71 | CES50 = 89 | CES75 = 58 | |



REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

Color Rendition by Hue-Angle Bin



REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

Measure Comparisons



(END OF REPORT)