

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P630371

Luminaire Tested: GWS-SA1D-750-U-5NQ-W-GRSBK

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P630371
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA1D-750-U-5NQ-W-GRSBK
Description: GALLEON WALL SLIM LUMINAIRE. (1) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE V NARROW OPTICS W/ FACTORY INSTALLED GLARE SHIELD, BK
Light Source: (16) 5000K CCT, 70 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4364.7 lumens
Efficiency: N/A
Efficacy: 98.5 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type V - Short
BUG Rating: B2 - U0 - G0


Input Watts (W): 44.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P630371
 CATALOG NUMBER: GWS-SA1D-750-U-5NQ-W-GRSBK

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

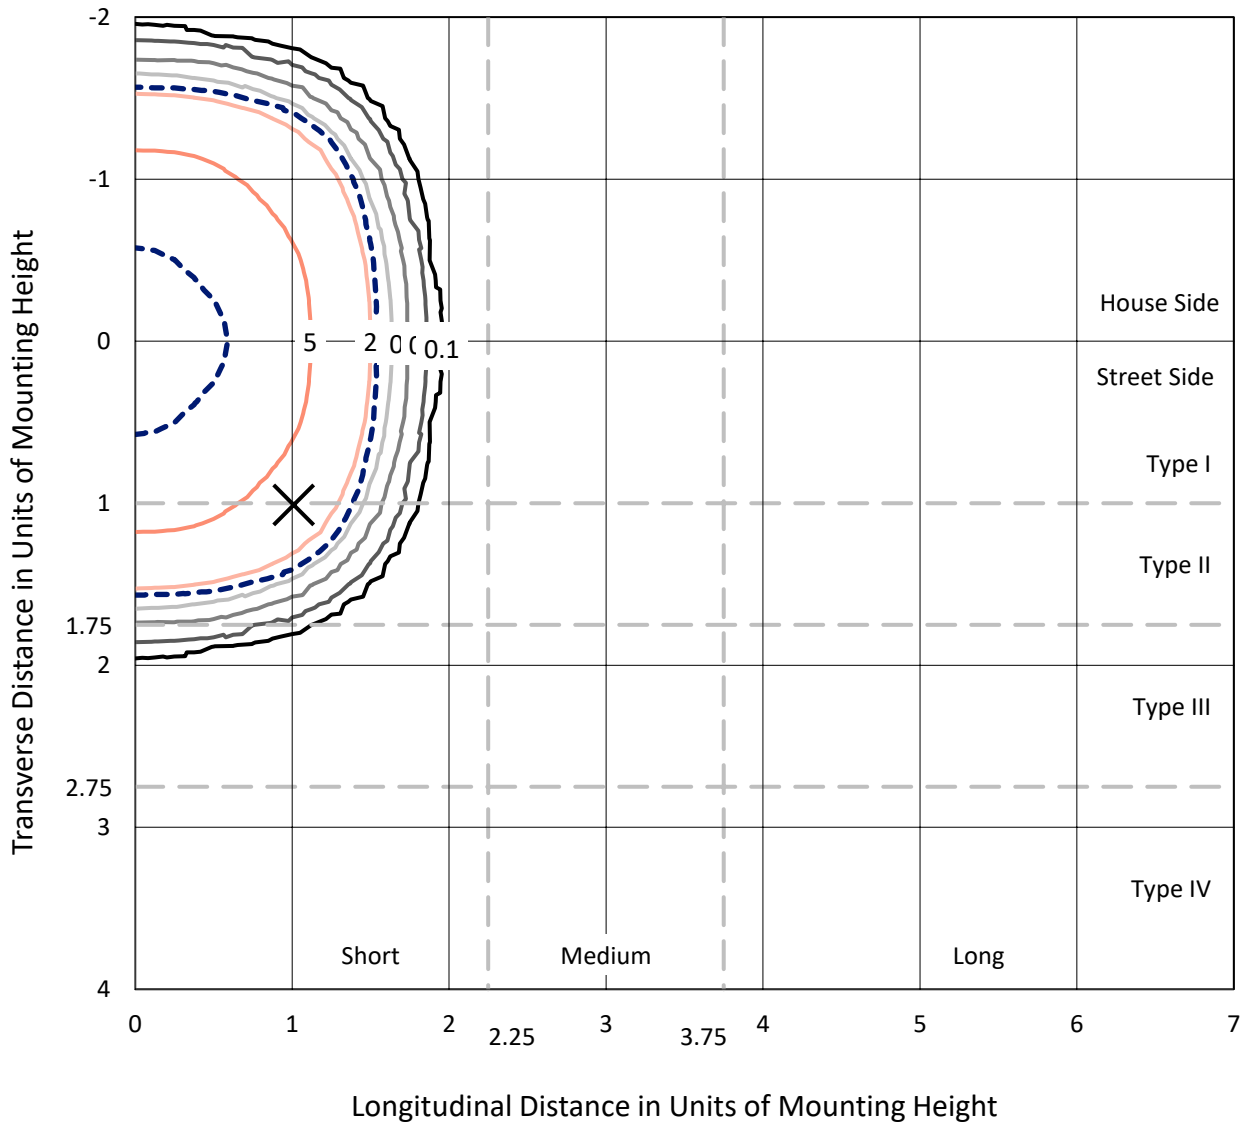

Based on 10 foot mounting height. Maximum calculated value = 7.1 fc
 Type V - Short - N/A

REPORT NUMBER: P630371
CATALOG NUMBER: GWS-SA1D-750-U-5NQ-W-GRSBK

Luminous Intensity Polar Plot

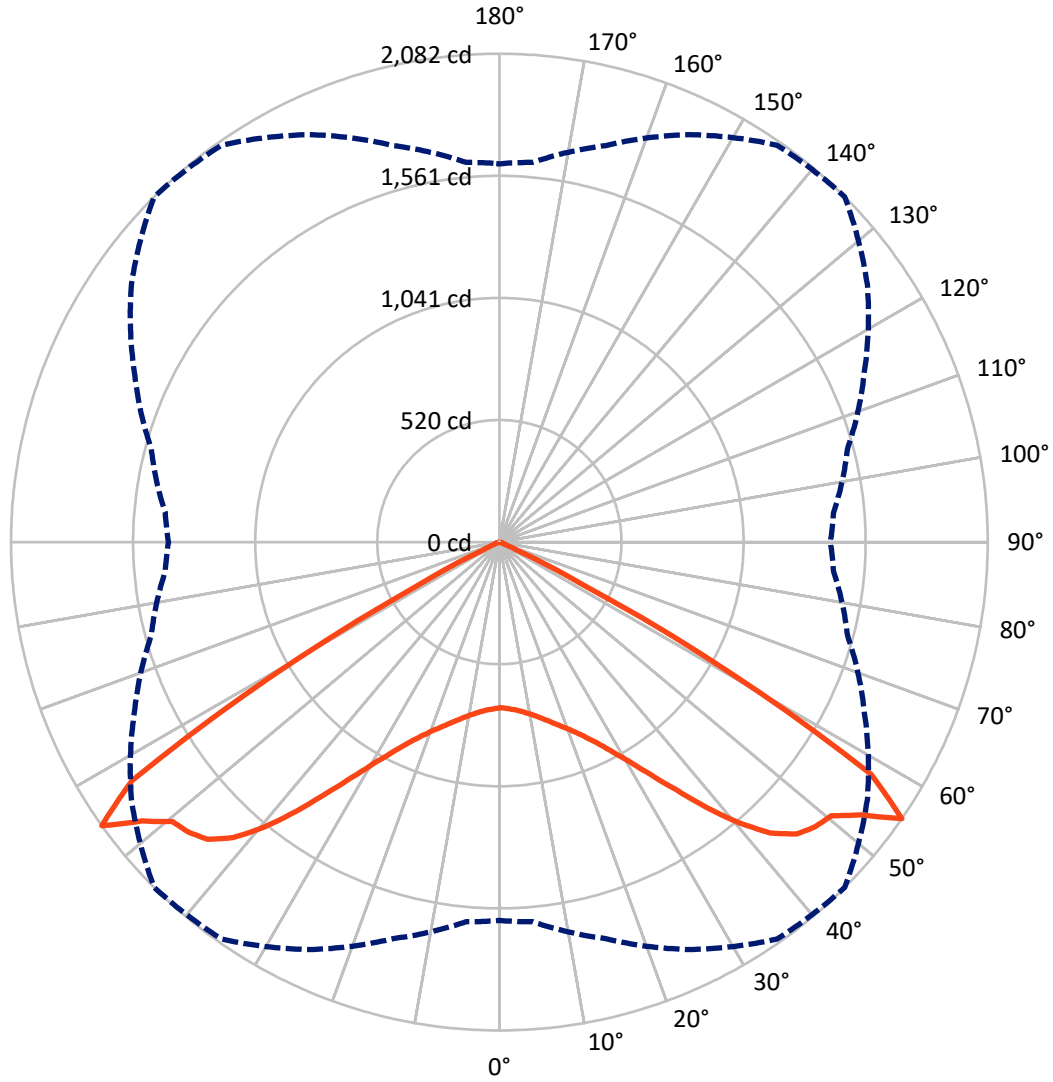

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 55-Deg Vertical

REPORT NUMBER: P630371

CATALOG NUMBER: GWS-SA1D-750-U-5NQ-W-GRSBK


FLUX DISTRIBUTION:

| | | Downward | Upward | Total |
|--------------------|-----------|----------|--------|--------|
| House Side | Lumens | 2182.3 | 0.0 | 2182.3 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Street Side | Lumens | 2182.3 | 0.0 | 2182.3 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Total | Lumens | 4364.7 | 0.0 | 4364.7 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 69.1 | 1.6 |
| 10°-20° | 224.1 | 5.1 |
| 20°-30° | 434.1 | 9.9 |
| 30°-40° | 777.6 | 17.8 |
| 40°-50° | 1303.7 | 29.9 |
| 50°-60° | 1395.6 | 32.0 |
| 60°-70° | 153.4 | 3.5 |
| 70°-80° | 6.7 | 0.2 |
| 80°-90° | 0.3 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 4364.7 | 100.0 |
| 0°-180° | 4364.7 | 100.0 |

Coefficient of Utilization

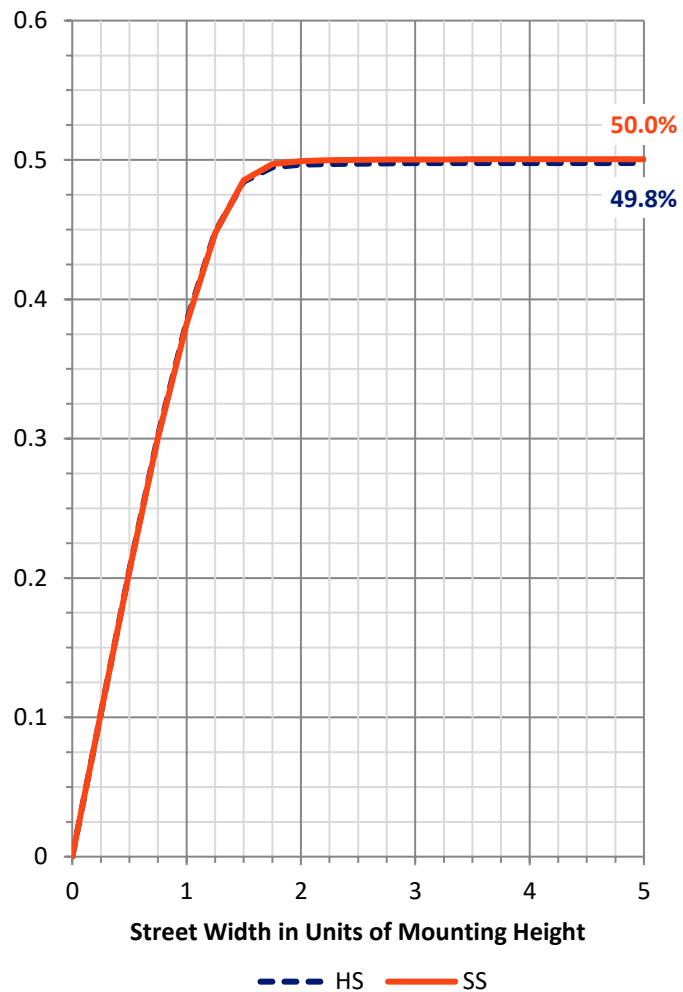

REPORT NUMBER: P630371


CATALOG NUMBER: GWS-SA1D-750-U-5NQ-W-GRSBK

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | Lumens | % Fixture | Zone Rating/Lumen Limit | | |
|----------------|--------|-----------|-------------------------|------|--------|
| | | | B | U | G |
| FL (0°-30°) | 363.7 | 8.3 | | | |
| FM (30°-60°) | 1738.5 | 39.8 | | | |
| FH (60°-80°) | 80.0 | 1.8 | | | G0/660 |
| FVH (80°-90°) | 0.1 | 0.0 | | | G0/10 |
| BL (0°-30°) | 363.7 | 8.3 | B1/500 | | |
| BM (30°-60°) | 1738.5 | 39.8 | B2/2500 | | |
| BH (60°-80°) | 80.0 | 1.8 | B0/110 | | G0/660 |
| BVH (80°-90°) | 0.1 | 0.0 | | | G0/10 |
| UL (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH (100°-180°) | 0.0 | 0.0 | | U0/0 | |

BUG Rating: B2-U0-G0

Type V Short

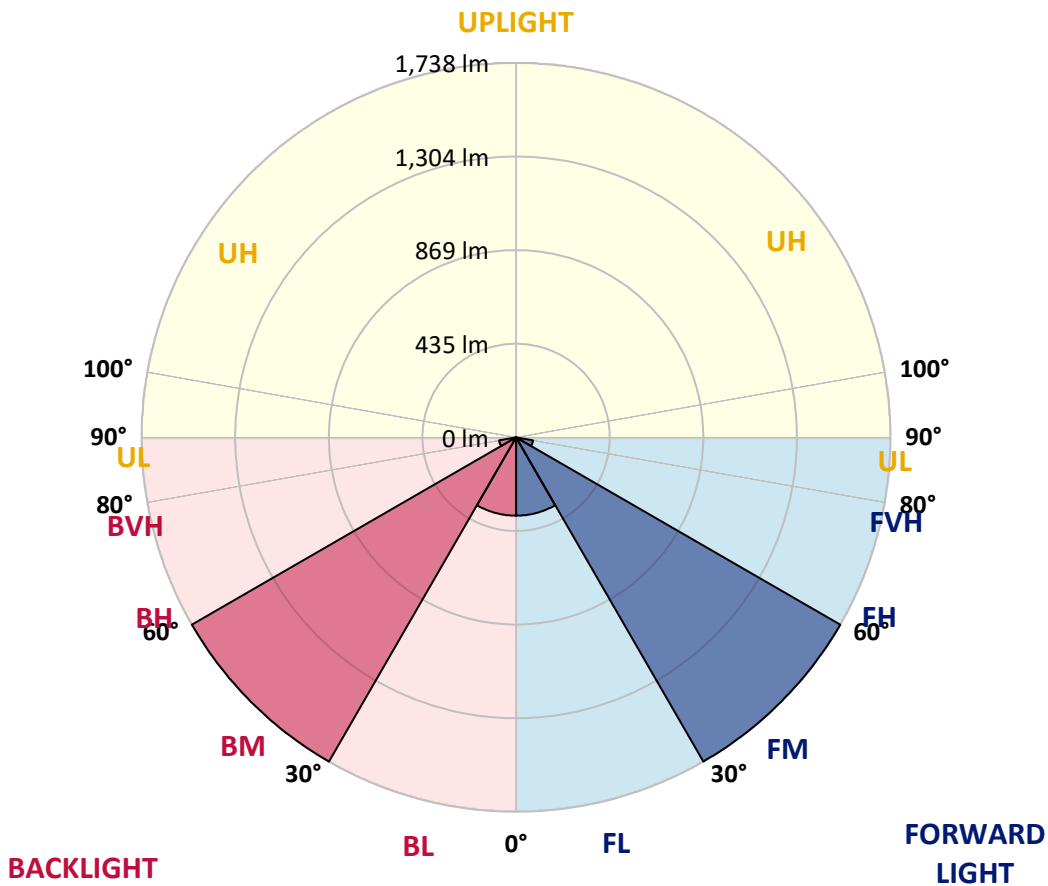



REPORT NUMBER: P630371

CATALOG NUMBER: GWS-SA1D-750-U-5NQ-W-GRSBK

CANDELA DISTRIBUTION (FULL):

| | 0° | 5° | 15° | 25° | 35° | 45° | 55° | 65° | 75° | 85° | 90° |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 705.7 | 705.7 | 705.7 | 705.7 | 705.7 | 705.7 | 705.7 | 705.7 | 705.7 | 705.7 | 705.7 |
| 2.5° | 704.4 | 704.4 | 706.1 | 707.5 | 707.5 | 711.0 | 709.7 | 708.4 | 708.4 | 706.6 | 710.1 |
| 5° | 714.6 | 714.1 | 715.9 | 716.8 | 715.0 | 718.6 | 716.4 | 715.0 | 714.1 | 712.4 | 715.9 |
| 7.5° | 725.7 | 726.1 | 726.6 | 728.4 | 727.5 | 731.0 | 729.3 | 726.6 | 725.7 | 723.0 | 726.6 |
| 10° | 739.0 | 739.0 | 739.9 | 742.2 | 742.6 | 747.0 | 745.3 | 742.2 | 739.5 | 736.8 | 740.4 |
| 12.5° | 755.9 | 756.4 | 757.7 | 760.8 | 762.6 | 767.5 | 764.8 | 758.6 | 754.6 | 751.5 | 755.5 |
| 15° | 780.4 | 779.9 | 781.7 | 786.2 | 788.4 | 792.0 | 788.0 | 779.5 | 774.6 | 771.1 | 773.7 |
| 17.5° | 807.1 | 807.1 | 808.0 | 812.4 | 815.5 | 820.9 | 816.0 | 805.7 | 801.3 | 796.4 | 799.1 |
| 20° | 836.4 | 837.8 | 838.6 | 841.8 | 847.1 | 852.4 | 848.4 | 838.2 | 833.3 | 827.1 | 830.2 |
| 22.5° | 875.1 | 873.8 | 874.2 | 879.6 | 887.1 | 892.4 | 889.3 | 877.3 | 868.9 | 864.0 | 865.8 |
| 25° | 918.2 | 917.8 | 919.1 | 927.1 | 935.6 | 941.4 | 936.9 | 921.4 | 912.9 | 904.5 | 908.0 |
| 27.5° | 971.2 | 971.6 | 972.5 | 982.3 | 995.6 | 1004.1 | 992.9 | 977.4 | 965.8 | 954.7 | 957.4 |
| 30° | 1033.9 | 1033.0 | 1035.6 | 1049.0 | 1068.5 | 1081.9 | 1069.0 | 1047.2 | 1030.7 | 1020.1 | 1021.4 |
| 32.5° | 1100.6 | 1101.4 | 1108.6 | 1129.9 | 1155.7 | 1179.3 | 1153.0 | 1124.1 | 1102.8 | 1082.8 | 1085.4 |
| 35° | 1172.6 | 1174.8 | 1190.8 | 1222.4 | 1264.6 | 1296.2 | 1259.7 | 1212.2 | 1181.9 | 1156.1 | 1157.0 |
| 37.5° | 1257.5 | 1262.9 | 1285.1 | 1332.2 | 1392.7 | 1434.9 | 1381.6 | 1318.4 | 1279.3 | 1247.3 | 1245.1 |
| 40° | 1369.1 | 1375.4 | 1405.6 | 1461.6 | 1535.0 | 1573.7 | 1511.9 | 1446.9 | 1398.5 | 1363.8 | 1358.5 |
| 42.5° | 1497.2 | 1505.2 | 1538.1 | 1595.5 | 1668.8 | 1695.1 | 1634.6 | 1579.9 | 1536.3 | 1495.4 | 1493.6 |
| 45° | 1641.7 | 1646.2 | 1672.8 | 1716.9 | 1769.8 | 1776.0 | 1730.6 | 1700.4 | 1656.4 | 1618.1 | 1615.0 |
| 47.5° | 1777.3 | 1781.8 | 1800.0 | 1822.7 | 1835.1 | 1812.9 | 1804.9 | 1791.6 | 1734.6 | 1687.5 | 1677.7 |
| 50° | 1880.5 | 1884.1 | 1906.7 | 1915.6 | 1880.9 | 1833.8 | 1849.4 | 1820.9 | 1759.1 | 1706.2 | 1691.1 |
| 52.5° | 1873.4 | 1882.3 | 1940.5 | 1991.2 | 1969.4 | 1931.2 | 1889.4 | 1828.0 | 1732.0 | 1659.5 | 1640.8 |
| 55° | 1612.8 | 1624.8 | 1749.8 | 1916.5 | 2065.5 | 2081.9 | 1914.7 | 1716.9 | 1536.3 | 1430.1 | 1410.9 |
| 57.5° | 1036.5 | 1039.6 | 1192.2 | 1426.0 | 1761.8 | 1867.6 | 1587.9 | 1294.4 | 1069.9 | 952.9 | 944.9 |
| 60° | 381.1 | 374.9 | 490.0 | 683.9 | 1014.7 | 1126.8 | 934.7 | 654.6 | 466.9 | 384.2 | 377.5 |
| 62.5° | 91.6 | 92.5 | 114.7 | 172.1 | 318.4 | 394.0 | 311.3 | 173.9 | 110.7 | 92.9 | 92.0 |
| 65° | 46.2 | 45.4 | 45.8 | 49.4 | 68.0 | 81.4 | 66.7 | 47.1 | 45.4 | 45.8 | 45.4 |
| 67.5° | 29.8 | 29.3 | 30.2 | 30.7 | 30.2 | 28.5 | 28.0 | 28.9 | 28.9 | 29.3 | 28.5 |
| 70° | 18.2 | 17.8 | 18.7 | 20.0 | 19.1 | 16.9 | 17.8 | 18.7 | 17.8 | 17.3 | 17.3 |
| 72.5° | 9.8 | 9.8 | 10.7 | 11.6 | 10.7 | 9.8 | 9.8 | 10.2 | 9.8 | 9.8 | 9.8 |
| 75° | 4.4 | 4.4 | 4.9 | 5.3 | 4.4 | 4.4 | 4.4 | 4.4 | 4.4 | 4.4 | 4.4 |
| 77.5° | 1.3 | 1.3 | 1.8 | 1.8 | 1.3 | 1.3 | 1.3 | 1.3 | 1.8 | 1.8 | 1.8 |
| 80° | 0.4 | 0.9 | 0.9 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.9 | 0.9 | 0.9 |
| 82.5° | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 |
| 85° | 0.4 | 0.4 | 0.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.4 | 0.4 | 0.4 | 0.4 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.4 | 0.4 | 0.4 | 0.4 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2008: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGRAW-EDISON

Report Number: SP1-1908-441-4-R4

Test Date: 10/02/2019

Luminaire Tested: SA1C-750-U-5WQ

Data in this report applies to families of products SA1C-760-U-5WQ .

Test Information

Test Method: LM-79-2008
 Report Number: SP1-1908-441-4-R4
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/28/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGRAW-EDISON
 Catalog Number: **SA1C-750-U-5WQ**
 Description: McGRAW EDISON ROADWAY AND AREA LUMINAIRE

THIS IS A REVISION OF SP1-1908-441-4-R3. TO UPDATE THE CATALOG INFORMATION.TESTED IN SITU. ROADWAY AND AREA LUMINAIRE. (1) 70 CRI, 5000K, 1050MA LIGHTSQUARE WITH 16 LEDS AND TYPE V WIDE OPTICS.

Spectral Parameters

| | | | | | |
|---------------------------|--------|-----------|------|------|-------|
| CCT (K): | 4884 | CRI (Ra): | 73.5 | R9: | -28.4 |
| CIE u': | 0.2101 | R1: | 70.5 | R10: | 48.6 |
| CIE v': | 0.4904 | R2: | 77.7 | R11: | 73.2 |
| Duv: | 0.0037 | R3: | 84.6 | R12: | 50.7 |
| CIE x: | 0.3493 | R4: | 74.7 | R13: | 71.2 |
| CIE y: | 0.3624 | R5: | 71.9 | R14: | 91.4 |
| CIE z: | 0.2884 | R6: | 70.7 | | |
| Peak Wavelength (nm): | 444 | R7: | 81.2 | | |
| Dominant Wavelength (nm): | 571 | R8: | 56.9 | | |
| Purity: | 13.7 | | | | |
| Rf: | 74.9 | | | | |
| Rg: | 96.3 | | | | |



Test Conditions

Stabilization Time: 240M
 Operation Time: 12H
 Room Temperature (°C) / RH%: 25.0./44%
 Sphere Temperature (°C): 25.7

REPORT NUMBER: SP1-1908-441-4-R4

| Measurement and Test Equipment | | | |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/28/2019 | 12/28/2019 |
| Power Meter | IN0071 | 12/5/2018 | 12/5/2019 |
| AC Power Source | IN0063 | 12/5/2018 | 12/5/2019 |
| DC Power Source | IN0208 | 12/5/2018 | 12/5/2019 |
| Sphere Thermometer | IN0085 | 12/5/2018 | 12/5/2019 |
| Room Thermometer | IN0046 | 12/5/2018 | 12/5/2019 |

REPORT NUMBER: SP1-1908-441-4-R4

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-1908-441-4-R4

Photopic Flux vs. Wavelength



#####

| λ (nm) | Power ($\mu\text{W}/\text{nm}$) | Lumens (ϕ/nm) | λ (nm) | Power ($\mu\text{W}/\text{nm}$) | Lumens (ϕ/nm) | λ (nm) | Power ($\mu\text{W}/\text{nm}$) | Lumens (ϕ/nm) | λ (nm) | Power ($\mu\text{W}/\text{nm}$) | Lumens (ϕ/nm) | λ (nm) | Power ($\mu\text{W}/\text{nm}$) | Lumens (ϕ/nm) |
|-------------------|--------------------------------------|--------------------------------|-------------------|--------------------------------------|--------------------------------|-------------------|--------------------------------------|--------------------------------|-------------------|--------------------------------------|--------------------------------|-------------------|--------------------------------------|--------------------------------|
| 360 | 2945 | NR | 490 | 37941 | NR | 620 | 88803 | NR | 750 | 3908 | NR | 880 | 2997 | NR |
| 365 | 2596 | NR | 495 | 48525 | NR | 625 | 80578 | NR | 755 | 3988 | NR | 885 | 2927 | NR |
| 370 | 2732 | NR | 500 | 60609 | NR | 630 | 73127 | NR | 760 | 3335 | NR | 890 | 2649 | NR |
| 375 | 2894 | NR | 505 | 72036 | NR | 635 | 66244 | NR | 765 | 3438 | NR | 895 | 2828 | NR |
| 380 | 2822 | NR | 510 | 82168 | NR | 640 | 59440 | NR | 770 | 3427 | NR | 900 | 1407 | NR |
| 385 | 2394 | NR | 515 | 90898 | NR | 645 | 52864 | NR | 775 | 2759 | NR | 905 | 2224 | NR |
| 390 | 2370 | NR | 520 | 97142 | NR | 650 | 47085 | NR | 780 | 2340 | NR | 910 | 2905 | NR |
| 395 | 2267 | NR | 525 | 103255 | NR | 655 | 41789 | NR | 785 | 2412 | NR | 915 | 3350 | NR |
| 400 | 2262 | NR | 530 | 106697 | NR | 660 | 37064 | NR | 790 | 1999 | NR | 920 | 3114 | NR |
| 405 | 3000 | NR | 535 | 110081 | NR | 665 | 32299 | NR | 795 | 2054 | NR | 925 | 2834 | NR |
| 410 | 5324 | NR | 540 | 112494 | NR | 670 | 28142 | NR | 800 | 2331 | NR | 930 | 2271 | NR |
| 415 | 10725 | NR | 545 | 115513 | NR | 675 | 24505 | NR | 805 | 2648 | NR | 935 | 2228 | NR |
| 420 | 22128 | NR | 550 | 117203 | NR | 680 | 21162 | NR | 810 | 2485 | NR | 940 | 2833 | NR |
| 425 | 44095 | NR | 555 | 119753 | NR | 685 | 18400 | NR | 815 | 2409 | NR | 945 | 2941 | NR |
| 430 | 77002 | NR | 560 | 122602 | NR | 690 | 16065 | NR | 820 | 2221 | NR | 950 | 2323 | NR |
| 435 | 119881 | NR | 565 | 124314 | NR | 695 | 13860 | NR | 825 | 1562 | NR | 955 | 1667 | NR |
| 440 | 164454 | NR | 570 | 126775 | NR | 700 | 12177 | NR | 830 | 2249 | NR | 960 | 749 | NR |
| 445 | 179997 | NR | 575 | 127511 | NR | 705 | 10757 | NR | 835 | 2573 | NR | 965 | 2669 | NR |
| 450 | 142822 | NR | 580 | 127577 | NR | 710 | 9601 | NR | 840 | 2764 | NR | 970 | 3968 | NR |
| 455 | 90008 | NR | 585 | 126153 | NR | 715 | 8944 | NR | 845 | 3109 | NR | 975 | 3886 | NR |
| 460 | 60557 | NR | 590 | 123678 | NR | 720 | 7947 | NR | 850 | 2963 | NR | 980 | 2788 | NR |
| 465 | 43305 | NR | 595 | 119774 | NR | 725 | 7062 | NR | 855 | 2336 | NR | 985 | 3496 | NR |
| 470 | 31089 | NR | 600 | 115733 | NR | 730 | 6004 | NR | 860 | 2118 | NR | 990 | 2913 | NR |
| 475 | 26278 | NR | 605 | 109231 | NR | 735 | 5594 | NR | 865 | 3144 | NR | 995 | 4659 | NR |
| 480 | 27060 | NR | 610 | 102408 | NR | 740 | 5165 | NR | 870 | 3069 | NR | 1000 | 1308 | NR |
| 485 | 30698 | NR | 615 | 96015 | NR | 745 | 4687 | NR | 875 | 3311 | NR | | | |

REPORT NUMBER: SP1-1908-441-4-R4

Scotopic Flux vs. Wavelength



Scotopic Lumens: 13493.5 S/P: 1.77

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360 | 2945 | NR | 490 | 37941 | NR | 620 | 88803 | NR | 750 | 3908 | NR | 880 | 2997 | NR |
| 365 | 2596 | NR | 495 | 48525 | NR | 625 | 80578 | NR | 755 | 3988 | NR | 885 | 2927 | NR |
| 370 | 2732 | NR | 500 | 60609 | NR | 630 | 73127 | NR | 760 | 3335 | NR | 890 | 2649 | NR |
| 375 | 2894 | NR | 505 | 72036 | NR | 635 | 66244 | NR | 765 | 3438 | NR | 895 | 2828 | NR |
| 380 | 2822 | NR | 510 | 82168 | NR | 640 | 59440 | NR | 770 | 3427 | NR | 900 | 1407 | NR |
| 385 | 2394 | NR | 515 | 90898 | NR | 645 | 52864 | NR | 775 | 2759 | NR | 905 | 2224 | NR |
| 390 | 2370 | NR | 520 | 97142 | NR | 650 | 47085 | NR | 780 | 2340 | NR | 910 | 2905 | NR |
| 395 | 2267 | NR | 525 | 103255 | NR | 655 | 41789 | NR | 785 | 2412 | NR | 915 | 3350 | NR |
| 400 | 2262 | NR | 530 | 106697 | NR | 660 | 37064 | NR | 790 | 1999 | NR | 920 | 3114 | NR |
| 405 | 3000 | NR | 535 | 110081 | NR | 665 | 32299 | NR | 795 | 2054 | NR | 925 | 2834 | NR |
| 410 | 5324 | NR | 540 | 112494 | NR | 670 | 28142 | NR | 800 | 2331 | NR | 930 | 2271 | NR |
| 415 | 10725 | NR | 545 | 115513 | NR | 675 | 24505 | NR | 805 | 2648 | NR | 935 | 2228 | NR |
| 420 | 22128 | NR | 550 | 117203 | NR | 680 | 21162 | NR | 810 | 2485 | NR | 940 | 2833 | NR |
| 425 | 44095 | NR | 555 | 119753 | NR | 685 | 18400 | NR | 815 | 2409 | NR | 945 | 2941 | NR |
| 430 | 77002 | NR | 560 | 122602 | NR | 690 | 16065 | NR | 820 | 2221 | NR | 950 | 2323 | NR |
| 435 | 119881 | NR | 565 | 124314 | NR | 695 | 13860 | NR | 825 | 1562 | NR | 955 | 1667 | NR |
| 440 | 164454 | NR | 570 | 126775 | NR | 700 | 12177 | NR | 830 | 2249 | NR | 960 | 749 | NR |
| 445 | 179997 | NR | 575 | 127511 | NR | 705 | 10757 | NR | 835 | 2573 | NR | 965 | 2669 | NR |
| 450 | 142822 | NR | 580 | 127577 | NR | 710 | 9601 | NR | 840 | 2764 | NR | 970 | 3968 | NR |
| 455 | 90008 | NR | 585 | 126153 | NR | 715 | 8944 | NR | 845 | 3109 | NR | 975 | 3886 | NR |
| 460 | 60557 | NR | 590 | 123678 | NR | 720 | 7947 | NR | 850 | 2963 | NR | 980 | 2788 | NR |
| 465 | 43305 | NR | 595 | 119774 | NR | 725 | 7062 | NR | 855 | 2336 | NR | 985 | 3496 | NR |
| 470 | 31089 | NR | 600 | 115733 | NR | 730 | 6004 | NR | 860 | 2118 | NR | 990 | 2913 | NR |
| 475 | 26278 | NR | 605 | 109231 | NR | 735 | 5594 | NR | 865 | 3144 | NR | 995 | 4659 | NR |
| 480 | 27060 | NR | 610 | 102408 | NR | 740 | 5165 | NR | 870 | 3069 | NR | 1000 | 1308 | NR |
| 485 | 30698 | NR | 615 | 96015 | NR | 745 | 4687 | NR | 875 | 3311 | NR | | | |

REPORT NUMBER: SP1-1908-441-4-R4

Melanopic Flux vs. Wavelength



Melanopic Lumens: 5378.9 M/P: 0.71

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360 | 2945 | NR | 490 | 37941 | NR | 620 | 88803 | NR | 750 | 3908 | NR | 880 | 2997 | NR |
| 365 | 2596 | NR | 495 | 48525 | NR | 625 | 80578 | NR | 755 | 3988 | NR | 885 | 2927 | NR |
| 370 | 2732 | NR | 500 | 60609 | NR | 630 | 73127 | NR | 760 | 3335 | NR | 890 | 2649 | NR |
| 375 | 2894 | NR | 505 | 72036 | NR | 635 | 66244 | NR | 765 | 3438 | NR | 895 | 2828 | NR |
| 380 | 2822 | NR | 510 | 82168 | NR | 640 | 59440 | NR | 770 | 3427 | NR | 900 | 1407 | NR |
| 385 | 2394 | NR | 515 | 90898 | NR | 645 | 52864 | NR | 775 | 2759 | NR | 905 | 2224 | NR |
| 390 | 2370 | NR | 520 | 97142 | NR | 650 | 47085 | NR | 780 | 2340 | NR | 910 | 2905 | NR |
| 395 | 2267 | NR | 525 | 103255 | NR | 655 | 41789 | NR | 785 | 2412 | NR | 915 | 3350 | NR |
| 400 | 2262 | NR | 530 | 106697 | NR | 660 | 37064 | NR | 790 | 1999 | NR | 920 | 3114 | NR |
| 405 | 3000 | NR | 535 | 110081 | NR | 665 | 32299 | NR | 795 | 2054 | NR | 925 | 2834 | NR |
| 410 | 5324 | NR | 540 | 112494 | NR | 670 | 28142 | NR | 800 | 2331 | NR | 930 | 2271 | NR |
| 415 | 10725 | NR | 545 | 115513 | NR | 675 | 24505 | NR | 805 | 2648 | NR | 935 | 2228 | NR |
| 420 | 22128 | NR | 550 | 117203 | NR | 680 | 21162 | NR | 810 | 2485 | NR | 940 | 2833 | NR |
| 425 | 44095 | NR | 555 | 119753 | NR | 685 | 18400 | NR | 815 | 2409 | NR | 945 | 2941 | NR |
| 430 | 77002 | NR | 560 | 122602 | NR | 690 | 16065 | NR | 820 | 2221 | NR | 950 | 2323 | NR |
| 435 | 119881 | NR | 565 | 124314 | NR | 695 | 13860 | NR | 825 | 1562 | NR | 955 | 1667 | NR |
| 440 | 164454 | NR | 570 | 126775 | NR | 700 | 12177 | NR | 830 | 2249 | NR | 960 | 749 | NR |
| 445 | 179997 | NR | 575 | 127511 | NR | 705 | 10757 | NR | 835 | 2573 | NR | 965 | 2669 | NR |
| 450 | 142822 | NR | 580 | 127577 | NR | 710 | 9601 | NR | 840 | 2764 | NR | 970 | 3968 | NR |
| 455 | 90008 | NR | 585 | 126153 | NR | 715 | 8944 | NR | 845 | 3109 | NR | 975 | 3886 | NR |
| 460 | 60557 | NR | 590 | 123678 | NR | 720 | 7947 | NR | 850 | 2963 | NR | 980 | 2788 | NR |
| 465 | 43305 | NR | 595 | 119774 | NR | 725 | 7062 | NR | 855 | 2336 | NR | 985 | 3496 | NR |
| 470 | 31089 | NR | 600 | 115733 | NR | 730 | 6004 | NR | 860 | 2118 | NR | 990 | 2913 | NR |
| 475 | 26278 | NR | 605 | 109231 | NR | 735 | 5594 | NR | 865 | 3144 | NR | 995 | 4659 | NR |
| 480 | 27060 | NR | 610 | 102408 | NR | 740 | 5165 | NR | 870 | 3069 | NR | 1000 | 1308 | NR |
| 485 | 30698 | NR | 615 | 96015 | NR | 745 | 4687 | NR | 875 | 3311 | NR | | | |

REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

Summary

$R_f = 74.9$
 $R_g = 96.3$
 CIE $R_a = 73.5$
 $R_g = -28.4$



Color Vector Graphics



REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

Individual Sample Fidelity Index ($R_{f,i}$)

| | | | |
|------------|------------|------------|------------|
| CES01 = 85 | CES26 = 61 | CES51 = 90 | CES76 = 52 |
| CES02 = 60 | CES27 = 84 | CES52 = 91 | CES77 = 71 |
| CES03 = 30 | CES28 = 81 | CES53 = 79 | CES78 = 54 |
| CES04 = 69 | CES29 = 58 | CES54 = 83 | CES79 = 80 |
| CES05 = 46 | CES30 = 67 | CES55 = 83 | CES80 = 77 |
| CES06 = 50 | CES31 = 63 | CES56 = 73 | CES81 = 77 |
| CES07 = 39 | CES32 = 59 | CES57 = 72 | CES82 = 90 |
| CES08 = 38 | CES33 = 69 | CES58 = 73 | CES83 = 86 |
| CES09 = 29 | CES34 = 69 | CES59 = 88 | CES84 = 88 |
| CES10 = 73 | CES35 = 83 | CES60 = 93 | CES85 = 84 |
| CES11 = 56 | CES36 = 95 | CES61 = 88 | CES86 = 75 |
| CES12 = 61 | CES37 = 78 | CES62 = 85 | CES87 = 78 |
| CES13 = 41 | CES38 = 76 | CES63 = 77 | CES88 = 79 |
| CES14 = 74 | CES39 = 93 | CES64 = 74 | CES89 = 75 |
| CES15 = 70 | CES40 = 86 | CES65 = 67 | CES90 = 77 |
| CES16 = 46 | CES41 = 87 | CES66 = 69 | CES91 = 89 |
| CES17 = 49 | CES42 = 78 | CES67 = 67 | CES92 = 66 |
| CES18 = 55 | CES43 = 75 | CES68 = 73 | CES93 = 80 |
| CES19 = 71 | CES44 = 99 | CES69 = 81 | CES94 = 57 |
| CES20 = 64 | CES45 = 83 | CES70 = 63 | CES95 = 71 |
| CES21 = 85 | CES46 = 81 | CES71 = 60 | CES96 = 78 |
| CES22 = 77 | CES47 = 80 | CES72 = 86 | CES97 = 85 |
| CES23 = 91 | CES48 = 72 | CES73 = 53 | CES98 = 75 |
| CES24 = 90 | CES49 = 81 | CES74 = 96 | CES99 = 62 |
| CES25 = 71 | CES50 = 89 | CES75 = 58 | |



REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

Color Rendition by Hue-Angle Bin



REPORT NUMBER: SP1-1908-441-4-R4

TM-30-18

Measure Comparisons



(END OF REPORT)