

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P631915

Luminaire Tested: GWS-SA2B-760-U-5WQ-W-GRSWH

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P631915
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-3)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA2B-760-U-5WQ-W-GRSWH
Description: GALLEON WALL SLIM LUMINAIRE. (2) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE V WIDE OPTICS W/ FACTORY INSTALLED GLARE SHIELD, WH
Light Source: (32) 5700K CCT, 70 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5880.2 lumens
Efficiency: N/A
Efficacy: 126.7 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')
IES Classification: Type V - Short
BUG Rating: B2 - U0 - G1


Input Watts (W): 46.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P631915
 CATALOG NUMBER: GWS-SA2B-760-U-5WQ-W-GRSWH

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

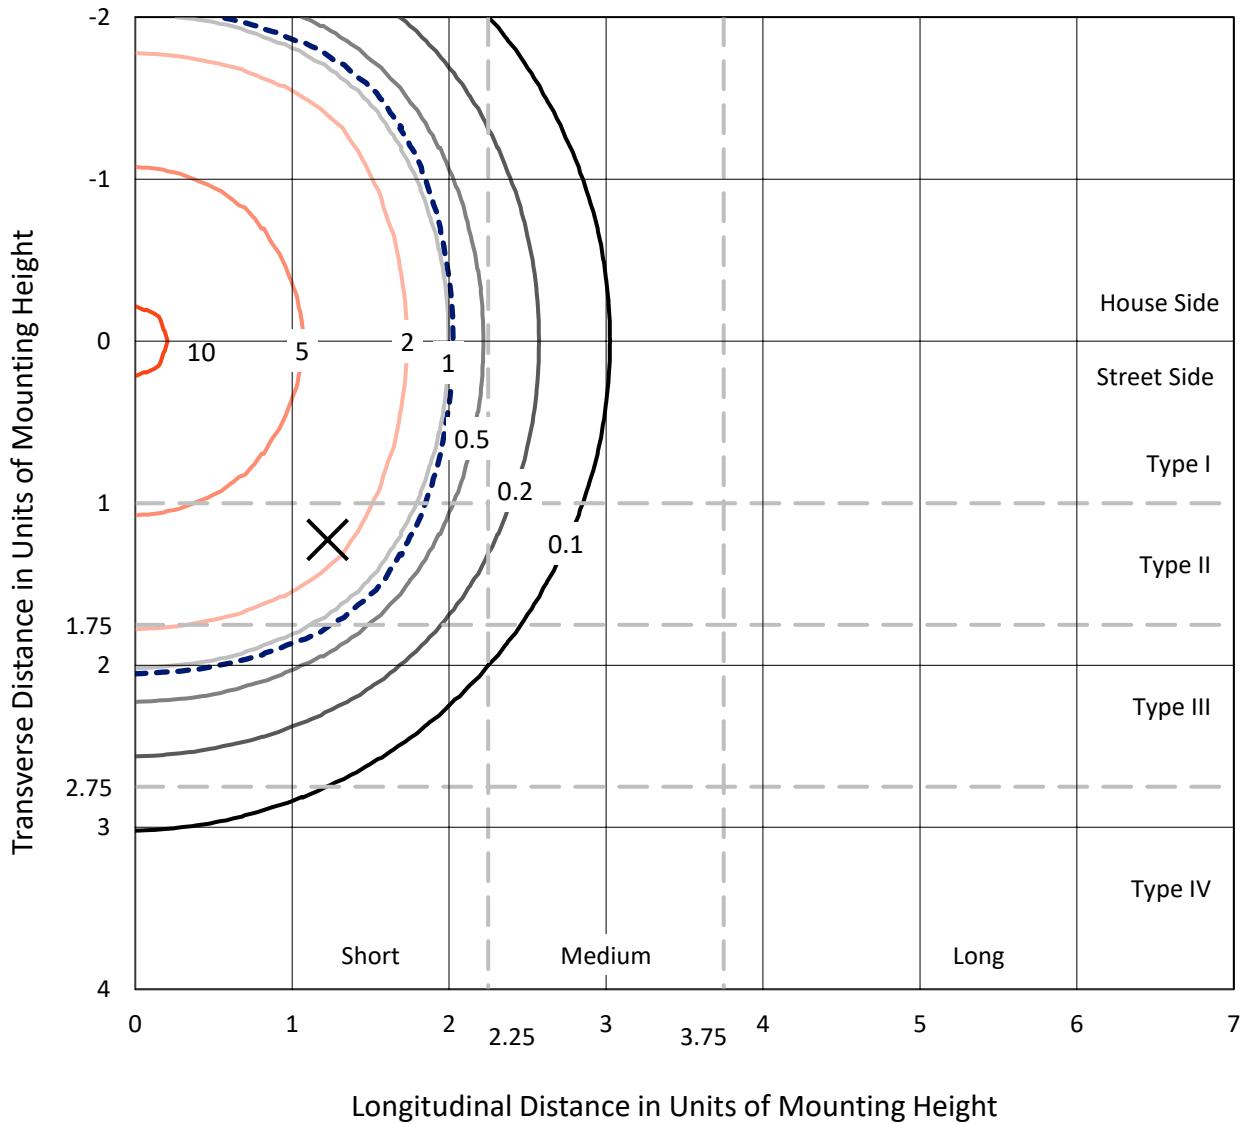

Based on 10 foot mounting height. Maximum calculated value = 10.7 fc
 Type V - Short - N/A

REPORT NUMBER: P631915
CATALOG NUMBER: GWS-SA2B-760-U-5WQ-W-GRSWH

Luminous Intensity Polar Plot

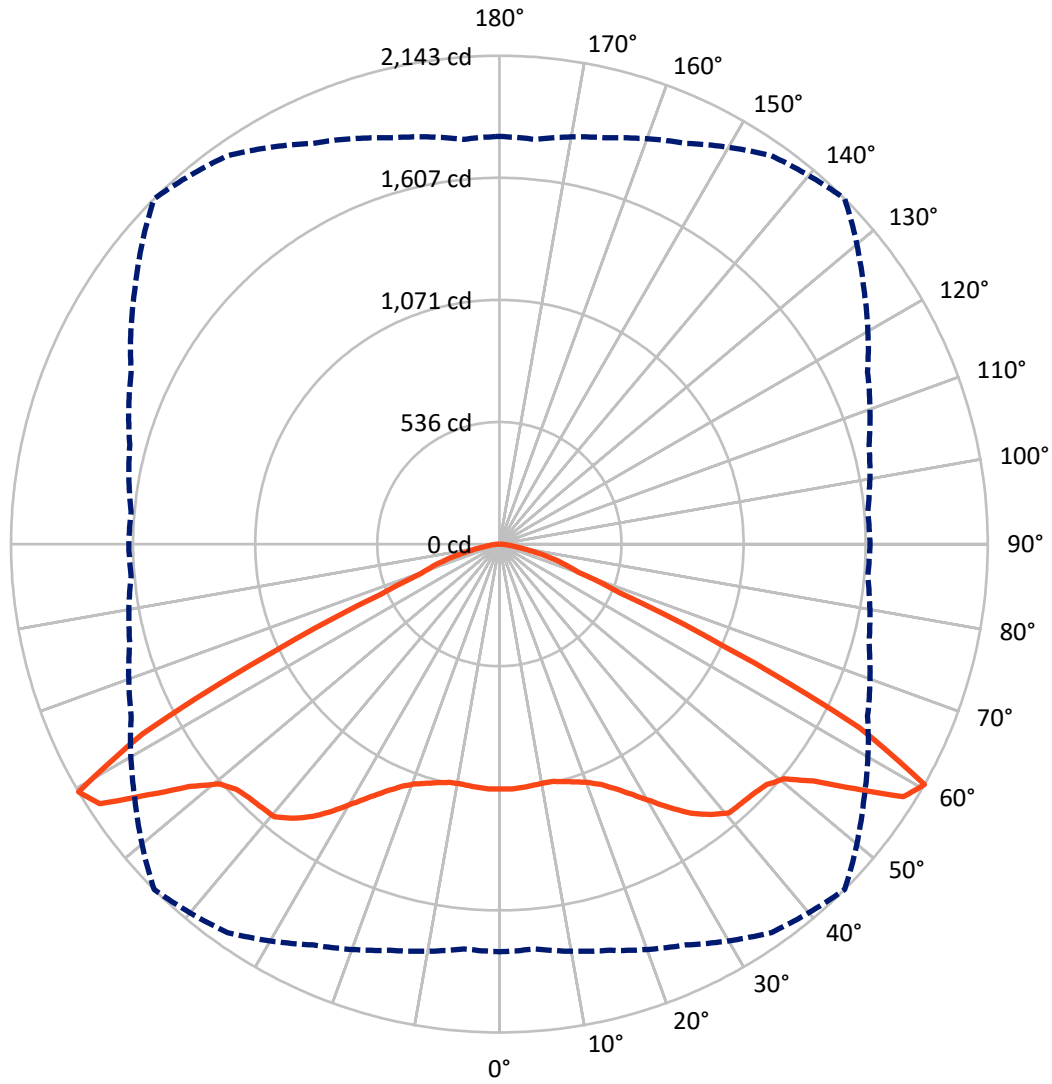

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 60-Deg Vertical

REPORT NUMBER: P631915

CATALOG NUMBER: GWS-SA2B-760-U-5WQ-W-GRSWH


FLUX DISTRIBUTION:

| | | Downward | Upward | Total |
|--------------------|-----------|----------|--------|--------|
| House Side | Lumens | 2940.1 | 0.0 | 2940.1 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Street Side | Lumens | 2940.1 | 0.0 | 2940.1 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Total | Lumens | 5880.2 | 0.0 | 5880.2 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 101.9 | 1.7 |
| 10°-20° | 306.5 | 5.2 |
| 20°-30° | 542.3 | 9.2 |
| 30°-40° | 873.1 | 14.8 |
| 40°-50° | 1200.1 | 20.4 |
| 50°-60° | 1599.2 | 27.2 |
| 60°-70° | 996.7 | 17.0 |
| 70°-80° | 229.2 | 3.9 |
| 80°-90° | 31.1 | 0.5 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 5880.2 | 100.0 |
| 0°-180° | 5880.2 | 100.0 |

Coefficient of Utilization

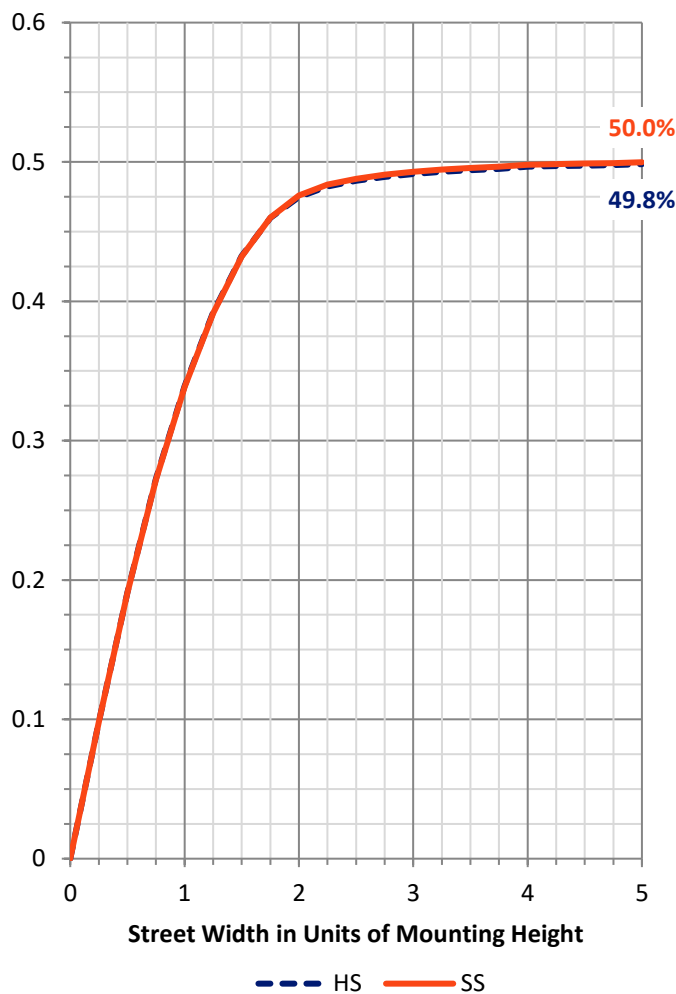

REPORT NUMBER: P631915


CATALOG NUMBER: GWS-SA2B-760-U-5WQ-W-GRSWH

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | Lumens | % Fixture | Zone Rating/Lumen Limit | | |
|----------------|--------|-----------|-------------------------|------|--------|
| | | | B | U | G |
| FL (0°-30°) | 475.4 | 8.1 | | | |
| FM (30°-60°) | 1836.2 | 31.2 | | | |
| FH (60°-80°) | 613.0 | 10.4 | | | G0/660 |
| FVH (80°-90°) | 15.6 | 0.3 | | | G1/100 |
| BL (0°-30°) | 475.4 | 8.1 | B1/500 | | |
| BM (30°-60°) | 1836.2 | 31.2 | B2/2500 | | |
| BH (60°-80°) | 613.0 | 10.4 | B2/1000 | | G0/660 |
| BVH (80°-90°) | 15.6 | 0.3 | | | G1/100 |
| UL (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH (100°-180°) | 0.0 | 0.0 | | U0/0 | |

BUG Rating: B2-U0-G1

Type V Short

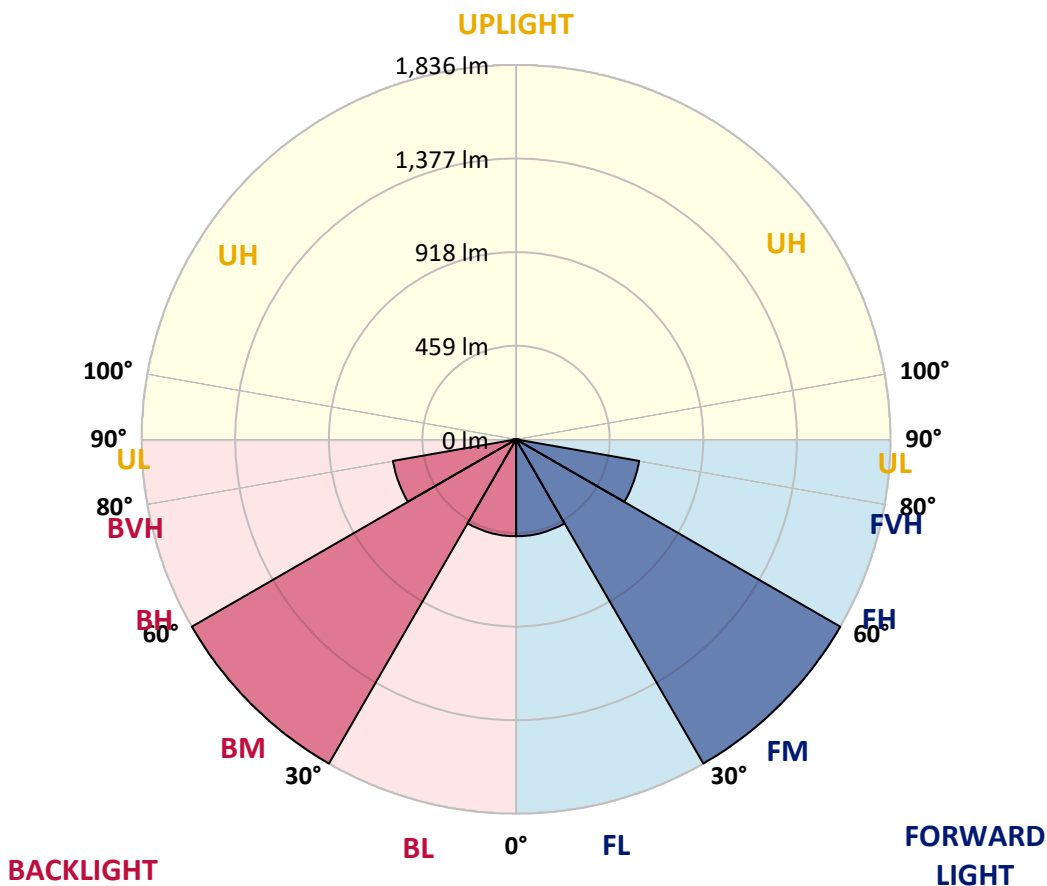



REPORT NUMBER: P631915

CATALOG NUMBER: GWS-SA2B-760-U-5WQ-W-GRSWH

CANDELA DISTRIBUTION (FULL):

| | 0° | 5° | 15° | 25° | 35° | 45° | 55° | 65° | 75° | 85° | 90° |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1074.6 | 1074.6 | 1074.6 | 1074.6 | 1074.6 | 1074.6 | 1074.6 | 1074.6 | 1074.6 | 1074.6 | 1074.6 |
| 2.5° | 1067.1 | 1068.1 | 1070.1 | 1071.6 | 1073.6 | 1075.6 | 1076.6 | 1074.6 | 1073.6 | 1069.6 | 1074.1 |
| 5° | 1068.1 | 1069.1 | 1070.6 | 1070.6 | 1071.1 | 1072.6 | 1072.6 | 1070.1 | 1067.6 | 1063.1 | 1068.1 |
| 7.5° | 1066.6 | 1067.6 | 1068.1 | 1067.6 | 1068.1 | 1068.6 | 1067.6 | 1064.6 | 1062.1 | 1058.1 | 1062.1 |
| 10° | 1064.1 | 1065.1 | 1066.1 | 1065.1 | 1064.1 | 1065.6 | 1065.6 | 1063.6 | 1062.1 | 1058.1 | 1062.6 |
| 12.5° | 1069.6 | 1071.1 | 1071.6 | 1069.1 | 1068.1 | 1068.6 | 1068.6 | 1066.6 | 1066.6 | 1063.1 | 1068.1 |
| 15° | 1082.6 | 1083.6 | 1082.1 | 1079.1 | 1079.6 | 1081.1 | 1077.6 | 1072.6 | 1071.6 | 1070.1 | 1074.1 |
| 17.5° | 1092.6 | 1093.6 | 1092.1 | 1090.1 | 1093.6 | 1097.1 | 1090.6 | 1081.1 | 1078.1 | 1077.1 | 1081.6 |
| 20° | 1103.5 | 1105.0 | 1103.0 | 1105.5 | 1112.5 | 1116.5 | 1108.5 | 1095.6 | 1089.6 | 1088.1 | 1093.6 |
| 22.5° | 1121.5 | 1123.5 | 1123.5 | 1129.0 | 1139.5 | 1146.0 | 1136.0 | 1118.5 | 1109.5 | 1107.0 | 1112.5 |
| 25° | 1150.0 | 1151.5 | 1153.0 | 1163.9 | 1180.9 | 1189.9 | 1173.9 | 1150.0 | 1137.5 | 1133.5 | 1136.5 |
| 27.5° | 1189.4 | 1191.9 | 1194.4 | 1210.4 | 1231.3 | 1244.3 | 1221.3 | 1191.4 | 1175.9 | 1167.9 | 1173.9 |
| 30° | 1236.3 | 1239.8 | 1245.8 | 1263.8 | 1293.2 | 1307.7 | 1278.2 | 1241.8 | 1224.3 | 1215.8 | 1223.8 |
| 32.5° | 1300.2 | 1300.7 | 1305.2 | 1325.2 | 1364.1 | 1380.6 | 1343.6 | 1303.2 | 1285.2 | 1275.2 | 1279.7 |
| 35° | 1376.1 | 1376.6 | 1369.6 | 1390.0 | 1432.0 | 1450.4 | 1407.0 | 1366.1 | 1351.1 | 1348.1 | 1359.6 |
| 37.5° | 1453.9 | 1449.4 | 1442.4 | 1451.4 | 1493.9 | 1505.8 | 1459.9 | 1425.0 | 1418.5 | 1424.0 | 1440.9 |
| 40° | 1509.3 | 1501.8 | 1487.9 | 1494.4 | 1537.3 | 1551.3 | 1502.3 | 1469.4 | 1467.4 | 1480.9 | 1501.3 |
| 42.5° | 1545.3 | 1537.3 | 1520.8 | 1520.8 | 1550.3 | 1556.2 | 1518.3 | 1500.8 | 1505.3 | 1520.8 | 1540.3 |
| 45° | 1562.7 | 1558.2 | 1548.8 | 1543.8 | 1560.2 | 1562.7 | 1533.8 | 1526.8 | 1535.3 | 1542.8 | 1557.7 |
| 47.5° | 1576.2 | 1576.2 | 1573.2 | 1568.2 | 1575.7 | 1577.2 | 1555.7 | 1553.8 | 1564.7 | 1564.7 | 1574.7 |
| 50° | 1600.2 | 1602.7 | 1606.7 | 1605.7 | 1613.6 | 1618.6 | 1602.7 | 1599.7 | 1604.2 | 1589.7 | 1594.7 |
| 52.5° | 1663.1 | 1669.5 | 1681.0 | 1690.0 | 1710.5 | 1725.9 | 1697.5 | 1673.5 | 1650.1 | 1618.1 | 1619.1 |
| 55° | 1775.9 | 1778.9 | 1801.3 | 1827.8 | 1862.2 | 1893.6 | 1835.3 | 1760.9 | 1710.0 | 1672.5 | 1673.0 |
| 57.5° | 1871.2 | 1875.7 | 1908.6 | 1964.0 | 2041.4 | 2090.3 | 1961.0 | 1836.7 | 1764.9 | 1719.0 | 1720.5 |
| 60° | 1788.8 | 1782.8 | 1845.2 | 1940.1 | 2080.3 | 2142.7 | 1952.0 | 1782.3 | 1679.0 | 1622.1 | 1626.1 |
| 62.5° | 1384.1 | 1372.6 | 1441.9 | 1541.3 | 1709.5 | 1771.9 | 1596.2 | 1433.5 | 1335.6 | 1291.2 | 1284.7 |
| 65° | 842.5 | 832.0 | 881.9 | 942.8 | 1056.6 | 1096.1 | 1015.7 | 929.4 | 844.0 | 817.1 | 809.6 |
| 67.5° | 458.7 | 457.2 | 470.7 | 500.6 | 550.5 | 569.0 | 553.5 | 512.6 | 490.6 | 471.7 | 471.7 |
| 70° | 363.9 | 360.9 | 358.4 | 358.9 | 363.4 | 365.9 | 366.4 | 364.4 | 366.9 | 367.3 | 365.4 |
| 72.5° | 301.5 | 300.5 | 295.5 | 296.0 | 294.0 | 293.0 | 296.5 | 298.5 | 302.5 | 303.0 | 303.0 |
| 75° | 218.6 | 216.1 | 218.6 | 219.1 | 217.1 | 217.1 | 219.6 | 219.1 | 221.1 | 222.1 | 216.6 |
| 77.5° | 124.3 | 124.3 | 127.8 | 131.8 | 134.8 | 134.8 | 137.3 | 137.3 | 139.8 | 139.3 | 138.3 |
| 80° | 68.4 | 68.4 | 70.4 | 72.9 | 75.9 | 78.9 | 81.4 | 81.9 | 83.4 | 82.9 | 81.4 |
| 82.5° | 38.9 | 39.4 | 40.4 | 41.9 | 44.9 | 47.4 | 49.9 | 50.4 | 51.9 | 51.9 | 50.4 |
| 85° | 18.5 | 18.0 | 18.5 | 19.5 | 21.0 | 23.0 | 25.5 | 27.0 | 28.0 | 28.0 | 27.0 |
| 87.5° | 3.5 | 4.0 | 3.5 | 4.0 | 4.5 | 6.0 | 7.0 | 8.0 | 9.5 | 10.0 | 9.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2008: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGRAW-EDISON

Report Number: SP1-1908-441-9-R4

Test Date: 10/23/2019

Luminaire Tested: SA1C-760-U-5WQ

Data in this report applies to families of products SA1C-760-U-5WQ .

Test Information

Test Method: LM-79-2008
 Report Number: SP1-1908-441-9-R4
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 10/28/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: McGRAW-EDISON
 Catalog Number: **SA1C-760-U-5WQ**
 Description: McGRAW EDISON ROADWAY AND AREA LUMINAIRE

THIS IS A REVISION OF SP1-1908-441-4-R3. TO UPDATE THE CATALOG INFORMATION.TESTED IN SITU. ROADWAY AND AREA LUMINAIRE. (1) 70 CRI, 5000K, 1050MA LIGHTSQUARE WITH 16 LEDS AND TYPE V WIDE OPTICS.

Spectral Parameters

| | | | | | |
|---------------------------|--------|-----------|------|------|-------|
| CCT (K): | 5474 | CRI (Ra): | 71.7 | R9: | -27.1 |
| CIE u': | 0.2052 | R1: | 70.6 | R10: | 40.8 |
| CIE v': | 0.4804 | R2: | 74.6 | R11: | 74.6 |
| Duv: | 0.0025 | R3: | 78.3 | R12: | 50.4 |
| CIE x: | 0.3330 | R4: | 73.8 | R13: | 70.0 |
| CIE y: | 0.3466 | R5: | 72.4 | R14: | 87.8 |
| CIE z: | 0.3204 | R6: | 67.5 | | |
| Peak Wavelength (nm): | 442 | R7: | 77.5 | | |
| Dominant Wavelength (nm): | 554 | R8: | 58.9 | | |
| Purity: | 4.1 | | | | |
| Rf: | 72.1 | | | | |
| Rg: | 97.2 | | | | |



Test Conditions

Stabilization Time: 240M
 Operation Time: 12H
 Room Temperature (°C) / RH%: 24.6/31%
 Sphere Temperature (°C): 25.9

REPORT NUMBER: SP1-1908-441-9-R4

| Measurement and Test Equipment | | | |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/28/2019 | 12/28/2019 |
| Power Meter | IN0071 | 12/5/2018 | 12/5/2019 |
| AC Power Source | IN0063 | 12/5/2018 | 12/5/2019 |
| DC Power Source | IN0208 | 12/5/2018 | 12/5/2019 |
| Sphere Thermometer | IN0085 | 12/5/2018 | 12/5/2019 |
| Room Thermometer | IN0046 | 12/5/2018 | 12/5/2019 |

REPORT NUMBER: SP1-1908-441-9-R4

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 5700K 4-step quadrangle

REPORT NUMBER: SP1-1908-441-9-R4

Photopic Flux vs. Wavelength



#####

| λ (nm) | Power ($\mu\text{W}/\text{nm}$) | Lumens (ϕ/nm) | λ (nm) | Power ($\mu\text{W}/\text{nm}$) | Lumens (ϕ/nm) | λ (nm) | Power ($\mu\text{W}/\text{nm}$) | Lumens (ϕ/nm) | λ (nm) | Power ($\mu\text{W}/\text{nm}$) | Lumens (ϕ/nm) | λ (nm) | Power ($\mu\text{W}/\text{nm}$) | Lumens (ϕ/nm) |
|-------------------|--------------------------------------|--------------------------------|-------------------|--------------------------------------|--------------------------------|-------------------|--------------------------------------|--------------------------------|-------------------|--------------------------------------|--------------------------------|-------------------|--------------------------------------|--------------------------------|
| 360 | 3540 | NR | 490 | 33363 | NR | 620 | 80193 | NR | 750 | 4663 | NR | 880 | 4678 | NR |
| 365 | 2862 | NR | 495 | 44177 | NR | 625 | 73091 | NR | 755 | 4147 | NR | 885 | 4128 | NR |
| 370 | 2865 | NR | 500 | 57019 | NR | 630 | 66269 | NR | 760 | 4040 | NR | 890 | 4504 | NR |
| 375 | 3254 | NR | 505 | 70030 | NR | 635 | 60012 | NR | 765 | 3474 | NR | 895 | 4371 | NR |
| 380 | 3076 | NR | 510 | 81972 | NR | 640 | 53914 | NR | 770 | 3469 | NR | 900 | 4082 | NR |
| 385 | 2904 | NR | 515 | 92590 | NR | 645 | 48385 | NR | 775 | 3181 | NR | 905 | 2982 | NR |
| 390 | 2689 | NR | 520 | 100305 | NR | 650 | 43219 | NR | 780 | 2969 | NR | 910 | 4351 | NR |
| 395 | 2619 | NR | 525 | 107452 | NR | 655 | 38562 | NR | 785 | 3132 | NR | 915 | 3365 | NR |
| 400 | 2679 | NR | 530 | 111373 | NR | 660 | 34110 | NR | 790 | 2507 | NR | 920 | 3430 | NR |
| 405 | 3515 | NR | 535 | 114505 | NR | 665 | 30085 | NR | 795 | 2968 | NR | 925 | 4264 | NR |
| 410 | 6934 | NR | 540 | 116408 | NR | 670 | 26205 | NR | 800 | 2758 | NR | 930 | 4095 | NR |
| 415 | 14943 | NR | 545 | 118700 | NR | 675 | 22906 | NR | 805 | 2872 | NR | 935 | 5048 | NR |
| 420 | 31939 | NR | 550 | 119209 | NR | 680 | 20058 | NR | 810 | 3094 | NR | 940 | 4074 | NR |
| 425 | 64701 | NR | 555 | 120742 | NR | 685 | 17413 | NR | 815 | 3222 | NR | 945 | 4949 | NR |
| 430 | 110939 | NR | 560 | 121594 | NR | 690 | 15447 | NR | 820 | 3238 | NR | 950 | 4387 | NR |
| 435 | 164597 | NR | 565 | 121913 | NR | 695 | 13398 | NR | 825 | 3524 | NR | 955 | 4978 | NR |
| 440 | 207696 | NR | 570 | 122147 | NR | 700 | 11777 | NR | 830 | 2921 | NR | 960 | 4706 | NR |
| 445 | 201830 | NR | 575 | 121605 | NR | 705 | 10412 | NR | 835 | 3595 | NR | 965 | 5083 | NR |
| 450 | 145410 | NR | 580 | 120248 | NR | 710 | 9544 | NR | 840 | 3016 | NR | 970 | 4522 | NR |
| 455 | 89594 | NR | 585 | 117717 | NR | 715 | 8940 | NR | 845 | 4032 | NR | 975 | 4740 | NR |
| 460 | 58321 | NR | 590 | 114359 | NR | 720 | 7897 | NR | 850 | 3579 | NR | 980 | 6122 | NR |
| 465 | 39318 | NR | 595 | 109974 | NR | 725 | 7045 | NR | 855 | 4571 | NR | 985 | 6450 | NR |
| 470 | 27693 | NR | 600 | 105269 | NR | 730 | 6483 | NR | 860 | 4485 | NR | 990 | 4875 | NR |
| 475 | 23081 | NR | 605 | 99453 | NR | 735 | 5838 | NR | 865 | 3978 | NR | 995 | 4764 | NR |
| 480 | 23002 | NR | 610 | 92921 | NR | 740 | 5261 | NR | 870 | 4298 | NR | 1000 | 3640 | NR |
| 485 | 26201 | NR | 615 | 86989 | NR | 745 | 4760 | NR | 875 | 4356 | NR | | | |

REPORT NUMBER: SP1-1908-441-9-R4

Scotopic Flux vs. Wavelength



Scotopic Lumens: 13759.3 S/P: 1.85

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360 | 3540 | NR | 490 | 33363 | NR | 620 | 80193 | NR | 750 | 4663 | NR | 880 | 4678 | NR |
| 365 | 2862 | NR | 495 | 44177 | NR | 625 | 73091 | NR | 755 | 4147 | NR | 885 | 4128 | NR |
| 370 | 2865 | NR | 500 | 57019 | NR | 630 | 66269 | NR | 760 | 4040 | NR | 890 | 4504 | NR |
| 375 | 3254 | NR | 505 | 70030 | NR | 635 | 60012 | NR | 765 | 3474 | NR | 895 | 4371 | NR |
| 380 | 3076 | NR | 510 | 81972 | NR | 640 | 53914 | NR | 770 | 3469 | NR | 900 | 4082 | NR |
| 385 | 2904 | NR | 515 | 92590 | NR | 645 | 48385 | NR | 775 | 3181 | NR | 905 | 2982 | NR |
| 390 | 2689 | NR | 520 | 100305 | NR | 650 | 43219 | NR | 780 | 2969 | NR | 910 | 4351 | NR |
| 395 | 2619 | NR | 525 | 107452 | NR | 655 | 38562 | NR | 785 | 3132 | NR | 915 | 3365 | NR |
| 400 | 2679 | NR | 530 | 111373 | NR | 660 | 34110 | NR | 790 | 2507 | NR | 920 | 3430 | NR |
| 405 | 3515 | NR | 535 | 114505 | NR | 665 | 30085 | NR | 795 | 2968 | NR | 925 | 4264 | NR |
| 410 | 6934 | NR | 540 | 116408 | NR | 670 | 26205 | NR | 800 | 2758 | NR | 930 | 4095 | NR |
| 415 | 14943 | NR | 545 | 118700 | NR | 675 | 22906 | NR | 805 | 2872 | NR | 935 | 5048 | NR |
| 420 | 31939 | NR | 550 | 119209 | NR | 680 | 20058 | NR | 810 | 3094 | NR | 940 | 4074 | NR |
| 425 | 64701 | NR | 555 | 120742 | NR | 685 | 17413 | NR | 815 | 3222 | NR | 945 | 4949 | NR |
| 430 | 110939 | NR | 560 | 121594 | NR | 690 | 15447 | NR | 820 | 3238 | NR | 950 | 4387 | NR |
| 435 | 164597 | NR | 565 | 121913 | NR | 695 | 13398 | NR | 825 | 3524 | NR | 955 | 4978 | NR |
| 440 | 207696 | NR | 570 | 122147 | NR | 700 | 11777 | NR | 830 | 2921 | NR | 960 | 4706 | NR |
| 445 | 201830 | NR | 575 | 121605 | NR | 705 | 10412 | NR | 835 | 3595 | NR | 965 | 5083 | NR |
| 450 | 145410 | NR | 580 | 120248 | NR | 710 | 9544 | NR | 840 | 3016 | NR | 970 | 4522 | NR |
| 455 | 89594 | NR | 585 | 117717 | NR | 715 | 8940 | NR | 845 | 4032 | NR | 975 | 4740 | NR |
| 460 | 58321 | NR | 590 | 114359 | NR | 720 | 7897 | NR | 850 | 3579 | NR | 980 | 6122 | NR |
| 465 | 39318 | NR | 595 | 109974 | NR | 725 | 7045 | NR | 855 | 4571 | NR | 985 | 6450 | NR |
| 470 | 27693 | NR | 600 | 105269 | NR | 730 | 6483 | NR | 860 | 4485 | NR | 990 | 4875 | NR |
| 475 | 23081 | NR | 605 | 99453 | NR | 735 | 5838 | NR | 865 | 3978 | NR | 995 | 4764 | NR |
| 480 | 23002 | NR | 610 | 92921 | NR | 740 | 5261 | NR | 870 | 4298 | NR | 1000 | 3640 | NR |
| 485 | 26201 | NR | 615 | 86989 | NR | 745 | 4760 | NR | 875 | 4356 | NR | | | |

REPORT NUMBER: SP1-1908-441-9-R4

Melanopic Flux vs. Wavelength



Melanopic Lumens: 5527.6 M/P: 0.74

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360 | 3540 | NR | 490 | 33363 | NR | 620 | 80193 | NR | 750 | 4663 | NR | 880 | 4678 | NR |
| 365 | 2862 | NR | 495 | 44177 | NR | 625 | 73091 | NR | 755 | 4147 | NR | 885 | 4128 | NR |
| 370 | 2865 | NR | 500 | 57019 | NR | 630 | 66269 | NR | 760 | 4040 | NR | 890 | 4504 | NR |
| 375 | 3254 | NR | 505 | 70030 | NR | 635 | 60012 | NR | 765 | 3474 | NR | 895 | 4371 | NR |
| 380 | 3076 | NR | 510 | 81972 | NR | 640 | 53914 | NR | 770 | 3469 | NR | 900 | 4082 | NR |
| 385 | 2904 | NR | 515 | 92590 | NR | 645 | 48385 | NR | 775 | 3181 | NR | 905 | 2982 | NR |
| 390 | 2689 | NR | 520 | 100305 | NR | 650 | 43219 | NR | 780 | 2969 | NR | 910 | 4351 | NR |
| 395 | 2619 | NR | 525 | 107452 | NR | 655 | 38562 | NR | 785 | 3132 | NR | 915 | 3365 | NR |
| 400 | 2679 | NR | 530 | 111373 | NR | 660 | 34110 | NR | 790 | 2507 | NR | 920 | 3430 | NR |
| 405 | 3515 | NR | 535 | 114505 | NR | 665 | 30085 | NR | 795 | 2968 | NR | 925 | 4264 | NR |
| 410 | 6934 | NR | 540 | 116408 | NR | 670 | 26205 | NR | 800 | 2758 | NR | 930 | 4095 | NR |
| 415 | 14943 | NR | 545 | 118700 | NR | 675 | 22906 | NR | 805 | 2872 | NR | 935 | 5048 | NR |
| 420 | 31939 | NR | 550 | 119209 | NR | 680 | 20058 | NR | 810 | 3094 | NR | 940 | 4074 | NR |
| 425 | 64701 | NR | 555 | 120742 | NR | 685 | 17413 | NR | 815 | 3222 | NR | 945 | 4949 | NR |
| 430 | 110939 | NR | 560 | 121594 | NR | 690 | 15447 | NR | 820 | 3238 | NR | 950 | 4387 | NR |
| 435 | 164597 | NR | 565 | 121913 | NR | 695 | 13398 | NR | 825 | 3524 | NR | 955 | 4978 | NR |
| 440 | 207696 | NR | 570 | 122147 | NR | 700 | 11777 | NR | 830 | 2921 | NR | 960 | 4706 | NR |
| 445 | 201830 | NR | 575 | 121605 | NR | 705 | 10412 | NR | 835 | 3595 | NR | 965 | 5083 | NR |
| 450 | 145410 | NR | 580 | 120248 | NR | 710 | 9544 | NR | 840 | 3016 | NR | 970 | 4522 | NR |
| 455 | 89594 | NR | 585 | 117717 | NR | 715 | 8940 | NR | 845 | 4032 | NR | 975 | 4740 | NR |
| 460 | 58321 | NR | 590 | 114359 | NR | 720 | 7897 | NR | 850 | 3579 | NR | 980 | 6122 | NR |
| 465 | 39318 | NR | 595 | 109974 | NR | 725 | 7045 | NR | 855 | 4571 | NR | 985 | 6450 | NR |
| 470 | 27693 | NR | 600 | 105269 | NR | 730 | 6483 | NR | 860 | 4485 | NR | 990 | 4875 | NR |
| 475 | 23081 | NR | 605 | 99453 | NR | 735 | 5838 | NR | 865 | 3978 | NR | 995 | 4764 | NR |
| 480 | 23002 | NR | 610 | 92921 | NR | 740 | 5261 | NR | 870 | 4298 | NR | 1000 | 3640 | NR |
| 485 | 26201 | NR | 615 | 86989 | NR | 745 | 4760 | NR | 875 | 4356 | NR | | | |

REPORT NUMBER: SP1-1908-441-9-R4




TM-30-18

Summary

$R_f = 72.1$
 $R_g = 97.2$
 CIE $R_a = 71.7$
 $R_g = -27.1$



Color Vector Graphics

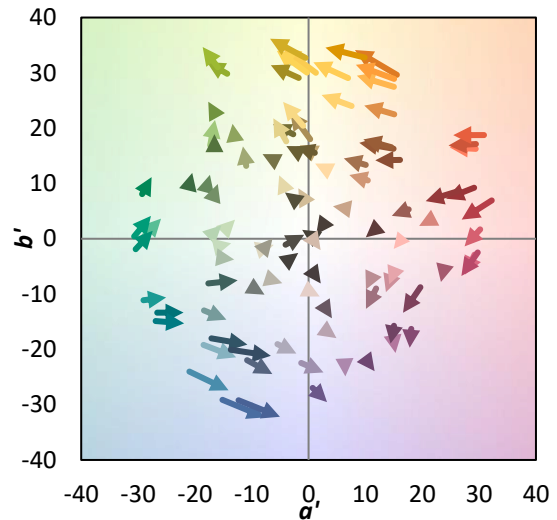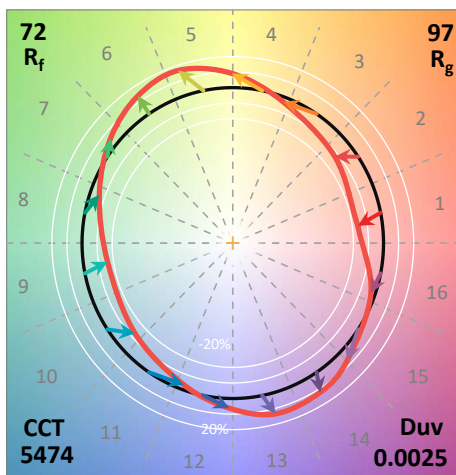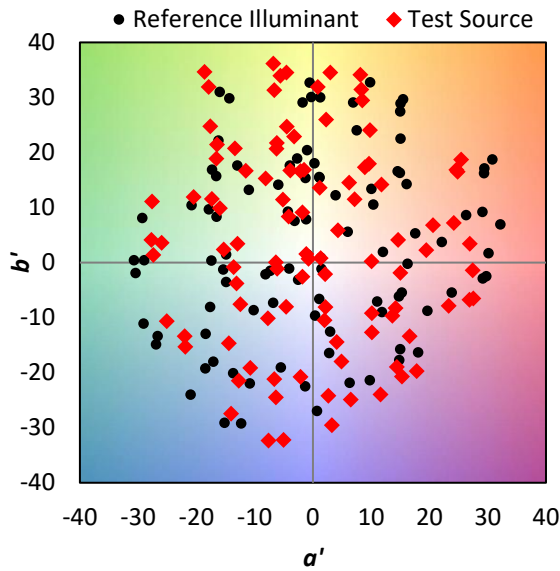


REPORT NUMBER: SP1-1908-441-9-R4

TM-30-18

Individual Sample Fidelity Index ($R_{f,i}$)


| | | | |
|------------|------------|------------|------------|
| CES01 = 85 | CES26 = 54 | CES51 = 88 | CES76 = 43 |
| CES02 = 59 | CES27 = 79 | CES52 = 90 | CES77 = 64 |
| CES03 = 30 | CES28 = 77 | CES53 = 77 | CES78 = 46 |
| CES04 = 69 | CES29 = 50 | CES54 = 81 | CES79 = 74 |
| CES05 = 46 | CES30 = 59 | CES55 = 80 | CES80 = 70 |
| CES06 = 50 | CES31 = 55 | CES56 = 70 | CES81 = 71 |
| CES07 = 38 | CES32 = 52 | CES57 = 68 | CES82 = 88 |
| CES08 = 38 | CES33 = 63 | CES58 = 70 | CES83 = 82 |
| CES09 = 29 | CES34 = 63 | CES59 = 88 | CES84 = 87 |
| CES10 = 72 | CES35 = 79 | CES60 = 92 | CES85 = 84 |
| CES11 = 55 | CES36 = 90 | CES61 = 88 | CES86 = 76 |
| CES12 = 61 | CES37 = 72 | CES62 = 81 | CES87 = 75 |
| CES13 = 41 | CES38 = 68 | CES63 = 75 | CES88 = 77 |
| CES14 = 74 | CES39 = 91 | CES64 = 72 | CES89 = 76 |
| CES15 = 70 | CES40 = 83 | CES65 = 65 | CES90 = 76 |
| CES16 = 46 | CES41 = 84 | CES66 = 66 | CES91 = 92 |
| CES17 = 48 | CES42 = 70 | CES67 = 64 | CES92 = 70 |
| CES18 = 55 | CES43 = 69 | CES68 = 71 | CES93 = 83 |
| CES19 = 70 | CES44 = 98 | CES69 = 80 | CES94 = 60 |
| CES20 = 64 | CES45 = 79 | CES70 = 58 | CES95 = 73 |
| CES21 = 85 | CES46 = 78 | CES71 = 55 | CES96 = 79 |
| CES22 = 77 | CES47 = 76 | CES72 = 84 | CES97 = 84 |
| CES23 = 91 | CES48 = 68 | CES73 = 47 | CES98 = 73 |
| CES24 = 90 | CES49 = 78 | CES74 = 94 | CES99 = 62 |
| CES25 = 71 | CES50 = 87 | CES75 = 51 | |

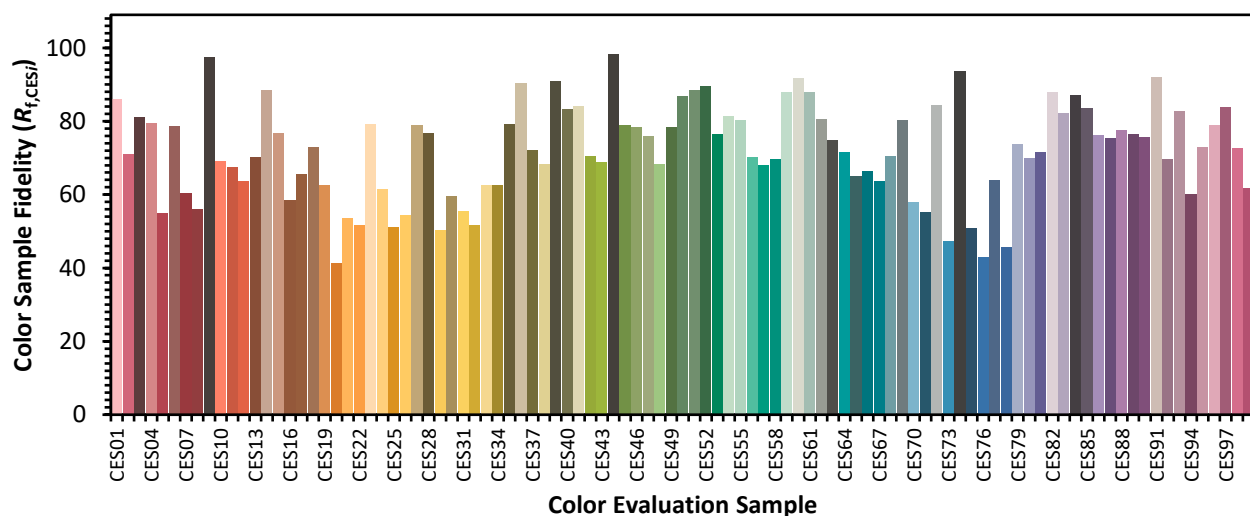

REPORT NUMBER: SP1-1908-441-9-R4

TM-30-18

Color Rendition by Hue-Angle Bin

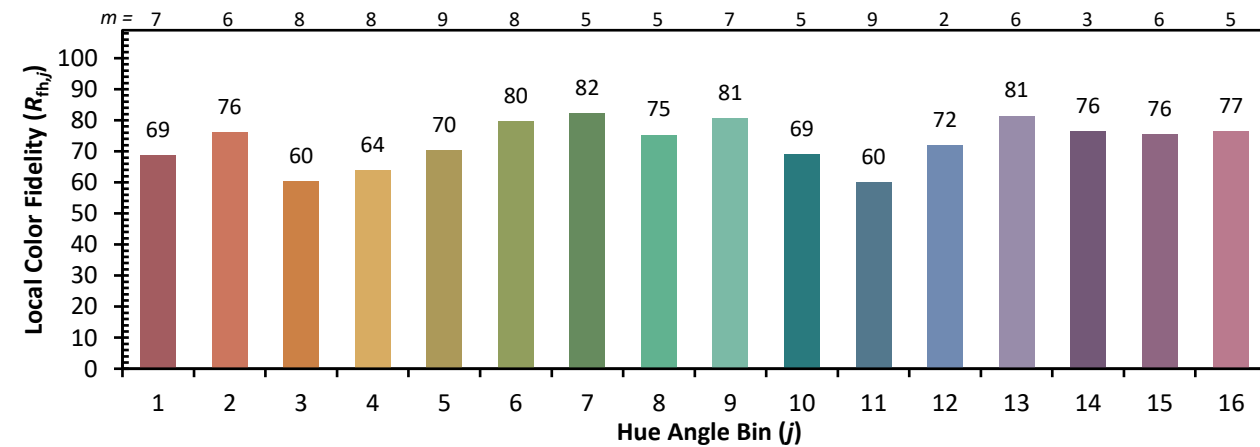

REPORT NUMBER: SP1-1908-441-9-R4

TM-30-18

Measure Comparisons



(END OF REPORT)