

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P636010

Luminaire Tested: GWS-SA3E-830-U-SLR-W-HSS

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P636010
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA3E-830-U-SLR-W-HSS
Description: GALLEON WALL SLIM LUMINAIRE. (3) LIGHTSQUARES WITH 16 LEDS EACH AND
SPILL LIGHT ELIMINATOR RIGHT OPTICS WITH HOUSE SIDE SHIELD
Light Source: (48) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10841.7 lumens
Efficiency: N/A
Efficacy: 68.1 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 0.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B1 - U0 - G3


Input Watts (W): 159.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P636010
 CATALOG NUMBER: GWS-SA3E-830-U-SLR-W-HSS

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

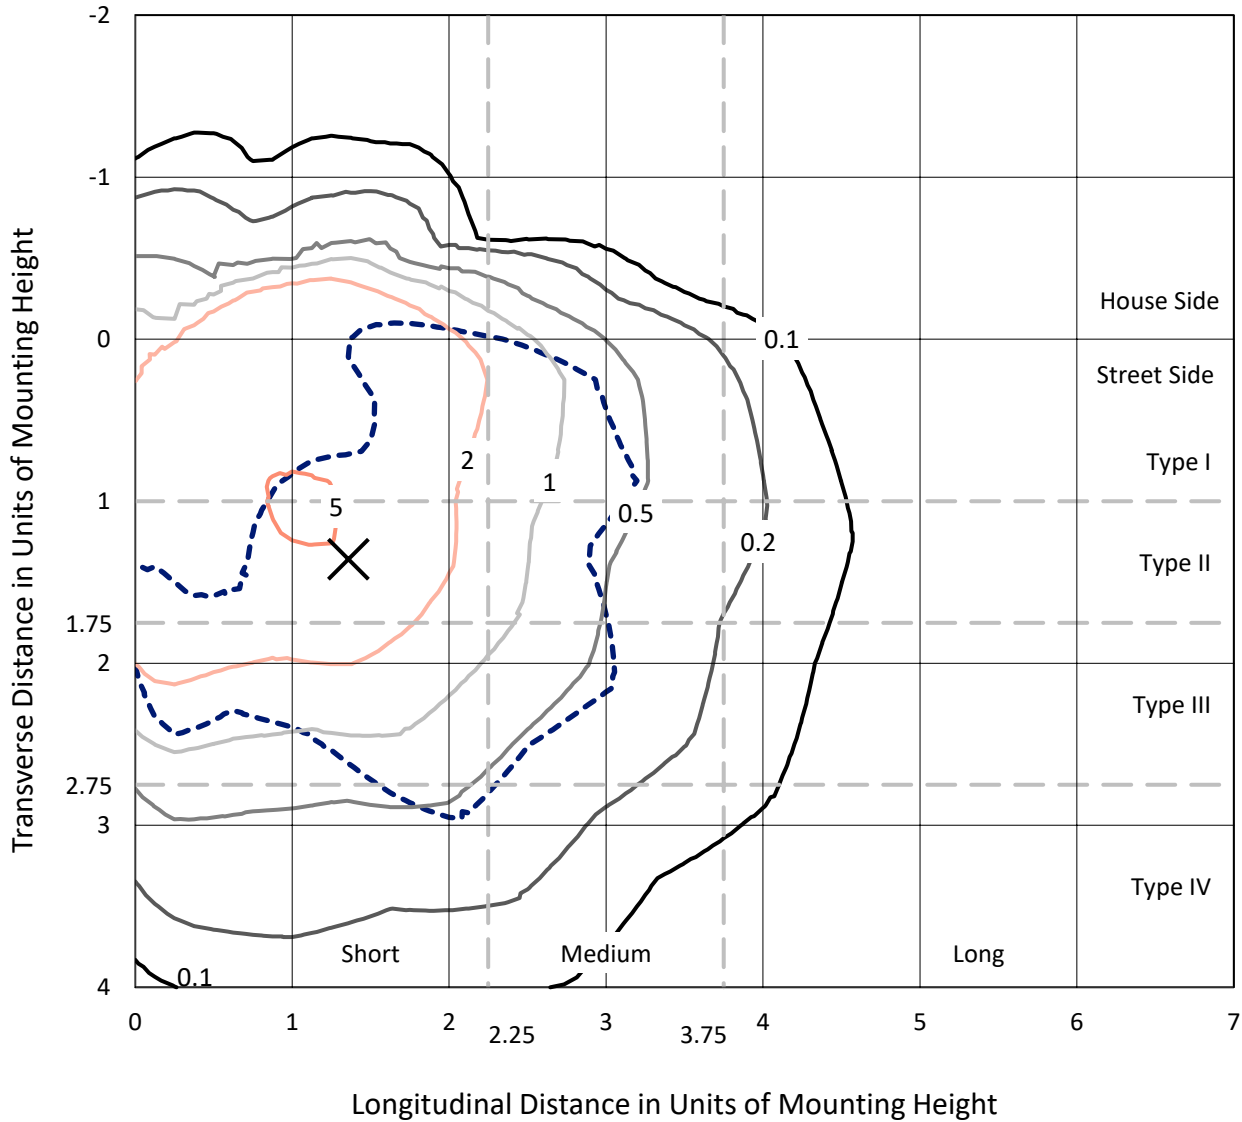

Based on 20 foot mounting height. Maximum calculated value = 5.5 fc
 Type IV - Short - N/A

REPORT NUMBER: P636010
CATALOG NUMBER: GWS-SA3E-830-U-SLR-W-HSS

Luminous Intensity Polar Plot

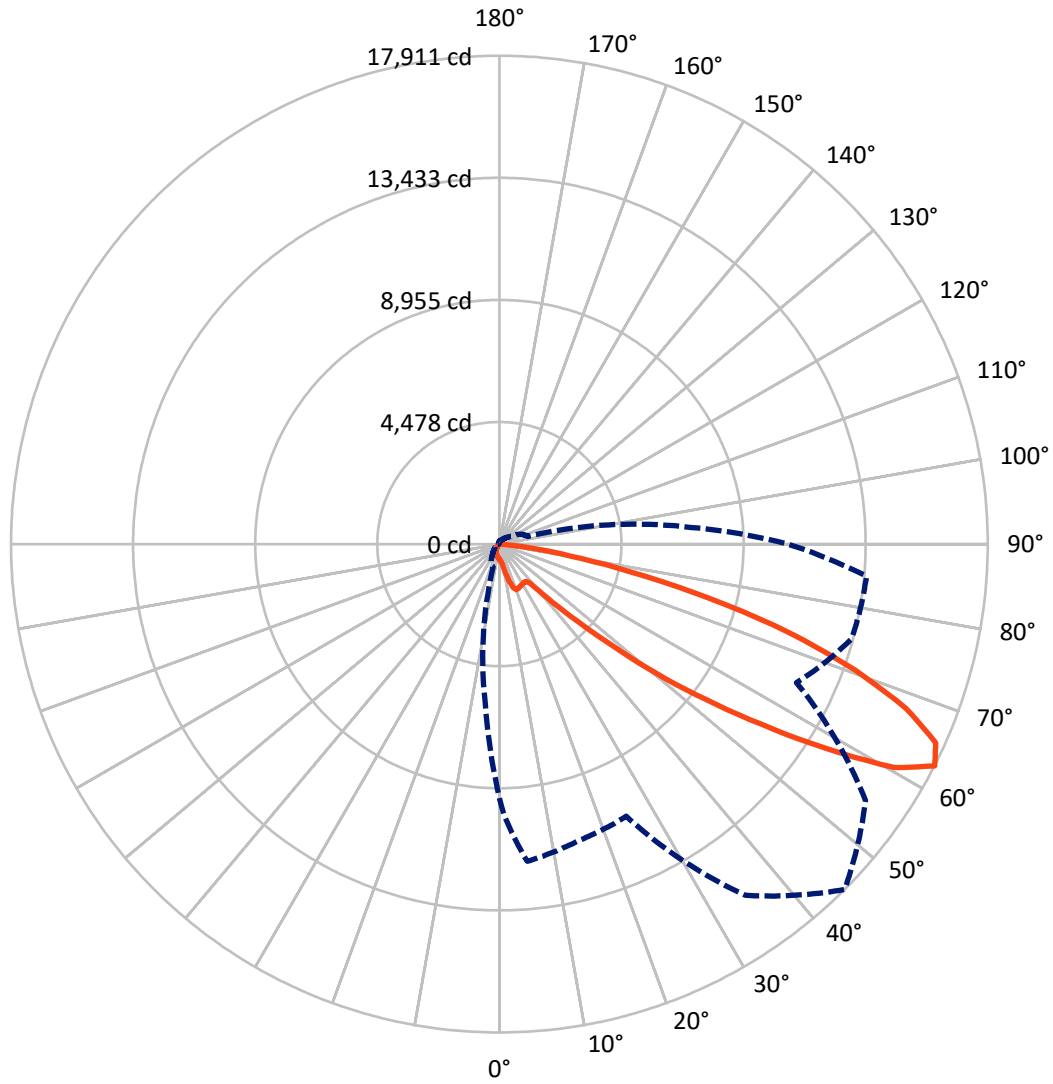

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 62.5-Deg Vertical

REPORT NUMBER: P636010
 CATALOG NUMBER: GWS-SA3E-830-U-SLR-W-HSS


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1337.9	0.0	1337.9
	% Fixture	12.3	0.0	12.3
Street Side	Lumens	9503.9	0.0	9503.9
	% Fixture	87.7	0.0	87.7
Total	Lumens	10841.7	0.0	10841.7
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.0	0.5
10°-20°	189.0	1.7
20°-30°	410.9	3.8
30°-40°	674.4	6.2
40°-50°	1239.8	11.4
50°-60°	2662.6	24.6
60°-70°	3576.2	33.0
70°-80°	1862.2	17.2
80°-90°	176.6	1.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	10841.7	100.0
0°-180°	10841.7	100.0

Coefficient of Utilization

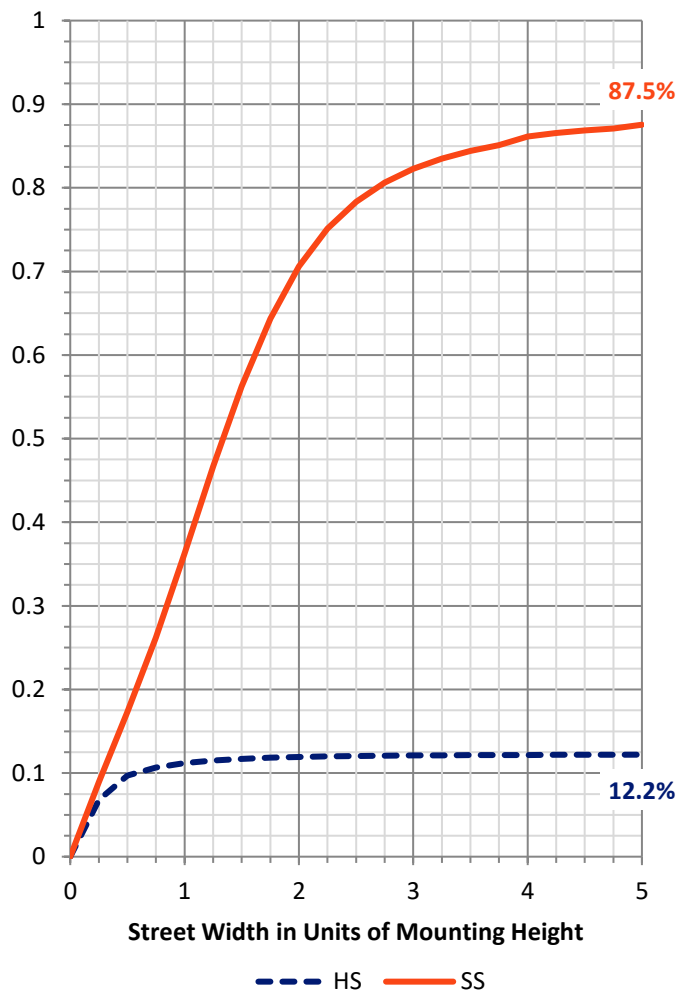


REPORT NUMBER: P636010
 CATALOG NUMBER: GWS-SA3E-830-U-SLR-W-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	458.0	4.2			
FM (30°-60°)	3805.3	35.1			
FH (60°-80°)	5071.8	46.8			G3/7500
FVH (80°-90°)	168.7	1.6			G2/225
BL (0°-30°)	191.9	1.8	B1/500		
BM (30°-60°)	771.5	7.1	B1/1000		
BH (60°-80°)	366.6	3.4	B1/500		G1/500
BVH (80°-90°)	7.9	0.1			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G3
 Type IV Short

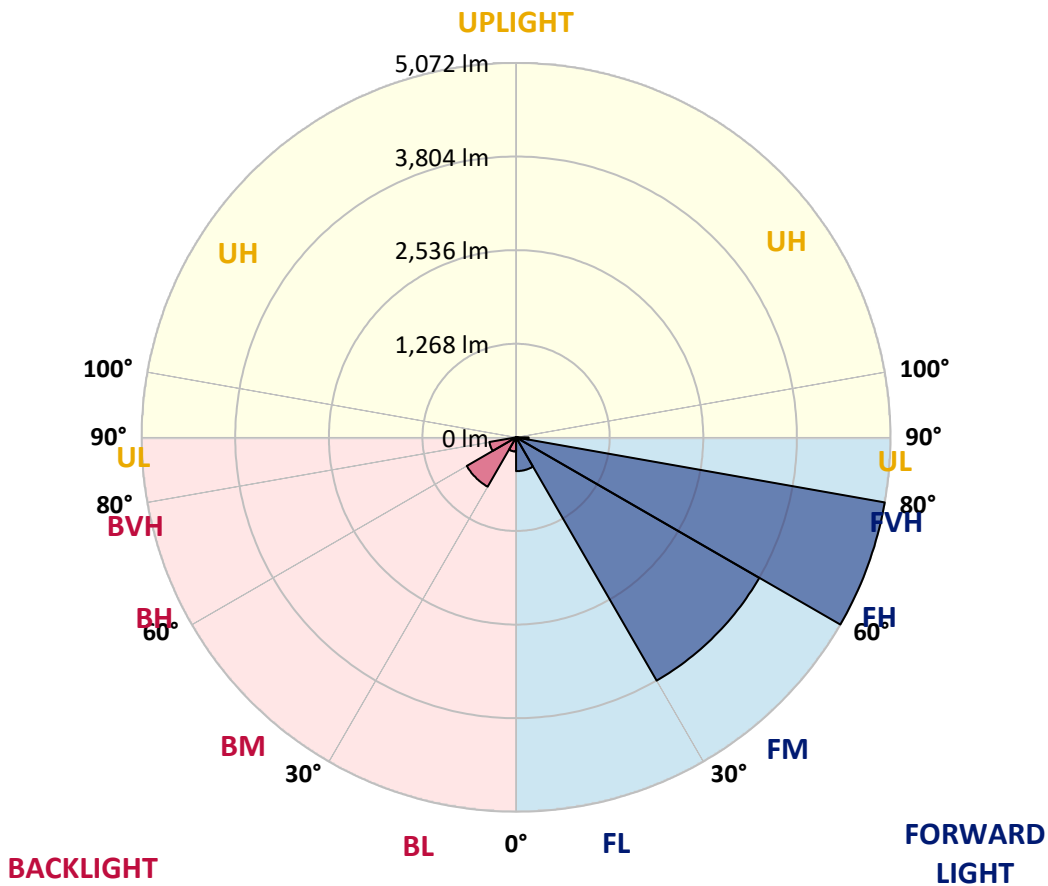



REPORT NUMBER: P636010

CATALOG NUMBER: GWS-SA3E-830-U-SLR-W-HSS

CANDELA DISTRIBUTION (FULL):

	0°	1°	5°	15°	25°	35°	45°	55°	65°	75°	85°
0°	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5
2.5°	574.8	577.3	579.8	588.6	594.8	599.9	601.1	597.4	588.6	579.8	567.3
5°	557.3	559.8	568.6	592.3	616.1	634.9	641.2	637.4	616.1	588.6	559.8
7.5°	556.0	561.0	582.3	632.4	683.8	722.6	732.6	723.8	683.8	628.7	569.8
10°	601.1	609.9	641.2	731.4	825.3	894.2	921.7	884.1	820.3	720.1	623.7
12.5°	718.8	733.9	794.0	925.5	1070.7	1162.1	1199.7	1153.4	1053.2	907.9	755.1
15°	904.2	926.7	1016.9	1213.5	1385.1	1466.5	1479.0	1452.7	1336.2	1175.9	970.5
17.5°	1165.9	1198.5	1338.7	1539.1	1663.1	1691.9	1688.1	1660.6	1575.4	1465.2	1271.1
20°	1479.0	1517.8	1655.6	1820.9	1833.4	1799.6	1780.8	1764.5	1735.7	1716.9	1565.4
22.5°	1794.6	1842.2	1986.2	2027.5	1914.8	1817.1	1770.8	1783.3	1825.9	1918.5	1857.2
25°	2108.9	2154.0	2289.2	2177.8	1952.4	1789.6	1730.7	1760.8	1862.2	2062.6	2141.5
27.5°	2475.8	2509.6	2589.8	2280.5	1958.6	1767.0	1709.4	1755.7	1879.7	2152.7	2453.3
30°	2857.8	2877.8	2839.0	2308.0	1937.3	1733.2	1688.1	1755.7	1909.8	2212.8	2687.5
32.5°	3138.3	3142.1	3015.6	2310.5	1926.1	1705.7	1668.1	1748.2	1938.6	2262.9	2914.1
35°	3427.6	3408.8	3184.6	2348.1	1956.1	1715.7	1683.1	1769.5	1983.7	2321.8	3113.3
37.5°	3720.6	3686.8	3373.7	2409.5	2033.8	1824.6	1804.6	1878.5	2056.3	2403.2	3332.4
40°	4021.2	3974.8	3570.3	2502.1	2206.6	2195.3	2264.2	2255.4	2255.4	2507.1	3557.8
42.5°	4388.1	4334.3	3860.9	2763.9	2609.8	2861.5	3049.4	2932.9	2717.5	2746.3	3850.9
45°	4872.8	4826.4	4364.3	3264.8	3242.2	3820.8	4073.8	3843.4	3307.4	3298.6	4340.5
47.5°	5647.9	5639.2	5167.0	3845.9	4016.2	5041.8	5530.2	5086.9	3979.9	3883.4	5267.2
50°	6737.5	6711.2	6167.6	4527.1	4936.6	6554.6	7426.2	6687.4	4792.6	4565.9	6508.3
52.5°	7964.7	7992.3	7569.0	5271.0	5914.7	8237.7	9451.2	8520.7	5675.5	5433.8	8069.9
55°	9120.6	9278.4	9166.9	6141.3	6870.2	10096.2	11675.3	10532.0	6768.8	6569.6	9820.6
57.5°	10024.8	10469.3	11250.8	7406.2	7993.5	12270.2	14158.7	12712.2	8044.9	8414.3	12203.8
60°	10074.9	10663.5	12478.1	10052.3	9438.7	14134.9	16638.2	14842.4	10051.1	11546.3	14071.0
62.5°	9319.7	9950.9	11679.1	11254.5	11012.9	15721.6	17910.6	16395.3	12024.7	13381.0	13517.5
65°	8455.6	9093.1	10787.4	9890.8	10830.0	15653.9	17587.5	16431.6	12203.8	12133.7	12526.9
67.5°	7149.5	7721.8	9255.9	8754.9	9982.2	14898.8	16094.7	15396.0	11243.3	11348.5	11523.8
70°	5218.4	5769.4	7193.3	7218.3	8717.4	13537.5	13829.3	13732.9	10354.1	10465.6	9964.7
72.5°	3769.5	4234.1	5462.6	5919.7	6959.1	11352.2	11150.6	11522.5	8883.9	9321.0	8003.5
75°	2710.0	3058.2	4007.4	5149.5	5516.4	8430.6	7982.3	8924.0	7128.2	8026.1	6017.4
77.5°	1099.5	1222.3	1576.7	3468.9	3625.5	5671.7	4886.5	6482.0	5081.9	5273.5	2916.6
80°	45.1	50.1	65.1	1790.8	2485.8	3190.9	2614.8	3465.2	3356.2	2123.9	688.8
82.5°	5.0	5.0	11.3	516.0	1088.3	1760.8	1232.3	1996.2	1699.4	900.4	313.1
85°	1.3	1.3	2.5	58.9	255.5	281.8	166.6	612.4	790.2	368.2	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.3	11.3	12.5	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P636010
 CATALOG NUMBER: GWS-SA3E-830-U-SLR-W-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5
2.5°	567.3	561.0	553.5	546.0	542.3	532.2	528.5	526.0	523.5	524.7	524.7
5°	548.5	534.7	518.5	502.2	493.4	483.4	478.4	475.9	477.1	482.1	482.1
7.5°	546.0	519.7	484.6	463.4	453.3	445.8	440.8	438.3	439.6	445.8	448.3
10°	587.3	541.0	478.4	442.1	430.8	423.3	418.3	414.5	412.0	417.0	418.3
12.5°	676.2	612.4	508.4	439.6	419.5	409.5	405.7	398.2	394.5	397.0	398.2
15°	860.3	750.1	568.6	449.6	409.5	398.2	392.0	385.7	379.5	378.2	379.5
17.5°	1100.8	943.0	660.0	473.4	402.0	388.2	379.5	370.7	361.9	360.7	359.4
20°	1398.8	1179.7	787.7	510.9	395.7	379.5	366.9	354.4	343.1	339.4	339.4
22.5°	1670.6	1465.2	951.8	557.3	387.0	366.9	351.9	336.9	324.3	318.1	316.8
25°	2002.5	1768.3	1148.4	611.1	374.4	350.6	334.4	319.3	306.8	299.3	296.8
27.5°	2336.8	2087.6	1371.3	681.3	359.4	334.4	319.3	305.6	291.8	283.0	280.5
30°	2661.2	2432.0	1621.7	768.9	348.1	318.1	305.6	291.8	279.3	265.5	261.7
32.5°	3009.3	2783.9	1902.3	866.6	339.4	306.8	293.0	280.5	264.2	251.7	245.5
35°	3344.9	3147.1	2211.6	961.8	330.6	296.8	281.8	269.2	251.7	237.9	229.2
37.5°	3683.1	3516.5	2534.7	1019.4	318.1	283.0	269.2	259.2	239.2	222.9	212.9
40°	4041.2	3898.5	2884.1	995.6	306.8	268.0	260.5	249.2	226.7	207.9	195.4
42.5°	4434.4	4262.9	3239.7	904.2	296.8	255.5	248.0	236.7	215.4	192.9	176.6
45°	4929.1	4662.4	3531.5	766.4	301.8	242.9	227.9	225.4	205.4	176.6	156.5
47.5°	5779.4	5276.0	3758.2	677.5	335.6	229.2	211.6	217.9	196.6	160.3	137.8
50°	7080.6	6292.9	3969.8	671.2	387.0	222.9	196.6	212.9	187.8	144.0	121.5
52.5°	8320.4	7326.0	4105.1	726.3	432.0	239.2	181.6	206.6	181.6	132.7	110.2
55°	9506.3	7922.1	3863.4	766.4	474.6	288.0	170.3	196.6	174.1	126.5	106.4
57.5°	10784.9	8187.6	3041.9	847.8	504.7	329.4	172.8	181.6	164.1	122.7	105.2
60°	11166.9	7848.3	1835.9	954.3	488.4	341.9	191.6	161.5	150.3	115.2	101.4
62.5°	10573.3	7043.0	1083.3	869.1	474.6	323.1	219.2	149.0	136.5	105.2	93.9
65°	9685.4	5949.7	706.3	733.9	503.4	288.0	232.9	142.8	124.0	95.2	82.7
67.5°	8671.0	4792.6	494.7	433.3	464.6	259.2	196.6	141.5	111.5	80.1	67.6
70°	7303.5	3589.1	348.1	286.8	387.0	230.4	152.8	137.8	97.7	65.1	52.6
72.5°	5642.9	2246.7	259.2	185.3	275.5	187.8	121.5	116.5	78.9	53.8	40.1
75°	4161.4	1281.1	182.8	134.0	181.6	142.8	90.2	82.7	67.6	51.3	36.3
77.5°	2172.8	641.2	114.0	102.7	103.9	88.9	65.1	60.1	62.6	51.3	33.8
80°	417.0	127.7	68.9	75.1	56.4	56.4	47.6	50.1	55.1	41.3	28.8
82.5°	174.1	27.6	37.6	42.6	35.1	38.8	38.8	40.1	38.8	30.1	21.3
85°	0.0	0.0	16.3	17.5	23.8	23.8	20.0	20.0	20.0	17.5	12.5
87.5°	0.0	0.0	0.0	0.0	1.3	3.8	7.5	8.8	10.0	7.5	5.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P636010

CATALOG NUMBER: GWS-SA3E-830-U-SLR-W-HSS

CANDELA DISTRIBUTION (continued):

	185°	195°	205°	215°	225°	235°	245°	255°	265°	270°	275°
0°	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5
2.5°	523.5	521.0	524.7	527.2	529.7	529.7	527.2	524.7	521.0	524.7	521.0
5°	483.4	487.2	493.4	495.9	498.4	493.4	490.9	483.4	477.1	478.4	475.9
7.5°	452.1	455.8	463.4	468.4	468.4	465.9	458.3	450.8	440.8	440.8	439.6
10°	423.3	428.3	437.1	443.3	445.8	443.3	435.8	425.8	417.0	417.0	413.3
12.5°	399.5	405.7	415.8	424.5	427.0	424.5	417.0	407.0	397.0	397.0	394.5
15°	379.5	387.0	398.2	408.3	412.0	408.3	399.5	387.0	376.9	378.2	374.4
17.5°	360.7	366.9	382.0	393.2	397.0	393.2	382.0	365.7	355.7	358.2	355.7
20°	339.4	346.9	361.9	374.4	378.2	374.4	361.9	344.4	334.4	334.4	335.6
22.5°	316.8	324.3	339.4	348.1	353.2	349.4	336.9	320.6	310.6	310.6	311.8
25°	296.8	300.6	311.8	320.6	321.8	318.1	308.1	295.5	288.0	291.8	293.0
27.5°	278.0	278.0	283.0	288.0	286.8	283.0	279.3	269.2	268.0	271.8	275.5
30°	258.0	251.7	249.2	245.5	244.2	242.9	246.7	246.7	249.2	254.2	258.0
32.5°	240.4	227.9	216.7	205.4	199.1	204.1	214.1	222.9	231.7	239.2	242.9
35°	220.4	200.4	181.6	166.6	156.5	164.1	180.3	196.6	211.6	221.7	227.9
37.5°	200.4	171.6	149.0	130.2	122.7	129.0	146.5	169.1	191.6	204.1	212.9
40°	179.1	142.8	116.5	101.4	93.9	100.2	117.7	140.3	170.3	186.6	197.9
42.5°	157.8	117.7	93.9	78.9	75.1	78.9	92.7	115.2	147.8	167.8	182.8
45°	136.5	97.7	75.1	63.9	60.1	63.9	75.1	93.9	126.5	149.0	166.6
47.5°	117.7	82.7	62.6	52.6	50.1	53.8	62.6	78.9	106.4	129.0	149.0
50°	102.7	72.6	53.8	45.1	42.6	46.3	53.8	66.4	90.2	110.2	131.5
52.5°	92.7	67.6	47.6	38.8	37.6	40.1	46.3	56.4	76.4	93.9	114.0
55°	90.2	67.6	43.8	35.1	33.8	36.3	41.3	48.8	66.4	81.4	98.9
57.5°	92.7	72.6	41.3	30.1	28.8	31.3	36.3	42.6	57.6	70.1	86.4
60°	92.7	73.9	36.3	23.8	22.5	25.0	30.1	37.6	51.3	61.4	75.1
62.5°	83.9	67.6	30.1	18.8	16.3	18.8	25.0	31.3	45.1	55.1	66.4
65°	72.6	57.6	25.0	13.8	11.3	13.8	20.0	26.3	38.8	47.6	60.1
67.5°	58.9	43.8	18.8	10.0	7.5	10.0	15.0	21.3	32.6	41.3	53.8
70°	43.8	31.3	15.0	8.8	7.5	8.8	13.8	20.0	28.8	37.6	50.1
72.5°	32.6	21.3	12.5	8.8	6.3	8.8	12.5	18.8	27.6	36.3	47.6
75°	27.6	17.5	11.3	7.5	6.3	7.5	11.3	17.5	25.0	33.8	45.1
77.5°	26.3	16.3	10.0	6.3	5.0	6.3	10.0	15.0	22.5	31.3	43.8
80°	22.5	13.8	8.8	5.0	3.8	5.0	8.8	12.5	17.5	23.8	33.8
82.5°	17.5	11.3	6.3	2.5	1.3	2.5	6.3	7.5	11.3	13.8	20.0
85°	11.3	6.3	2.5	0.0	0.0	0.0	2.5	5.0	5.0	6.3	10.0
87.5°	5.0	1.3	0.0	0.0	0.0	0.0	0.0	0.0	1.3	2.5	3.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P636010

CATALOG NUMBER: GWS-SA3E-830-U-SLR-W-HSS

CANDELA DISTRIBUTION (continued):

	285°	295°	305°	315°	325°	335°	345°	355°	359°	360°
0°	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5	563.5
2.5°	528.5	529.7	532.2	536.0	544.8	552.3	559.8	569.8	574.8	574.8
5°	478.4	479.6	480.9	485.9	498.4	508.4	524.7	544.8	554.8	557.3
7.5°	439.6	442.1	444.6	448.3	460.9	474.6	495.9	533.5	552.3	556.0
10°	417.0	420.8	425.8	433.3	444.6	459.6	495.9	563.5	594.8	601.1
12.5°	399.5	405.7	410.8	419.5	433.3	457.1	529.7	648.7	703.8	718.8
15°	382.0	389.5	397.0	405.7	420.8	465.9	594.8	801.5	892.9	904.2
17.5°	364.4	373.2	383.2	393.2	412.0	487.2	697.5	1013.1	1140.9	1165.9
20°	344.4	355.7	369.4	382.0	403.2	521.0	840.3	1264.8	1425.1	1479.0
22.5°	323.1	336.9	353.2	369.4	393.2	562.3	1013.1	1535.3	1759.5	1794.6
25°	305.6	319.3	334.4	350.6	376.9	612.4	1222.3	1871.0	2075.1	2108.9
27.5°	289.3	303.1	316.8	331.9	360.7	677.5	1474.0	2227.9	2440.8	2475.8
30°	271.8	288.0	301.8	316.8	345.6	757.7	1764.5	2623.6	2825.2	2857.8
32.5°	256.7	273.0	286.8	301.8	334.4	845.3	2070.1	2974.2	3138.3	3138.3
35°	244.2	261.7	271.8	291.8	325.6	901.7	2359.4	3308.6	3432.6	3427.6
37.5°	230.4	251.7	259.2	273.0	314.3	907.9	2631.1	3661.8	3753.2	3720.6
40°	216.7	239.2	250.5	258.0	301.8	856.6	2929.2	3986.1	4063.8	4021.2
42.5°	204.1	221.7	237.9	246.7	294.3	766.4	3168.4	4333.0	4425.7	4388.1
45°	191.6	206.6	216.7	232.9	299.3	703.8	3373.7	4737.5	4900.3	4872.8
47.5°	179.1	191.6	197.9	222.9	333.1	675.0	3499.0	5363.7	5670.5	5647.9
50°	165.3	180.3	180.3	220.4	383.2	685.0	3607.9	6270.3	6745.0	6737.5
52.5°	151.5	167.8	165.3	239.2	422.0	731.4	3731.9	7070.6	7895.8	7964.7
55°	137.8	152.8	155.3	276.8	444.6	771.4	3252.3	7407.4	8878.9	9120.6
57.5°	122.7	131.5	161.5	305.6	437.1	887.9	2227.9	7468.8	9506.3	10024.8
60°	106.4	114.0	182.8	299.3	413.3	820.3	1402.6	6917.8	9417.4	10074.9
62.5°	92.7	105.2	192.9	264.2	420.8	711.3	894.2	5895.9	8569.6	9319.7
65°	81.4	101.4	175.3	239.2	425.8	482.1	603.6	4796.4	7741.8	8455.6
67.5°	72.6	112.7	144.0	212.9	365.7	339.4	414.5	3726.9	6509.5	7149.5
70°	66.4	115.2	117.7	182.8	283.0	217.9	273.0	2508.4	4487.0	5218.4
72.5°	60.1	85.2	88.9	146.5	182.8	132.7	176.6	1435.2	3271.0	3769.5
75°	57.6	57.6	61.4	95.2	101.4	96.4	114.0	856.6	2345.6	2710.0
77.5°	53.8	43.8	38.8	61.4	55.1	68.9	67.6	380.7	1016.9	1099.5
80°	42.6	31.3	26.3	38.8	37.6	46.3	40.1	31.3	46.3	45.1
82.5°	26.3	20.0	18.8	23.8	21.3	23.8	18.8	5.0	5.0	5.0
85°	12.5	11.3	10.0	10.0	11.3	10.0	7.5	2.5	1.3	1.3
87.5°	6.3	6.3	5.0	3.8	5.0	5.0	3.8	1.3	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)