

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P631565

Luminaire Tested: GWS-SA1F-830-U-T2R-W

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P631565
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA1F-830-U-T2R-W
Description: GALLEON WALL SLIM LUMINAIRE. (1) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE II ROADWAY OPTICS
Light Source: (16) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6824.3 lumens
Efficiency: N/A
Efficacy: 101.6 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type II - Short
BUG Rating: B1 - U0 - G1


Input Watts (W): 67.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P631565
 CATALOG NUMBER: GWS-SA1F-830-U-T2R-W

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

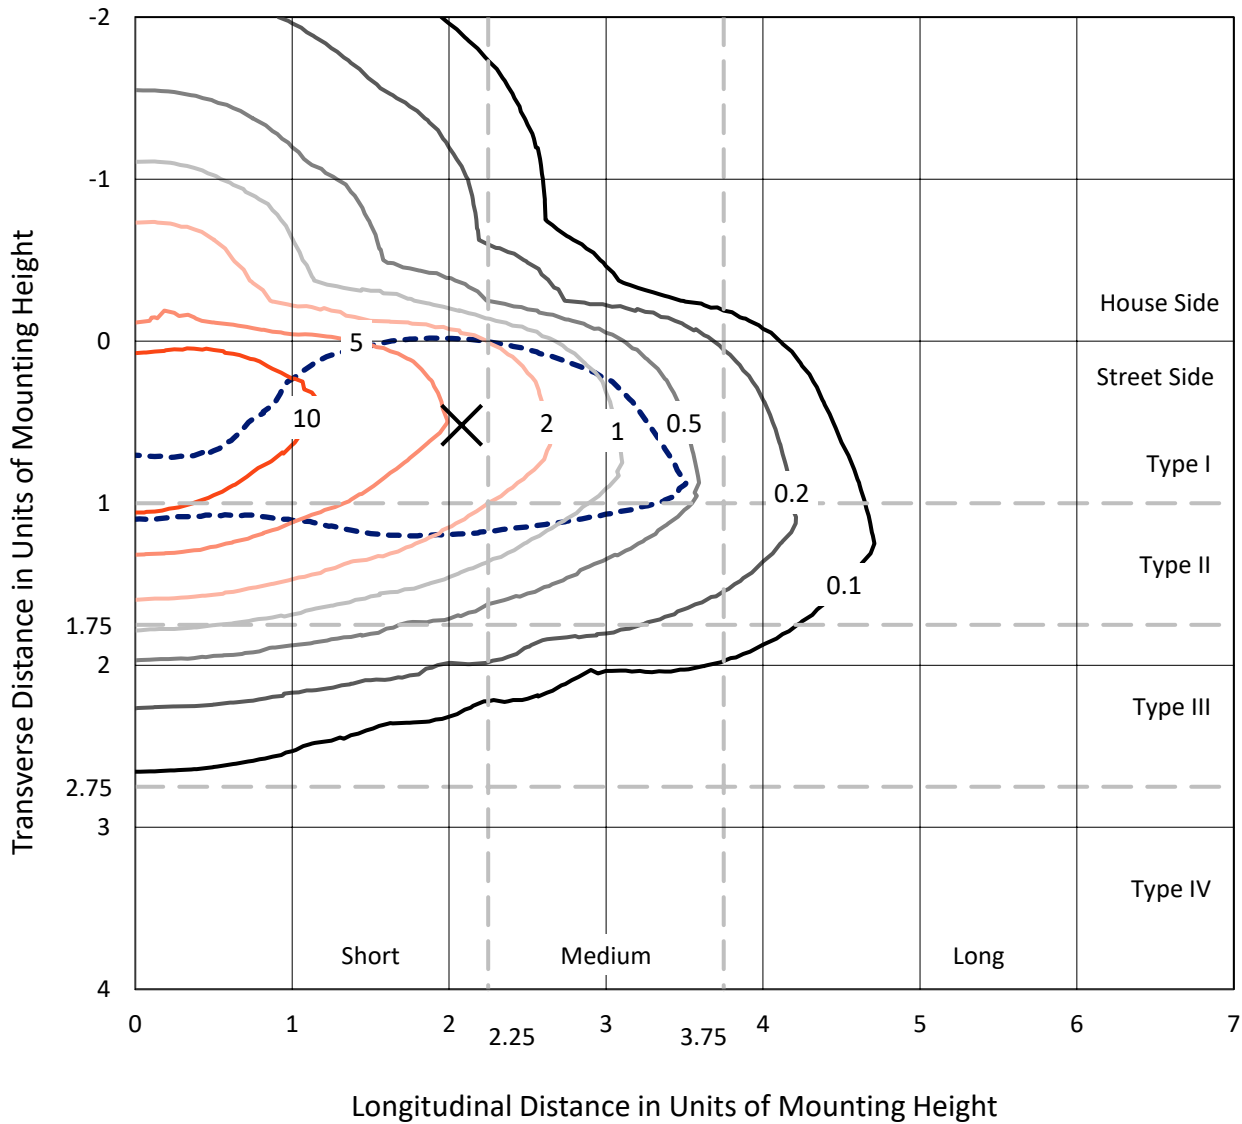

Based on 10 foot mounting height. Maximum calculated value = 16.8 fc
 Type II - Short - N/A

REPORT NUMBER: P631565
CATALOG NUMBER: GWS-SA1F-830-U-T2R-W

Luminous Intensity Polar Plot

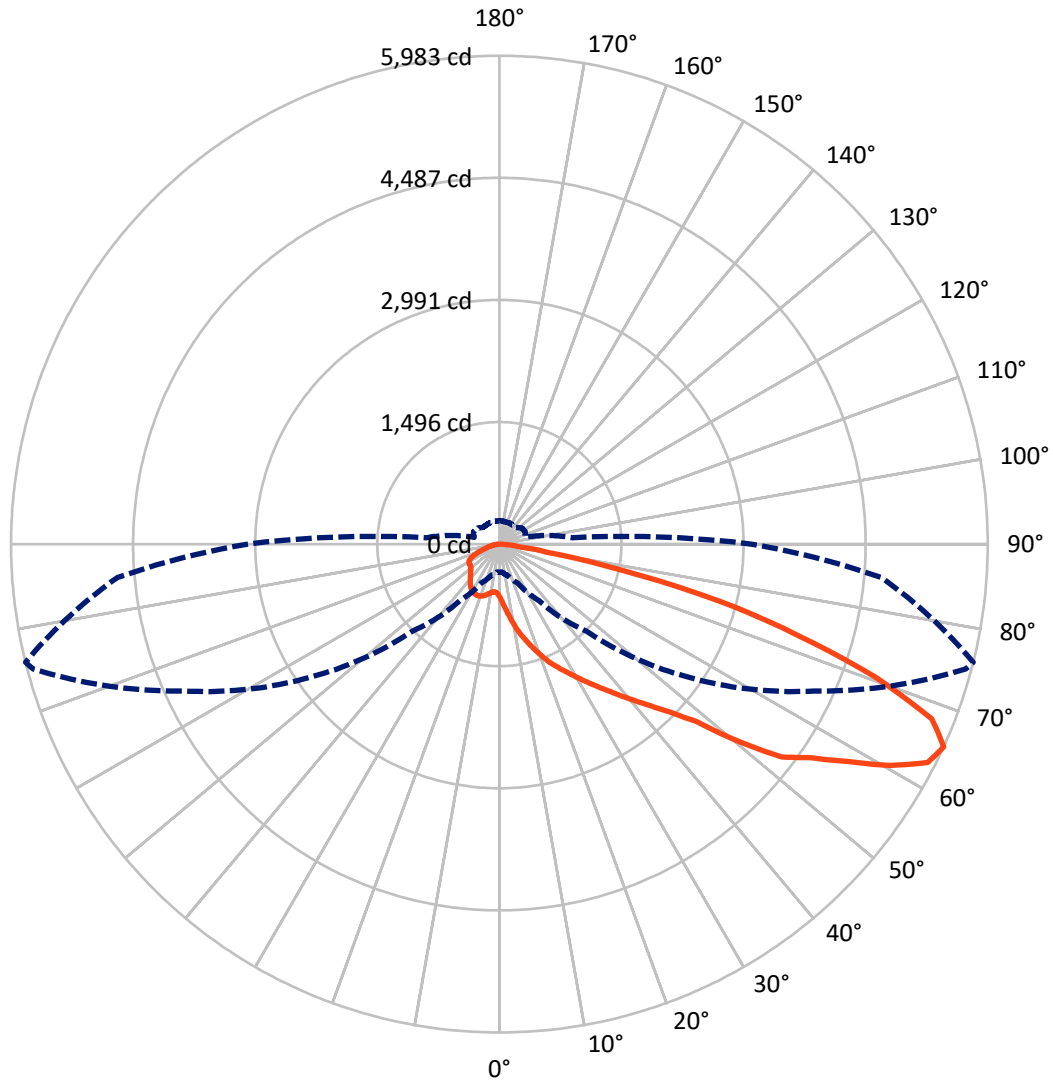

— Vertical Plane Through 76-Deg Lateral - - - Horizontal Cone Through 65-Deg Vertical

REPORT NUMBER: P631565

CATALOG NUMBER: GWS-SA1F-830-U-T2R-W

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1140.7	0.0	1140.7
	% Fixture	16.7	0.0	16.7
Street Side	Lumens	5683.6	0.0	5683.6
	% Fixture	83.3	0.0	83.3
Total	Lumens	6824.3	0.0	6824.3
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.8	1.1
10°-20°	292.4	4.3
20°-30°	569.9	8.4
30°-40°	953.1	14.0
40°-50°	1364.7	20.0
50°-60°	1615.6	23.7
60°-70°	1343.4	19.7
70°-80°	549.8	8.1
80°-90°	58.5	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	6824.3	100.0
0°-180°	6824.3	100.0

Coefficient of Utilization



REPORT NUMBER: P631565


CATALOG NUMBER: GWS-SA1F-830-U-T2R-W

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	700.5	10.3			
FM (30°-60°)	3379.1	49.5			
FH (60°-80°)	1569.1	23.0			G1/1800
FVH (80°-90°)	34.9	0.5			G1/100
BL (0°-30°)	238.6	3.5	B1/500		
BM (30°-60°)	554.4	8.1	B1/1000		
BH (60°-80°)	324.1	4.7	B1/500		G1/500
BVH (80°-90°)	23.6	0.3			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G1

Type II Short

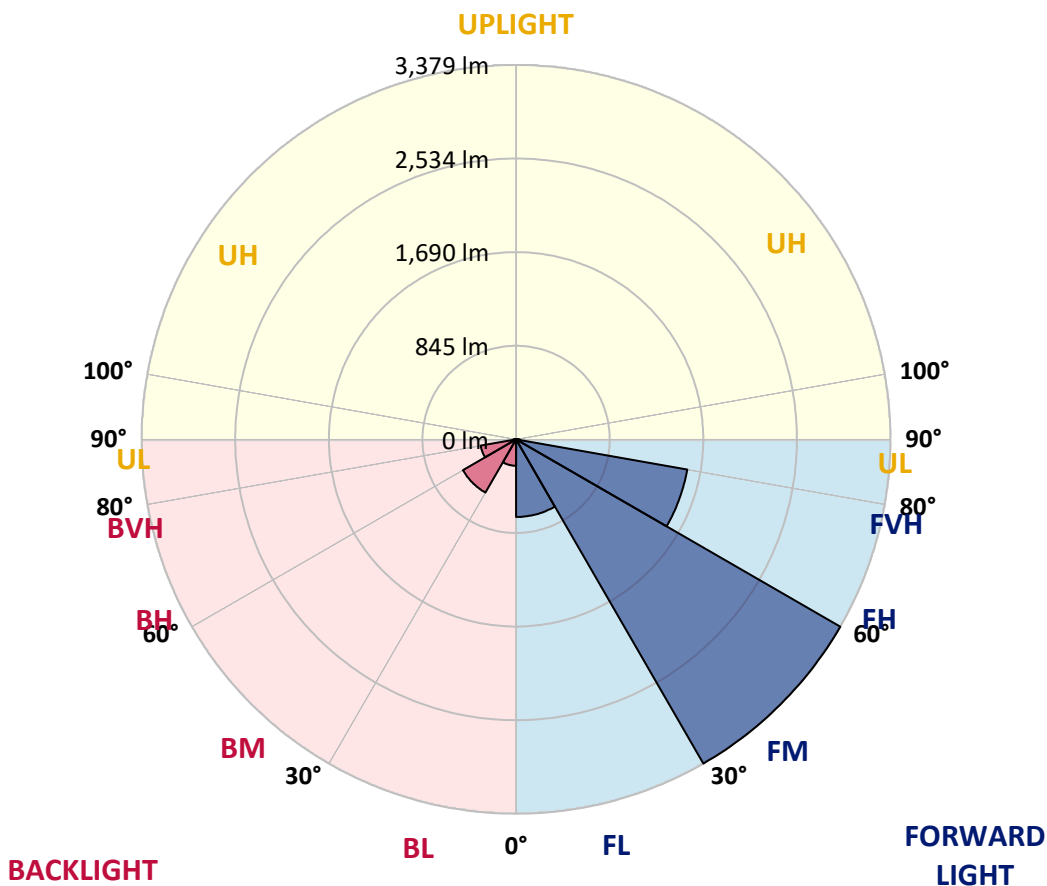



REPORT NUMBER: P631565
 CATALOG NUMBER: GWS-SA1F-830-U-T2R-W

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	76°	85°
0°	646.2	646.2	646.2	646.2	646.2	646.2	646.2	646.2	646.2	646.2	646.2
2.5°	905.8	909.1	898.1	894.3	868.4	833.3	804.1	759.9	719.2	712.9	676.5
5°	1150.5	1136.1	1123.6	1115.4	1079.5	1039.6	977.7	894.8	807.9	797.4	718.7
7.5°	1295.8	1293.4	1278.1	1273.3	1245.5	1205.6	1141.8	1038.7	912.5	895.2	775.8
10°	1412.4	1411.0	1403.3	1407.6	1382.2	1343.3	1281.4	1174.9	1027.2	1009.9	839.6
12.5°	1514.1	1516.5	1515.1	1530.9	1518.0	1487.7	1423.4	1306.4	1141.8	1123.1	917.3
15°	1588.5	1590.4	1597.6	1632.1	1639.3	1633.1	1567.9	1435.4	1255.1	1228.2	997.4
17.5°	1609.6	1613.4	1630.7	1686.4	1725.2	1751.1	1702.7	1566.9	1366.4	1337.1	1079.0
20°	1637.9	1642.2	1659.5	1717.5	1774.6	1833.6	1825.0	1700.3	1478.6	1454.6	1161.5
22.5°	1768.9	1765.5	1757.8	1785.7	1826.4	1899.8	1921.4	1828.4	1594.7	1571.7	1252.7
25°	2021.2	2015.0	1966.1	1940.6	1927.2	1971.8	2010.2	1944.9	1707.9	1673.4	1337.6
27.5°	2299.5	2296.1	2233.8	2173.3	2090.8	2071.6	2094.2	2046.7	1817.8	1782.8	1411.5
30°	2562.9	2552.8	2487.6	2411.8	2301.4	2218.9	2185.8	2146.4	1938.2	1901.8	1497.8
32.5°	2798.4	2785.5	2708.7	2624.8	2509.1	2411.8	2312.9	2252.5	2074.5	2032.3	1586.1
35°	2991.8	2978.8	2900.1	2810.9	2683.8	2611.8	2476.5	2367.6	2213.1	2170.4	1690.2
37.5°	3141.5	3129.5	3047.4	2959.6	2848.8	2791.7	2674.2	2497.1	2372.9	2328.3	1800.5
40°	3225.4	3216.8	3151.1	3081.5	2988.4	2939.0	2886.2	2660.7	2551.8	2507.2	1930.6
42.5°	3250.9	3245.1	3199.0	3163.1	3100.2	3062.8	3093.0	2853.1	2742.8	2703.9	2076.9
45°	3187.0	3187.0	3173.6	3191.8	3194.7	3194.2	3300.3	3070.5	2977.4	2934.7	2283.2
47.5°	3023.9	3034.5	3054.1	3143.9	3238.4	3317.5	3542.5	3360.2	3279.2	3244.1	2575.3
50°	2725.5	2754.3	2821.5	2996.6	3197.6	3399.1	3771.9	3788.7	3865.9	3804.0	3005.2
52.5°	2288.5	2284.1	2455.4	2704.9	3011.5	3402.5	3898.0	4166.7	4374.4	4331.7	3324.7
55°	1818.8	1811.6	1971.3	2315.3	2726.0	3273.9	3973.8	4339.9	4656.5	4618.2	3612.1
57.5°	1392.7	1383.6	1525.6	1836.0	2323.0	3000.9	3959.5	4546.2	5044.7	5025.0	4002.6
60°	958.6	947.5	1080.4	1352.0	1846.1	2583.5	3800.2	4652.2	5499.0	5505.7	4420.5
62.5°	575.7	569.5	665.9	876.5	1328.0	2066.3	3427.4	4587.9	5860.7	5891.0	4689.2
65°	347.3	343.0	399.6	522.9	842.5	1507.9	2852.6	4259.3	5913.0	5982.6	4695.4
67.5°	252.8	253.3	269.6	318.6	491.3	973.9	2140.7	3670.2	5640.5	5712.5	4399.4
70°	219.7	220.7	229.3	240.4	297.0	557.5	1391.8	2897.3	4835.0	4890.7	3689.8
72.5°	195.3	195.3	201.0	206.8	232.2	339.7	745.5	2025.1	3816.0	3830.9	2816.2
75°	171.8	170.3	173.2	176.1	201.5	237.5	362.7	1411.0	2818.6	2784.0	1820.2
77.5°	136.7	135.3	135.8	138.7	161.7	169.8	183.7	881.3	1588.5	1499.2	804.1
80°	97.4	96.4	101.7	108.9	119.5	104.1	115.1	426.5	629.9	586.3	311.8
82.5°	58.1	60.0	68.1	73.9	82.5	65.2	74.4	142.5	223.1	217.3	126.7
85°	8.2	8.6	24.5	28.3	35.5	25.4	39.3	64.3	89.2	95.5	44.6
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	3.4	11.5	25.4	25.9	11.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P631565
 CATALOG NUMBER: GWS-SA1F-830-U-T2R-W

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	646.2	646.2	646.2	646.2	646.2	646.2	646.2	646.2	646.2	646.2	646.2
2.5°	657.8	635.2	603.1	576.2	553.6	535.4	520.1	508.5	505.2	500.4	500.4
5°	681.7	641.0	583.4	542.6	519.1	505.2	495.6	490.8	488.4	485.5	484.1
7.5°	714.8	657.8	580.0	538.8	520.5	511.9	505.7	502.8	500.9	498.0	498.0
10°	760.4	682.7	590.6	552.2	537.8	529.2	522.0	517.2	512.9	508.5	507.6
12.5°	809.8	715.3	609.8	570.4	555.1	544.5	534.5	527.3	522.0	516.7	515.3
15°	864.5	748.9	630.4	588.2	569.0	554.6	542.6	531.6	524.4	516.7	515.7
17.5°	918.3	783.0	647.7	600.2	575.7	558.0	540.7	526.3	517.2	508.5	506.1
20°	982.5	817.0	659.7	603.5	574.3	550.8	530.1	511.9	501.8	491.8	490.3
22.5°	1041.6	848.7	665.4	598.7	563.2	535.4	511.4	491.8	480.7	470.6	468.7
25°	1098.6	876.5	663.0	587.2	546.4	514.3	489.4	469.7	459.1	448.6	445.7
27.5°	1153.8	895.2	653.4	569.5	525.3	490.8	466.8	449.1	439.9	430.8	427.0
30°	1208.0	912.5	638.6	546.4	498.5	466.3	446.7	434.2	425.1	415.5	412.6
32.5°	1262.7	925.0	616.0	519.6	471.1	444.7	432.7	423.6	414.0	404.4	401.6
35°	1317.9	930.3	588.7	488.9	448.1	430.8	426.5	416.0	403.0	391.5	387.6
37.5°	1383.6	935.1	554.6	458.7	427.9	424.1	423.1	407.3	392.0	376.1	371.8
40°	1462.8	941.3	519.6	431.3	411.6	421.7	417.9	396.3	365.6	350.2	345.4
42.5°	1559.7	952.8	483.1	406.4	399.6	412.6	408.3	369.4	348.8	340.1	337.8
45°	1702.2	995.0	446.7	386.7	390.5	399.6	392.9	353.6	345.4	339.7	336.8
47.5°	1956.0	1059.8	415.0	371.8	383.3	388.1	362.2	349.3	343.0	335.4	332.0
50°	2219.8	1088.1	389.6	362.7	375.2	377.6	345.4	343.5	339.2	331.0	327.7
52.5°	2398.3	1084.3	374.2	359.3	368.5	359.3	337.8	337.3	334.4	324.8	321.0
55°	2599.8	1091.0	367.5	360.3	365.6	328.6	328.2	329.6	328.2	317.6	315.7
57.5°	2871.8	1111.6	364.1	363.7	363.7	313.8	319.0	321.0	318.1	313.3	311.8
60°	3133.3	1113.0	357.9	367.5	362.2	304.6	308.5	310.4	307.0	306.1	305.6
62.5°	3231.7	1044.0	344.0	364.6	356.5	294.6	297.5	298.4	295.1	297.5	297.0
65°	3085.3	897.2	321.0	350.7	338.7	285.5	283.5	285.9	280.2	286.4	286.9
67.5°	2739.4	712.9	285.9	324.3	313.8	275.4	271.5	271.5	261.9	271.5	271.1
70°	2208.8	503.7	234.6	282.1	286.4	263.4	261.5	250.4	235.1	249.5	248.0
72.5°	1674.4	361.7	184.7	223.1	246.6	246.6	247.1	228.4	210.6	217.3	211.6
75°	1060.7	254.8	147.8	170.8	193.3	216.4	227.4	192.9	177.0	174.2	171.3
77.5°	477.8	167.4	115.1	131.0	137.2	170.8	207.7	166.0	144.4	138.2	136.3
80°	200.1	104.1	82.0	92.6	84.4	143.4	183.3	129.1	106.0	97.4	91.2
82.5°	87.8	61.9	52.3	49.9	52.8	106.5	136.7	85.9	66.2	89.7	90.7
85°	36.9	32.6	26.9	24.5	21.6	40.8	64.3	33.6	41.3	23.5	19.2
87.5°	8.6	9.6	7.2	4.8	2.9	0.5	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)