

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P634015

Luminaire Tested: GWS-SA2F-830-U-SL2-W-GRSWH

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P634015
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-29)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA2F-830-U-SL2-W-GRSWH
Description: GALLEON WALL SLIM LUMINAIRE. (2) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE II SPILL LIGHT ELIMINATOR OPTICS W/ FACTORY INSTALLED GLARE SHIELD, WH
Light Source: (32) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10976.1 lumens
Efficiency: N/A
Efficacy: 88.2 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')
IES Classification: Type II - Short
BUG Rating: B3 - U0 - G2


Input Watts (W): 124.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P634015
 CATALOG NUMBER: GWS-SA2F-830-U-SL2-W-GRSWH

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

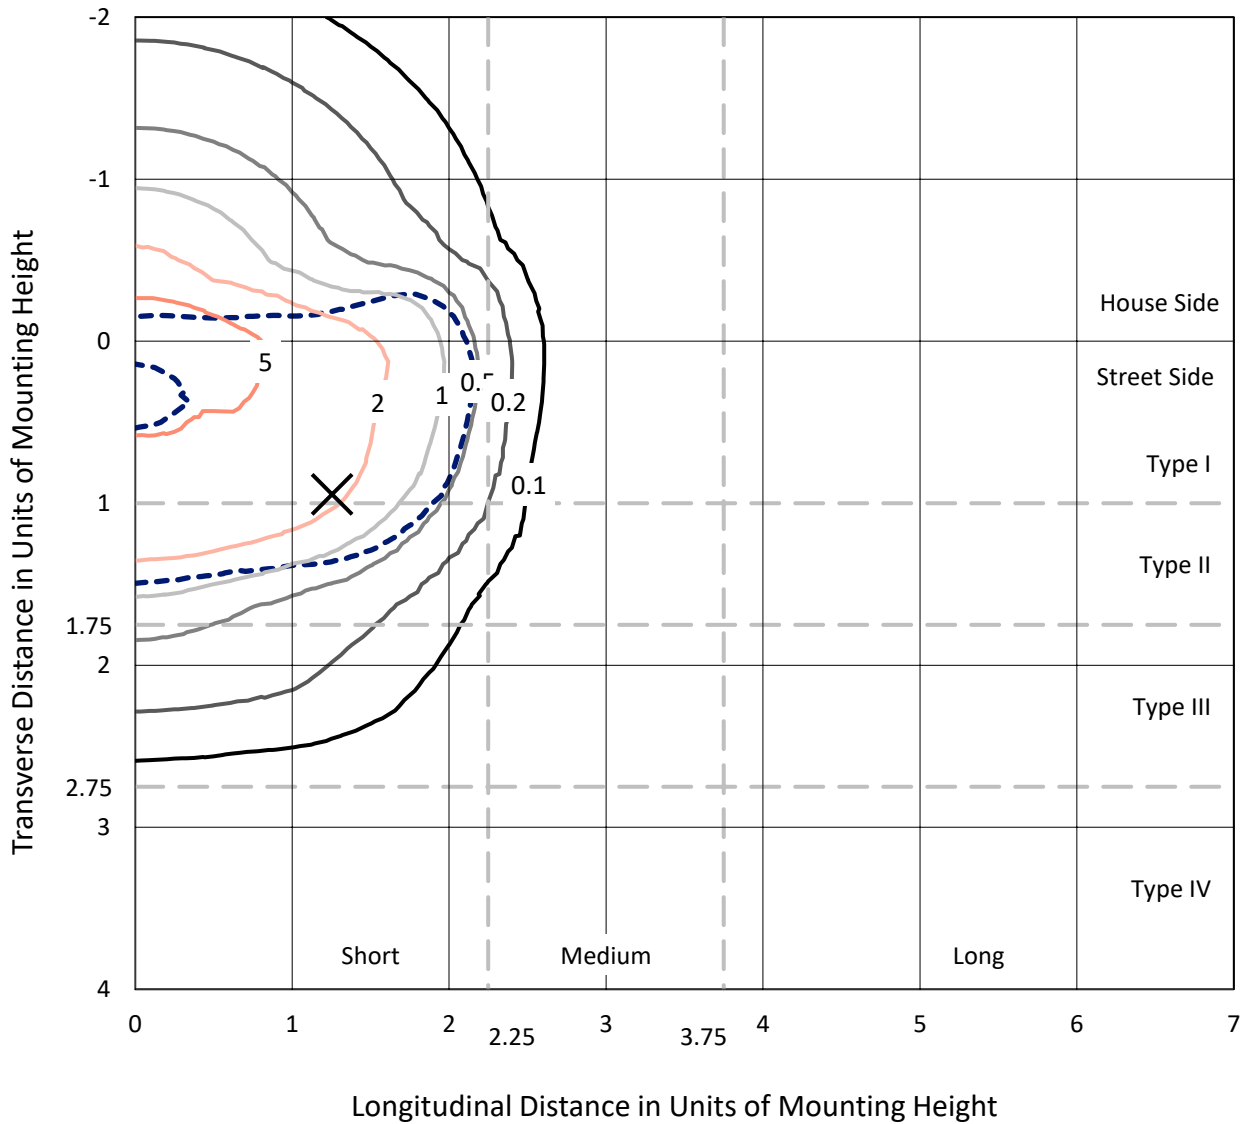

Based on 20 foot mounting height. Maximum calculated value = 8.8 fc
 Type II - Short - N/A

REPORT NUMBER: P634015
CATALOG NUMBER: GWS-SA2F-830-U-SL2-W-GRSWH

Luminous Intensity Polar Plot

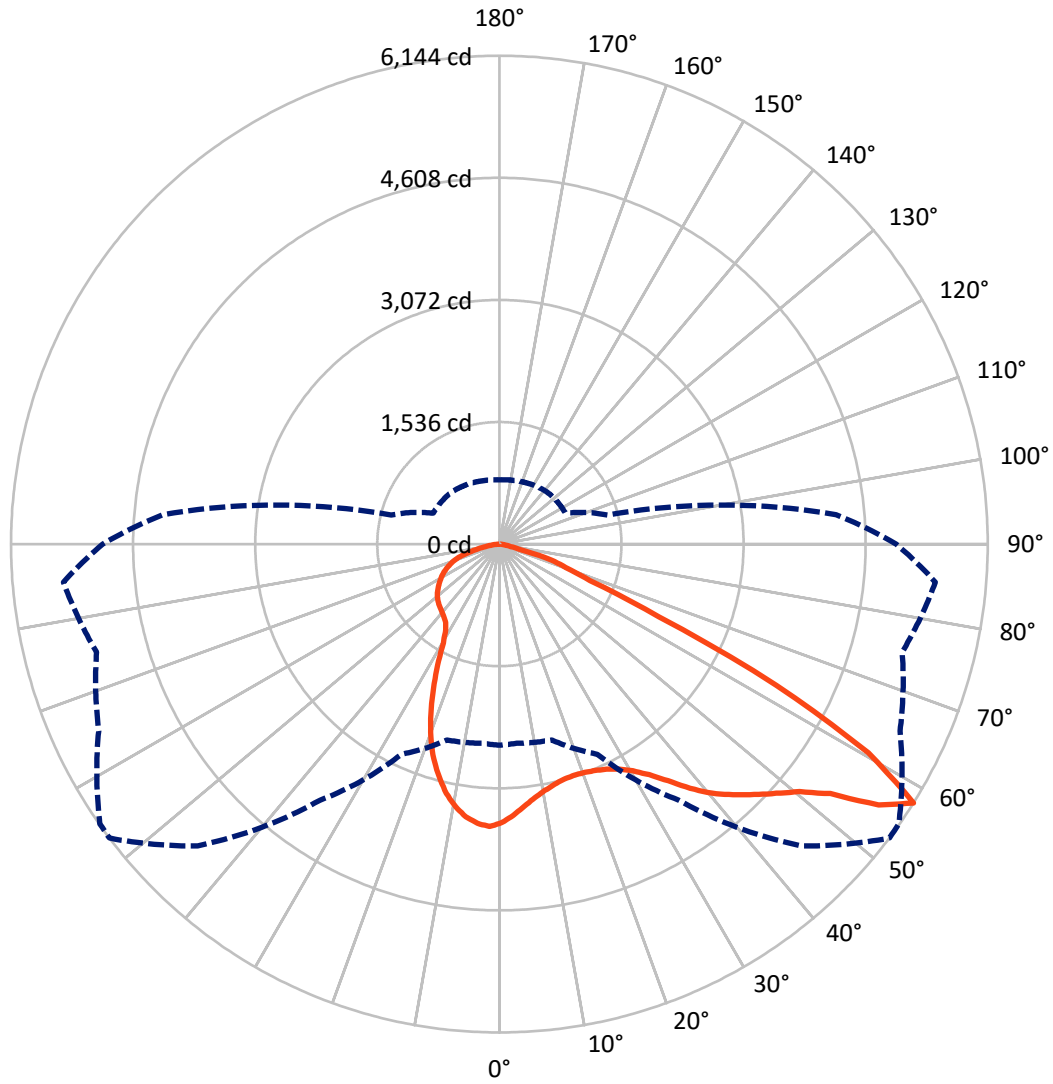

— Vertical Plane Through 53-Deg Lateral - - - Horizontal Cone Through 57.5-Deg Vertical

REPORT NUMBER: P634015

CATALOG NUMBER: GWS-SA2F-830-U-SL2-W-GRSWH

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	3431.8	0.0	3431.8
	% Fixture	31.3	0.0	31.3
Street Side	Lumens	7544.3	0.0	7544.3
	% Fixture	68.7	0.0	68.7
Total	Lumens	10976.1	0.0	10976.1
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	317.0	2.9
10°-20°	831.5	7.6
20°-30°	1225.2	11.2
30°-40°	1714.9	15.6
40°-50°	2254.4	20.5
50°-60°	2643.2	24.1
60°-70°	1557.2	14.2
70°-80°	387.4	3.5
80°-90°	45.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	10976.1	100.0
0°-180°	10976.1	100.0

Coefficient of Utilization



REPORT NUMBER: P634015


CATALOG NUMBER: GWS-SA2F-830-U-SL2-W-GRSWH

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	1334.5	12.2			
FM (30°-60°)	4910.8	44.7			
FH (60°-80°)	1283.8	11.7			G1/1800
FVH (80°-90°)	15.2	0.1			G1/100
BL (0°-30°)	1039.2	9.5	B3/2500		
BM (30°-60°)	1701.7	15.5	B2/2500		
BH (60°-80°)	660.7	6.0	B2/1000		G2/1000
BVH (80°-90°)	30.2	0.3			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G2

Type II Short

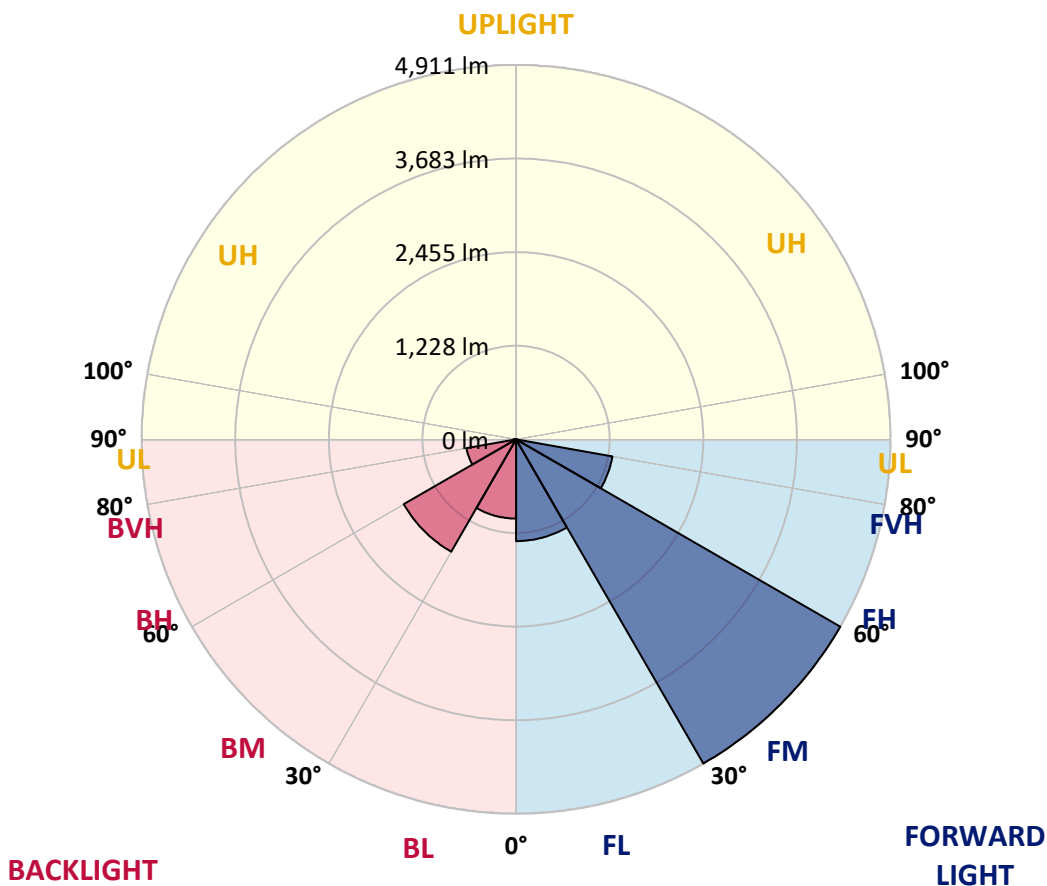



REPORT NUMBER: P634015

CATALOG NUMBER: GWS-SA2F-830-U-SL2-W-GRSWH

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	53°	55°	65°	75°	85°
0°	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0
2.5°	3303.6	3312.8	3314.7	3343.3	3345.1	3386.7	3414.4	3408.9	3437.5	3472.6	3500.3
5°	3145.6	3146.5	3155.8	3189.9	3208.4	3262.9	3309.1	3309.1	3364.5	3436.6	3498.5
7.5°	3015.3	3014.4	3022.7	3060.6	3091.1	3156.7	3219.5	3226.9	3304.5	3409.8	3510.5
10°	2894.3	2900.8	2910.0	2956.2	2995.0	3076.3	3151.1	3163.2	3261.1	3391.3	3527.1
12.5°	2816.7	2817.6	2831.5	2883.2	2933.1	3020.0	3098.5	3113.3	3226.0	3373.8	3539.1
15°	2766.8	2767.8	2782.5	2839.8	2898.0	2985.8	3066.2	3082.8	3205.6	3371.0	3562.2
17.5°	2744.7	2743.7	2757.6	2814.9	2878.6	2970.1	3056.0	3076.3	3214.9	3392.3	3602.9
20°	2744.7	2745.6	2753.0	2804.7	2869.4	2966.4	3066.2	3091.1	3250.9	3440.3	3665.7
22.5°	2783.5	2787.2	2790.9	2826.0	2876.8	2971.9	3092.9	3126.2	3328.5	3520.7	3747.9
25°	2859.2	2860.1	2863.8	2892.5	2915.6	2987.6	3137.3	3187.2	3449.5	3638.0	3851.4
27.5°	2960.8	2973.8	2977.5	2995.9	2995.9	3026.4	3206.6	3278.6	3613.1	3807.1	3983.5
30°	3103.1	3107.7	3114.2	3134.5	3112.3	3099.4	3308.2	3400.6	3802.4	4011.2	4142.4
32.5°	3227.8	3238.0	3273.1	3306.3	3266.6	3226.0	3457.9	3566.9	3984.4	4223.7	4311.5
35°	3334.1	3359.0	3426.4	3500.3	3472.6	3432.0	3656.5	3770.1	4134.1	4376.1	4461.1
37.5°	3462.5	3481.9	3574.3	3694.3	3719.3	3699.9	3898.5	3979.8	4233.9	4414.9	4542.4
40°	3592.7	3622.3	3741.5	3907.7	4002.9	4016.8	4122.1	4176.6	4268.0	4339.2	4526.7
42.5°	3725.8	3776.6	3940.1	4134.1	4303.1	4334.6	4310.5	4333.6	4257.0	4234.8	4453.7
45°	3888.3	3948.4	4133.2	4380.7	4603.4	4652.3	4495.3	4474.1	4255.1	4195.1	4408.5
47.5°	4080.5	4140.6	4317.0	4605.2	4889.8	4925.8	4684.7	4645.9	4319.8	4256.0	4469.4
50°	4250.5	4292.1	4450.0	4772.4	5156.8	5178.0	4893.5	4846.3	4480.5	4425.1	4659.7
52.5°	4077.7	4073.1	4239.4	4636.6	5295.3	5551.2	5215.0	5169.7	4790.9	4705.9	4954.4
55°	3459.7	3407.0	3555.8	3946.6	4908.2	5882.9	5791.4	5700.9	5204.8	4988.6	5230.7
57.5°	2529.4	2514.6	2550.7	2917.4	3931.8	5369.2	6144.3	6136.0	5562.3	5247.3	5506.0
60°	1977.9	1955.7	1859.6	1869.8	2680.0	4194.1	5332.3	5577.1	5784.0	5402.5	5698.1
62.5°	1756.2	1739.5	1689.7	1552.0	1596.4	2812.1	3908.7	4133.2	5054.2	4771.5	4894.4
65°	1454.1	1449.5	1491.0	1485.5	1337.7	1552.9	2206.1	2432.4	3177.9	3217.7	3177.9
67.5°	1056.8	1048.5	1153.8	1361.7	1287.8	1172.3	1229.6	1308.1	1629.6	1463.3	1317.4
70°	687.3	675.3	736.3	983.9	1152.9	1021.7	885.9	873.0	896.1	557.1	602.3
72.5°	461.0	447.1	446.2	541.4	696.6	688.2	686.4	679.9	606.9	439.7	487.8
75°	256.8	245.7	243.0	233.7	249.4	254.0	270.7	279.9	303.0	333.5	369.5
77.5°	43.4	42.5	53.6	68.4	94.2	121.0	149.7	158.0	194.9	231.0	254.0
80°	24.0	24.9	32.3	39.7	52.7	72.1	92.4	97.9	120.1	139.5	158.0
82.5°	12.9	12.9	16.6	21.2	28.6	37.9	49.9	54.5	69.3	81.3	94.2
85°	4.6	4.6	6.5	8.3	12.0	15.7	19.4	22.2	30.5	41.6	47.1
87.5°	0.0	0.0	0.0	0.0	0.9	1.8	3.7	3.7	4.6	8.3	12.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P634015

CATALOG NUMBER: GWS-SA2F-830-U-SL2-W-GRSWH

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0	3505.0
2.5°	3523.4	3498.5	3532.7	3548.4	3553.9	3557.6	3533.6	3517.0	3511.4	3493.9	3483.7
5°	3536.4	3519.7	3552.1	3552.1	3529.0	3505.0	3456.0	3421.8	3397.8	3369.2	3364.5
7.5°	3558.5	3546.5	3564.1	3528.1	3469.9	3405.2	3320.2	3253.7	3200.1	3165.0	3165.9
10°	3588.1	3573.3	3559.5	3479.1	3372.9	3253.7	3123.4	3026.4	2937.7	2897.1	2874.9
12.5°	3607.5	3586.3	3528.1	3395.0	3238.9	3079.1	2895.2	2751.1	2622.7	2564.5	2559.9
15°	3631.5	3592.7	3476.3	3286.0	3068.9	2850.9	2614.4	2413.9	2240.3	2149.7	2145.1
17.5°	3662.9	3599.2	3414.4	3161.3	2889.7	2568.2	2270.7	2018.5	1833.8	1763.6	1775.6
20°	3707.3	3606.6	3344.2	3022.7	2667.1	2246.7	1876.3	1644.4	1573.3	1568.6	1559.4
22.5°	3757.2	3611.2	3266.6	2867.5	2397.3	1904.0	1550.2	1451.3	1450.4	1473.5	1479.0
25°	3813.5	3614.9	3178.9	2686.5	2105.4	1562.2	1370.9	1341.4	1364.5	1407.9	1413.4
27.5°	3885.6	3622.3	3072.6	2487.8	1795.0	1349.7	1272.1	1264.7	1292.4	1333.1	1331.2
30°	3991.8	3649.1	2959.9	2259.7	1476.3	1249.0	1212.0	1213.0	1224.1	1243.5	1246.2
32.5°	4099.9	3690.7	2850.0	2002.8	1293.3	1191.7	1175.1	1173.2	1173.2	1181.6	1183.4
35°	4202.4	3737.8	2730.8	1734.9	1204.7	1158.5	1147.4	1141.8	1139.1	1137.2	1134.4
37.5°	4259.7	3760.9	2614.4	1470.7	1157.5	1136.3	1125.2	1117.8	1107.7	1100.3	1098.4
40°	4234.8	3734.1	2479.5	1273.0	1128.9	1115.0	1102.1	1092.0	1078.1	1071.6	1067.9
42.5°	4151.6	3650.9	2332.6	1179.7	1105.8	1092.0	1076.2	1059.6	1050.4	1044.8	1043.9
45°	4063.9	3550.2	2155.3	1125.2	1083.6	1067.0	1048.5	1030.1	1019.9	1017.1	1016.2
47.5°	4061.1	3500.3	1966.8	1081.8	1056.8	1040.2	1017.1	998.6	987.6	983.9	980.2
50°	4183.0	3551.2	1754.3	1043.9	1029.1	1011.6	985.7	965.4	951.5	946.9	946.0
52.5°	4436.2	3742.4	1564.0	1006.0	992.2	971.9	950.6	930.3	913.7	905.3	904.4
55°	4709.6	3985.4	1445.8	967.2	948.8	931.2	911.8	889.6	871.2	858.2	856.4
57.5°	4992.3	4250.5	1409.7	918.3	904.4	892.4	869.3	845.3	824.0	812.0	809.3
60°	5225.1	4478.7	1477.2	866.5	859.2	843.4	822.2	799.1	784.3	775.1	773.2
62.5°	4374.3	3646.3	1192.6	810.2	810.2	793.6	769.5	752.9	742.7	736.3	734.4
65°	2776.1	2257.8	813.9	753.8	752.9	730.7	710.4	699.3	694.7	684.5	682.7
67.5°	1209.3	1031.9	695.6	696.6	692.9	668.8	648.5	640.2	631.0	619.9	619.0
70°	627.3	639.3	622.7	632.8	626.3	597.7	578.3	565.4	546.0	534.9	535.8
72.5°	506.3	519.2	537.7	553.4	539.5	516.4	485.9	470.2	445.3	433.3	434.2
75°	386.2	400.0	417.6	434.2	423.1	394.5	375.1	359.4	330.7	316.9	319.6
77.5°	266.1	273.5	294.7	293.8	290.1	281.8	253.1	234.6	205.1	188.5	190.3
80°	165.4	170.0	180.1	184.8	182.9	171.8	148.7	134.9	117.3	107.2	108.1
82.5°	99.8	102.5	111.8	112.7	111.8	103.5	85.9	75.8	64.7	59.1	59.1
85°	50.8	52.7	58.2	58.2	52.7	44.3	39.7	35.1	28.6	25.9	25.9
87.5°	13.9	13.9	17.6	14.8	12.0	11.1	5.5	4.6	1.8	0.9	0.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)