

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P629069

Luminaire Tested: GWS-SA1A-830-U-SL2-W

Issue Date: 1/10/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P629069  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-27)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/10/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: McGRAW-EDISON  
Catalog Number: GWS-SA1A-830-U-SL2-W  
Description: GALLEON WALL SLIM LUMINAIRE. (1) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE II SPILL LIGHT ELIMINATOR OPTICS  
Light Source: (16) 3000K CCT, 80 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2219.9 lumens  
Efficiency: N/A  
Efficacy: 112.7 lumens/watt  
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')  
IES Classification: Type II - Short  
BUG Rating: B1 - U0 - G1  
  
Input Watts (W): 19.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 0  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT



REPORT NUMBER: P629069  
 CATALOG NUMBER: GWS-SA1A-830-U-SL2-W

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

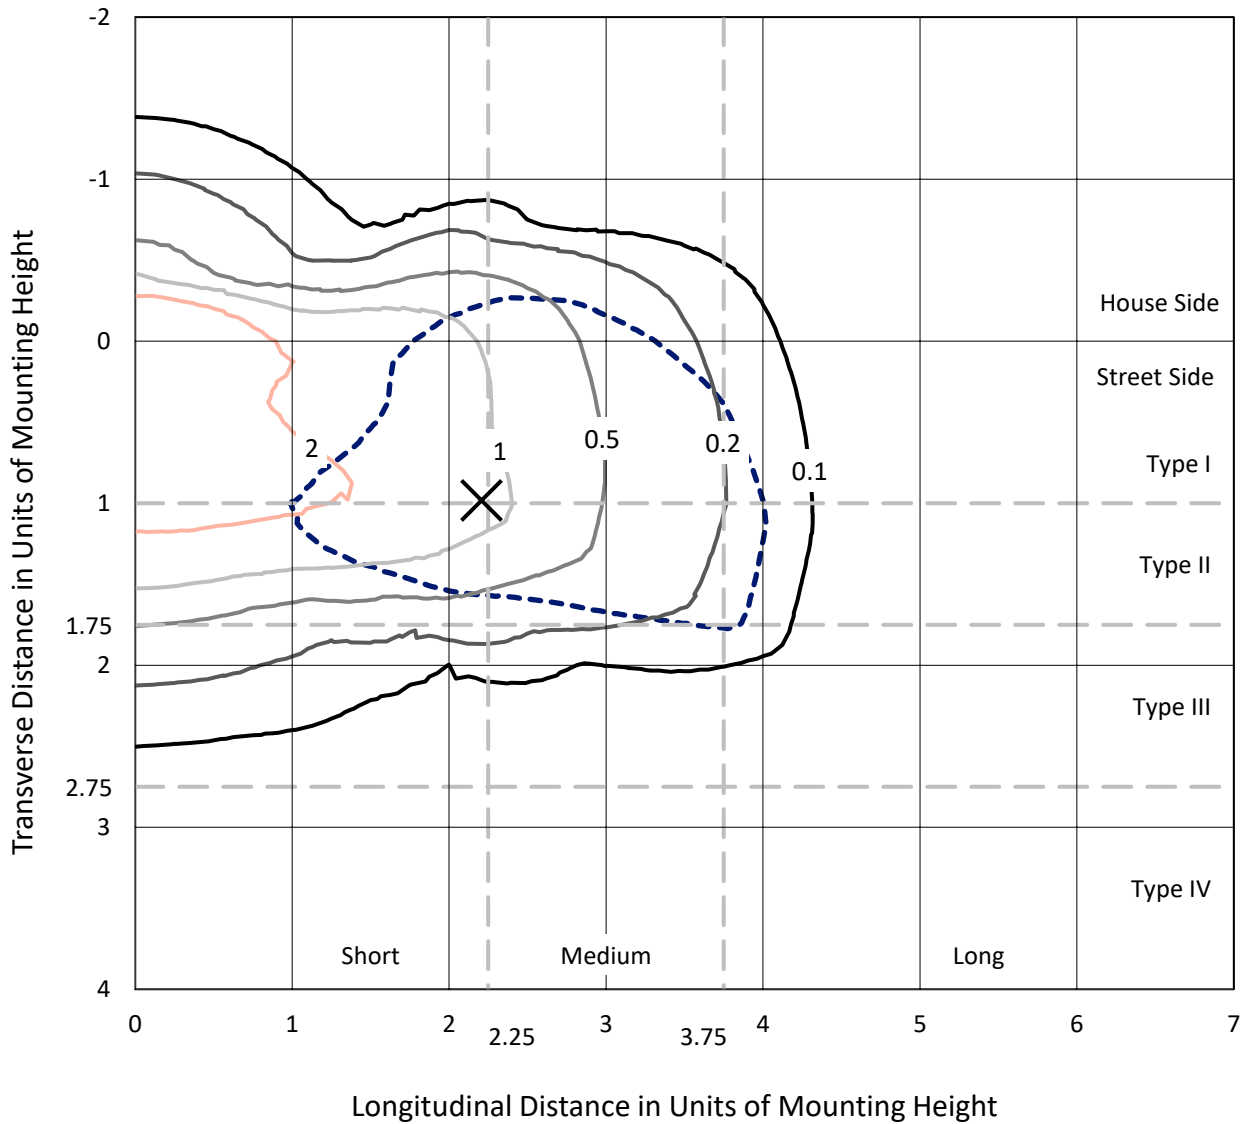

Based on 10 foot mounting height. Maximum calculated value = 4.9 fc  
 Type II - Short - N/A

REPORT NUMBER: P629069  
CATALOG NUMBER: GWS-SA1A-830-U-SL2-W

### Luminous Intensity Polar Plot

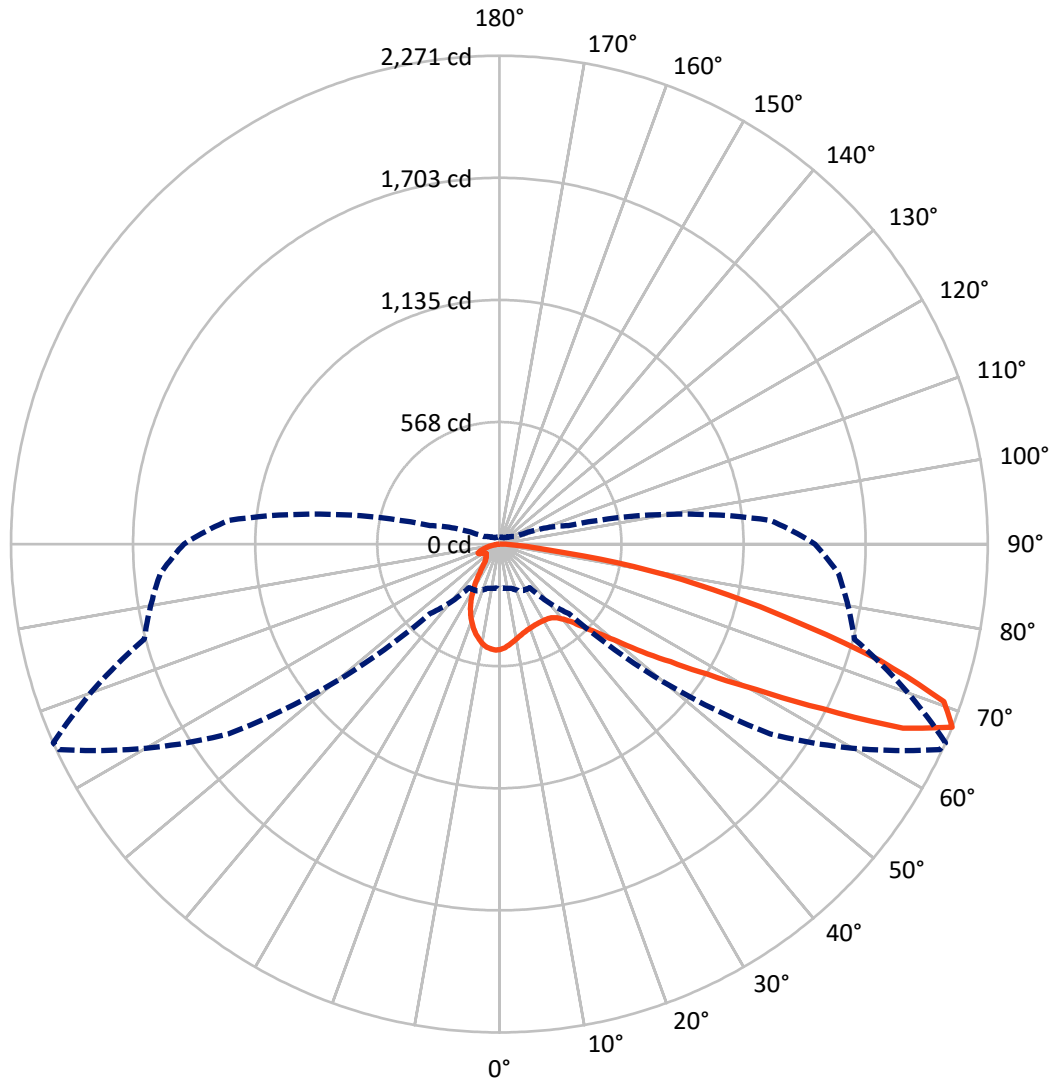

— Vertical Plane Through 66-Deg Lateral    - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P629069

CATALOG NUMBER: GWS-SA1A-830-U-SL2-W


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	450.5	0.0	450.5
	% Fixture	20.3	0.0	20.3
<b>Street Side</b>	Lumens	1769.4	0.0	1769.4
	% Fixture	79.7	0.0	79.7
<b>Total</b>	Lumens	2219.9	0.0	2219.9
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	43.1	1.9
10°-20°	105.8	4.8
20°-30°	145.4	6.6
30°-40°	198.8	9.0
40°-50°	301.3	13.6
50°-60°	468.3	21.1
60°-70°	570.2	25.7
70°-80°	347.3	15.6
80°-90°	39.7	1.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	2219.9	100.0
0°-180°	2219.9	100.0

**Coefficient of Utilization**

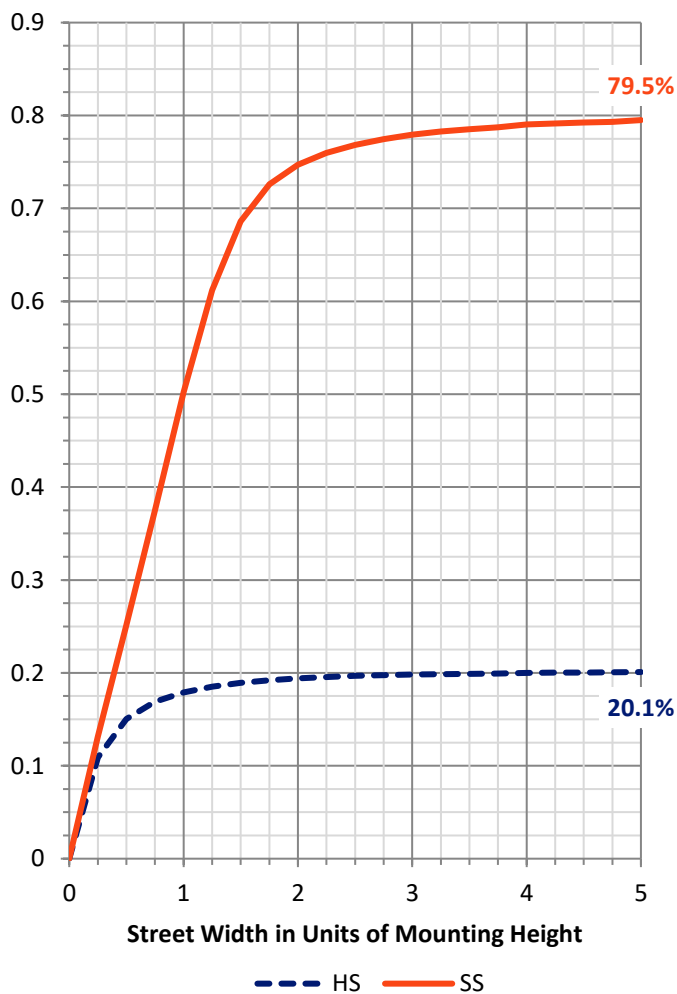


REPORT NUMBER: P629069

CATALOG NUMBER: GWS-SA1A-830-U-SL2-W

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	173.9	7.8			
FM (30°-60°)	809.2	36.5			
FH (60°-80°)	753.3	33.9			G1/1800
FVH (80°-90°)	33.0	1.5			G1/100
BL (0°-30°)	120.3	5.4	B1/500		
BM (30°-60°)	159.2	7.2	B0/220		
BH (60°-80°)	164.3	7.4	B1/500		G1/500
BVH (80°-90°)	6.7	0.3			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B1-U0-G1**  
 Type II Short

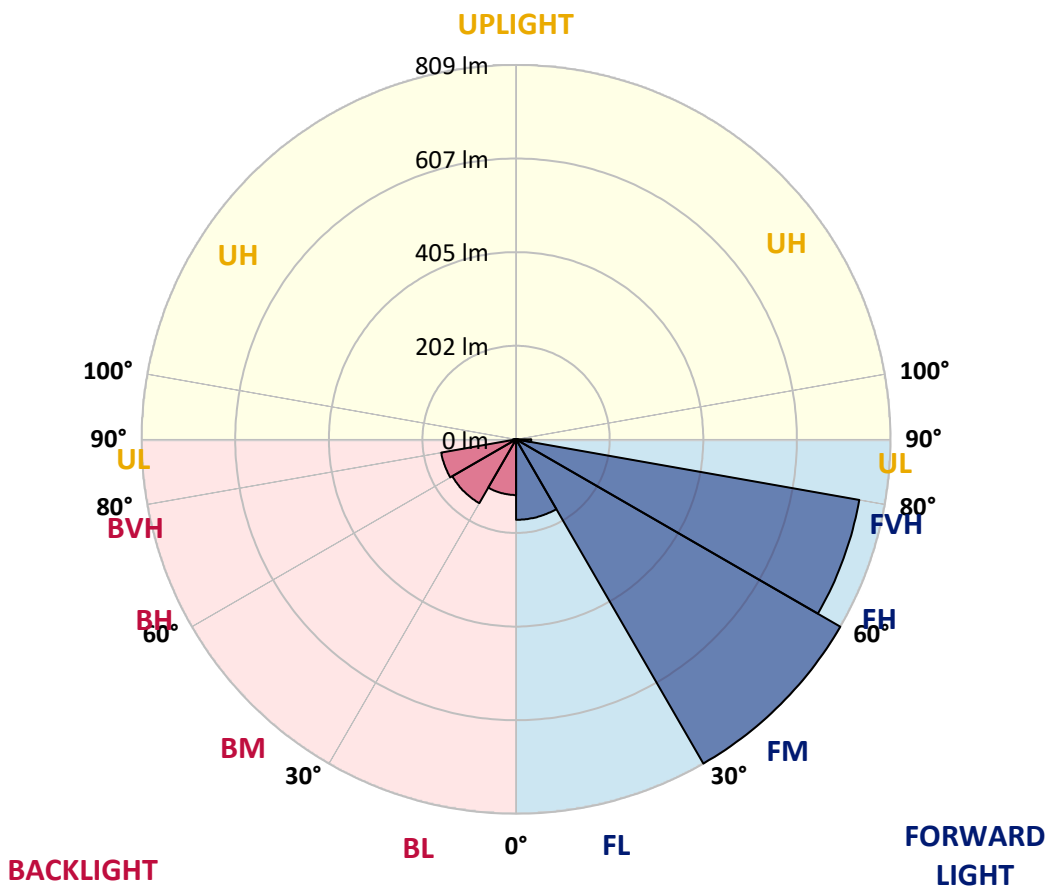



REPORT NUMBER: P629069  
 CATALOG NUMBER: GWS-SA1A-830-U-SL2-W

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	45°	55°	65°	66°	75°	85°
0°	490.5	490.5	490.5	490.5	490.5	490.5	490.5	490.5	490.5	490.5	490.5
2.5°	459.4	461.1	460.1	466.2	466.6	474.3	478.7	482.4	482.8	487.6	490.9
5°	428.0	429.0	429.0	434.8	438.7	449.1	459.1	469.8	470.6	482.3	491.2
7.5°	402.6	403.6	402.9	410.7	415.7	427.2	440.0	456.4	458.0	476.8	492.3
10°	382.7	382.4	384.0	391.1	397.6	411.3	425.6	444.2	446.6	470.5	493.6
12.5°	369.1	369.4	370.4	377.8	384.8	398.4	413.1	433.4	436.0	463.2	493.0
15°	362.6	361.9	362.8	369.6	376.2	388.2	403.4	424.3	426.9	456.7	493.1
17.5°	361.1	360.7	360.5	365.4	370.4	381.5	396.1	417.3	420.1	452.5	494.1
20°	365.7	365.0	363.2	365.4	367.5	376.8	390.9	412.3	415.4	449.7	496.0
22.5°	378.1	377.0	374.3	371.7	368.9	374.6	387.7	408.6	411.7	447.9	498.0
25°	397.1	396.1	393.2	387.4	377.3	376.4	387.1	407.0	410.0	446.6	498.8
27.5°	423.2	421.7	418.8	410.4	394.0	383.0	389.5	406.8	409.7	445.2	498.0
30°	454.1	453.1	451.5	441.3	419.4	397.1	395.0	408.1	410.4	444.4	496.4
32.5°	485.5	484.5	485.8	481.0	454.1	420.4	407.0	411.7	413.3	444.2	494.9
35°	513.2	514.3	523.7	524.5	498.1	452.0	425.9	419.9	420.3	447.5	495.6
37.5°	542.2	546.6	558.9	569.4	547.4	493.8	454.1	435.5	435.1	455.7	499.6
40°	580.6	582.5	598.2	618.0	604.2	551.1	494.1	460.9	458.6	472.6	510.5
42.5°	618.0	622.7	647.8	670.5	665.9	615.7	544.5	499.0	494.9	502.4	532.8
45°	665.6	670.1	698.3	727.5	735.7	688.8	608.9	553.0	549.0	547.2	573.8
47.5°	713.2	717.9	743.2	785.3	814.3	780.1	692.8	624.5	617.8	610.9	635.6
50°	745.3	750.8	774.9	825.4	893.5	894.1	792.2	718.1	709.6	698.6	722.8
52.5°	744.1	747.7	770.7	829.0	950.5	1025.1	925.4	837.3	830.5	806.5	827.5
55°	685.7	691.0	714.2	787.1	956.6	1149.3	1121.0	977.8	965.7	922.8	945.9
57.5°	568.3	572.8	596.1	686.0	902.0	1213.0	1369.4	1156.9	1140.3	1049.4	1076.1
60°	429.0	423.5	434.5	513.2	771.5	1214.6	1588.7	1399.9	1372.0	1184.8	1207.1
62.5°	321.9	316.4	318.9	341.1	523.1	1116.5	1713.7	1732.2	1686.2	1337.7	1333.3
65°	254.4	251.3	258.3	273.5	304.9	850.2	1714.7	2091.5	2062.5	1514.8	1462.7
67.5°	207.3	205.3	212.5	240.7	247.3	456.9	1537.5	2259.3	2270.6	1708.9	1582.7
70°	167.0	164.1	175.2	212.3	230.0	276.4	1101.4	2173.8	2192.1	1824.5	1548.9
72.5°	115.3	115.5	121.1	172.0	222.0	238.7	623.0	1810.1	1849.7	1719.7	1361.6
75°	77.7	78.4	80.0	113.5	204.5	231.6	332.0	1370.4	1398.4	1421.4	1125.5
77.5°	47.0	47.3	51.0	68.7	141.1	216.2	224.9	993.4	1015.4	937.0	697.7
80°	27.2	28.3	31.7	46.0	95.2	162.4	174.1	609.1	634.0	416.5	221.7
82.5°	12.0	12.8	17.3	26.7	55.5	138.1	135.9	240.7	237.1	116.1	76.9
85°	2.1	2.6	3.7	8.4	20.4	72.9	105.4	106.2	99.9	44.0	31.9
87.5°	0.0	0.0	0.0	0.0	0.0	0.5	15.9	28.5	28.3	12.5	11.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P629069  
 CATALOG NUMBER: GWS-SA1A-830-U-SL2-W

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	490.5	490.5	490.5	490.5	490.5	490.5	490.5	490.5	490.5	490.5	490.5
2.5°	493.0	488.6	492.5	493.0	492.2	491.5	486.6	482.4	482.0	477.4	477.4
5°	494.7	490.7	492.6	488.9	483.1	477.1	466.7	459.6	456.4	450.5	450.5
7.5°	497.2	493.0	490.7	481.5	467.9	454.7	438.1	424.1	418.5	410.2	409.9
10°	499.4	494.1	486.3	468.3	446.6	425.8	401.5	381.7	368.3	358.4	358.4
12.5°	499.3	492.3	476.9	450.4	420.4	390.1	357.7	327.9	310.1	294.7	293.8
15°	499.0	489.4	464.9	429.5	389.8	347.9	303.8	264.9	238.5	223.5	222.2
17.5°	498.6	485.7	451.5	405.7	352.6	295.4	237.3	195.1	173.1	163.9	164.2
20°	498.6	481.5	437.1	378.3	309.6	232.6	174.1	143.5	138.0	138.5	138.9
22.5°	497.2	476.3	421.1	348.5	261.9	171.0	128.4	118.1	121.0	125.5	126.2
25°	493.8	467.7	402.4	315.5	205.0	124.5	104.8	102.8	108.2	113.8	115.5
27.5°	488.4	457.8	381.5	276.8	150.9	100.1	92.1	92.0	96.2	100.4	101.9
30°	482.8	446.8	359.5	233.7	109.3	87.1	84.1	84.1	86.2	88.7	88.4
32.5°	476.1	435.6	335.9	188.8	89.1	79.8	78.9	78.4	78.7	79.7	79.7
35°	470.5	425.8	311.6	141.4	79.8	75.8	74.8	73.7	73.2	72.6	72.9
37.5°	468.3	418.0	286.5	106.6	75.3	72.9	71.3	69.6	68.5	68.2	68.0
40°	471.7	414.7	261.4	87.8	72.1	69.8	68.0	65.9	64.9	64.9	64.9
42.5°	485.0	417.2	235.8	79.4	69.8	67.2	64.6	62.7	62.3	62.7	62.8
45°	509.3	426.6	209.2	75.1	67.9	64.6	61.5	60.1	60.1	60.4	60.4
47.5°	552.7	451.2	183.0	72.6	65.9	62.5	59.3	57.8	57.7	58.0	58.0
50°	627.9	495.6	159.4	70.8	64.5	60.9	57.7	55.7	55.2	55.1	55.1
52.5°	722.6	572.5	144.3	69.5	62.7	59.1	55.9	53.3	52.3	51.8	51.8
55°	837.1	675.0	144.3	68.5	60.4	57.0	53.3	50.7	49.2	48.6	48.6
57.5°	966.8	794.3	169.2	67.7	58.6	54.6	50.5	47.9	46.3	45.3	45.3
60°	1098.8	920.5	230.9	66.6	57.0	51.5	47.5	45.0	42.9	41.8	41.6
62.5°	1235.6	1059.5	312.2	67.2	55.9	48.6	44.2	41.5	39.7	38.5	38.4
65°	1361.0	1191.8	383.3	72.2	56.0	46.0	40.5	38.1	36.6	35.1	35.0
67.5°	1467.4	1264.8	333.4	82.4	59.4	42.9	36.8	34.3	33.0	32.1	31.9
70°	1392.9	1153.4	189.2	88.7	64.1	39.7	32.6	30.9	29.6	29.0	28.8
72.5°	1191.1	976.5	126.5	78.4	58.5	35.5	28.7	27.4	26.4	25.6	25.4
75°	964.9	774.4	96.7	64.3	45.5	28.8	24.6	23.6	22.7	21.9	21.7
77.5°	570.9	447.5	71.3	50.9	32.1	22.5	20.4	19.6	18.6	18.0	17.8
80°	182.2	155.5	45.2	35.0	21.2	17.3	15.7	15.1	14.1	13.3	13.1
82.5°	69.5	60.1	24.0	17.8	14.1	11.8	10.5	9.9	9.2	8.4	8.3
85°	30.8	28.8	13.3	9.6	7.6	5.8	5.2	4.9	4.0	3.4	3.2
87.5°	10.9	10.9	5.7	2.8	1.6	0.8	0.5	0.2	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)