

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P629075

Luminaire Tested: GWS-SA1A-830-U-SL4-W

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P629075
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-35)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA1A-830-U-SL4-W
Description: GALLEON WALL SLIM LUMINAIRE. (1) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE IV SPILL LIGHT ELIMINATOR OPTICS
Light Source: (16) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2169.6 lumens
Efficiency: N/A
Efficacy: 110.1 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type IV - Short
BUG Rating: B0 - U0 - G1


Input Watts (W): 19.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P629075
 CATALOG NUMBER: GWS-SA1A-830-U-SL4-W

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

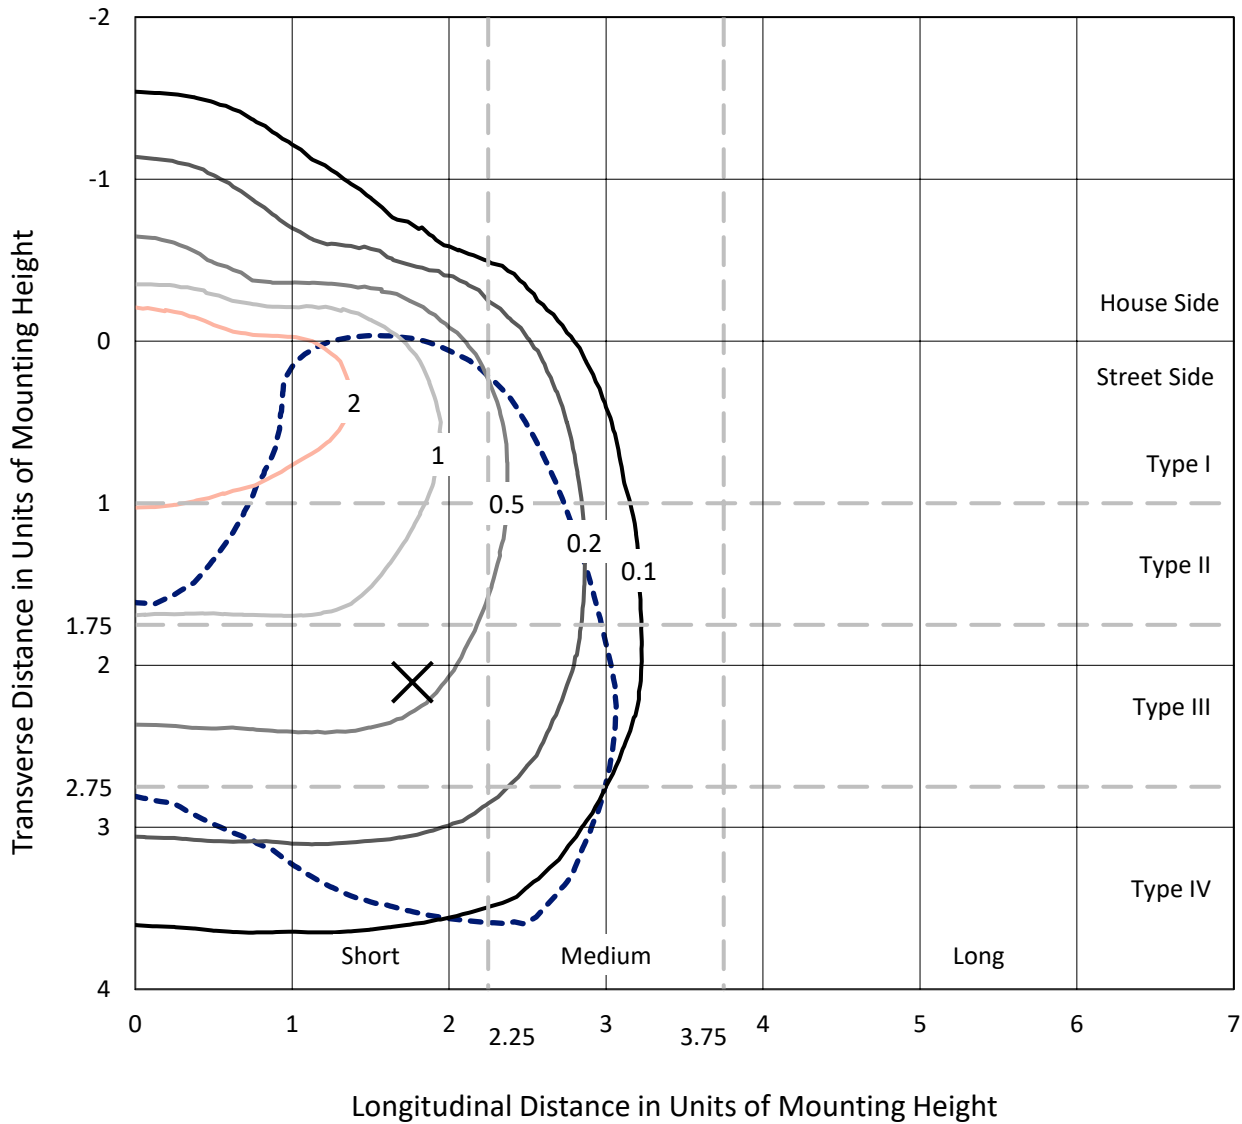

Based on 10 foot mounting height. Maximum calculated value = 3.7 fc
 Type IV - Short - N/A

REPORT NUMBER: P629075
CATALOG NUMBER: GWS-SA1A-830-U-SL4-W

Luminous Intensity Polar Plot

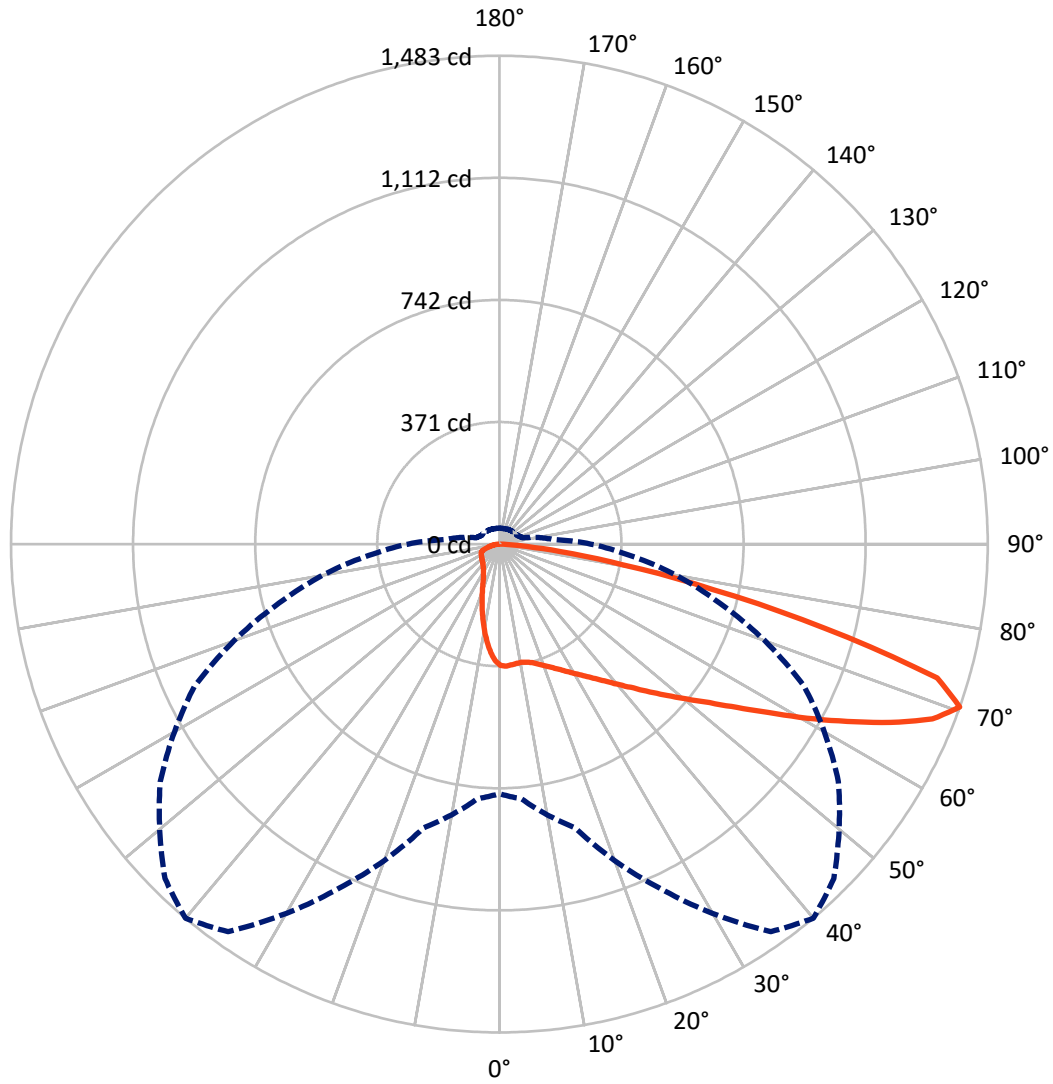

— Vertical Plane Through 40-Deg Lateral - - - Horizontal Cone Through 70-Deg Vertical

REPORT NUMBER: P629075

CATALOG NUMBER: GWS-SA1A-830-U-SL4-W


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	334.2	0.0	334.2
	% Fixture	15.4	0.0	15.4
Street Side	Lumens	1835.4	0.0	1835.4
	% Fixture	84.6	0.0	84.6
Total	Lumens	2169.6	0.0	2169.6
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	32.5	1.5
10°-20°	84.8	3.9
20°-30°	133.2	6.1
30°-40°	200.3	9.2
40°-50°	309.1	14.2
50°-60°	459.1	21.2
60°-70°	578.7	26.7
70°-80°	334.6	15.4
80°-90°	37.1	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	2169.6	100.0
0°-180°	2169.6	100.0

Coefficient of Utilization

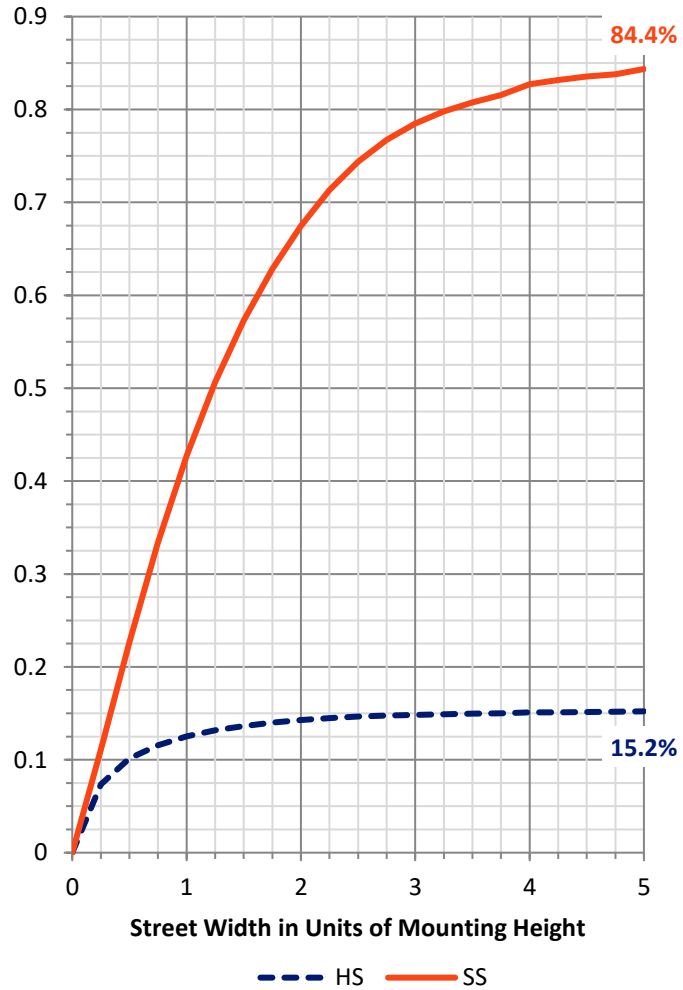

REPORT NUMBER: P629075


CATALOG NUMBER: GWS-SA1A-830-U-SL4-W

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	164.5	7.6			
FM (30°-60°)	803.8	37.0			
FH (60°-80°)	836.2	38.5			G1/1800
FVH (80°-90°)	30.9	1.4			G1/100
BL (0°-30°)	86.1	4.0	B0/110		
BM (30°-60°)	164.7	7.6	B0/220		
BH (60°-80°)	77.1	3.6	B0/110		G0/110
BVH (80°-90°)	6.2	0.3			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G1

Type IV Short

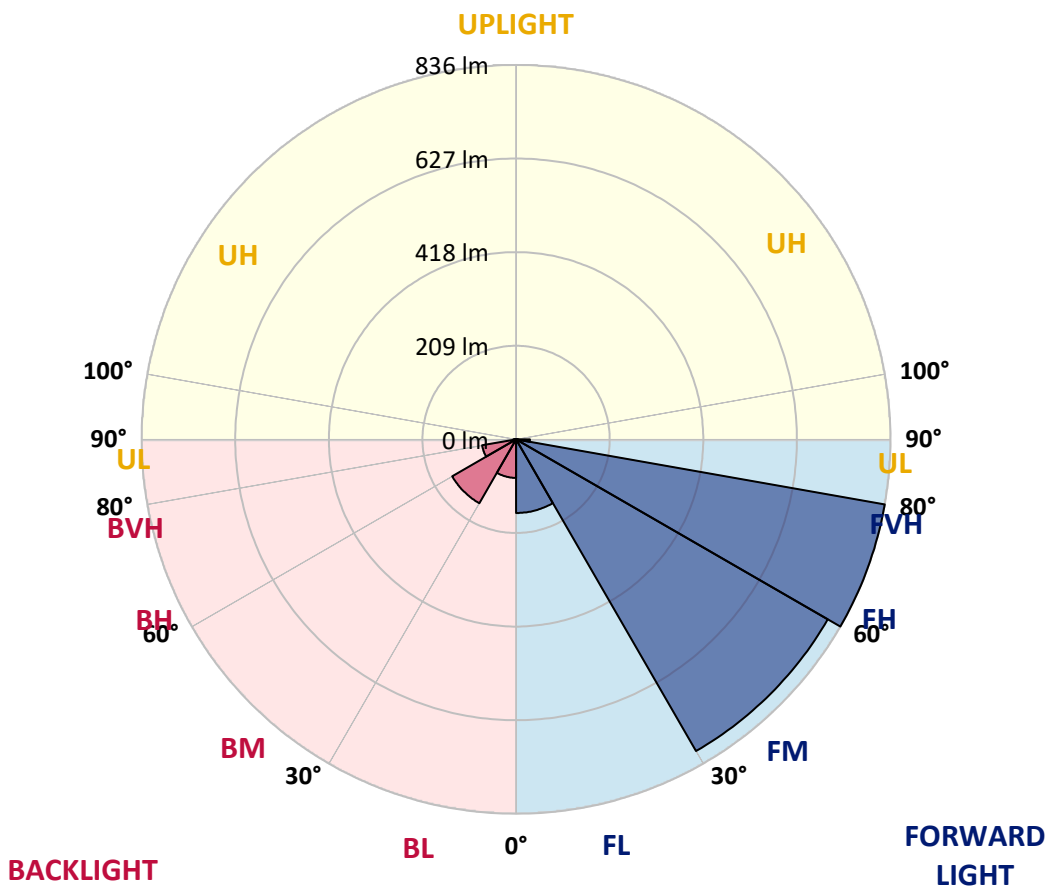



REPORT NUMBER: P629075
 CATALOG NUMBER: GWS-SA1A-830-U-SL4-W

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	40°	45°	55°	65°	75°	85°
0°	368.4	368.4	368.4	368.4	368.4	368.4	368.4	368.4	368.4	368.4	368.4
2.5°	370.7	371.3	371.8	372.5	372.1	371.2	372.0	372.0	370.2	368.3	366.5
5°	371.2	372.0	371.8	371.7	370.4	368.7	368.7	367.8	364.7	361.6	358.7
7.5°	370.2	370.0	369.9	369.4	367.9	366.2	365.8	363.9	359.8	355.6	351.4
10°	365.8	365.7	366.2	367.3	367.0	365.3	365.3	363.6	358.9	353.7	348.2
12.5°	362.3	362.3	364.2	367.3	368.4	367.8	367.9	366.6	361.3	355.1	348.7
15°	362.8	362.9	367.1	372.1	374.3	373.8	373.9	372.5	366.5	360.3	351.6
17.5°	366.0	366.8	374.1	381.1	383.8	383.2	382.0	379.6	372.8	365.8	355.1
20°	372.8	374.1	383.5	392.2	395.5	394.0	392.1	387.2	379.8	372.1	359.0
22.5°	386.2	387.0	397.4	406.0	408.6	406.8	402.9	396.0	387.4	379.4	363.7
25°	405.2	406.2	416.0	424.0	423.3	421.2	415.9	407.3	397.1	388.7	370.5
27.5°	427.7	429.3	439.0	445.3	441.1	438.1	432.1	421.7	410.2	402.6	380.9
30°	452.3	453.0	461.2	467.5	461.1	456.8	449.6	438.4	428.0	422.4	396.4
32.5°	476.1	476.8	483.9	487.5	480.7	477.6	471.3	459.4	452.1	449.1	419.6
35°	501.2	501.1	506.9	510.0	503.0	501.7	495.2	486.2	484.9	488.9	453.4
37.5°	526.3	524.9	527.9	532.0	528.1	529.4	525.2	522.1	527.1	537.7	498.5
40°	546.4	546.4	549.6	554.7	556.0	561.6	559.2	563.2	579.4	604.5	554.2
42.5°	564.2	564.4	571.2	579.0	588.3	597.1	599.0	609.6	643.1	682.4	624.1
45°	582.8	583.0	592.2	603.6	623.5	640.2	644.1	667.7	715.6	763.6	700.1
47.5°	604.4	602.6	615.4	634.3	662.7	686.6	696.7	730.2	790.8	849.7	771.7
50°	628.7	624.9	639.2	671.9	706.9	739.8	756.6	795.0	871.4	929.2	839.0
52.5°	656.0	653.9	668.8	708.7	762.1	800.0	822.8	873.2	949.8	1008.4	892.5
55°	690.0	685.0	706.6	757.3	826.9	875.1	902.2	950.6	1035.5	1080.3	933.3
57.5°	727.3	721.8	750.6	818.0	911.1	964.1	997.9	1037.7	1116.1	1135.4	957.3
60°	767.5	765.7	799.8	889.2	1011.5	1073.0	1097.5	1133.6	1186.2	1167.3	951.3
62.5°	804.2	803.6	853.3	966.5	1117.9	1185.6	1205.0	1214.6	1236.8	1165.2	903.6
65°	842.9	848.4	915.6	1056.0	1239.8	1306.2	1314.3	1290.0	1253.8	1110.0	806.2
67.5°	847.8	858.5	954.8	1139.9	1355.5	1418.1	1411.7	1318.7	1203.6	956.3	631.9
70°	758.2	776.8	892.3	1152.7	1436.9	1483.1	1436.3	1257.0	1021.4	692.8	397.4
72.5°	633.5	649.6	751.6	983.0	1331.8	1390.6	1327.3	1064.0	721.8	397.4	202.4
75°	493.1	511.7	605.8	781.4	997.1	1020.6	988.8	742.0	396.8	163.9	92.0
77.5°	300.9	314.3	387.5	529.4	697.7	662.5	561.5	416.0	174.1	78.5	56.8
80°	133.1	141.4	190.9	284.4	403.1	381.1	300.4	177.7	95.2	49.9	39.7
82.5°	71.4	76.8	94.1	112.6	177.0	185.1	150.1	102.3	51.2	28.5	22.7
85°	31.4	34.5	42.8	40.8	58.1	57.2	57.7	70.3	24.5	13.1	14.7
87.5°	0.0	0.0	0.0	0.0	0.2	0.2	1.8	9.4	2.4	3.9	3.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P629075
 CATALOG NUMBER: GWS-SA1A-830-U-SL4-W

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	368.4	368.4	368.4	368.4	368.4	368.4	368.4	368.4	368.4	368.4	368.4
2.5°	364.5	361.6	360.8	359.8	358.1	355.0	352.7	350.1	349.0	347.7	347.9
5°	355.5	351.9	348.5	344.1	338.6	332.5	328.3	323.4	320.8	318.4	319.0
7.5°	347.7	342.2	335.2	326.0	316.1	305.1	296.2	289.2	284.5	281.3	282.9
10°	342.8	336.4	324.2	309.2	292.5	275.6	262.8	250.9	243.4	237.6	237.2
12.5°	341.9	333.4	315.8	293.9	269.8	247.3	228.5	212.3	202.4	195.1	197.9
15°	342.8	332.1	308.5	279.8	249.4	218.9	195.6	177.0	165.2	158.5	158.1
17.5°	344.0	330.9	300.2	264.6	228.0	193.2	166.2	146.4	134.3	127.6	127.8
20°	344.9	328.9	290.5	247.9	206.3	169.2	141.2	122.4	111.6	106.7	107.5
22.5°	346.6	327.0	280.2	230.1	184.1	146.1	121.5	106.2	99.8	96.5	96.7
25°	349.6	325.8	269.5	210.7	162.3	127.6	107.9	97.7	93.6	91.7	91.5
27.5°	356.0	326.8	258.3	191.9	142.5	113.5	99.1	92.5	89.7	88.4	88.3
30°	366.5	330.7	248.6	172.8	125.5	102.5	93.1	89.1	87.4	86.3	86.2
32.5°	382.5	338.0	238.1	155.0	111.7	94.4	88.4	86.3	85.2	84.5	84.5
35°	406.8	351.3	227.7	139.4	101.1	88.1	84.7	83.9	82.9	82.6	82.9
37.5°	441.8	372.5	218.3	125.8	93.4	83.2	80.6	81.0	80.2	80.6	81.1
40°	486.2	400.8	210.4	114.7	87.8	79.7	77.1	78.2	77.7	78.2	79.0
42.5°	542.4	436.0	204.4	105.9	83.7	76.8	74.3	75.5	75.1	75.8	76.6
45°	605.0	482.3	201.6	99.8	80.8	74.7	72.1	72.9	72.6	73.0	73.8
47.5°	665.1	524.4	204.0	96.2	78.4	72.9	70.1	70.4	70.3	70.1	70.6
50°	716.9	557.9	211.0	95.1	76.8	71.1	68.5	68.7	68.2	67.2	67.5
52.5°	759.2	584.8	215.2	95.1	76.0	69.2	66.7	66.9	65.9	64.6	64.8
55°	787.0	595.6	211.8	94.9	75.6	67.5	64.9	65.1	64.1	62.5	62.7
57.5°	795.0	585.1	197.6	93.1	75.3	66.2	63.2	63.5	62.8	61.1	61.1
60°	772.8	546.6	171.5	89.1	74.5	65.4	61.9	62.3	62.0	60.2	60.2
62.5°	714.7	478.1	140.4	82.9	72.2	64.5	60.7	61.7	62.5	61.5	61.4
65°	605.8	383.0	114.2	76.1	69.3	62.8	59.1	61.5	63.3	64.6	64.6
67.5°	454.6	274.2	93.1	69.0	64.9	59.6	57.0	59.3	60.6	61.4	61.9
70°	277.1	161.3	73.4	60.7	58.6	54.7	52.8	50.5	48.7	48.4	48.6
72.5°	135.5	92.3	59.6	51.7	50.0	46.5	42.1	41.1	40.3	39.8	39.7
75°	74.7	64.3	49.2	42.9	40.0	35.6	34.7	33.0	32.7	32.1	32.2
77.5°	52.8	50.7	40.6	34.8	30.4	28.2	28.7	27.5	27.5	27.0	26.9
80°	39.7	39.8	31.3	25.4	22.5	21.7	22.2	22.2	21.9	21.7	21.5
82.5°	25.1	28.3	21.1	16.4	16.0	16.2	16.0	15.9	16.2	15.7	15.5
85°	17.3	20.4	12.8	9.7	9.7	9.6	9.9	9.7	10.0	9.6	9.6
87.5°	3.9	9.1	4.7	2.9	3.1	2.9	3.1	3.2	3.6	3.7	3.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)