

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P629091

Luminaire Tested: GWS-SA1A-830-U-T2R-W-HSS

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P629091
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-14)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA1A-830-U-T2R-W-HSS
Description: GALLEON WALL SLIM LUMINAIRE. (1) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE II ROADWAY OPTICS WITH HOUSE SIDE SHIELD
Light Source: (16) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1821.9 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type II - Short
BUG Rating: B0 - U0 - G0


Input Watts (W): 19.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P629091
 CATALOG NUMBER: GWS-SA1A-830-U-T2R-W-HSS

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

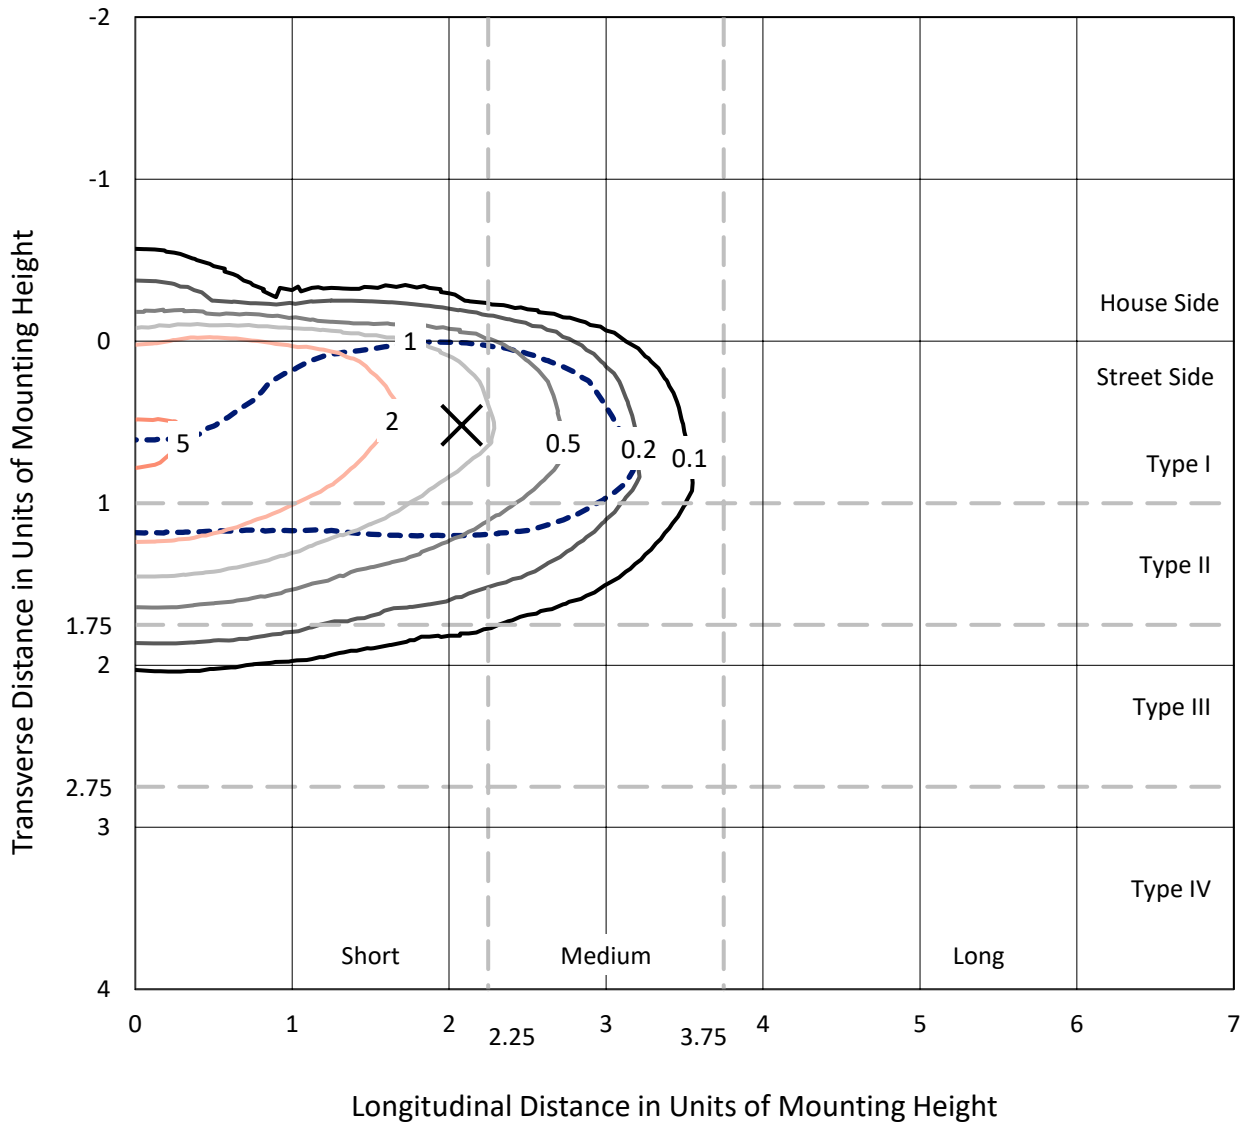

Based on 10 foot mounting height. Maximum calculated value = 5.5 fc
 Type II - Short - N/A

REPORT NUMBER: P629091
CATALOG NUMBER: GWS-SA1A-830-U-T2R-W-HSS

Luminous Intensity Polar Plot

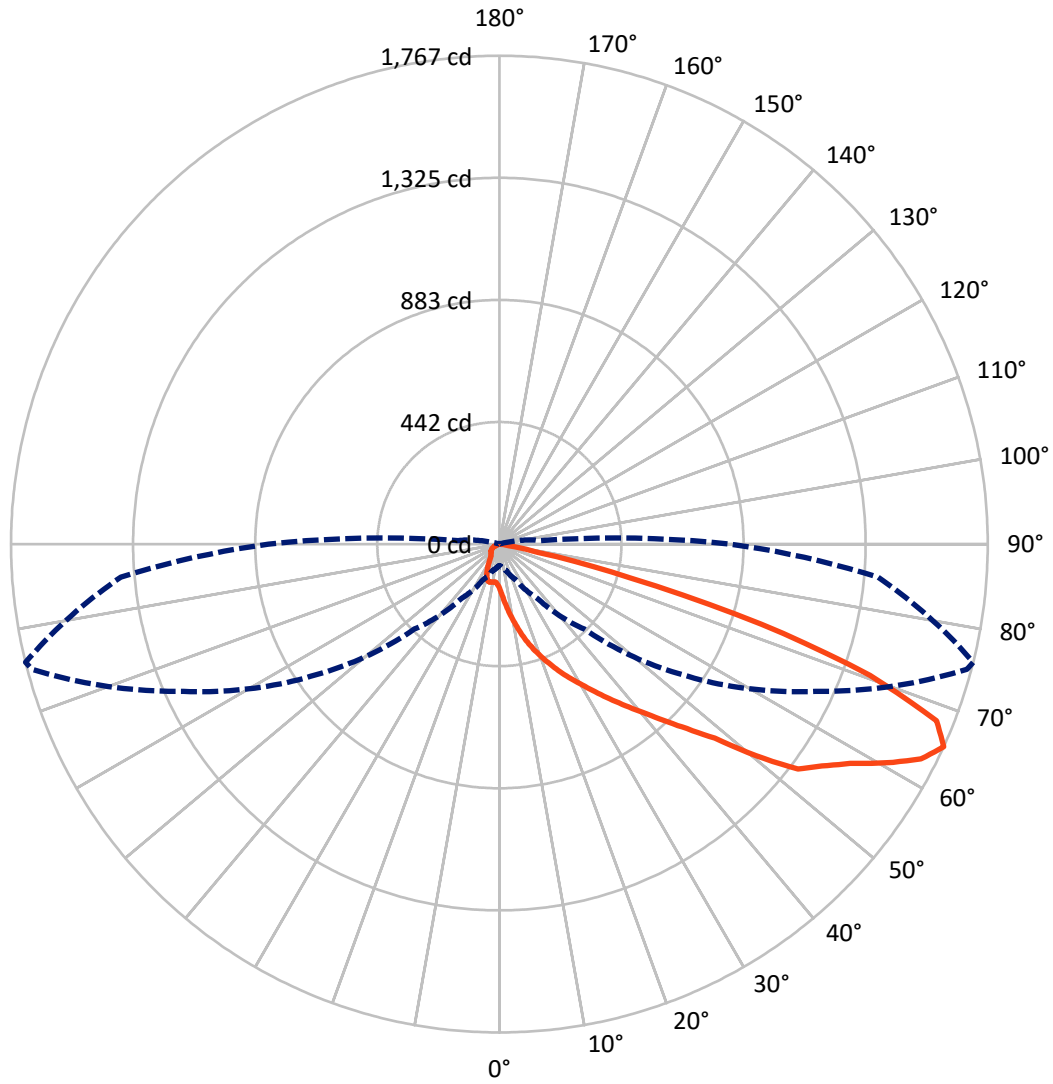

— Vertical Plane Through 76-Deg Lateral - - - Horizontal Cone Through 65-Deg Vertical

REPORT NUMBER: P629091
 CATALOG NUMBER: GWS-SA1A-830-U-T2R-W-HSS


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	100.7	0.0	100.7
	% Fixture	5.5	0.0	5.5
Street Side	Lumens	1721.2	0.0	1721.2
	% Fixture	94.5	0.0	94.5
Total	Lumens	1821.9	0.0	1821.9
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	19.6	1.1
10°-20°	74.5	4.1
20°-30°	151.9	8.3
30°-40°	270.2	14.8
40°-50°	399.4	21.9
50°-60°	457.3	25.1
60°-70°	348.9	19.1
70°-80°	97.7	5.4
80°-90°	2.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	1821.9	100.0
0°-180°	1821.9	100.0

Coefficient of Utilization

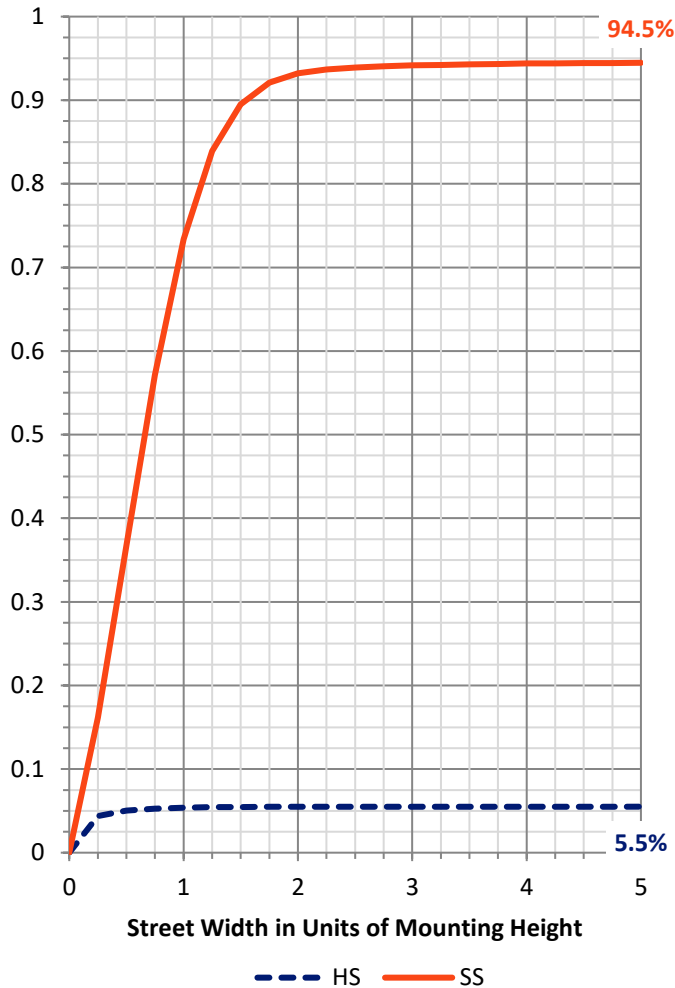


REPORT NUMBER: P629091
 CATALOG NUMBER: GWS-SA1A-830-U-T2R-W-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	217.2	11.9			
FM (30°-60°)	1077.1	59.1			
FH (60°-80°)	424.5	23.3			G0/660
FVH (80°-90°)	2.3	0.1			G0/10
BL (0°-30°)	28.7	1.6	B0/110		
BM (30°-60°)	49.7	2.7	B0/220		
BH (60°-80°)	22.1	1.2	B0/110		G0/110
BVH (80°-90°)	0.1	0.0			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G0
 Type II Short

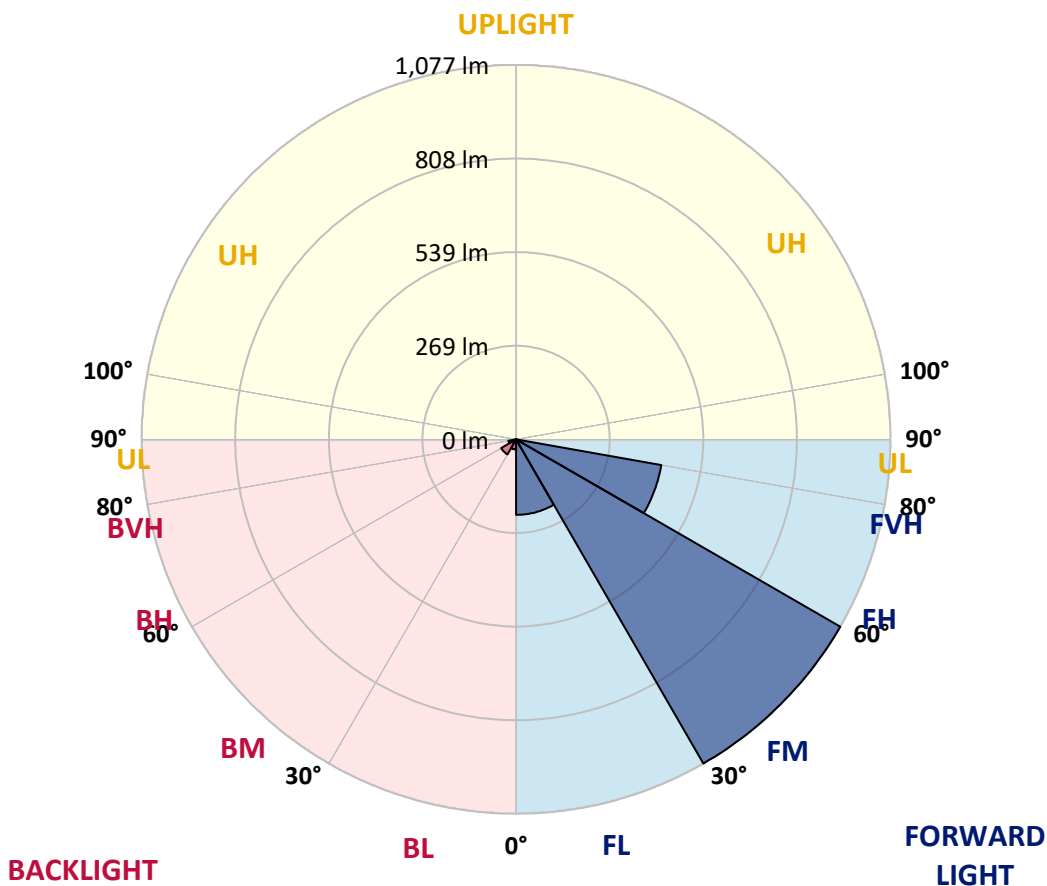



REPORT NUMBER: P629091
 CATALOG NUMBER: GWS-SA1A-830-U-T2R-W-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	76°	85°
0°	161.3	161.3	161.3	161.3	161.3	161.3	161.3	161.3	161.3	161.3	161.3
2.5°	248.6	252.3	249.4	244.5	235.2	226.1	214.4	198.4	185.6	184.0	172.0
5°	335.7	335.4	329.1	322.8	312.9	297.3	273.9	244.1	215.4	213.0	186.1
7.5°	387.6	388.0	384.5	379.6	369.9	353.9	329.4	293.5	251.5	246.7	205.4
10°	431.1	431.0	428.4	426.1	417.4	406.7	380.4	340.9	290.4	282.8	226.9
12.5°	463.8	465.0	466.3	468.5	464.8	454.3	429.5	386.4	329.7	321.3	251.5
15°	489.7	490.1	494.9	503.7	506.7	501.2	478.7	430.5	368.6	361.3	279.9
17.5°	497.5	498.2	506.4	522.5	538.7	541.7	524.7	474.8	406.8	399.1	307.4
20°	513.9	515.3	521.5	535.6	556.0	572.5	565.9	519.7	445.0	434.8	335.6
22.5°	565.4	566.2	564.1	565.9	576.4	595.5	599.5	563.1	484.2	473.4	366.0
25°	654.0	654.3	639.6	625.6	617.7	621.2	630.2	603.1	523.1	512.4	394.4
27.5°	746.0	747.1	729.4	705.8	677.4	661.3	658.7	639.7	562.3	550.5	422.4
30°	832.6	832.6	814.0	785.1	747.2	715.7	697.0	676.6	604.2	591.3	451.0
32.5°	910.5	909.8	886.0	854.8	817.4	782.7	743.5	715.2	650.9	636.5	484.1
35°	974.8	973.2	946.1	916.2	876.2	850.4	806.7	756.6	701.4	687.0	518.1
37.5°	1023.4	1021.6	996.8	965.1	928.0	911.3	874.7	806.4	754.7	741.6	555.8
40°	1049.8	1046.2	1029.0	1005.4	974.3	959.7	944.5	868.1	817.4	801.0	600.4
42.5°	1057.5	1053.3	1042.0	1031.0	1012.2	1000.7	1017.1	937.7	886.2	872.1	651.2
45°	1034.6	1032.1	1031.2	1039.1	1042.5	1045.7	1086.1	1014.8	962.2	951.5	715.2
47.5°	979.2	978.5	987.1	1020.1	1056.1	1090.3	1161.0	1109.9	1060.6	1049.1	804.6
50°	876.8	883.5	907.4	965.4	1037.3	1115.5	1231.2	1241.7	1220.0	1203.1	921.2
52.5°	716.8	729.6	783.4	871.5	974.8	1108.4	1263.6	1347.3	1369.5	1352.0	1004.8
55°	562.5	574.4	622.4	734.1	872.0	1054.1	1265.0	1383.7	1432.1	1415.9	1061.3
57.5°	419.0	430.0	473.5	580.4	732.0	947.4	1230.4	1404.0	1506.5	1496.1	1150.5
60°	273.9	284.7	324.1	417.5	567.8	791.9	1145.0	1399.8	1607.7	1606.7	1260.2
62.5°	151.9	160.5	189.0	261.9	396.3	613.3	1010.9	1357.5	1705.7	1711.8	1350.5
65°	77.7	83.2	100.6	144.0	239.9	434.8	834.5	1260.6	1751.0	1766.6	1374.3
67.5°	50.9	52.6	56.8	74.8	128.4	273.5	628.1	1105.3	1687.2	1705.4	1294.5
70°	41.3	42.8	45.2	49.9	66.2	145.3	412.5	882.8	1409.8	1422.1	1030.8
72.5°	30.3	32.2	36.9	40.0	47.8	79.7	214.6	579.5	968.2	989.9	647.8
75°	22.3	23.5	27.4	31.6	39.0	50.4	82.1	304.6	499.9	487.3	272.1
77.5°	13.4	14.3	17.5	20.2	27.9	31.4	28.7	112.6	152.1	143.0	65.8
80°	6.6	7.4	11.5	15.2	17.8	12.6	12.0	31.4	33.8	33.8	16.5
82.5°	2.3	2.9	6.2	10.0	8.7	4.9	5.7	8.1	9.1	9.6	4.9
85°	0.0	0.0	1.5	2.9	1.3	0.6	1.5	1.8	2.3	2.4	1.6
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.5	0.6	0.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P629091
 CATALOG NUMBER: GWS-SA1A-830-U-T2R-W-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	161.3	161.3	161.3	161.3	161.3	161.3	161.3	161.3	161.3	161.3	161.3
2.5°	165.5	157.9	146.4	136.0	128.1	120.7	115.0	110.5	109.6	107.1	107.4
5°	173.0	159.2	138.0	121.6	110.1	102.4	95.9	91.0	88.9	86.8	85.2
7.5°	184.5	164.5	134.7	114.8	101.4	89.4	79.4	71.3	67.4	64.9	63.3
10°	198.6	172.0	134.9	110.8	90.9	72.6	58.8	49.9	45.7	44.4	44.2
12.5°	215.4	181.4	136.2	104.1	75.6	53.9	43.6	39.5	38.2	37.1	37.1
15°	233.2	191.9	136.2	92.0	57.7	42.1	37.7	35.1	33.5	32.9	32.6
17.5°	252.0	201.8	133.0	75.3	44.2	37.1	33.5	31.1	29.8	28.8	28.5
20°	272.1	211.2	124.9	57.7	37.9	33.2	29.8	27.4	26.1	25.1	25.1
22.5°	292.5	219.9	111.7	44.4	33.5	29.5	26.2	24.0	22.7	21.7	21.7
25°	311.4	225.8	94.9	36.6	30.3	26.2	23.3	21.1	19.6	18.9	18.6
27.5°	329.1	229.5	76.3	32.2	27.2	23.5	20.4	18.3	17.2	16.7	16.4
30°	347.4	230.5	58.3	29.3	24.6	20.7	17.8	16.2	15.2	14.6	14.6
32.5°	365.2	229.3	44.5	26.9	22.3	18.3	15.9	14.4	13.6	13.1	13.0
35°	383.3	224.1	36.1	24.8	20.1	16.0	14.1	13.0	12.5	11.8	11.8
37.5°	403.1	217.2	31.4	22.7	17.8	14.4	12.6	11.8	11.2	10.7	10.5
40°	427.7	209.1	28.8	20.9	15.7	13.0	11.3	10.5	10.0	9.6	9.4
42.5°	456.9	201.1	27.5	18.9	14.1	11.5	10.2	9.2	8.7	8.1	7.9
45°	498.2	199.4	26.1	16.8	12.6	10.4	8.9	7.9	7.3	6.8	6.6
47.5°	564.6	204.4	23.6	14.6	11.2	9.1	7.6	6.8	6.0	5.5	5.2
50°	630.5	203.1	21.2	12.6	9.9	7.8	6.5	5.7	4.9	4.4	4.2
52.5°	666.4	196.9	18.9	11.2	8.6	6.6	5.5	4.5	4.0	3.6	3.4
55°	699.0	194.5	16.7	9.7	7.3	5.8	4.5	3.7	3.4	2.9	2.8
57.5°	762.8	200.2	14.7	8.4	6.3	5.0	3.9	3.1	2.8	2.3	2.1
60°	829.5	200.8	12.6	7.3	5.5	4.2	3.1	2.4	2.1	1.6	1.5
62.5°	864.3	184.5	10.4	6.2	4.5	3.6	2.6	1.9	1.6	1.0	1.0
65°	835.2	149.2	8.7	5.0	3.6	2.8	1.9	1.5	1.0	0.5	0.2
67.5°	739.2	106.1	7.3	4.0	2.6	1.9	1.5	1.0	0.2	0.0	0.0
70°	541.2	60.6	5.7	2.9	1.9	1.3	1.0	0.5	0.0	0.0	0.0
72.5°	332.7	32.4	4.2	1.9	1.5	1.0	0.8	0.3	0.0	0.0	0.0
75°	126.2	15.5	2.6	1.3	1.1	0.8	0.5	0.2	0.0	0.0	0.0
77.5°	34.2	7.6	1.5	1.0	0.8	0.5	0.3	0.0	0.0	0.0	0.0
80°	8.9	3.6	1.0	0.6	0.5	0.3	0.0	0.0	0.0	0.0	0.0
82.5°	3.1	1.6	0.5	0.5	0.3	0.2	0.0	0.0	0.0	0.0	0.0
85°	1.3	0.6	0.3	0.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.5	0.2	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)