

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P636978

Luminaire Tested: GWS-SA4B-830-U-AFL-W-GRSWH

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P636978
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-47)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA4B-830-U-AFL-W-GRSWH
Description: GALLEON WALL SLIM LUMINAIRE. (4) LIGHTSQUARES WITH 16 LEDS EACH AND AUTOMOTIVE FRONTLINE OPTICS W/ FACTORY INSTALLED GLARE SHIELD, WH
Light Source: (64) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10431.2 lumens
Efficiency: N/A
Efficacy: 110.5 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')
IES Classification: Type II - Short
BUG Rating: B2 - U0 - G1


Input Watts (W): 94.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P636978
 CATALOG NUMBER: GWS-SA4B-830-U-AFL-W-GRSWH

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

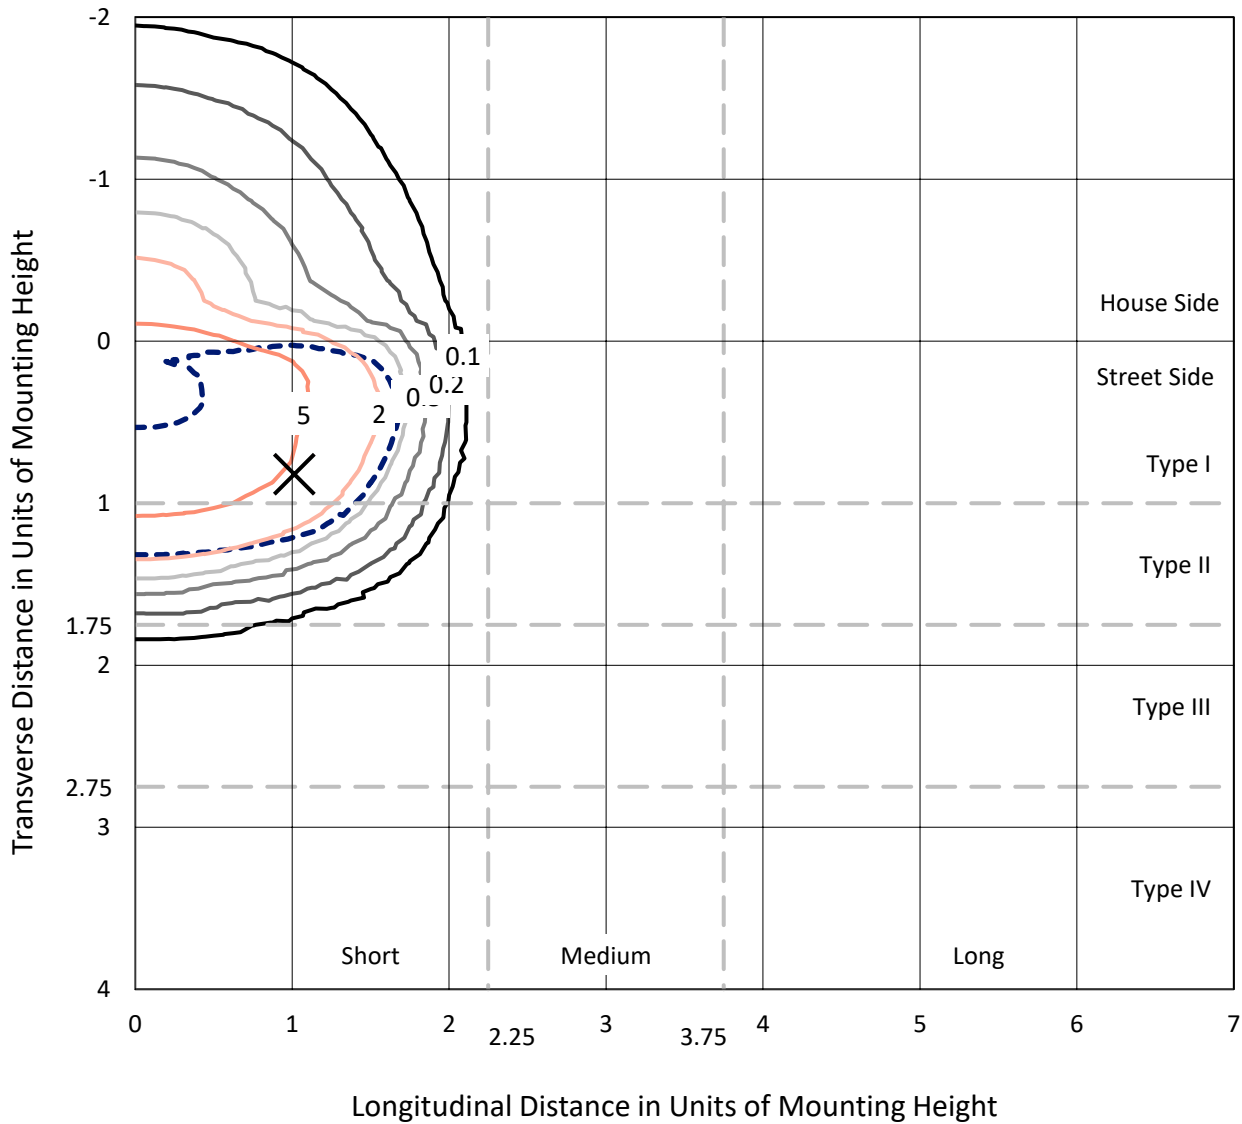

Based on 20 foot mounting height. Maximum calculated value = 9.5 fc
 Type II - Short - N/A

REPORT NUMBER: P636978
CATALOG NUMBER: GWS-SA4B-830-U-AFL-W-GRSWH

Luminous Intensity Polar Plot

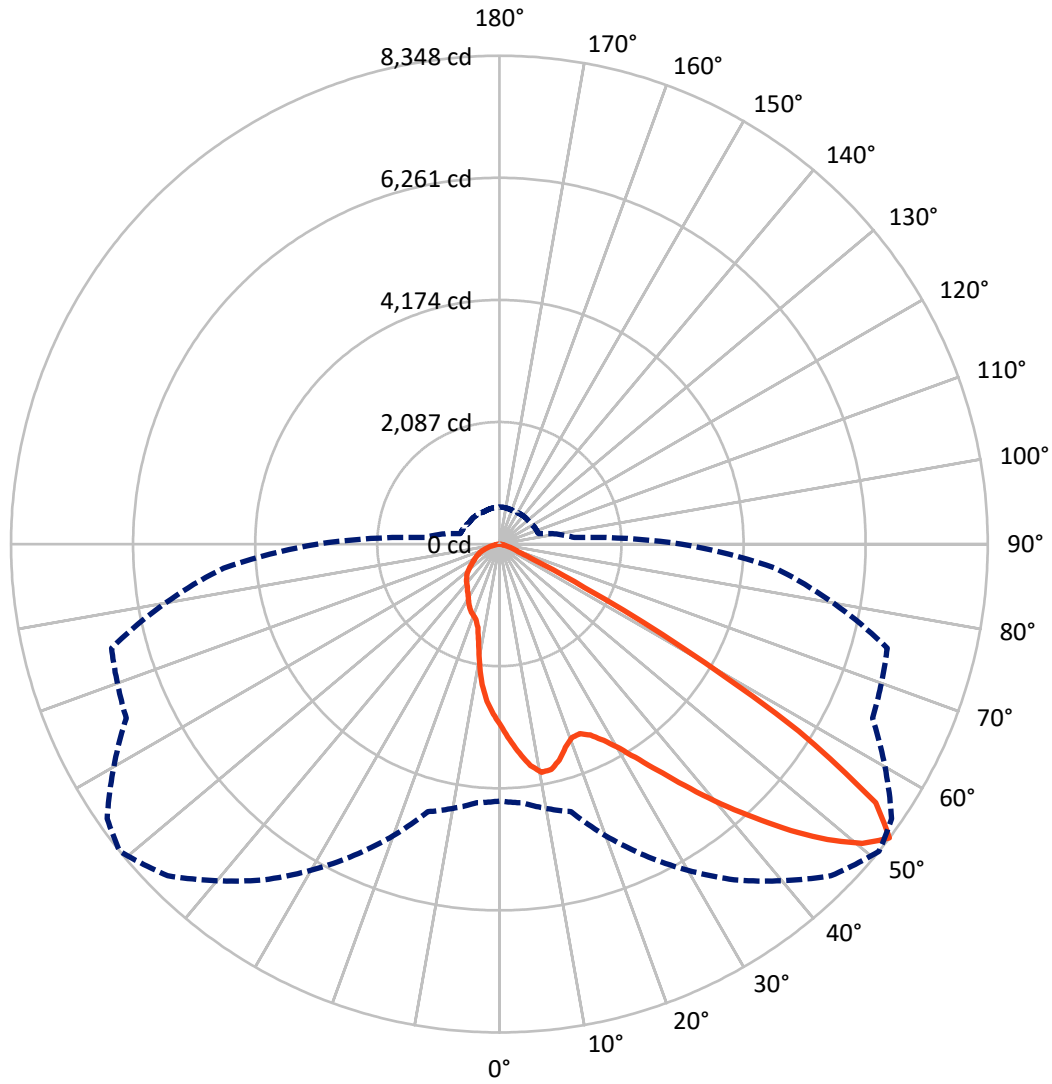

— Vertical Plane Through 51-Deg Lateral - - - Horizontal Cone Through 52.5-Deg Vertical

REPORT NUMBER: P636978

CATALOG NUMBER: GWS-SA4B-830-U-AFL-W-GRSWH

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	2032.4	0.0	2032.4
	% Fixture	19.5	0.0	19.5
Street Side	Lumens	8398.8	0.0	8398.8
	% Fixture	80.5	0.0	80.5
Total	Lumens	10431.2	0.0	10431.2
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	289.8	2.8
10°-20°	753.1	7.2
20°-30°	1224.4	11.7
30°-40°	1940.5	18.6
40°-50°	2926.6	28.1
50°-60°	2531.8	24.3
60°-70°	574.0	5.5
70°-80°	169.2	1.6
80°-90°	21.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	10431.2	100.0
0°-180°	10431.2	100.0

Coefficient of Utilization



REPORT NUMBER: P636978


CATALOG NUMBER: GWS-SA4B-830-U-AFL-W-GRSWH

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	1556.9	14.9			
FM (30°-60°)	6382.0	61.2			
FH (60°-80°)	451.7	4.3			G0/660
FVH (80°-90°)	8.2	0.1			G0/10
BL (0°-30°)	710.5	6.8	B2/1000		
BM (30°-60°)	1016.9	9.7	B2/2500		
BH (60°-80°)	291.5	2.8	B1/500		G1/500
BVH (80°-90°)	13.6	0.1			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G1

Type II Short

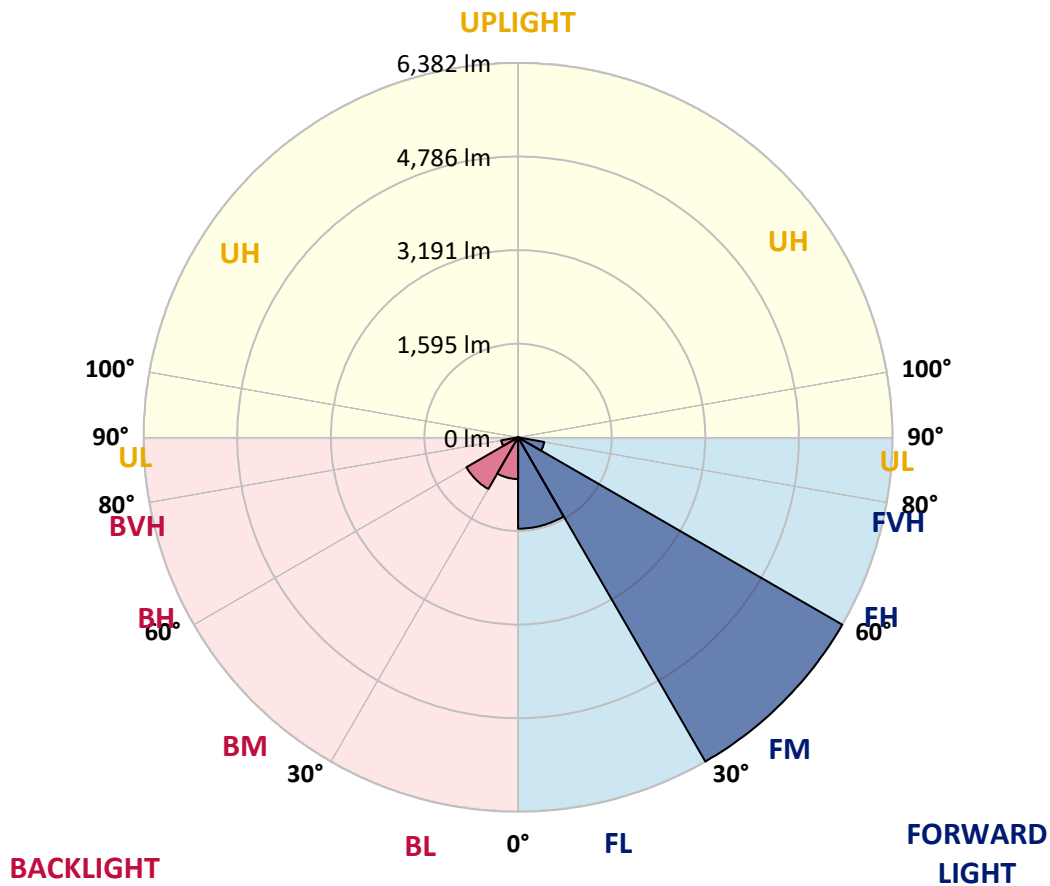



REPORT NUMBER: P636978

CATALOG NUMBER: GWS-SA4B-830-U-AFL-W-GRSWH

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	51°	55°	65°	75°	85°
0°	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9
2.5°	3461.2	3480.9	3450.4	3438.9	3419.9	3387.0	3349.1	3338.3	3256.7	3203.2	3143.0
5°	3809.0	3819.7	3795.0	3770.3	3723.3	3664.8	3591.4	3575.7	3427.4	3304.5	3176.8
7.5°	3886.5	3882.4	3903.8	3917.8	3912.0	3889.0	3823.8	3793.3	3616.1	3421.6	3232.8
10°	3579.8	3556.8	3635.9	3729.9	3842.8	3973.0	3965.6	3963.1	3809.0	3579.0	3304.5
12.5°	3173.5	3161.9	3226.2	3344.1	3557.6	3846.1	3954.1	4038.1	3982.9	3729.0	3384.5
15°	2941.0	2936.9	2980.6	3065.5	3235.3	3599.6	3830.4	3996.9	4132.1	3889.8	3469.4
17.5°	2899.0	2901.5	2916.3	2964.9	3086.9	3387.0	3654.0	3886.5	4248.3	4066.2	3575.7
20°	3021.8	3038.3	3012.7	3020.2	3086.1	3310.3	3533.7	3775.2	4322.5	4243.4	3690.3
22.5°	3294.6	3288.9	3232.8	3199.9	3200.7	3357.3	3520.5	3723.3	4371.2	4415.7	3794.2
25°	3603.8	3597.2	3530.4	3457.0	3410.9	3485.1	3615.3	3778.5	4414.8	4573.1	3877.4
27.5°	3968.9	3948.3	3874.1	3780.2	3677.9	3710.1	3798.3	3927.7	4482.4	4728.1	3932.6
30°	4322.5	4346.4	4240.1	4128.8	4020.8	4001.1	4052.2	4169.2	4620.1	4909.4	3998.6
32.5°	4791.5	4783.3	4665.4	4520.4	4366.2	4351.4	4391.8	4498.9	4867.4	5160.0	4099.1
35°	5359.5	5361.1	5193.8	4997.6	4778.4	4738.8	4806.4	4910.2	5235.8	5499.6	4258.2
37.5°	5949.7	5947.2	5801.3	5578.7	5279.5	5223.5	5300.9	5378.4	5696.6	5962.0	4505.5
40°	6363.4	6379.9	6311.5	6194.5	5910.9	5774.1	5842.5	5896.1	6197.8	6506.0	4831.1
42.5°	6598.4	6623.1	6637.9	6708.0	6558.8	6412.9	6388.2	6416.2	6645.3	7011.3	5136.9
45°	6648.6	6681.6	6789.6	7049.2	7106.9	7065.7	6985.0	6917.4	6979.2	7369.9	5337.2
47.5°	6426.9	6484.6	6715.4	7169.6	7506.7	7636.1	7546.3	7443.3	7172.1	7462.2	5316.6
50°	5548.2	5615.8	6135.9	6924.0	7563.6	8035.1	8043.3	7890.8	7149.0	7196.0	5057.8
52.5°	4392.6	4438.8	4736.3	5869.7	7005.6	8018.6	8348.3	8185.1	7037.7	6863.0	4733.8
55°	2625.3	2699.5	2977.3	3872.5	5457.6	7106.9	7809.2	7888.4	6983.3	6583.5	4512.9
57.5°	886.1	922.4	1187.8	1710.4	3216.3	5203.7	6033.7	6355.2	6339.5	6156.6	4081.8
60°	422.0	430.3	483.9	648.7	1287.5	2719.3	3571.6	3942.5	4280.5	4314.3	2539.6
62.5°	321.5	326.4	353.6	389.1	517.6	1145.7	1637.0	1920.6	2051.6	1760.7	924.8
65°	268.7	272.8	293.4	315.7	352.0	496.2	628.1	724.5	652.8	508.6	441.0
67.5°	224.2	227.5	243.2	267.1	291.8	332.2	348.7	358.6	375.9	422.0	405.5
70°	175.6	178.9	195.4	216.0	239.9	249.8	265.4	275.3	309.9	369.3	367.6
72.5°	135.2	139.3	148.4	161.6	181.3	191.2	208.5	220.1	239.9	287.7	307.5
75°	98.9	101.4	109.6	113.8	116.2	113.8	131.1	144.2	170.6	188.8	193.7
77.5°	40.4	45.3	43.7	43.7	51.9	62.6	71.7	80.0	98.1	108.8	109.6
80°	16.5	18.1	21.4	23.9	28.8	37.1	42.9	46.2	54.4	61.0	65.9
82.5°	9.9	10.7	12.4	13.2	16.5	21.4	24.7	27.2	33.8	40.4	42.9
85°	4.9	4.9	5.8	6.6	8.2	9.9	11.5	13.2	17.3	21.4	23.9
87.5°	0.8	0.8	0.8	1.6	2.5	3.3	4.1	4.9	5.8	6.6	8.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P636978
 CATALOG NUMBER: GWS-SA4B-830-U-AFL-W-GRSWH

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9	3105.9
2.5°	3107.5	3063.0	3011.1	2969.9	2922.1	2886.6	2836.3	2805.0	2775.4	2750.6	2732.5
5°	3110.8	3035.8	2927.8	2832.2	2733.3	2639.3	2542.9	2464.6	2394.5	2336.0	2331.1
7.5°	3129.8	3021.8	2852.8	2685.5	2492.6	2306.3	2120.0	1968.4	1853.0	1792.8	1780.4
10°	3161.9	3020.2	2776.2	2509.1	2180.2	1880.2	1659.3	1543.9	1477.1	1453.2	1445.0
12.5°	3195.7	3016.0	2678.1	2260.2	1803.5	1540.6	1419.4	1405.4	1417.8	1419.4	1418.6
15°	3236.9	3013.6	2554.4	1968.4	1528.2	1383.1	1391.4	1421.1	1449.9	1456.5	1456.5
17.5°	3287.2	3007.8	2386.3	1683.2	1355.9	1352.6	1396.3	1435.9	1463.1	1468.0	1468.0
20°	3340.0	2993.0	2179.4	1450.7	1285.9	1333.7	1380.7	1411.2	1430.1	1436.7	1437.5
22.5°	3376.3	2953.4	1941.2	1278.5	1242.2	1297.4	1331.2	1362.5	1362.5	1346.0	1341.1
25°	3383.7	2868.5	1683.2	1160.6	1190.3	1241.4	1276.0	1257.9	1224.1	1210.9	1210.0
27.5°	3356.5	2744.9	1428.5	1076.5	1127.6	1178.7	1173.0	1146.6	1131.7	1118.5	1123.5
30°	3323.5	2596.5	1207.6	1007.3	1055.1	1105.4	1085.6	1076.5	1065.8	1051.0	1054.3
32.5°	3301.2	2430.8	1037.8	953.7	1006.4	1014.7	1028.7	1027.9	1018.0	990.0	988.3
35°	3307.8	2263.5	924.0	910.0	966.1	962.8	989.1	984.2	915.8	877.0	874.6
37.5°	3360.6	2102.7	857.3	875.4	901.8	922.4	945.4	886.1	862.2	837.5	839.1
40°	3461.2	1953.5	821.0	856.4	863.0	893.5	839.9	839.1	828.4	806.1	805.3
42.5°	3574.9	1827.4	796.3	847.4	838.3	844.1	787.2	793.8	793.0	778.9	774.8
45°	3644.1	1711.2	776.5	813.6	816.0	758.3	741.0	748.4	752.6	745.1	744.3
47.5°	3572.4	1577.7	755.9	761.6	783.1	719.6	698.2	699.0	706.4	707.2	703.9
50°	3371.3	1428.5	731.1	717.1	703.1	679.2	659.4	655.3	662.7	670.1	672.6
52.5°	3111.7	1285.9	689.9	668.5	635.5	635.5	626.5	613.3	623.2	633.0	636.3
55°	2921.2	1180.4	631.4	607.5	571.2	583.6	581.9	570.4	583.6	591.0	593.5
57.5°	2531.4	948.7	555.6	548.1	517.6	532.5	535.8	520.9	514.4	516.0	518.5
60°	1502.7	612.4	501.2	500.3	473.1	490.4	500.3	485.5	465.7	468.2	471.5
62.5°	674.3	468.2	432.7	429.5	428.6	450.9	461.6	447.6	419.6	422.0	425.3
65°	424.5	404.7	375.9	375.9	389.1	408.0	416.3	404.7	372.6	368.5	371.8
67.5°	394.0	376.7	347.0	341.3	347.8	363.5	364.3	342.1	323.1	319.8	319.8
70°	353.6	340.4	311.6	300.0	297.6	296.7	294.3	288.5	276.1	272.8	274.5
72.5°	292.6	283.6	265.4	253.1	246.5	245.6	235.7	230.8	220.1	218.4	217.6
75°	193.7	196.2	196.2	194.5	188.8	186.3	175.6	170.6	158.3	153.3	152.5
77.5°	114.6	117.0	120.3	121.2	120.3	120.3	110.5	104.7	92.3	85.7	84.1
80°	70.1	71.7	73.4	75.8	72.5	70.1	61.0	55.2	49.5	45.3	44.5
82.5°	45.3	47.0	47.8	49.5	47.8	44.5	37.1	33.8	29.7	26.4	25.6
85°	25.6	26.4	28.0	28.0	25.6	23.1	19.0	16.5	14.0	12.4	12.4
87.5°	9.1	9.1	9.1	9.9	8.2	7.4	4.9	3.3	2.5	2.5	2.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)