

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P637002

Luminaire Tested: GWS-SA4B-830-U-T1-W

Issue Date: 1/10/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P637002  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-10)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/10/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: McGRAW-EDISON  
Catalog Number: GWS-SA4B-830-U-T1-W  
Description: GALLEON WALL SLIM LUMINAIRE. (4) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE I OPTICS  
Light Source: (64) 3000K CCT, 80 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 11477.2 lumens  
Efficiency: N/A  
Efficacy: 121.6 lumens/watt  
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')  
IES Classification: Type I - Medium  
BUG Rating: B3 - U0 - G3  
  
Input Watts (W): 94.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 0  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT



REPORT NUMBER: P637002  
 CATALOG NUMBER: GWS-SA4B-830-U-T1-W

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

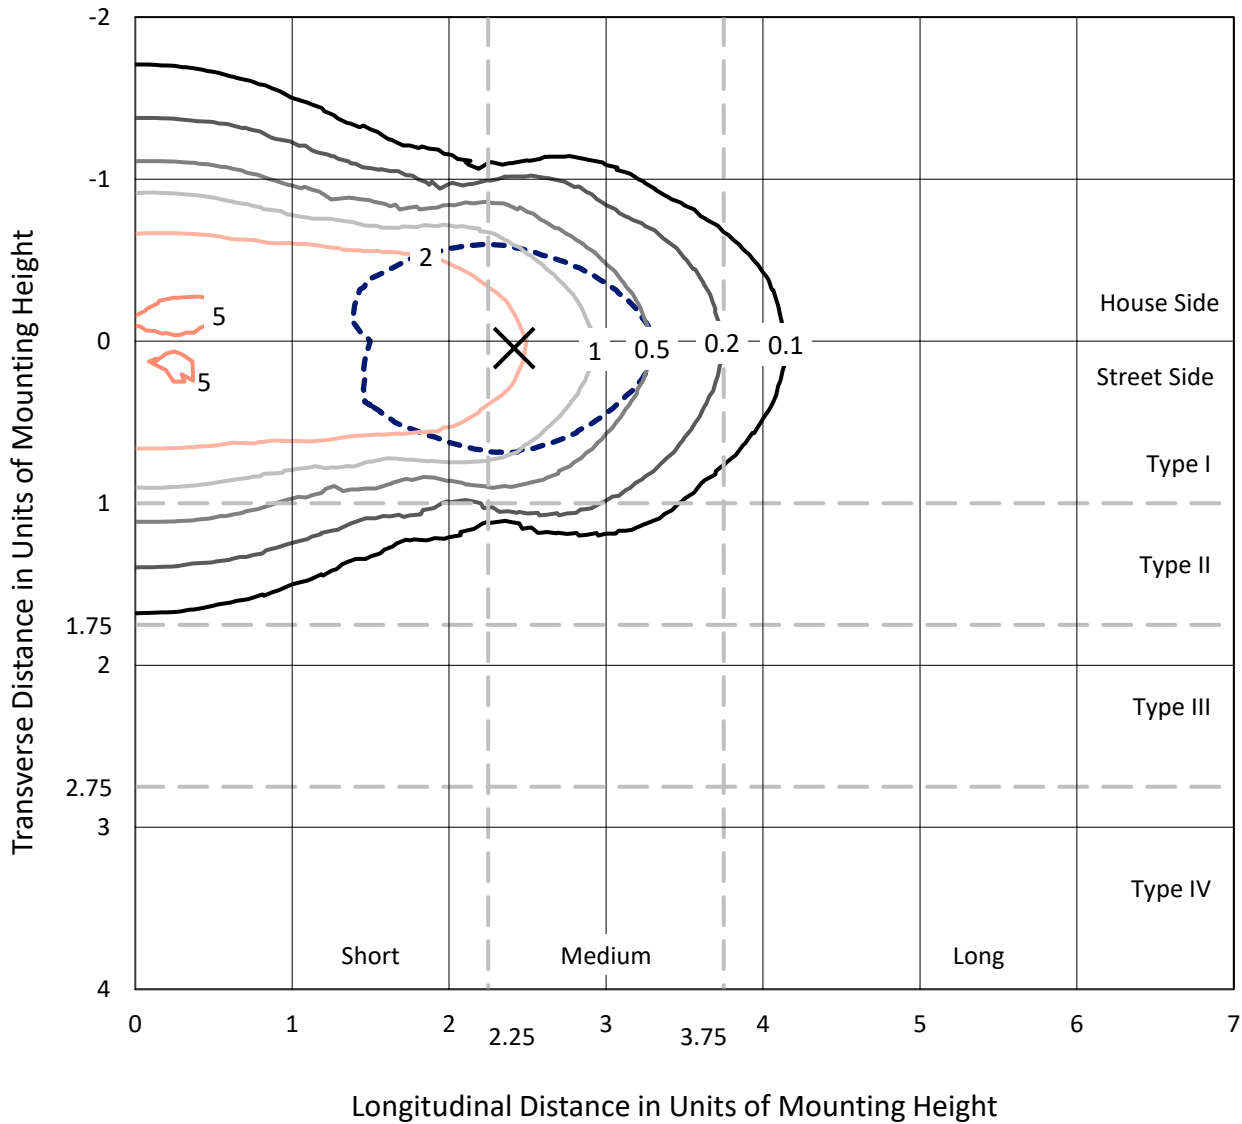

Based on 20 foot mounting height. Maximum calculated value = 5.3 fc  
 Type I - Medium - N/A

REPORT NUMBER: P637002  
CATALOG NUMBER: GWS-SA4B-830-U-T1-W

### Luminous Intensity Polar Plot

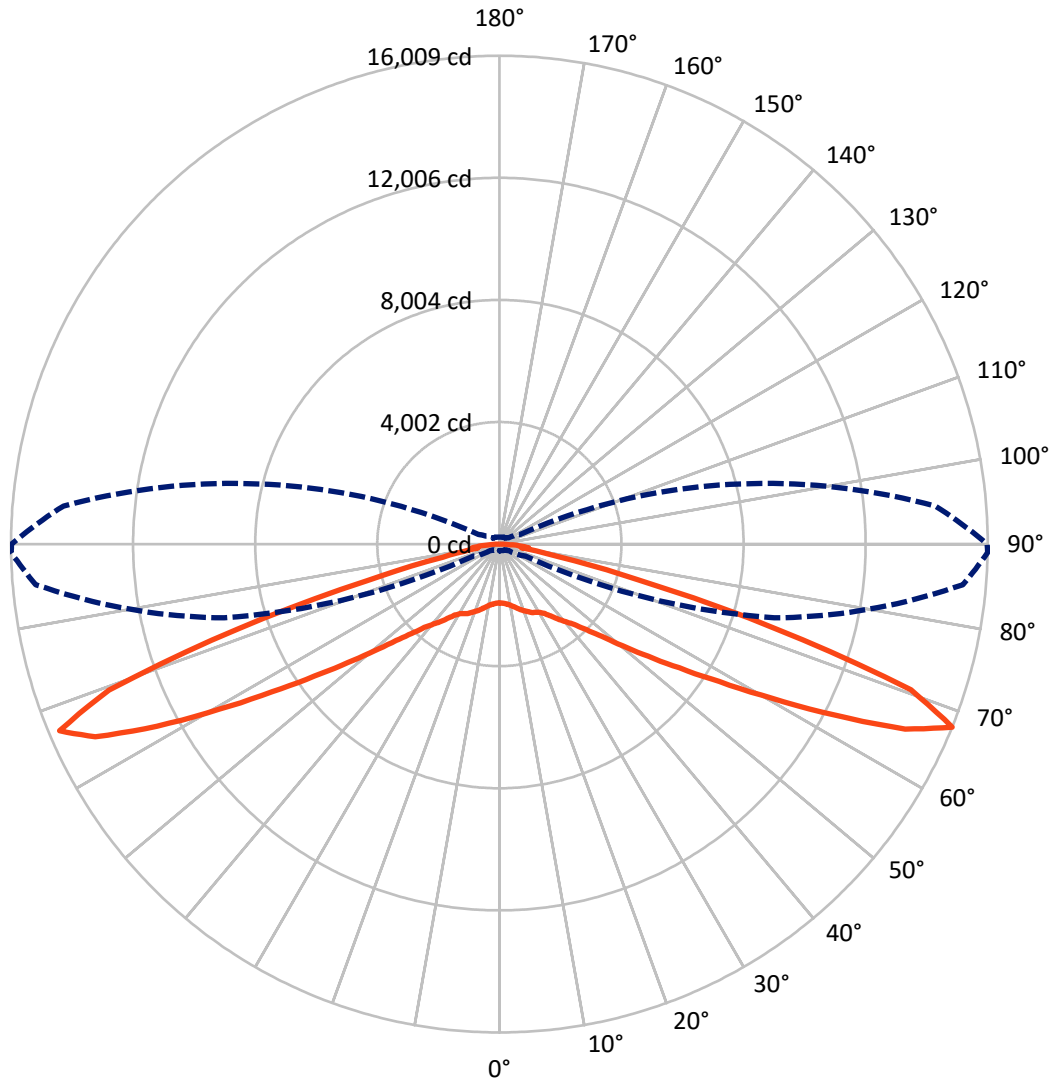

— Vertical Plane Through 89-Deg Lateral    - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P637002

CATALOG NUMBER: GWS-SA4B-830-U-T1-W

**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	5688.3	0.0	5688.3
	% Fixture	49.6	0.0	49.6
<b>Street Side</b>	Lumens	5788.9	0.0	5788.9
	% Fixture	50.4	0.0	50.4
<b>Total</b>	Lumens	11477.2	0.0	11477.2
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	193.2	1.7
10°-20°	629.2	5.5
20°-30°	1063.6	9.3
30°-40°	1459.7	12.7
40°-50°	1861.4	16.2
50°-60°	2335.4	20.3
60°-70°	2816.7	24.5
70°-80°	1019.0	8.9
80°-90°	99.1	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	11477.2	100.0
0°-180°	11477.2	100.0

**Coefficient of Utilization**



REPORT NUMBER: P637002


CATALOG NUMBER: GWS-SA4B-830-U-T1-W

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	929.6	8.1			
FM (30°-60°)	2808.7	24.5			
FH (60°-80°)	1998.3	17.4			G2/5000
FVH (80°-90°)	52.3	0.5			G1/100
BL (0°-30°)	956.4	8.3	B2/1000		
BM (30°-60°)	2847.7	24.8	B3/5000		
BH (60°-80°)	1837.3	16.0	B3/2500		G3/2500
BVH (80°-90°)	46.8	0.4			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B3-U0-G3**

Type I Medium

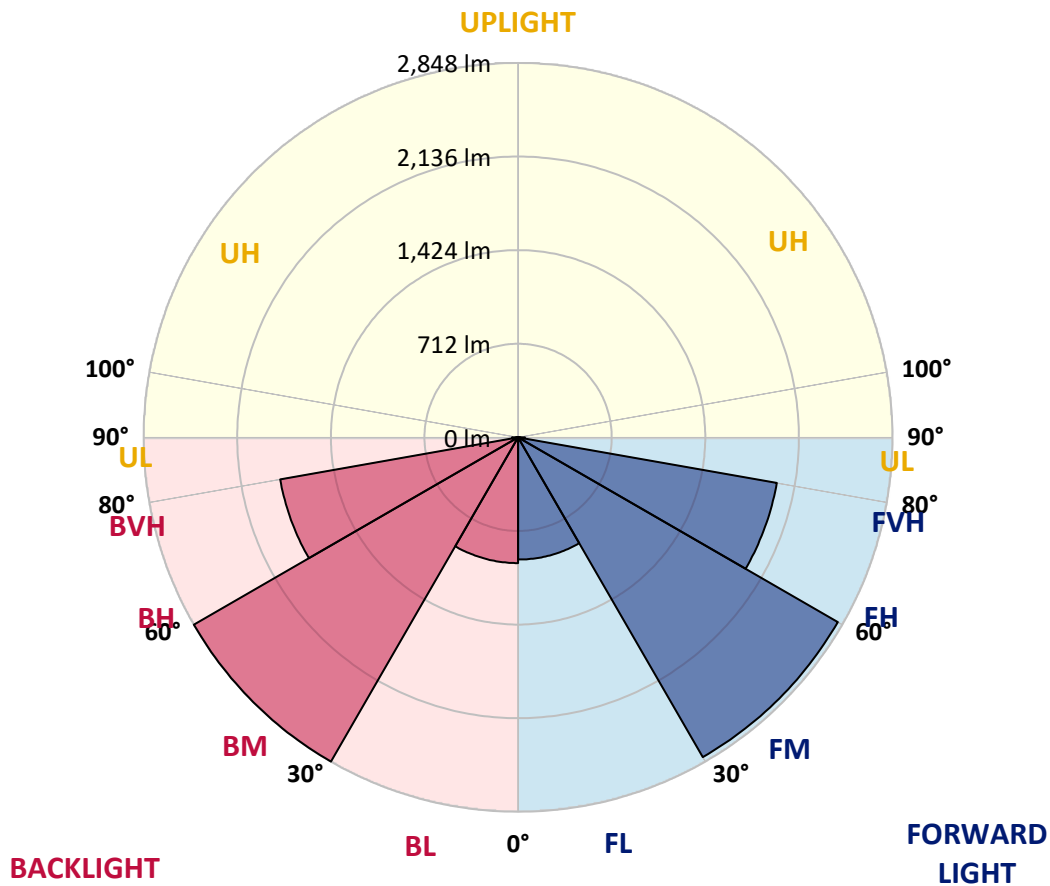



REPORT NUMBER: P637002  
 CATALOG NUMBER: GWS-SA4B-830-U-T1-W

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	89°
0°	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4
2.5°	1932.1	1930.5	1926.4	1938.7	1936.2	1937.1	1942.0	1938.7	1932.9	1923.1	1937.1
5°	1986.5	1985.7	1976.6	1984.1	1975.8	1970.0	1969.2	1961.0	1954.4	1943.7	1958.5
7.5°	2039.3	2038.5	2031.0	2044.2	2037.6	2031.0	2023.6	2007.1	1991.5	1975.8	1992.3
10°	2079.7	2078.8	2077.2	2096.2	2097.8	2100.3	2097.0	2069.0	2041.8	2022.8	2039.3
12.5°	2102.8	2105.2	2109.3	2144.0	2161.3	2177.8	2181.9	2158.8	2113.5	2086.3	2106.0
15°	2087.1	2092.0	2112.6	2175.3	2223.1	2260.2	2275.9	2256.9	2198.4	2153.0	2175.3
17.5°	2012.1	2016.2	2056.6	2152.2	2257.7	2343.4	2369.0	2357.5	2292.3	2237.1	2258.5
20°	1908.2	1917.3	1961.0	2094.5	2251.9	2401.1	2469.6	2465.4	2394.5	2309.6	2335.2
22.5°	1814.3	1825.0	1871.1	2018.7	2213.2	2416.0	2570.9	2581.7	2487.7	2382.2	2402.8
25°	1708.7	1718.6	1778.0	1928.8	2146.4	2404.4	2657.5	2706.1	2593.2	2465.4	2484.4
27.5°	1600.8	1608.2	1666.7	1827.4	2059.1	2383.0	2725.9	2843.0	2697.1	2523.1	2536.3
30°	1506.0	1515.9	1569.4	1726.1	1963.4	2340.1	2782.0	2988.9	2816.6	2588.3	2599.0
32.5°	1414.5	1422.7	1481.2	1626.3	1862.1	2274.2	2832.2	3160.3	2993.8	2709.4	2709.4
35°	1299.1	1313.9	1379.9	1530.7	1766.4	2186.8	2868.5	3359.8	3236.1	2888.3	2889.1
37.5°	1192.7	1201.0	1270.2	1422.7	1665.9	2087.9	2871.8	3566.7	3542.8	3115.8	3117.4
40°	1071.6	1082.3	1156.5	1307.3	1550.5	1984.1	2840.5	3759.6	3864.3	3349.9	3340.8
42.5°	948.8	964.4	1035.3	1182.8	1426.0	1857.1	2757.2	3943.4	4272.3	3621.1	3598.8
45°	830.1	839.9	910.8	1050.1	1283.4	1705.4	2623.7	4119.8	4757.0	4033.2	4001.1
47.5°	696.5	700.6	774.0	907.5	1135.9	1536.5	2432.5	4277.2	5289.4	4578.9	4523.7
50°	577.8	583.6	641.3	755.9	955.3	1336.2	2194.2	4369.5	5967.8	5323.2	5227.6
52.5°	467.4	473.1	519.3	610.8	789.7	1107.8	1899.2	4348.1	6656.1	6247.3	6108.0
55°	377.5	381.6	413.0	484.7	621.5	881.2	1550.5	4156.0	7420.2	7454.0	7154.0
57.5°	319.0	320.6	342.1	385.8	485.5	679.2	1196.9	3702.7	8221.4	8993.8	8500.9
60°	285.2	286.0	295.9	323.1	383.3	518.5	877.0	2980.6	9051.5	10920.1	10244.2
62.5°	263.8	263.8	272.0	287.7	318.2	399.0	644.6	2140.7	9647.4	13016.3	12344.5
65°	243.2	243.2	248.9	262.1	278.6	325.6	483.9	1380.7	9940.1	14768.7	14619.5
67.5°	216.8	217.6	221.7	235.7	250.6	272.0	366.8	933.9	9332.6	15253.4	16008.5
70°	192.1	192.9	198.7	207.7	220.1	234.9	286.9	643.8	6792.9	12703.9	14313.7
72.5°	164.9	168.2	172.3	182.2	189.6	200.3	234.1	417.1	3952.4	8172.0	9462.0
75°	135.2	139.3	144.2	154.1	159.1	163.2	192.9	297.6	1901.6	4141.2	4715.7
77.5°	104.7	108.8	114.6	123.6	126.9	131.9	147.5	215.1	910.8	1835.7	1979.1
80°	70.1	71.7	76.7	87.4	93.1	96.4	108.8	146.7	395.7	736.9	730.3
82.5°	42.9	43.7	45.3	51.9	54.4	57.7	70.9	89.8	188.8	837.5	960.3
85°	15.7	14.8	14.0	18.1	21.4	24.7	33.0	45.3	82.4	575.4	643.8
87.5°	0.0	0.0	0.0	0.8	1.6	1.6	3.3	6.6	19.8	215.1	147.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P637002  
 CATALOG NUMBER: GWS-SA4B-830-U-T1-W

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4	1926.4
2.5°	1932.9	1923.9	1935.4	1943.7	1961.8	1968.4	1970.0	1964.3	1964.3	1954.4	1956.0
5°	1955.2	1949.4	1968.4	1982.4	2008.8	2018.7	2025.3	2021.1	2023.6	2017.0	2018.7
7.5°	1989.0	1984.1	2017.0	2044.2	2071.4	2083.0	2088.7	2085.4	2086.3	2078.0	2080.5
10°	2036.0	2037.6	2077.2	2112.6	2148.9	2160.5	2162.9	2153.0	2144.8	2130.0	2130.8
12.5°	2100.3	2108.5	2164.6	2204.1	2241.2	2257.7	2239.6	2203.3	2169.5	2144.0	2140.7
15°	2170.3	2185.2	2266.0	2316.2	2356.6	2348.4	2294.8	2213.2	2146.4	2108.5	2101.1
17.5°	2254.4	2276.7	2378.1	2438.2	2472.9	2420.1	2308.0	2186.0	2092.9	2041.8	2031.9
20°	2333.6	2369.0	2496.8	2575.1	2579.2	2460.5	2302.2	2130.8	2013.7	1951.1	1937.9
22.5°	2406.1	2451.4	2621.2	2721.0	2667.4	2478.6	2266.8	2052.5	1918.1	1844.8	1833.2
25°	2485.2	2549.5	2766.3	2859.4	2755.6	2471.2	2192.6	1955.2	1802.7	1727.7	1719.5
27.5°	2539.6	2620.4	2912.2	3001.2	2828.1	2429.2	2097.0	1848.9	1697.2	1626.3	1614.8
30°	2602.3	2705.3	3072.9	3155.4	2872.6	2367.3	1994.8	1750.0	1599.1	1522.5	1514.2
32.5°	2716.0	2845.4	3272.4	3318.6	2886.6	2290.7	1896.7	1654.3	1496.9	1420.2	1408.7
35°	2899.0	3050.7	3552.7	3500.7	2875.9	2206.6	1803.5	1542.2	1392.2	1320.5	1309.0
37.5°	3129.8	3318.6	3865.1	3664.8	2846.3	2114.3	1693.1	1448.3	1298.2	1225.7	1219.1
40°	3345.0	3577.4	4215.4	3806.6	2786.1	2000.5	1586.7	1350.2	1196.9	1120.2	1105.4
42.5°	3614.5	3923.6	4620.9	3929.4	2687.2	1864.5	1467.2	1229.0	1069.9	1000.7	982.5
45°	4024.2	4408.3	5092.4	4047.2	2539.6	1697.2	1317.2	1081.5	930.6	859.7	845.7
47.5°	4535.2	5014.1	5603.5	4117.3	2315.4	1520.8	1147.4	925.7	774.8	694.9	688.3
50°	5253.2	5895.3	6151.6	4104.9	2064.8	1311.4	956.2	740.2	614.1	556.4	547.3
52.5°	6127.7	7001.5	6744.3	3956.6	1798.6	1073.2	745.2	581.1	487.2	445.9	438.5
55°	7224.9	8326.1	7368.3	3638.4	1462.3	821.8	585.2	458.3	394.0	369.3	366.0
57.5°	8583.3	10041.4	7969.2	3102.6	1099.6	627.3	450.9	378.3	347.8	333.0	332.2
60°	10376.1	11862.3	8491.0	2411.0	787.2	479.7	372.6	338.0	314.1	304.2	303.3
62.5°	12507.7	13515.8	8815.7	1642.0	591.8	382.5	328.1	306.6	292.6	286.9	286.0
65°	14698.7	14561.0	8660.8	1075.7	449.2	324.8	294.3	282.7	270.4	264.6	264.6
67.5°	15992.8	14340.1	7471.3	746.8	356.1	285.2	265.4	254.7	234.1	229.2	229.2
70°	14165.3	11620.0	4897.1	546.5	288.5	249.8	230.8	216.0	207.7	202.8	201.9
72.5°	9368.8	7561.2	2603.9	379.2	240.7	212.7	195.4	189.6	179.7	174.7	173.9
75°	4663.0	3971.4	1334.5	273.7	200.3	170.6	163.2	160.7	152.5	145.9	144.2
77.5°	1943.7	1768.1	622.3	198.7	152.5	137.7	131.1	131.1	122.0	114.6	111.3
80°	732.8	652.8	294.3	136.0	112.9	102.2	98.1	94.8	87.4	78.3	73.4
82.5°	980.1	640.5	144.2	84.9	74.2	65.9	60.2	57.7	53.6	49.5	46.2
85°	634.7	455.0	65.1	43.7	37.1	28.0	24.7	23.1	20.6	18.1	16.5
87.5°	129.4	152.5	19.8	8.2	4.9	2.5	2.5	0.8	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)