

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P630081

Luminaire Tested: GWS-SA1C-830-U-T3-W-GRSBK

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P630081
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-24)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA1C-830-U-T3-W-GRSBK
Description: GALLEON WALL SLIM LUMINAIRE. (1) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE III OPTICS W/ FACTORY INSTALLED GLARE SHIELD, BK
Light Source: (16) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2357.8 lumens
Efficiency: N/A
Efficacy: 69.1 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type II - Short
BUG Rating: B1 - U0 - G0


Input Watts (W): 34.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P630081
 CATALOG NUMBER: GWS-SA1C-830-U-T3-W-GRSBK

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

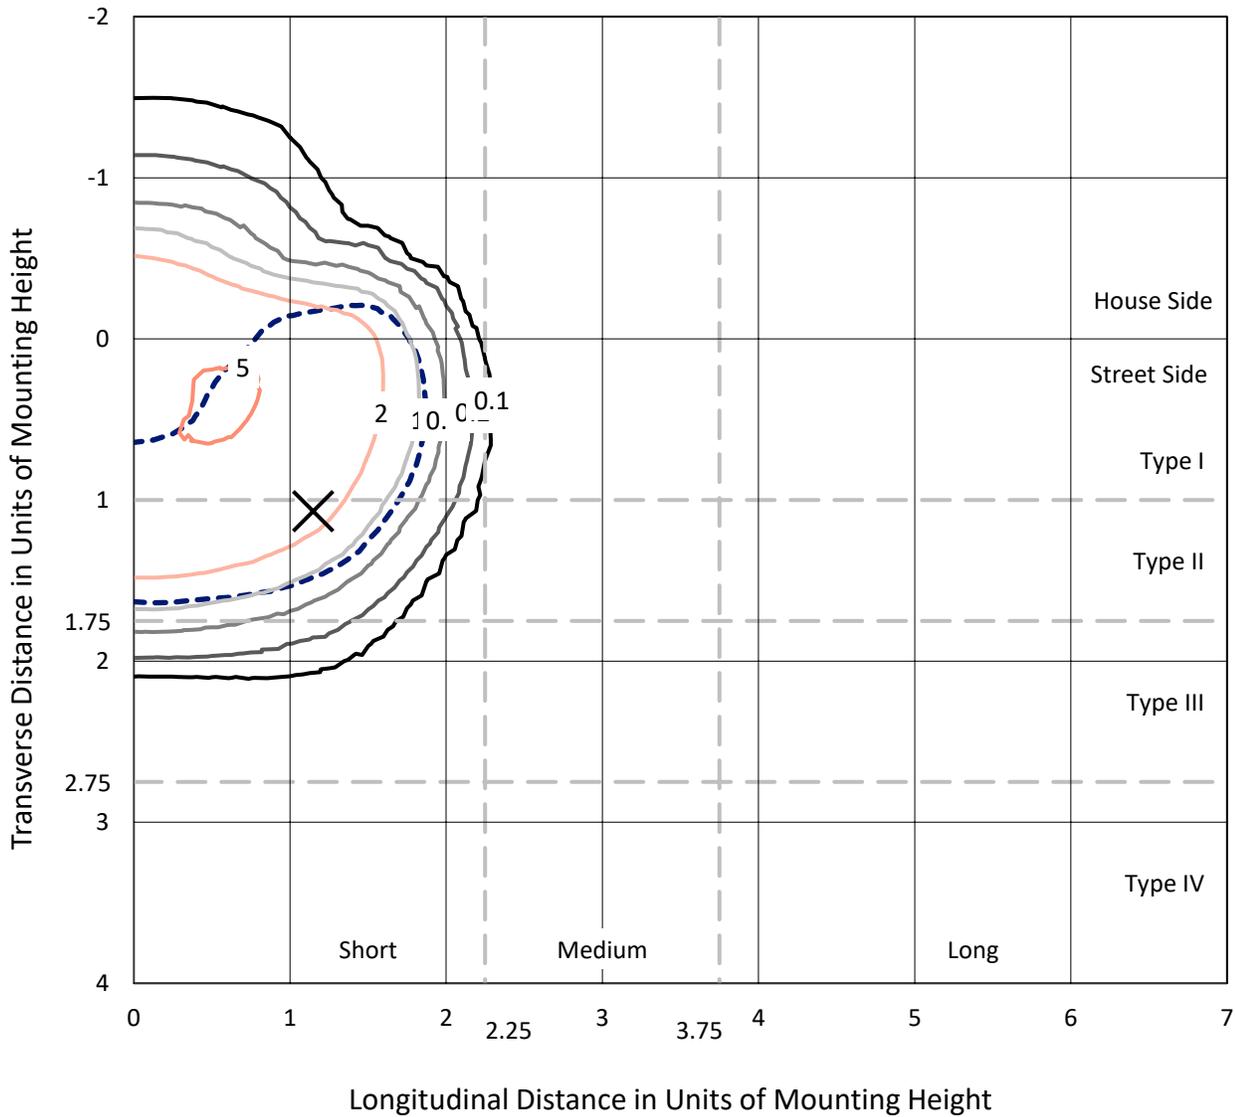

Based on 10 foot mounting height. Maximum calculated value = 5.6 fc
 Type II - Short - N/A

REPORT NUMBER: P630081
CATALOG NUMBER: GWS-SA1C-830-U-T3-W-GRSBK

Luminous Intensity Polar Plot

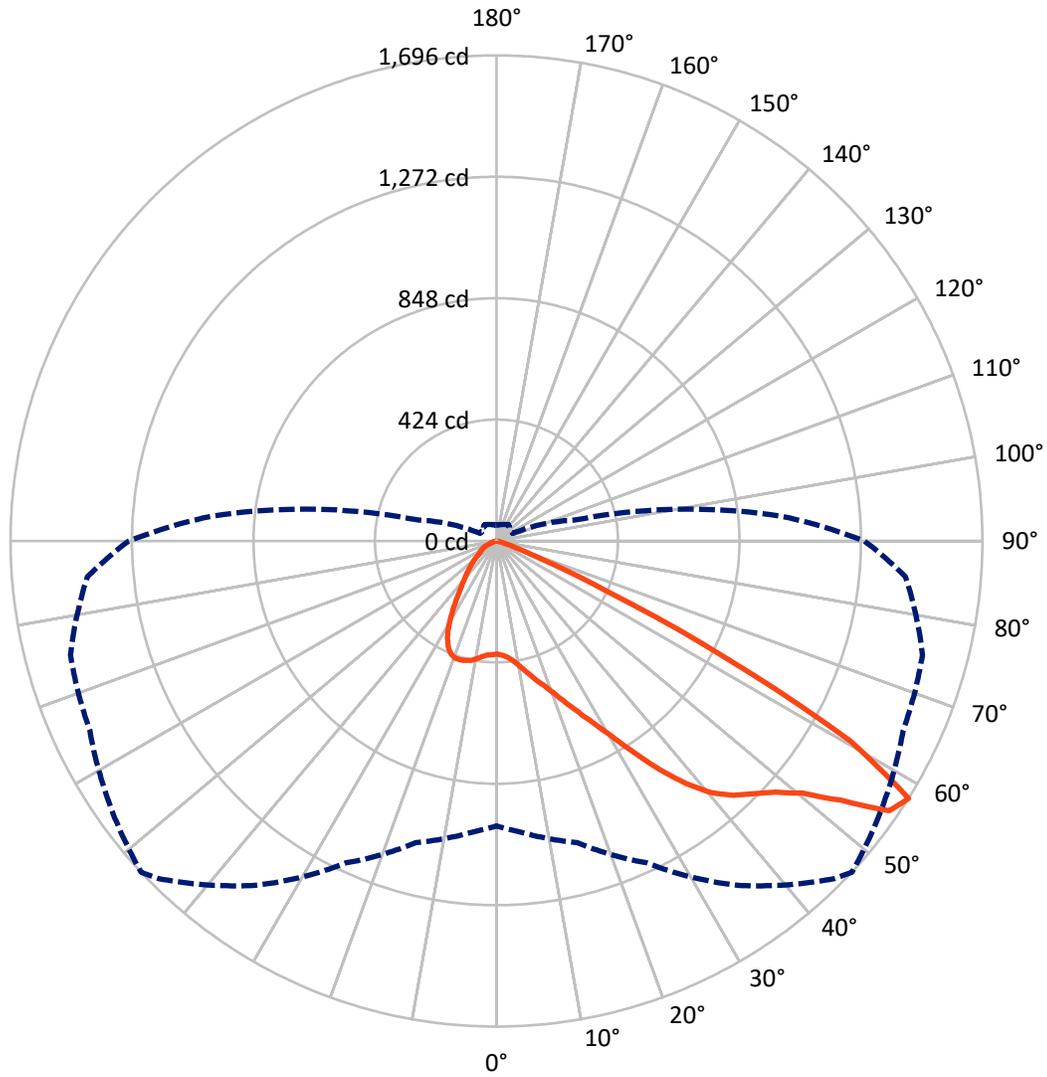

— Vertical Plane Through 47-Deg Lateral - - - Horizontal Cone Through 57.5-Deg Vertical



REPORT NUMBER: P630081
 CATALOG NUMBER: GWS-SA1C-830-U-T3-W-GRSBK


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	511.5	0.0	511.5
	% Fixture	21.7	0.0	21.7
Street Side	Lumens	1846.3	0.0	1846.3
	% Fixture	78.3	0.0	78.3
Total	Lumens	2357.8	0.0	2357.8
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.3	1.7
10°-20°	132.5	5.6
20°-30°	246.0	10.4
30°-40°	393.8	16.7
40°-50°	575.7	24.4
50°-60°	710.5	30.1
60°-70°	237.4	10.1
70°-80°	22.1	0.9
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	2357.8	100.0
0°-180°	2357.8	100.0

Coefficient of Utilization

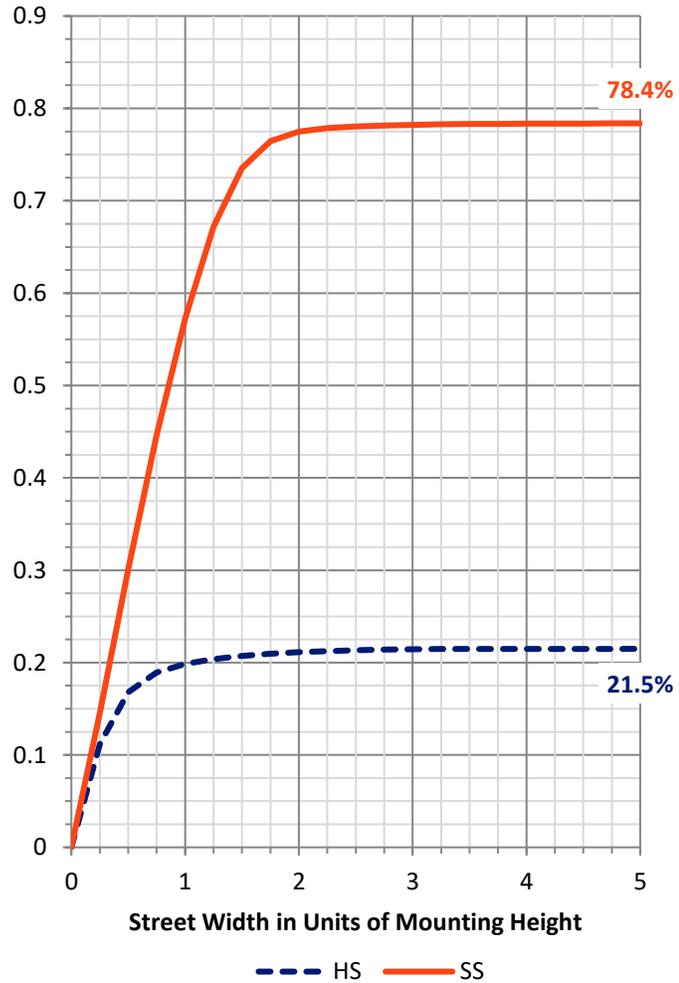


REPORT NUMBER: P630081

CATALOG NUMBER: GWS-SA1C-830-U-T3-W-GRSBK

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	243.7	10.3			
FM (30°-60°)	1381.7	58.6			
FH (60°-80°)	220.6	9.4			G0/660
FVH (80°-90°)	0.3	0.0			G0/10
BL (0°-30°)	174.1	7.4	B1/500		
BM (30°-60°)	298.4	12.7	B1/1000		
BH (60°-80°)	38.9	1.6	B0/110		G0/110
BVH (80°-90°)	0.1	0.0			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G0
 Type II Short

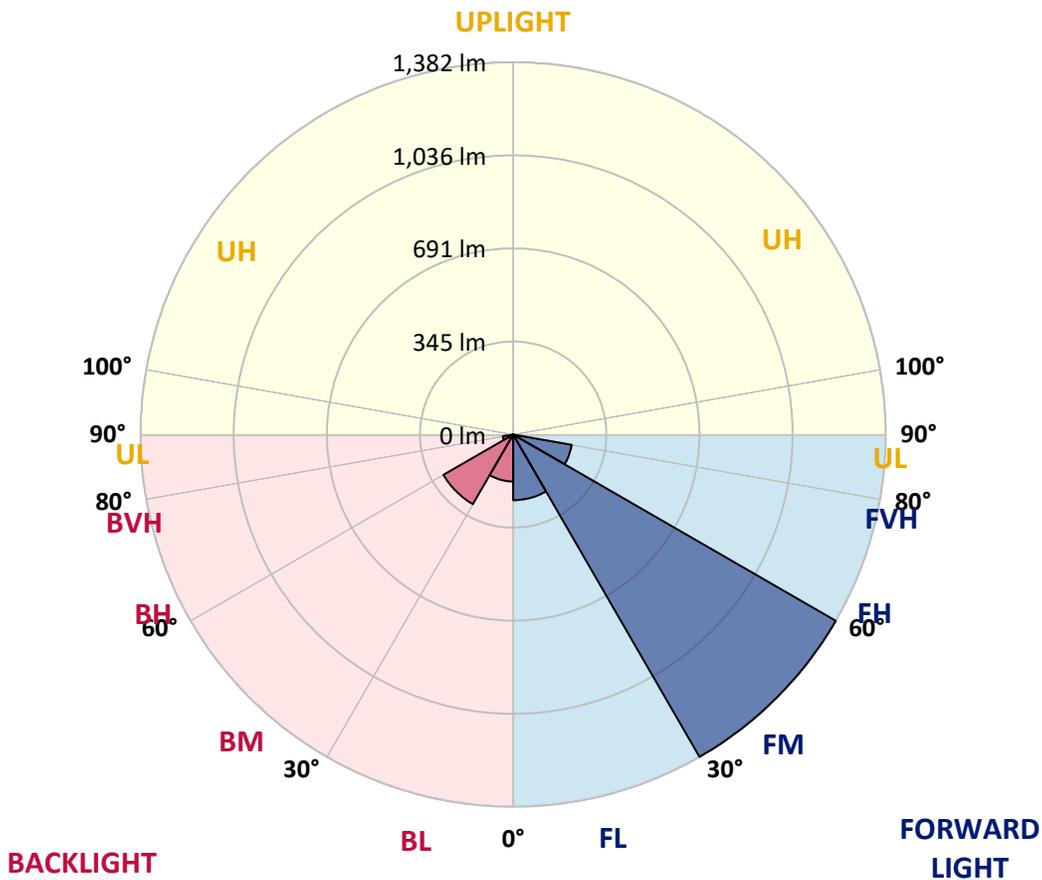



REPORT NUMBER: P630081

CATALOG NUMBER: GWS-SA1C-830-U-T3-W-GRSBK

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	47°	55°	65°	75°	85°
0°	394.7	394.7	394.7	394.7	394.7	394.7	394.7	394.7	394.7	394.7	394.7
2.5°	398.8	398.5	398.3	399.9	399.4	399.1	399.6	399.6	399.6	398.0	394.7
5°	408.4	408.4	408.1	409.8	408.4	407.6	407.8	407.8	406.7	403.7	399.6
7.5°	423.4	422.9	422.3	424.0	422.6	422.3	422.9	421.2	419.3	414.4	408.7
10°	445.1	445.1	444.2	445.9	444.8	444.2	444.2	443.1	439.6	431.9	423.4
12.5°	474.9	473.5	471.6	470.2	469.7	469.4	469.7	468.1	464.2	454.4	442.6
15°	507.5	506.4	503.4	501.2	498.2	497.6	499.3	497.9	494.1	480.6	463.9
17.5°	548.5	549.9	542.2	537.6	528.8	528.3	528.8	531.0	528.3	511.0	486.7
20°	583.6	584.7	578.9	575.6	567.7	564.1	565.2	568.8	565.8	545.5	511.6
22.5°	621.1	622.4	616.4	609.6	606.0	606.0	610.1	615.0	610.9	584.4	540.0
25°	666.0	667.0	662.1	653.1	646.8	654.7	660.8	673.9	667.0	630.9	573.7
27.5°	717.4	717.7	710.6	701.3	698.0	712.8	718.8	739.0	736.3	683.2	609.3
30°	772.4	772.7	771.1	764.8	761.8	781.2	789.4	818.7	816.8	748.1	657.7
32.5°	829.6	829.6	832.6	832.1	835.7	867.4	880.5	913.9	912.0	827.4	718.0
35°	887.1	887.4	892.6	905.7	920.5	962.7	979.9	1020.4	1016.0	922.4	794.9
37.5°	952.5	949.8	956.9	976.6	1009.5	1058.2	1074.6	1113.2	1108.3	1019.6	895.3
40°	1031.4	1026.4	1026.4	1049.4	1086.7	1142.8	1156.7	1175.9	1159.2	1098.1	993.9
42.5°	1118.4	1113.7	1107.7	1128.0	1159.2	1203.0	1214.5	1209.3	1195.6	1172.3	1106.1
45°	1206.5	1199.4	1203.5	1215.8	1233.9	1254.7	1259.1	1235.0	1228.7	1235.3	1198.9
47.5°	1273.6	1268.7	1278.8	1296.0	1310.8	1313.8	1310.8	1277.4	1276.9	1300.2	1263.2
50°	1296.0	1296.6	1324.5	1362.3	1386.1	1388.6	1384.5	1346.1	1340.9	1347.8	1298.0
52.5°	1298.2	1300.4	1341.2	1413.2	1478.1	1507.6	1504.3	1463.0	1412.1	1404.7	1350.5
55°	1245.4	1258.3	1315.2	1420.3	1558.3	1652.7	1663.6	1584.5	1509.0	1502.7	1463.6
57.5°	995.5	1021.8	1090.5	1240.2	1468.8	1667.8	1696.2	1639.3	1566.2	1539.4	1433.2
60°	595.1	627.6	693.6	877.3	1117.9	1370.8	1419.8	1427.7	1394.0	1316.6	1099.5
62.5°	255.4	252.6	333.9	474.6	664.9	871.2	893.4	927.9	957.2	876.2	667.3
65°	87.6	95.3	132.5	214.0	332.8	404.6	424.3	455.2	496.8	410.0	244.4
67.5°	54.2	57.5	76.4	126.5	179.6	176.8	168.1	163.1	158.8	108.7	67.1
70°	39.4	42.2	53.6	87.0	120.7	84.9	73.6	59.7	66.2	61.0	47.6
72.5°	26.6	28.7	37.0	52.8	61.9	41.3	38.3	43.5	52.6	50.1	38.9
75°	15.9	17.2	21.1	25.7	25.2	21.3	21.6	30.7	40.2	37.5	27.6
77.5°	10.9	11.5	14.0	16.7	12.3	6.6	6.0	8.5	13.7	13.7	9.3
80°	2.7	3.6	3.6	2.2	1.9	1.6	1.6	2.5	3.8	2.7	1.4
82.5°	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.5	0.5	0.5	0.5
85°	0.0	0.0	0.3	0.3	0.3	0.3	0.3	0.3	0.5	0.5	0.5
87.5°	0.0	0.0	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.5	0.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P630081
 CATALOG NUMBER: GWS-SA1C-830-U-T3-W-GRSBK

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	394.7	394.7	394.7	394.7	394.7	394.7	394.7	394.7	394.7	394.7	394.7
2.5°	396.6	393.3	395.5	395.0	396.6	397.2	394.7	394.2	394.4	391.1	390.0
5°	400.4	396.6	397.7	396.6	398.5	400.2	399.4	400.4	401.8	399.4	398.3
7.5°	408.7	404.8	404.6	402.9	405.6	406.7	406.5	409.5	412.2	410.6	408.9
10°	422.9	417.7	417.1	415.8	416.6	417.4	414.4	415.0	417.4	415.5	414.7
12.5°	440.4	434.1	432.7	429.5	429.5	425.4	418.8	417.4	419.3	418.0	416.6
15°	459.3	450.8	448.6	442.9	437.4	429.7	422.9	421.2	422.6	421.0	419.9
17.5°	480.4	470.8	463.7	453.5	441.5	432.5	424.8	421.2	419.1	415.8	415.5
20°	501.2	488.6	476.5	460.4	444.5	430.8	418.2	408.9	401.0	396.1	394.2
22.5°	525.3	506.6	487.2	464.5	441.8	421.0	398.8	382.9	369.2	364.6	362.4
25°	551.0	526.9	497.9	468.3	432.5	399.1	369.0	345.4	327.4	321.3	318.9
27.5°	579.5	546.3	508.8	467.5	413.3	367.9	327.9	298.6	280.8	275.4	277.3
30°	615.6	571.5	522.5	459.0	384.6	324.1	277.3	252.6	239.2	234.0	234.3
32.5°	663.8	607.6	542.5	441.0	347.6	274.3	233.2	215.1	206.1	199.3	198.7
35°	732.7	662.7	561.1	411.9	302.7	229.9	200.1	185.9	173.3	165.3	166.7
37.5°	815.4	731.9	571.2	372.8	252.4	195.4	175.2	160.7	146.4	134.7	136.0
40°	913.4	822.5	570.4	321.3	206.4	171.9	154.4	137.4	119.6	108.9	110.0
42.5°	1022.6	908.2	552.6	266.9	171.1	152.7	134.4	113.0	95.8	89.2	89.5
45°	1117.3	977.7	521.4	210.5	144.0	134.1	113.6	91.7	84.0	79.4	79.1
47.5°	1187.4	1028.6	476.8	165.6	122.1	117.2	93.3	82.1	76.1	72.3	71.7
50°	1226.5	1046.4	427.5	129.7	103.2	99.4	83.5	74.5	70.3	67.9	67.3
52.5°	1279.1	1067.8	392.2	102.4	86.5	81.3	76.9	69.3	66.5	64.6	63.8
55°	1362.3	1109.1	361.6	81.3	72.0	70.9	72.5	66.2	64.6	61.6	60.5
57.5°	1284.0	996.3	280.8	63.0	60.8	64.9	70.1	63.2	59.1	56.4	55.3
60°	903.5	662.4	141.2	50.6	54.2	60.8	66.0	57.2	53.1	53.6	53.1
62.5°	498.2	331.5	63.5	42.4	47.1	53.6	56.4	49.5	46.8	51.5	52.3
65°	162.9	112.8	36.7	32.8	37.2	43.8	48.7	47.1	46.5	52.0	53.6
67.5°	50.1	37.2	24.9	23.5	25.7	32.3	41.1	50.9	54.7	56.4	57.2
70°	37.5	29.3	21.3	20.0	21.1	24.6	34.8	42.4	40.0	40.2	39.7
72.5°	30.1	23.3	18.3	17.5	17.5	17.0	18.3	23.0	26.0	27.4	27.4
75°	21.1	16.4	14.0	12.9	10.1	8.2	7.4	7.4	6.6	6.3	6.0
77.5°	7.1	6.0	5.5	4.4	3.0	2.5	2.2	1.9	1.4	0.8	0.5
80°	1.1	0.8	0.5	0.5	0.5	0.3	0.3	0.3	0.0	0.0	0.0
82.5°	0.5	0.5	0.5	0.5	0.5	0.3	0.3	0.0	0.0	0.0	0.0
85°	0.5	0.5	0.5	0.5	0.5	0.3	0.3	0.0	0.0	0.0	0.0
87.5°	0.5	0.5	0.5	0.5	0.3	0.3	0.3	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)