

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P632546

Luminaire Tested: GWS-SA2C-830-U-SLR-W

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P632546
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-41)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA2C-830-U-SLR-W
Description: GALLEON WALL SLIM LUMINAIRE. (2) LIGHTSQUARES WITH 16 LEDS EACH AND
SPILL LIGHT ELIMINATOR RIGHT OPTICS
Light Source: (32) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6961.5 lumens
Efficiency: N/A
Efficacy: 110.2 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')
IES Classification: Type III - Short
BUG Rating: B1 - U0 - G2


Input Watts (W): 63.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P632546
 CATALOG NUMBER: GWS-SA2C-830-U-SLR-W

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

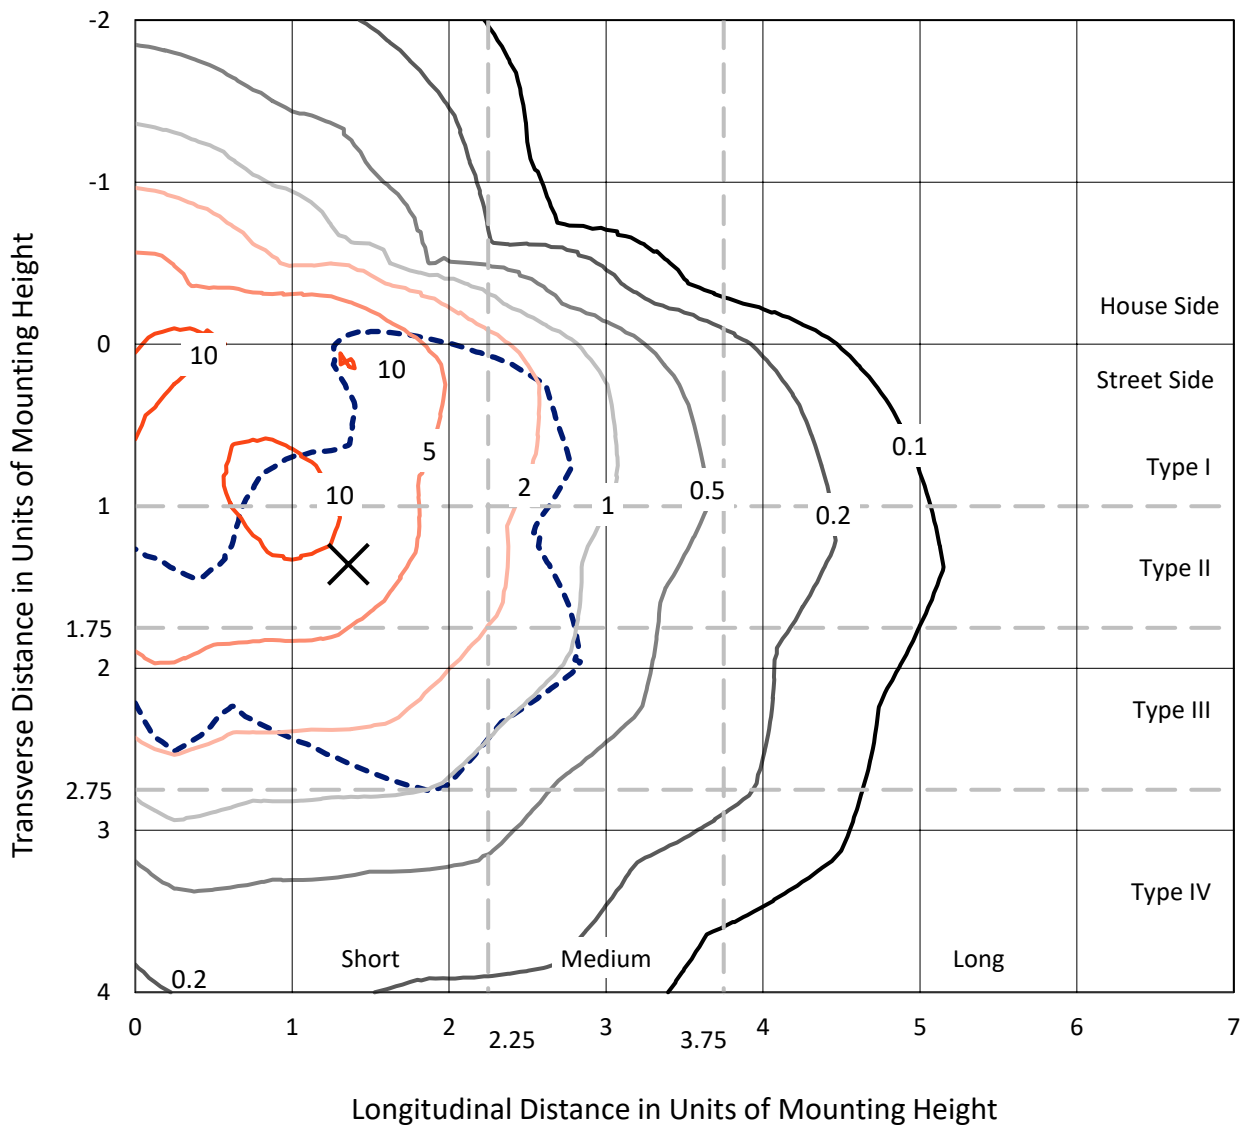

Based on 10 foot mounting height. Maximum calculated value = 13.2 fc
 Type III - Short - N/A

REPORT NUMBER: P632546
CATALOG NUMBER: GWS-SA2C-830-U-SLR-W

Luminous Intensity Polar Plot

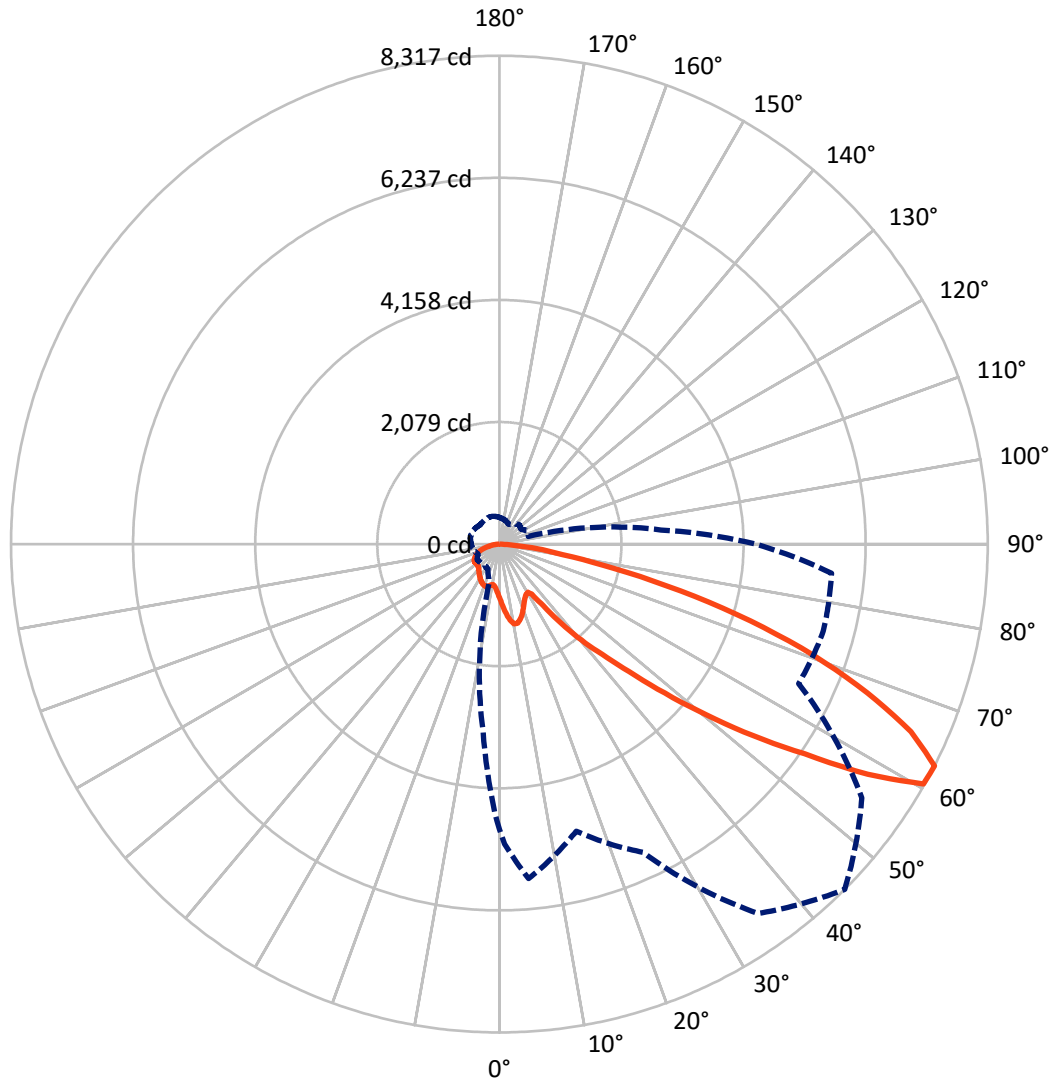

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 62.5-Deg Vertical

REPORT NUMBER: P632546

CATALOG NUMBER: GWS-SA2C-830-U-SLR-W

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1661.1	0.0	1661.1
	% Fixture	23.9	0.0	23.9
Street Side	Lumens	5300.4	0.0	5300.4
	% Fixture	76.1	0.0	76.1
Total	Lumens	6961.5	0.0	6961.5
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	90.2	1.3
10°-20°	282.9	4.1
20°-30°	439.4	6.3
30°-40°	596.5	8.6
40°-50°	945.5	13.6
50°-60°	1667.8	24.0
60°-70°	1855.7	26.7
70°-80°	941.1	13.5
80°-90°	142.5	2.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	6961.5	100.0
0°-180°	6961.5	100.0

Coefficient of Utilization



REPORT NUMBER: P632546


CATALOG NUMBER: GWS-SA2C-830-U-SLR-W

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	454.5	6.5			
FM (30°-60°)	2363.7	34.0			
FH (60°-80°)	2373.9	34.1			G2/5000
FVH (80°-90°)	108.2	1.6			G2/225
BL (0°-30°)	357.9	5.1	B1/500		
BM (30°-60°)	846.0	12.2	B1/1000		
BH (60°-80°)	422.8	6.1	B1/500		G1/500
BVH (80°-90°)	34.3	0.5			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G2

Type III Short

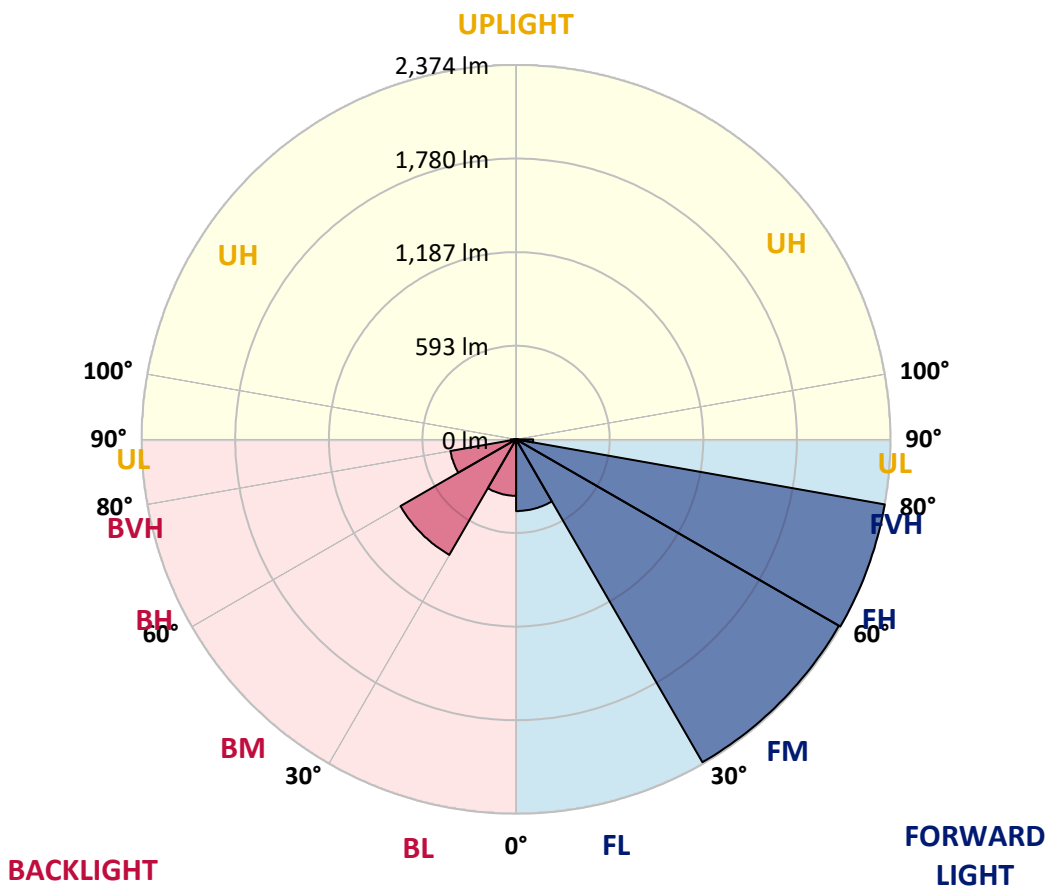



REPORT NUMBER: P632546
 CATALOG NUMBER: GWS-SA2C-830-U-SLR-W

CANDELA DISTRIBUTION (FULL):

	0°	1°	5°	15°	25°	35°	45°	55°	65°	75°	85°
0°	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9
2.5°	993.0	992.5	1002.5	1017.7	1032.0	1038.3	1048.8	1047.8	1039.4	1028.3	1024.6
5°	1071.0	1073.1	1090.5	1124.2	1161.6	1177.4	1184.3	1181.7	1166.4	1146.9	1112.6
7.5°	1141.6	1145.3	1172.2	1222.8	1269.2	1290.2	1307.1	1303.9	1281.8	1245.4	1194.8
10°	1193.3	1197.5	1229.6	1289.2	1340.8	1359.3	1380.9	1381.9	1362.4	1313.4	1261.8
12.5°	1244.9	1249.1	1279.2	1333.5	1367.2	1367.7	1380.4	1387.2	1388.3	1365.6	1314.0
15°	1298.7	1302.4	1329.8	1360.3	1358.8	1329.2	1329.2	1342.4	1371.4	1387.7	1351.9
17.5°	1344.5	1349.3	1370.4	1360.3	1313.4	1260.2	1253.9	1270.7	1321.3	1384.1	1380.4
20°	1382.5	1386.2	1397.8	1331.3	1246.0	1176.4	1164.3	1183.8	1252.3	1361.4	1402.0
22.5°	1418.8	1420.9	1414.6	1293.4	1173.2	1093.6	1078.9	1099.4	1173.2	1321.3	1420.4
25°	1462.1	1460.0	1429.9	1253.9	1106.8	1028.3	1013.0	1036.2	1113.1	1268.1	1440.5
27.5°	1512.1	1504.2	1443.1	1211.2	1055.7	979.8	969.3	994.0	1065.7	1219.1	1456.3
30°	1554.8	1539.5	1445.2	1173.2	1029.3	959.2	952.9	976.1	1042.5	1185.9	1476.3
32.5°	1602.3	1581.2	1457.3	1163.2	1044.1	1008.8	1017.2	1018.8	1048.8	1176.4	1506.3
35°	1670.2	1642.8	1490.5	1192.2	1195.9	1255.5	1286.0	1244.9	1144.2	1197.5	1563.3
37.5°	1773.0	1738.2	1558.0	1317.6	1509.5	1642.8	1716.6	1622.8	1434.1	1277.1	1649.2
40°	1897.9	1853.7	1644.4	1549.6	1802.5	2016.0	2147.2	2009.7	1732.4	1475.8	1769.9
42.5°	2072.4	2026.0	1812.0	1777.2	2074.0	2391.8	2563.1	2358.1	1995.4	1732.4	1963.3
45°	2376.5	2331.7	2119.3	2005.5	2391.8	2854.5	3094.9	2809.7	2262.7	1990.2	2324.9
47.5°	2938.4	2885.6	2575.7	2258.4	2754.4	3455.4	3791.7	3376.3	2540.4	2285.3	2932.0
50°	3613.0	3562.4	3148.6	2557.8	3155.0	4097.9	4565.4	4042.0	2860.3	2644.3	3657.8
52.5°	4424.7	4415.2	3966.1	2936.2	3571.9	4783.1	5424.0	4779.4	3210.8	3127.6	4480.0
55°	5156.2	5249.0	5004.4	3513.4	4110.5	5643.7	6306.8	5583.7	3686.2	3926.6	5442.9
57.5°	5550.5	5799.7	6175.5	4690.8	4893.7	6672.6	7396.2	6565.6	4503.2	5256.9	6335.8
60°	5290.1	5572.6	6253.5	5577.3	5670.6	7496.9	8295.4	7390.9	5305.4	6180.3	6285.2
62.5°	4856.8	5110.4	5715.9	5059.8	5790.8	7678.2	8316.5	7534.8	5624.2	5711.7	5677.5
65°	4343.0	4598.6	5240.0	4416.7	5408.7	7247.6	7703.0	7111.6	5051.3	5160.4	5173.1
67.5°	3660.4	3896.5	4549.6	3927.1	4930.1	6615.6	6761.1	6508.6	4651.8	4825.7	4643.9
70°	2734.9	2947.8	3524.4	3191.3	4155.9	5792.4	5674.8	5712.3	4203.3	4376.2	3879.1
72.5°	1868.9	2029.2	2523.6	2507.7	3182.4	4637.1	4473.1	4827.9	3510.7	3740.0	2957.3
75°	1307.1	1432.0	1824.1	1981.2	2405.5	3436.9	3185.5	3613.5	2741.8	3069.1	2157.8
77.5°	802.2	884.9	1152.1	1467.9	1547.4	2352.3	1978.6	2719.1	1925.3	2238.4	1439.4
80°	401.1	441.1	559.7	922.9	1026.2	1386.2	1092.6	1578.5	1302.9	1386.2	796.4
82.5°	121.2	133.9	163.9	350.5	531.8	798.0	645.6	917.1	711.5	649.9	313.6
85°	32.2	36.4	45.3	103.8	186.6	286.2	218.2	444.3	341.0	239.8	118.1
87.5°	2.6	2.6	2.1	2.1	1.1	0.0	0.0	31.6	63.8	36.4	20.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P632546
 CATALOG NUMBER: GWS-SA2C-830-U-SLR-W

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9
2.5°	1006.2	1004.0	982.4	966.6	948.2	930.3	911.8	895.5	877.0	858.6	853.3
5°	1087.3	1072.6	1026.7	988.2	950.3	917.1	888.1	858.1	833.8	810.1	801.1
7.5°	1159.0	1133.2	1066.8	1008.3	955.6	914.4	871.8	828.0	793.7	760.0	751.6
10°	1223.8	1189.6	1105.8	1032.0	973.5	926.6	876.5	818.0	768.5	727.3	716.3
12.5°	1271.8	1234.4	1139.5	1054.6	988.2	935.5	886.0	834.3	782.2	728.9	716.8
15°	1309.7	1270.7	1167.4	1072.0	988.8	920.8	872.8	854.9	838.5	786.4	764.2
17.5°	1340.3	1299.2	1191.7	1082.6	974.5	876.0	834.3	860.7	902.3	869.6	828.0
20°	1368.2	1326.6	1210.1	1090.0	942.9	814.3	791.1	847.0	909.7	908.6	871.2
22.5°	1398.8	1358.2	1237.0	1094.2	898.6	751.6	765.3	827.0	878.1	893.4	870.2
25°	1437.8	1402.0	1274.4	1103.7	848.6	708.4	746.3	801.1	843.8	847.5	833.8
27.5°	1483.1	1456.3	1330.3	1125.8	800.1	686.2	724.2	764.8	803.8	805.3	789.0
30°	1532.7	1514.8	1381.9	1144.2	763.7	679.4	695.7	728.4	753.2	757.4	743.2
32.5°	1595.9	1580.1	1427.8	1132.1	742.1	677.8	669.4	686.2	706.8	706.8	695.7
35°	1682.9	1660.8	1476.3	1085.7	715.7	671.5	641.4	646.2	655.1	656.7	650.4
37.5°	1806.2	1769.9	1525.3	994.0	672.5	648.8	609.3	603.5	606.6	610.9	609.3
40°	1959.1	1899.5	1597.0	883.9	620.9	605.1	576.1	565.0	562.4	570.8	574.0
42.5°	2151.5	2060.3	1673.9	781.1	574.0	555.0	537.1	527.6	523.4	537.6	546.0
45°	2458.7	2308.5	1747.7	679.4	547.6	512.3	500.2	493.3	495.4	512.3	522.8
47.5°	2989.5	2687.5	1817.8	615.1	545.5	481.7	467.0	468.6	474.4	492.3	504.9
50°	3660.9	3195.0	1864.7	588.2	551.8	463.3	443.8	452.2	461.2	478.6	493.3
52.5°	4344.5	3667.8	1808.9	573.4	551.3	463.8	422.2	447.5	451.7	469.1	484.9
55°	4814.7	3720.5	1562.7	550.8	542.9	484.9	405.3	445.4	448.0	463.8	478.0
57.5°	4993.9	3540.3	1191.7	557.1	517.6	501.2	397.9	430.6	449.6	463.3	478.0
60°	4777.3	3200.3	724.2	573.4	477.0	500.2	402.7	403.7	436.4	459.6	474.4
62.5°	4368.8	2763.9	508.6	527.1	447.5	472.2	413.7	372.1	413.2	441.1	454.3
65°	3900.8	2250.5	387.9	453.8	433.2	429.0	417.4	344.2	381.6	409.0	420.6
67.5°	3413.2	1749.3	315.2	338.4	391.6	387.9	381.6	319.4	344.2	363.7	376.8
70°	2799.2	1223.8	266.2	254.0	335.7	347.9	333.6	288.3	296.2	316.2	326.8
72.5°	2047.6	762.7	218.7	209.8	269.9	304.1	296.7	254.0	257.7	276.7	285.1
75°	1472.6	436.4	175.5	172.9	206.1	260.4	245.6	218.7	222.9	237.2	243.0
77.5°	936.1	243.0	135.5	139.1	147.6	194.5	209.8	187.1	187.1	195.5	200.3
80°	501.2	139.1	99.1	100.7	103.3	148.6	165.5	144.9	144.9	139.1	144.9
82.5°	204.5	80.1	68.0	63.2	69.0	101.7	116.0	92.2	96.5	87.0	89.1
85°	67.5	40.1	33.7	33.2	32.7	44.8	55.9	45.9	54.8	34.8	36.4
87.5°	9.0	7.4	4.2	3.2	3.7	1.6	3.2	3.7	3.7	2.6	2.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P632546
 CATALOG NUMBER: GWS-SA2C-830-U-SLR-W

CANDELA DISTRIBUTION (continued):

	185°	195°	205°	215°	225°	235°	245°	255°	265°	270°	275°
0°	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9
2.5°	849.6	845.4	830.1	833.8	831.2	827.0	831.2	823.3	829.6	831.7	844.9
5°	794.3	784.3	769.5	762.1	760.5	756.3	756.9	753.2	754.2	763.2	777.9
7.5°	744.7	735.2	723.7	718.4	713.6	708.9	708.4	707.8	712.1	720.0	734.2
10°	708.9	703.6	698.9	701.0	698.9	696.8	693.1	693.1	699.9	714.2	731.6
12.5°	708.9	707.8	708.9	715.2	714.7	715.2	710.5	713.1	732.1	756.3	781.1
15°	746.8	738.4	738.4	741.6	740.5	740.5	740.5	751.6	794.8	832.2	858.6
17.5°	793.2	768.5	757.9	756.3	755.8	755.8	757.9	781.6	849.1	888.6	903.9
20°	825.4	778.5	761.1	754.2	754.7	755.8	762.1	794.8	869.1	889.1	885.5
22.5°	831.2	770.6	749.5	739.5	741.0	742.1	751.6	786.4	841.7	844.9	837.5
25°	804.3	748.4	725.8	717.9	720.0	719.4	727.9	753.2	792.7	791.6	787.4
27.5°	764.2	713.1	696.2	691.0	694.7	690.4	693.1	712.6	743.2	742.1	740.5
30°	723.1	678.9	663.6	660.9	665.7	659.3	659.9	676.2	697.3	696.2	695.7
32.5°	682.0	644.6	630.9	630.9	635.6	628.8	629.8	644.1	658.3	654.1	654.1
35°	643.0	616.7	605.6	603.5	607.2	602.4	604.5	617.7	623.0	617.2	613.5
37.5°	608.8	597.2	586.1	578.7	579.2	579.8	586.1	596.1	592.9	584.5	579.8
40°	577.1	577.1	566.6	552.9	551.3	555.0	565.5	576.6	567.6	558.2	552.4
42.5°	554.5	559.2	549.2	535.5	532.3	538.7	550.2	558.2	547.6	537.1	529.2
45°	533.4	545.0	538.1	522.8	518.6	526.0	540.8	543.9	529.7	519.7	513.9
47.5°	518.6	534.4	529.7	514.9	508.6	519.2	534.4	533.9	516.0	505.4	500.7
50°	508.1	528.1	527.6	514.9	508.1	521.3	535.0	528.1	508.6	497.5	492.8
52.5°	499.7	527.6	531.3	523.9	519.2	530.7	539.2	526.0	503.3	491.7	488.1
55°	496.0	529.7	532.3	525.5	521.3	531.8	539.2	530.2	503.3	492.8	489.6
57.5°	497.0	527.1	527.6	518.1	510.7	523.9	535.5	532.9	509.1	497.0	493.3
60°	490.7	512.8	513.9	499.1	490.7	506.5	527.1	525.5	506.5	493.9	487.0
62.5°	469.6	489.1	489.6	475.9	463.8	486.5	509.1	508.6	491.2	478.6	470.7
65°	434.3	454.9	460.1	446.9	437.5	461.7	485.4	484.4	467.0	455.4	447.5
67.5°	390.6	412.7	422.7	413.7	410.1	432.2	454.3	453.8	439.6	428.5	421.6
70°	337.3	355.8	372.6	372.6	370.0	395.3	419.0	416.9	403.7	395.3	390.0
72.5°	293.0	307.3	312.5	317.8	325.7	352.1	372.1	373.7	364.2	360.0	364.2
75°	249.3	258.3	263.0	258.8	272.5	299.9	326.2	328.9	318.9	312.0	313.6
77.5°	205.0	215.0	219.8	210.3	209.2	244.0	276.2	282.0	273.5	263.0	266.2
80°	148.1	161.3	169.2	162.9	160.8	176.0	220.3	226.6	218.7	210.3	215.0
82.5°	90.7	98.0	100.1	106.5	119.6	126.0	141.8	162.9	157.1	149.7	162.9
85°	35.8	42.7	47.4	53.8	62.7	74.3	87.5	104.4	94.9	91.7	108.0
87.5°	2.1	0.5	0.0	1.1	9.0	17.4	37.4	51.7	43.2	46.4	55.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P632546
 CATALOG NUMBER: GWS-SA2C-830-U-SLR-W

CANDELA DISTRIBUTION (continued):

	285°	295°	305°	315°	325°	335°	345°	355°	359°	360°
0°	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9	923.9
2.5°	855.4	869.1	887.6	902.9	922.4	940.8	959.8	978.7	988.8	993.0
5°	794.8	820.1	849.6	882.3	920.2	960.3	1000.9	1042.5	1068.9	1071.0
7.5°	758.4	794.8	835.4	876.5	923.4	978.7	1043.0	1107.3	1134.2	1141.6
10°	770.0	810.6	842.8	881.2	932.9	1001.9	1077.8	1153.2	1184.3	1193.3
12.5°	816.4	824.3	834.3	869.6	932.9	1022.0	1113.7	1203.3	1236.5	1244.9
15°	854.9	816.9	799.0	836.4	920.2	1039.4	1151.6	1250.7	1290.8	1298.7
17.5°	858.1	792.7	753.7	787.4	898.1	1051.5	1188.0	1303.4	1337.1	1344.5
20°	825.9	766.9	716.3	736.8	868.1	1056.8	1214.3	1341.9	1375.1	1382.5
22.5°	789.5	745.8	691.0	689.9	831.7	1062.5	1246.0	1378.3	1414.1	1418.8
25°	755.3	716.8	670.4	655.7	789.5	1073.6	1288.7	1433.1	1460.5	1462.1
27.5°	715.2	685.7	654.1	639.8	752.6	1094.7	1351.9	1498.4	1514.8	1512.1
30°	678.9	656.7	642.5	638.3	729.4	1110.5	1412.0	1562.7	1563.8	1554.8
32.5°	640.4	631.9	631.9	645.6	710.5	1106.8	1461.0	1625.4	1615.4	1602.3
35°	606.1	607.7	618.8	650.9	678.9	1069.9	1507.9	1704.0	1689.2	1670.2
37.5°	573.4	585.6	601.4	632.5	637.2	1015.1	1562.7	1815.2	1796.7	1773.0
40°	545.5	564.0	582.4	597.7	592.9	937.1	1639.2	1945.9	1925.3	1897.9
42.5°	523.4	541.3	561.8	563.4	565.0	855.9	1720.3	2106.1	2102.4	2072.4
45°	509.1	520.7	540.2	537.6	563.4	766.3	1795.2	2350.7	2399.2	2376.5
47.5°	499.7	508.6	510.7	521.8	577.1	686.2	1891.6	2829.2	2964.2	2938.4
50°	494.4	503.3	479.6	522.8	579.2	634.6	2025.0	3430.1	3647.2	3613.0
52.5°	493.9	491.7	455.9	533.9	567.6	603.0	2094.5	3868.6	4350.3	4424.7
55°	494.9	468.6	443.8	537.1	544.5	591.4	1861.6	4079.4	4999.1	5156.2
57.5°	485.4	443.3	450.6	524.4	500.7	622.5	1376.1	4004.1	5258.5	5550.5
60°	467.5	419.0	463.3	490.2	455.9	569.2	947.7	3667.8	4989.7	5290.1
62.5°	441.7	402.1	461.7	445.9	439.6	465.9	651.4	3197.1	4563.3	4856.8
65°	412.7	388.4	436.9	403.2	406.9	358.4	460.6	2665.9	4054.1	4343.0
67.5°	381.6	380.0	400.6	358.9	343.6	284.1	335.7	2136.7	3400.1	3660.4
70°	346.3	357.9	364.2	318.9	278.8	222.9	249.3	1494.2	2508.3	2734.9
72.5°	311.0	312.0	321.0	277.2	208.7	178.7	187.1	905.0	1704.0	1868.9
75°	275.1	265.1	273.5	225.6	155.5	146.5	144.4	559.2	1176.9	1307.1
77.5°	236.6	225.6	214.5	169.7	124.9	113.3	110.7	313.6	722.1	802.2
80°	192.4	177.6	160.2	124.4	91.2	81.2	80.6	152.8	360.0	401.1
82.5°	149.7	121.8	117.0	77.5	56.4	49.5	52.7	58.5	108.6	121.2
85°	104.9	88.5	62.2	31.1	25.3	20.6	20.0	17.4	29.0	32.2
87.5°	58.5	38.5	20.0	3.7	4.2	4.7	3.7	2.6	2.6	2.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)