

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P635003

Luminaire Tested: GWS-SA3C-830-U-RW-W

Issue Date: 1/10/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P635003  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-49)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/10/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: McGRAW-EDISON  
Catalog Number: GWS-SA3C-830-U-RW-W  
Description: GALLEON WALL SLIM LUMINAIRE. (3) LIGHTSQUARES WITH 16 LEDS EACH AND RECTANGULAR WIDE OPTICS  
Light Source: (48) 3000K CCT, 80 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 11407.4 lumens  
Efficiency: N/A  
Efficacy: 122.7 lumens/watt  
Luminous Opening: Rectangular (W 1.5' x L: 0.5' x H: 0')  
IES Classification: Type III - Short  
BUG Rating: B3 - U0 - G3  
  
Input Watts (W): 93  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 0  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT



REPORT NUMBER: P635003  
 CATALOG NUMBER: GWS-SA3C-830-U-RW-W

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

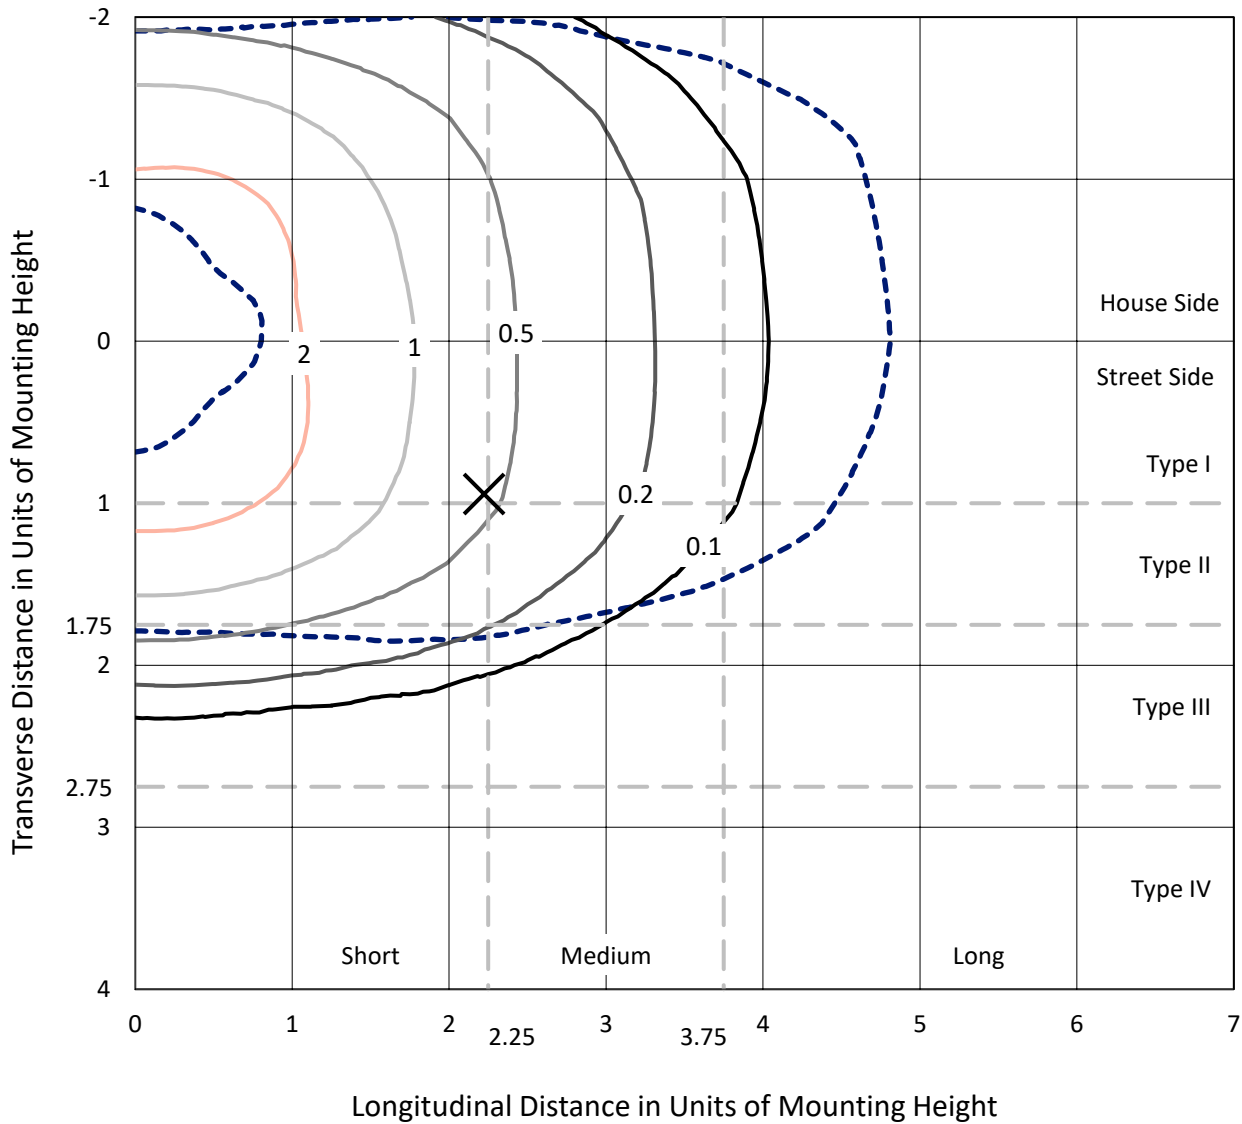

Based on 20 foot mounting height. Maximum calculated value = 3.3 fc  
 Type III - Short - N/A

REPORT NUMBER: P635003  
CATALOG NUMBER: GWS-SA3C-830-U-RW-W

### Luminous Intensity Polar Plot

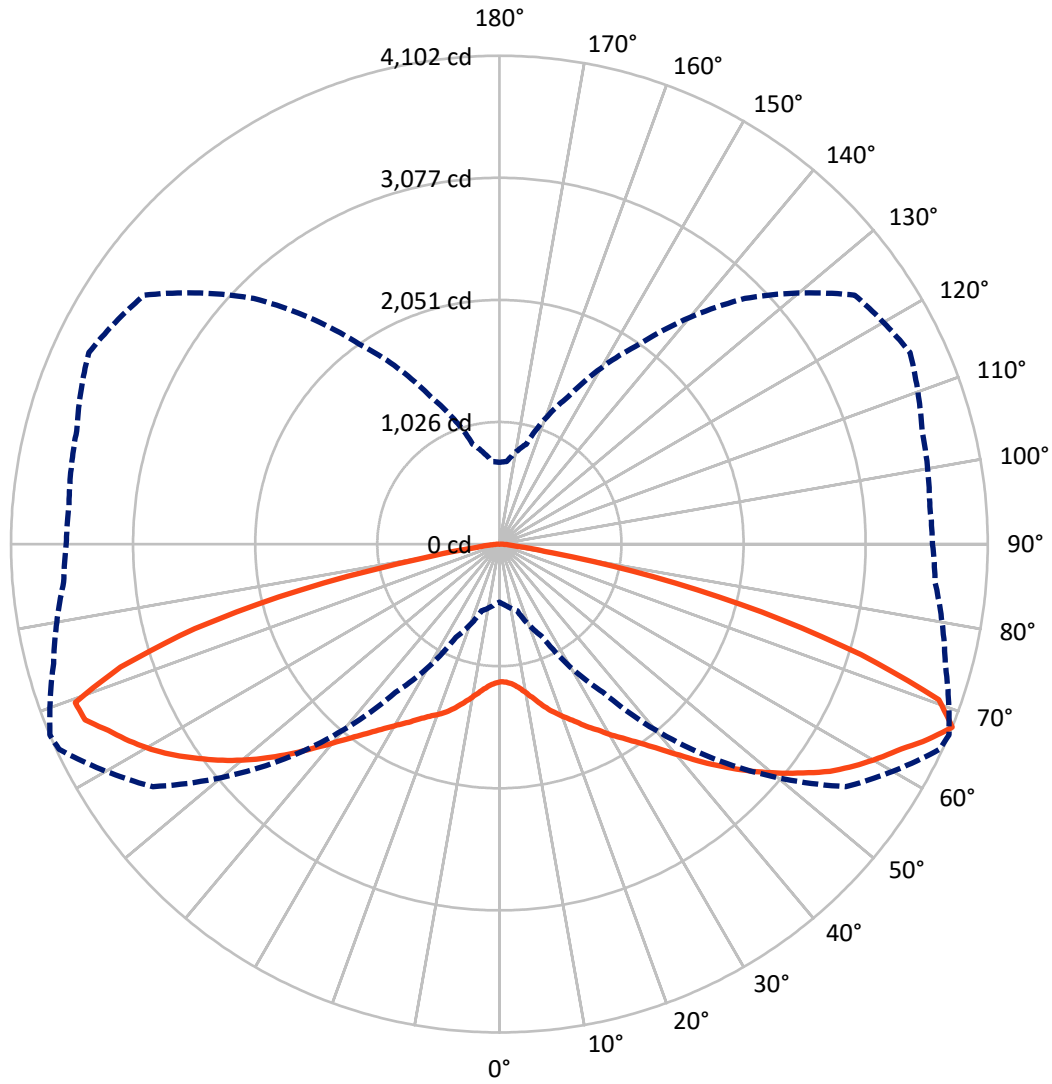

— Vertical Plane Through 67-Deg Lateral    - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P635003

CATALOG NUMBER: GWS-SA3C-830-U-RW-W

**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	5640.7	0.0	5640.7
	% Fixture	49.4	0.0	49.4
<b>Street Side</b>	Lumens	5766.6	0.0	5766.6
	% Fixture	50.6	0.0	50.6
<b>Total</b>	Lumens	11407.4	0.0	11407.4
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	113.3	1.0
10°-20°	382.9	3.4
20°-30°	751.2	6.6
30°-40°	1279.7	11.2
40°-50°	2055.0	18.0
50°-60°	2792.3	24.5
60°-70°	2671.0	23.4
70°-80°	1269.9	11.1
80°-90°	92.0	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	11407.4	100.0
0°-180°	11407.4	100.0

**Coefficient of Utilization**



REPORT NUMBER: P635003


CATALOG NUMBER: GWS-SA3C-830-U-RW-W

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	636.0	5.6			
FM (30°-60°)	3179.3	27.9			
FH (60°-80°)	1909.9	16.7			G2/5000
FVH (80°-90°)	41.4	0.4			G1/100
BL (0°-30°)	611.3	5.4	B2/1000		
BM (30°-60°)	2947.7	25.8	B3/5000		
BH (60°-80°)	2031.1	17.8	B3/2500		G3/2500
BVH (80°-90°)	50.7	0.4			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B3-U0-G3**

Type III Short

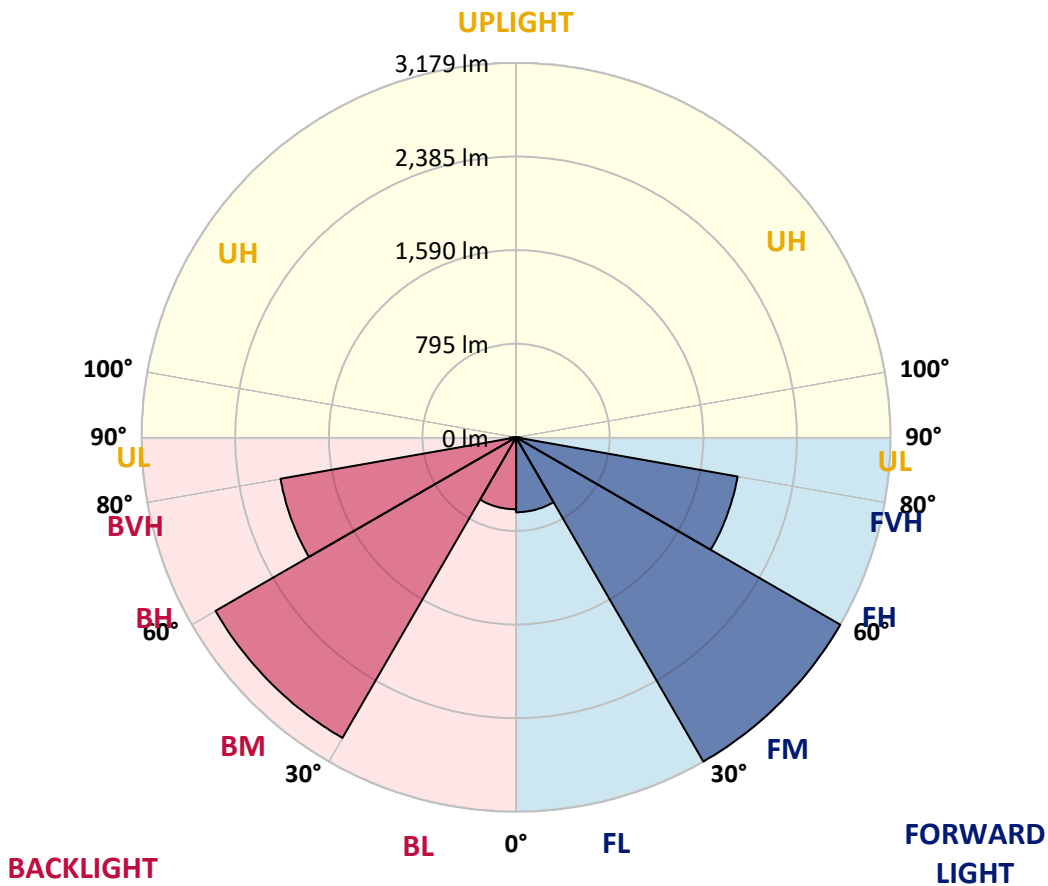



REPORT NUMBER: P635003  
 CATALOG NUMBER: GWS-SA3C-830-U-RW-W

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	45°	55°	65°	67°	75°	85°
0°	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1
2.5°	1131.2	1132.8	1135.2	1140.0	1144.7	1151.9	1159.0	1158.2	1161.4	1163.8	1166.2
5°	1124.9	1126.5	1130.4	1136.8	1143.9	1155.9	1171.0	1177.3	1182.1	1190.8	1198.8
7.5°	1138.4	1141.6	1147.1	1155.9	1167.0	1182.1	1202.7	1213.8	1221.0	1236.9	1250.4
10°	1156.7	1160.6	1171.7	1188.4	1205.1	1228.1	1254.4	1271.0	1275.8	1296.5	1321.9
12.5°	1174.1	1178.9	1197.2	1227.4	1257.5	1288.5	1319.5	1340.2	1341.7	1369.6	1398.2
15°	1201.9	1205.9	1230.5	1269.5	1315.5	1358.4	1396.6	1410.9	1417.2	1437.1	1472.8
17.5°	1263.1	1267.9	1299.6	1341.7	1390.2	1435.5	1473.6	1485.5	1485.5	1502.2	1531.6
20°	1329.0	1333.8	1375.9	1429.9	1488.7	1534.8	1564.2	1553.1	1549.1	1553.9	1574.5
22.5°	1402.9	1411.7	1452.2	1514.9	1587.2	1643.6	1658.7	1625.3	1614.2	1603.1	1607.9
25°	1497.5	1507.8	1547.5	1614.2	1684.9	1744.5	1753.2	1701.6	1695.3	1656.3	1642.0
27.5°	1606.3	1614.2	1663.5	1729.4	1795.4	1845.4	1854.9	1791.4	1769.9	1715.9	1682.5
30°	1746.9	1754.0	1796.9	1862.1	1919.3	1954.2	1966.1	1878.8	1862.1	1779.5	1727.8
32.5°	1900.2	1903.4	1947.1	2009.8	2060.7	2094.0	2077.4	1975.7	1951.1	1858.1	1787.4
35°	2075.8	2075.8	2132.2	2183.0	2223.5	2233.1	2201.3	2085.3	2056.7	1955.8	1867.6
37.5°	2248.2	2252.9	2305.4	2365.7	2401.5	2399.9	2341.9	2214.8	2182.2	2072.6	1974.9
40°	2434.8	2445.2	2497.6	2565.1	2599.3	2594.5	2505.5	2364.1	2330.8	2201.3	2106.0
42.5°	2606.4	2623.1	2684.3	2753.4	2790.7	2787.6	2694.6	2535.7	2503.2	2357.0	2261.7
45°	2743.1	2760.6	2836.8	2932.9	2992.5	2987.0	2893.2	2713.7	2674.0	2520.6	2415.8
47.5°	2863.0	2881.3	2966.3	3068.0	3162.5	3172.1	3086.3	2893.2	2851.1	2696.2	2577.8
50°	2955.2	2963.9	3059.2	3170.5	3280.1	3333.3	3258.6	3073.5	3022.7	2869.4	2735.9
52.5°	2948.0	2959.9	3077.5	3228.5	3375.4	3462.8	3411.2	3243.5	3194.3	3027.5	2897.2
55°	2802.7	2814.6	2954.4	3174.4	3428.6	3557.3	3551.8	3405.6	3369.9	3188.7	3064.8
57.5°	2590.6	2616.8	2755.8	2993.3	3358.7	3632.8	3655.1	3553.4	3516.0	3346.8	3230.8
60°	2210.8	2245.8	2406.2	2714.5	3134.7	3607.4	3765.5	3678.1	3655.1	3493.8	3381.0
62.5°	1606.3	1631.7	1845.4	2249.8	2802.7	3426.3	3858.4	3806.8	3789.3	3625.7	3516.8
65°	962.0	1020.0	1191.6	1591.2	2260.9	3084.7	3807.6	3975.2	3956.9	3761.5	3632.8
67.5°	487.0	513.2	580.7	862.7	1520.5	2552.4	3552.6	4080.1	4102.3	3877.5	3674.1
70°	301.9	309.0	328.1	425.8	759.4	1677.0	2905.1	3806.8	3915.6	3859.2	3566.9
72.5°	242.3	243.9	247.1	265.3	364.6	784.1	1836.7	2981.4	3177.6	3604.2	3413.6
75°	201.0	201.8	202.6	208.1	227.2	320.1	893.7	2048.8	2278.3	3063.2	3164.9
77.5°	161.3	157.3	160.5	162.9	167.6	178.7	308.2	1093.1	1325.9	2010.6	2447.6
80°	104.9	103.3	109.6	112.0	116.8	123.9	164.4	371.0	450.4	731.6	778.5
82.5°	56.4	53.2	66.7	64.3	66.7	72.3	96.9	135.8	152.5	220.8	186.7
85°	17.5	17.5	18.3	21.4	26.2	25.4	42.1	66.7	73.9	94.5	69.9
87.5°	3.2	3.2	3.2	3.2	3.2	4.0	8.7	13.5	18.3	32.6	24.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P635003  
 CATALOG NUMBER: GWS-SA3C-830-U-RW-W

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1	1155.1
2.5°	1171.0	1163.8	1167.8	1170.2	1169.4	1167.8	1159.8	1158.2	1154.3	1147.9	1146.3
5°	1205.9	1198.0	1198.8	1196.4	1188.4	1178.1	1160.6	1151.9	1144.7	1136.8	1136.0
7.5°	1260.7	1252.0	1249.6	1238.5	1216.2	1192.4	1164.6	1148.7	1136.8	1126.5	1124.9
10°	1330.6	1321.9	1313.9	1287.7	1251.2	1219.4	1182.9	1159.8	1142.4	1129.6	1127.3
12.5°	1408.5	1401.3	1381.5	1343.3	1299.6	1262.3	1225.0	1196.4	1171.0	1151.9	1149.5
15°	1495.1	1479.2	1449.0	1399.7	1358.4	1328.2	1283.0	1244.0	1203.5	1178.1	1172.5
17.5°	1555.4	1541.9	1506.2	1458.5	1426.0	1399.7	1346.5	1290.9	1236.1	1198.8	1190.8
20°	1598.3	1584.0	1543.5	1508.6	1498.2	1476.0	1414.0	1349.7	1286.1	1240.1	1229.7
22.5°	1629.3	1614.2	1572.9	1555.4	1569.7	1565.8	1505.4	1432.3	1356.8	1302.0	1289.3
25°	1658.7	1644.4	1607.9	1614.2	1652.4	1664.3	1599.1	1514.1	1428.3	1364.0	1348.9
27.5°	1686.5	1668.2	1651.6	1686.5	1740.5	1762.8	1693.7	1597.5	1504.6	1438.7	1426.7
30°	1729.4	1708.0	1705.6	1756.4	1842.2	1861.3	1785.0	1688.9	1596.8	1530.0	1514.9
32.5°	1783.4	1763.6	1765.2	1841.4	1940.7	1956.6	1891.5	1801.7	1709.6	1642.8	1622.2
35°	1856.5	1831.9	1845.4	1939.1	2039.2	2068.6	2016.2	1941.5	1851.8	1783.4	1760.4
37.5°	1957.4	1921.7	1949.5	2048.0	2148.9	2192.6	2152.0	2096.4	2007.5	1938.3	1916.9
40°	2086.1	2056.7	2067.8	2176.7	2280.7	2333.2	2307.7	2252.9	2164.7	2092.5	2067.8
42.5°	2238.6	2209.2	2205.3	2321.2	2425.3	2504.8	2480.1	2430.1	2338.7	2256.1	2232.3
45°	2388.0	2361.0	2366.5	2484.9	2601.7	2688.3	2663.6	2604.8	2505.5	2410.2	2391.2
47.5°	2543.7	2521.4	2526.2	2651.7	2780.4	2867.0	2836.0	2764.5	2648.5	2546.9	2523.8
50°	2703.4	2677.9	2685.1	2817.0	2956.0	3037.8	2990.1	2884.5	2756.6	2657.3	2637.4
52.5°	2862.2	2832.0	2850.3	2975.0	3118.8	3184.0	3095.8	2967.9	2844.0	2745.5	2723.2
55°	3044.9	3013.2	2993.3	3126.8	3269.0	3296.0	3175.2	3025.9	2878.9	2766.9	2753.4
57.5°	3211.8	3184.8	3147.4	3280.9	3385.7	3365.9	3236.4	3010.0	2793.9	2650.1	2631.1
60°	3361.1	3338.1	3305.5	3419.1	3466.8	3422.3	3187.1	2821.7	2584.2	2434.1	2425.3
62.5°	3498.6	3473.9	3443.7	3540.7	3534.3	3431.0	2963.1	2532.6	2214.8	2053.5	2039.2
65°	3607.4	3585.1	3576.4	3652.7	3642.3	3260.2	2614.4	2059.1	1618.2	1436.3	1430.7
67.5°	3638.4	3629.6	3676.5	3806.0	3644.7	2917.1	2050.4	1365.6	869.1	696.7	686.4
70°	3522.4	3521.6	3655.8	3840.9	3314.3	2228.3	1209.9	615.7	436.9	387.7	381.3
72.5°	3371.4	3369.1	3475.5	3313.5	2457.9	1219.4	509.2	329.7	273.3	259.8	259.8
75°	3123.6	3117.2	3197.5	2520.6	1382.3	459.2	270.1	226.4	214.5	212.1	212.1
77.5°	2546.1	2492.8	2366.5	1557.8	482.2	225.6	178.7	177.9	170.8	170.0	170.0
80°	837.3	837.3	973.1	594.2	212.9	139.0	126.3	132.7	125.5	120.7	120.0
82.5°	136.6	188.3	267.7	170.0	115.2	86.6	77.9	82.6	86.6	69.1	69.1
85°	54.0	70.7	103.3	79.4	53.2	35.0	37.3	41.3	36.5	31.8	31.0
87.5°	20.7	25.4	36.5	19.1	11.1	6.4	4.0	4.0	3.2	3.2	3.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)