

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P637507

Luminaire Tested: GWS-SA4C-830-U-T3-W-GRSWH

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P637507
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-25)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA4C-830-U-T3-W-GRSWH
Description: GALLEON WALL SLIM LUMINAIRE. (4) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE III OPTICS W/ FACTORY INSTALLED GLARE SHIELD, WH
Light Source: (64) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 13161.4 lumens
Efficiency: N/A
Efficacy: 102.4 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')
IES Classification: Type II - Short
BUG Rating: B3 - U0 - G2


Input Watts (W): 128.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P637507
 CATALOG NUMBER: GWS-SA4C-830-U-T3-W-GRSWH

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

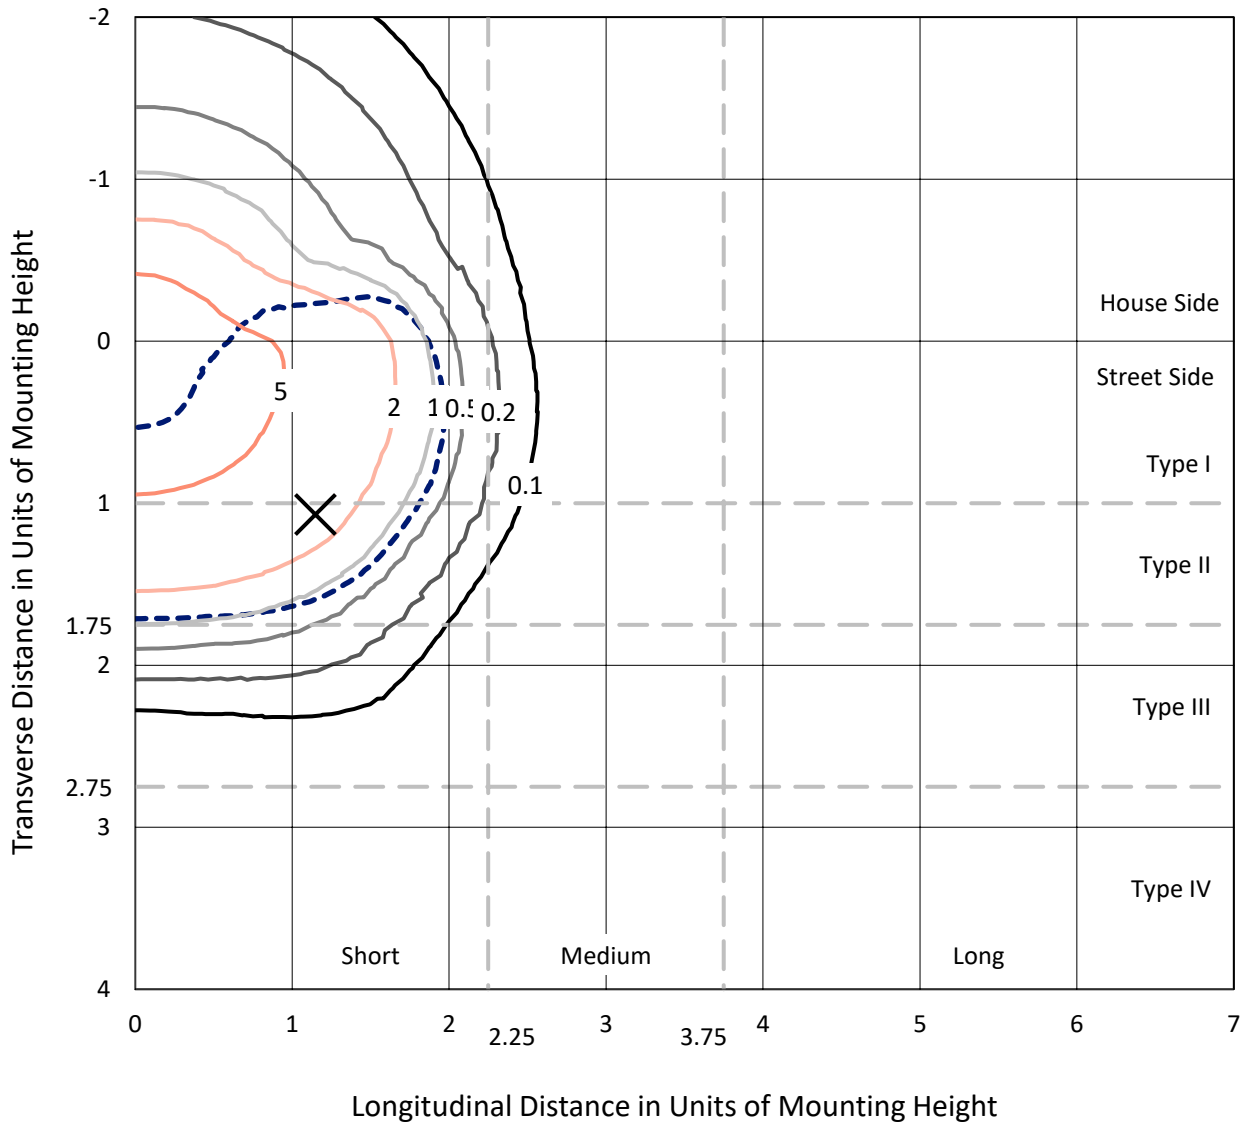

Based on 20 foot mounting height. Maximum calculated value = 6.8 fc
 Type II - Short - N/A

REPORT NUMBER: P637507
CATALOG NUMBER: GWS-SA4C-830-U-T3-W-GRSWH

Luminous Intensity Polar Plot

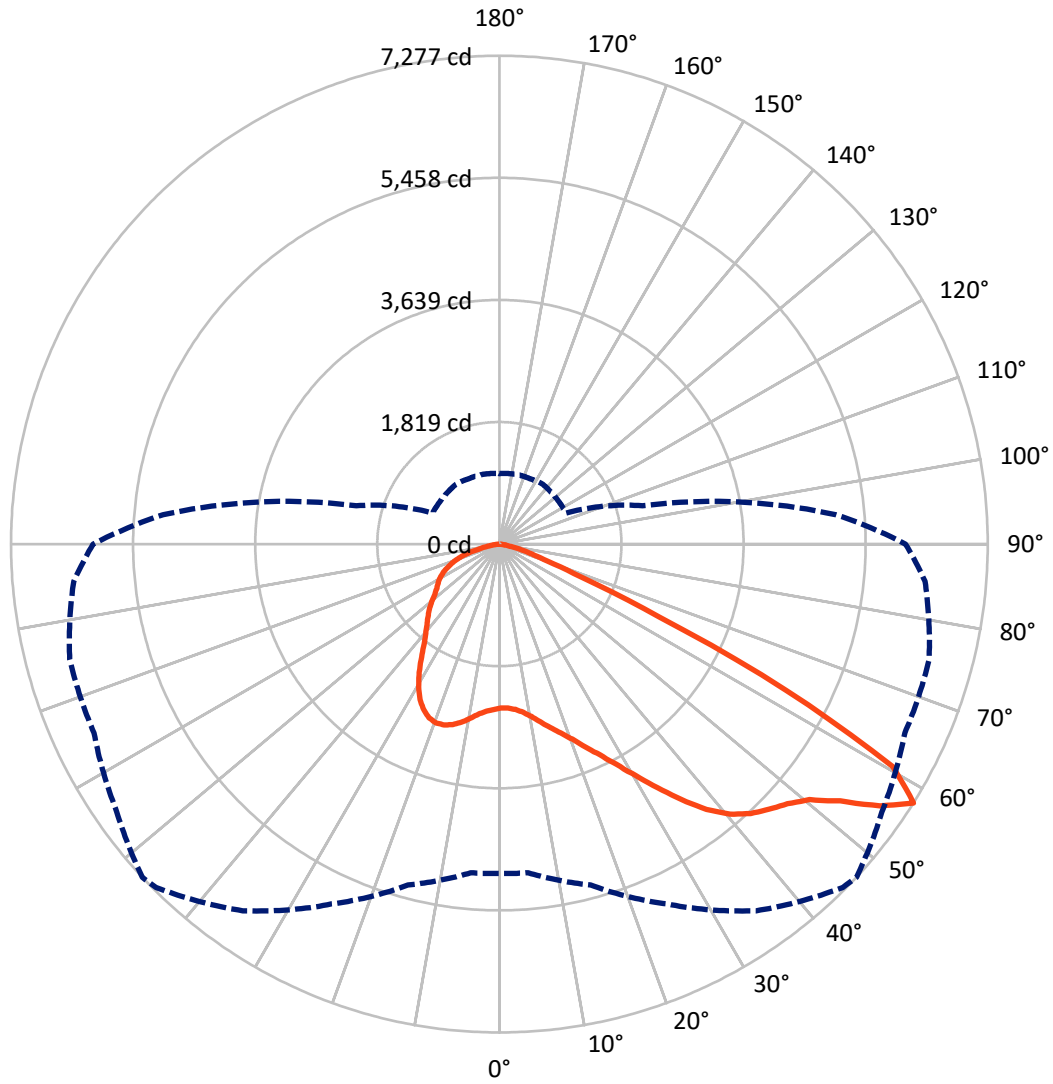

— Vertical Plane Through 47-Deg Lateral - - - Horizontal Cone Through 57.5-Deg Vertical

REPORT NUMBER: P637507
 CATALOG NUMBER: GWS-SA4C-830-U-T3-W-GRSWH


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	4165.6	0.0	4165.6
	% Fixture	31.6	0.0	31.6
Street Side	Lumens	8995.9	0.0	8995.9
	% Fixture	68.4	0.0	68.4
Total	Lumens	13161.4	0.0	13161.4
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	240.7	1.8
10°-20°	791.8	6.0
20°-30°	1425.7	10.8
30°-40°	2153.4	16.4
40°-50°	2899.8	22.0
50°-60°	3484.5	26.5
60°-70°	1697.0	12.9
70°-80°	418.1	3.2
80°-90°	50.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	13161.4	100.0
0°-180°	13161.4	100.0

Coefficient of Utilization

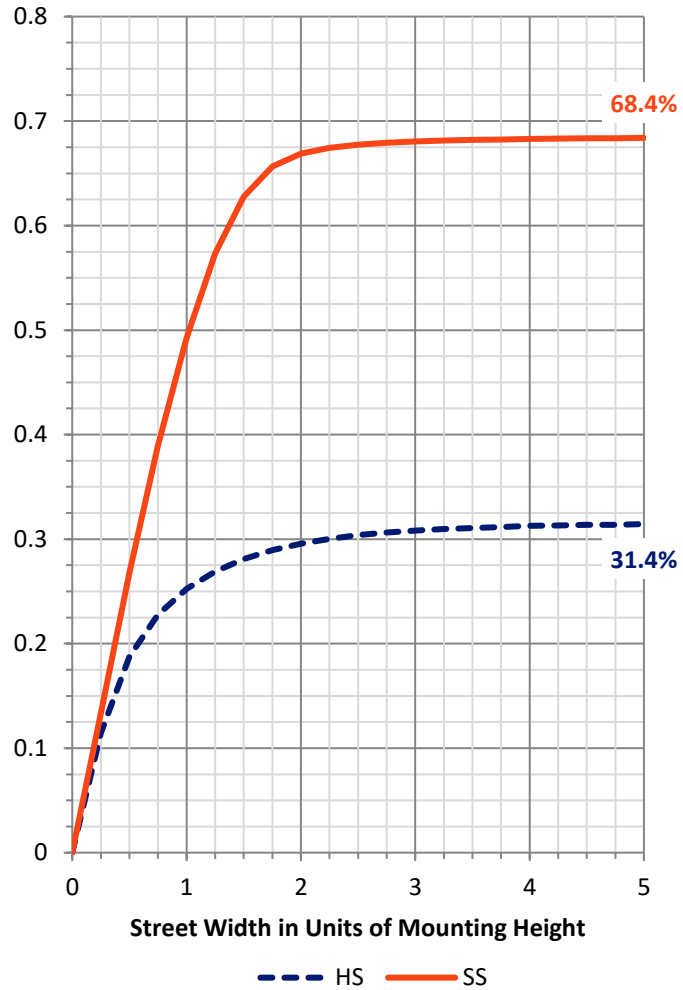


REPORT NUMBER: P637507
 CATALOG NUMBER: GWS-SA4C-830-U-T3-W-GRSWH

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	1322.0	10.0			
FM (30°-60°)	6256.3	47.5			
FH (60°-80°)	1398.7	10.6			G1/1800
FVH (80°-90°)	18.9	0.1			G1/100
BL (0°-30°)	1136.3	8.6	B3/2500		
BM (30°-60°)	2281.5	17.3	B2/2500		
BH (60°-80°)	716.5	5.4	B2/1000		G2/1000
BVH (80°-90°)	31.4	0.2			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G2
 Type II Short

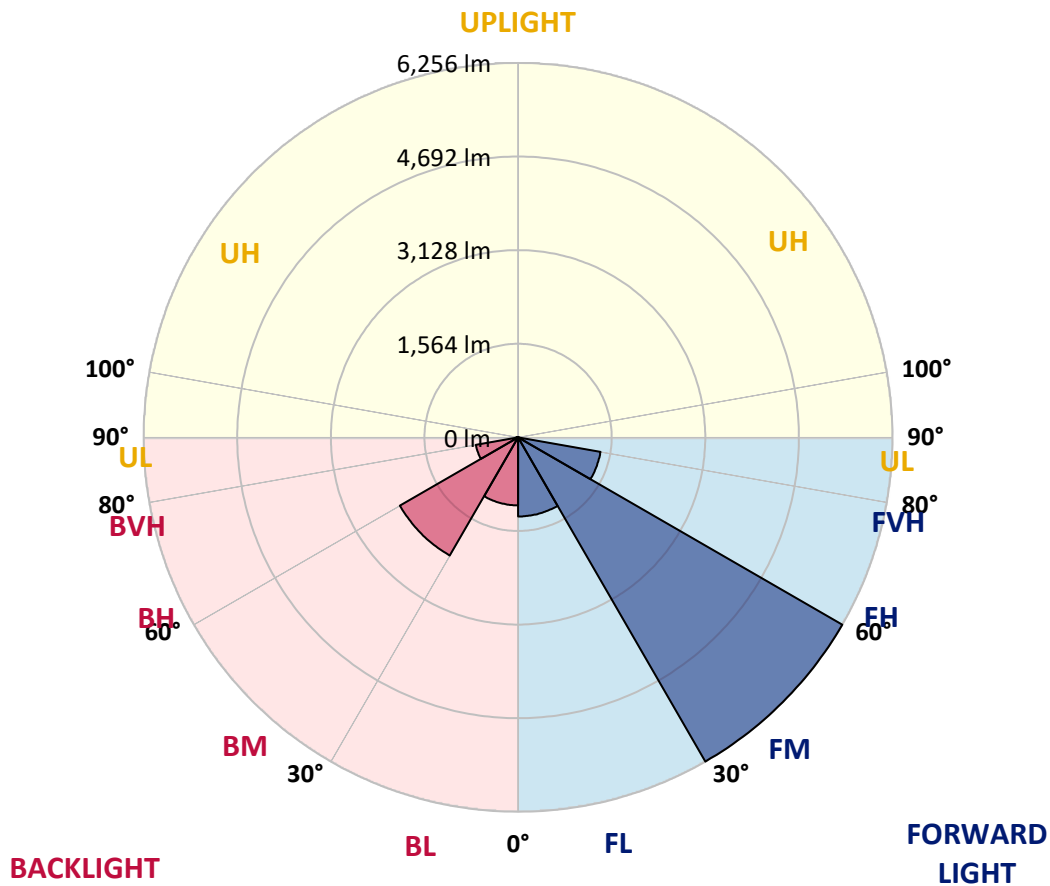



REPORT NUMBER: P637507
 CATALOG NUMBER: GWS-SA4C-830-U-T3-W-GRSWH

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	47°	55°	65°	75°	85°
0°	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8
2.5°	2436.4	2435.3	2435.3	2441.9	2441.9	2444.1	2447.4	2450.7	2451.9	2446.3	2434.2
5°	2462.9	2462.9	2462.9	2468.4	2468.4	2470.6	2475.1	2476.2	2475.1	2466.2	2454.1
7.5°	2504.9	2504.9	2506.0	2512.7	2518.2	2521.5	2529.2	2528.1	2524.8	2510.4	2495.0
10°	2573.5	2576.8	2580.1	2587.8	2598.9	2606.6	2612.1	2612.1	2607.7	2585.6	2565.7
12.5°	2670.7	2675.2	2678.5	2685.1	2693.9	2707.2	2719.4	2719.4	2713.8	2686.2	2656.4
15°	2784.6	2789.0	2787.9	2790.1	2806.7	2825.5	2835.4	2842.1	2844.3	2805.6	2759.2
17.5°	2915.0	2919.5	2915.0	2908.4	2910.6	2940.5	2958.1	2982.5	2996.8	2944.9	2870.8
20°	3033.3	3028.9	3028.9	3033.3	3039.9	3076.4	3103.0	3142.8	3160.4	3097.4	2982.5
22.5°	3158.2	3168.2	3163.8	3163.8	3190.3	3251.1	3283.1	3335.1	3353.9	3272.1	3117.3
25°	3319.6	3328.5	3326.3	3328.5	3359.4	3445.6	3477.7	3573.9	3592.7	3475.5	3266.6
27.5°	3496.5	3510.9	3517.5	3515.3	3565.0	3677.8	3717.6	3851.3	3885.6	3703.2	3425.7
30°	3726.4	3741.9	3747.4	3745.2	3803.8	3957.5	4002.8	4155.3	4204.0	3972.9	3628.0
32.5°	3992.8	4008.3	4024.9	4031.5	4106.7	4263.7	4328.9	4487.0	4556.6	4284.7	3872.3
35°	4257.0	4270.3	4302.4	4354.3	4457.1	4617.4	4674.9	4830.8	4898.2	4608.6	4167.5
37.5°	4548.9	4557.7	4585.3	4657.2	4805.3	4957.9	5015.4	5164.6	5172.3	4921.4	4501.3
40°	4868.3	4868.3	4862.8	4933.6	5088.3	5242.0	5291.7	5377.9	5332.6	5162.4	4826.3
42.5°	5139.2	5134.7	5139.2	5205.5	5320.5	5445.4	5488.5	5471.9	5414.4	5347.0	5120.4
45°	5383.5	5386.8	5426.6	5477.4	5537.1	5611.2	5636.6	5542.7	5490.7	5495.1	5355.8
47.5°	5549.3	5552.6	5645.5	5730.6	5767.1	5790.3	5779.2	5648.8	5622.2	5672.0	5537.1
50°	5571.4	5589.1	5749.4	5924.0	6014.7	6018.0	5987.0	5827.9	5820.1	5876.5	5634.4
52.5°	5575.8	5593.5	5793.6	6108.6	6344.1	6393.8	6358.5	6192.6	6112.0	6055.6	5753.8
55°	5559.2	5579.1	5800.2	6232.4	6683.5	6882.4	6885.8	6651.4	6393.8	6356.3	6094.3
57.5°	4908.1	4915.9	5258.6	5917.4	6670.2	7234.0	7277.1	6958.7	6664.7	6629.3	6367.3
60°	3419.1	3450.1	3822.6	4692.6	5603.5	6597.2	6736.5	6643.7	6446.9	6189.3	5463.1
62.5°	1712.3	1738.8	2112.5	2934.9	3864.6	4649.5	4798.7	4897.1	4943.5	4667.1	3719.8
65°	737.3	757.2	989.4	1533.2	2187.7	2566.8	2618.8	2737.1	3026.7	2700.6	2004.2
67.5°	493.0	506.3	624.6	935.2	1288.9	1313.3	1305.5	1330.9	1394.0	1150.8	905.4
70°	378.1	389.1	468.7	685.4	926.4	792.6	750.6	680.9	739.5	753.9	734.0
72.5°	274.1	283.0	342.7	467.6	580.4	506.3	499.7	535.0	614.6	636.7	624.6
75°	176.9	181.3	217.8	256.5	299.6	325.0	338.3	402.4	483.1	499.7	485.3
77.5°	118.3	121.6	142.6	164.7	170.2	171.3	175.8	204.5	259.8	290.7	287.4
80°	61.9	61.9	69.6	69.6	79.6	95.1	99.5	118.3	143.7	159.2	160.3
82.5°	24.3	25.4	29.8	33.2	39.8	48.6	52.0	61.9	75.2	86.2	96.2
85°	9.9	11.1	12.2	14.4	17.7	22.1	23.2	26.5	35.4	44.2	49.7
87.5°	0.0	0.0	1.1	1.1	2.2	3.3	3.3	4.4	5.5	9.9	13.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P637507

CATALOG NUMBER: GWS-SA4C-830-U-T3-W-GRSWH

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8	2440.8
2.5°	2448.5	2434.2	2448.5	2453.0	2465.1	2469.5	2461.8	2460.7	2460.7	2449.6	2446.3
5°	2465.1	2451.9	2466.2	2472.9	2490.5	2501.6	2503.8	2512.7	2518.2	2513.8	2512.7
7.5°	2506.0	2489.4	2504.9	2514.9	2538.1	2555.8	2563.5	2583.4	2597.8	2595.6	2594.5
10°	2577.9	2555.8	2573.5	2590.0	2615.5	2636.5	2637.6	2648.6	2663.0	2658.6	2656.4
12.5°	2660.8	2639.8	2659.7	2676.3	2706.1	2714.9	2700.6	2696.2	2698.4	2692.8	2688.4
15°	2762.5	2732.6	2750.3	2769.1	2785.7	2775.7	2744.8	2732.6	2731.5	2723.8	2719.4
17.5°	2864.2	2826.6	2839.9	2849.8	2842.1	2811.1	2772.4	2751.4	2741.5	2726.0	2721.6
20°	2964.8	2917.2	2915.0	2907.3	2871.9	2815.5	2763.6	2721.6	2696.2	2675.2	2667.4
22.5°	3079.7	3013.4	2980.3	2944.9	2867.5	2775.7	2697.3	2637.6	2596.7	2570.1	2561.3
25°	3203.6	3109.6	3041.1	2970.3	2823.3	2690.6	2581.2	2499.4	2450.7	2422.0	2412.1
27.5°	3326.3	3196.9	3094.1	2973.6	2734.8	2567.9	2420.9	2310.4	2261.7	2238.5	2230.8
30°	3492.1	3313.0	3157.1	2930.5	2618.8	2397.7	2214.2	2102.5	2070.5	2053.9	2047.3
32.5°	3683.3	3460.0	3241.1	2839.9	2470.6	2198.7	2005.3	1927.9	1905.8	1873.7	1872.6
35°	3935.3	3670.0	3320.7	2706.1	2283.8	1985.4	1845.0	1789.7	1749.9	1699.1	1694.6
37.5°	4229.4	3932.0	3363.8	2535.9	2066.1	1809.6	1725.6	1663.7	1599.6	1532.1	1523.3
40°	4533.4	4238.2	3367.2	2334.7	1852.7	1693.5	1622.8	1542.1	1462.5	1387.3	1377.4
42.5°	4852.9	4523.4	3308.6	2102.5	1678.1	1592.9	1521.1	1419.4	1329.8	1279.0	1273.5
45°	5138.1	4753.4	3175.9	1858.2	1548.7	1508.9	1417.2	1307.7	1260.2	1223.7	1216.0
47.5°	5362.5	4905.9	2996.8	1639.4	1443.7	1422.7	1303.3	1246.9	1210.5	1177.3	1169.6
50°	5473.0	4940.2	2763.6	1461.4	1346.4	1321.0	1239.2	1196.1	1171.8	1145.2	1138.6
52.5°	5610.1	4978.9	2562.4	1312.2	1251.4	1217.1	1186.1	1151.9	1134.2	1117.6	1112.1
55°	5925.1	5124.8	2456.3	1192.8	1160.7	1145.2	1140.8	1112.1	1106.5	1095.5	1085.5
57.5°	6053.4	5030.8	2205.3	1095.5	1088.9	1091.1	1102.1	1075.6	1070.1	1056.8	1050.2
60°	4868.3	3802.7	1493.4	1011.5	1029.2	1043.5	1054.6	1028.1	1020.3	1018.1	1009.3
62.5°	3119.5	2339.1	1042.4	933.0	959.5	977.2	983.8	958.4	952.9	970.6	971.7
65°	1623.9	1274.6	845.7	849.0	871.1	897.6	910.9	902.0	899.8	918.6	919.7
67.5°	829.1	779.3	737.3	749.5	767.2	801.4	832.4	871.1	884.3	886.6	887.7
70°	706.4	684.3	663.3	671.0	689.8	708.6	738.4	757.2	735.1	729.6	727.4
72.5°	601.4	584.8	574.8	583.7	593.6	590.3	581.5	590.3	593.6	594.7	595.8
75°	467.6	455.4	447.7	448.8	448.8	436.6	420.1	410.1	399.1	390.2	390.2
77.5°	286.3	288.5	296.3	295.2	294.0	289.6	273.0	264.2	237.7	229.9	229.9
80°	163.6	166.9	174.7	176.9	176.9	171.3	154.8	144.8	132.7	127.1	126.0
82.5°	99.5	103.9	108.3	110.5	111.6	105.0	90.6	82.9	76.3	70.7	70.7
85°	52.0	54.2	58.6	59.7	56.4	49.7	42.0	38.7	32.1	31.0	31.0
87.5°	14.4	15.5	17.7	14.4	13.3	9.9	5.5	4.4	2.2	1.1	1.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)