

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P630537

Luminaire Tested: GWS-SA1D-830-U-5NQ-W-GRSWH

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P630537
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-9)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA1D-830-U-5NQ-W-GRSWH
Description: GALLEON WALL SLIM LUMINAIRE. (1) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE V NARROW OPTICS W/ FACTORY INSTALLED GLARE SHIELD, WH
Light Source: (16) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4366.9 lumens
Efficiency: N/A
Efficacy: 98.6 lumens/watt
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
IES Classification: Type V - Short
BUG Rating: B2 - U0 - G0


Input Watts (W): 44.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P630537
 CATALOG NUMBER: GWS-SA1D-830-U-5NQ-W-GRSWH

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

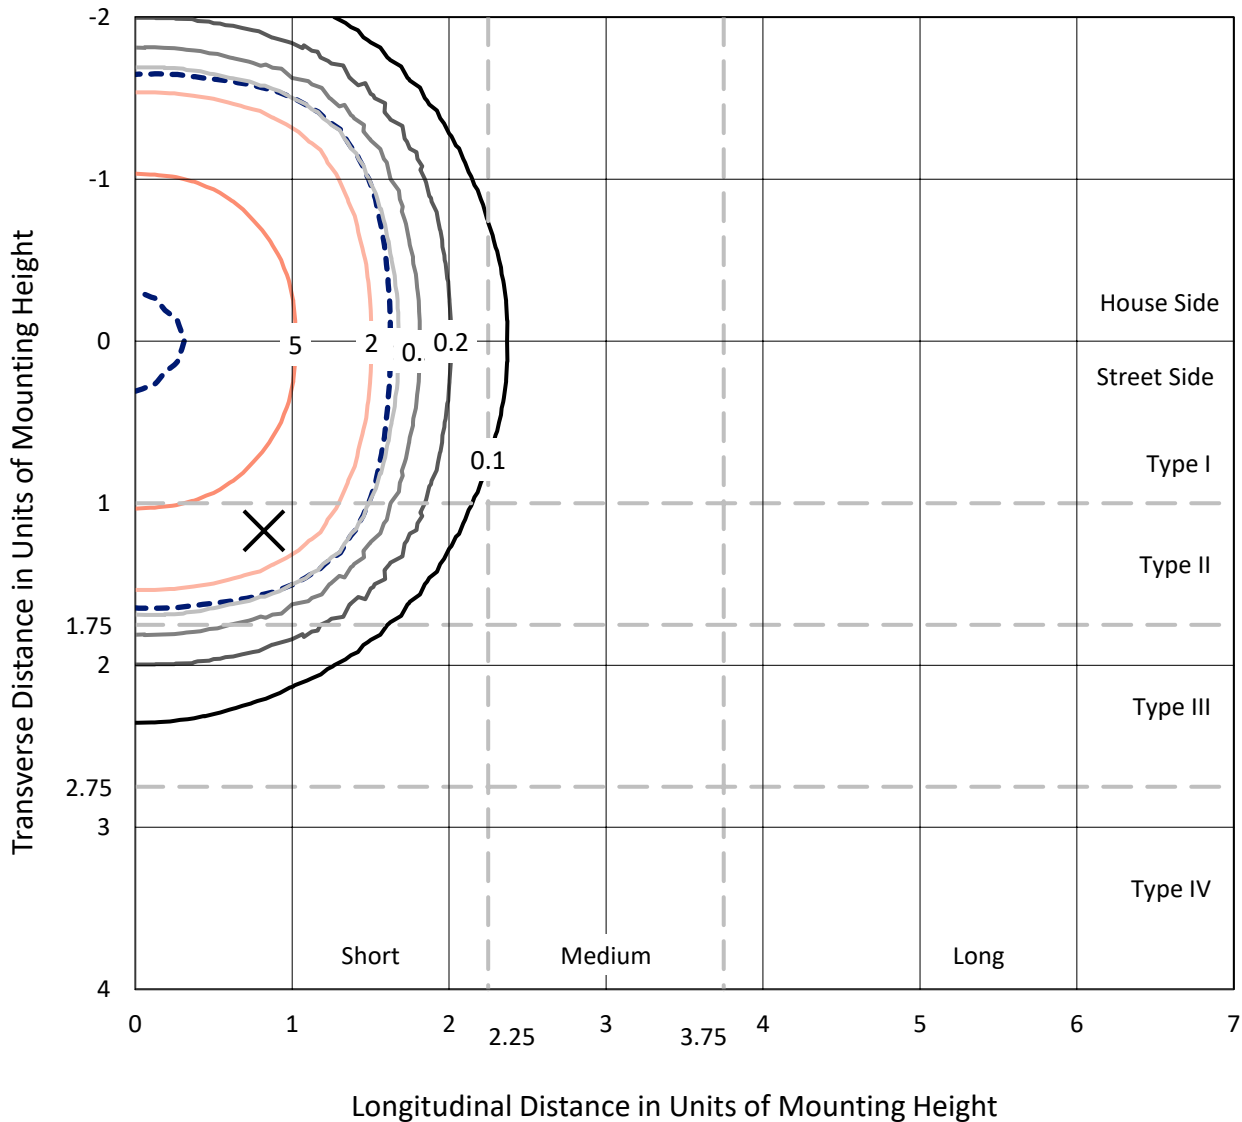

Based on 10 foot mounting height. Maximum calculated value = 7.9 fc
 Type V - Short - N/A

REPORT NUMBER: P630537
CATALOG NUMBER: GWS-SA1D-830-U-5NQ-W-GRSWH

Luminous Intensity Polar Plot

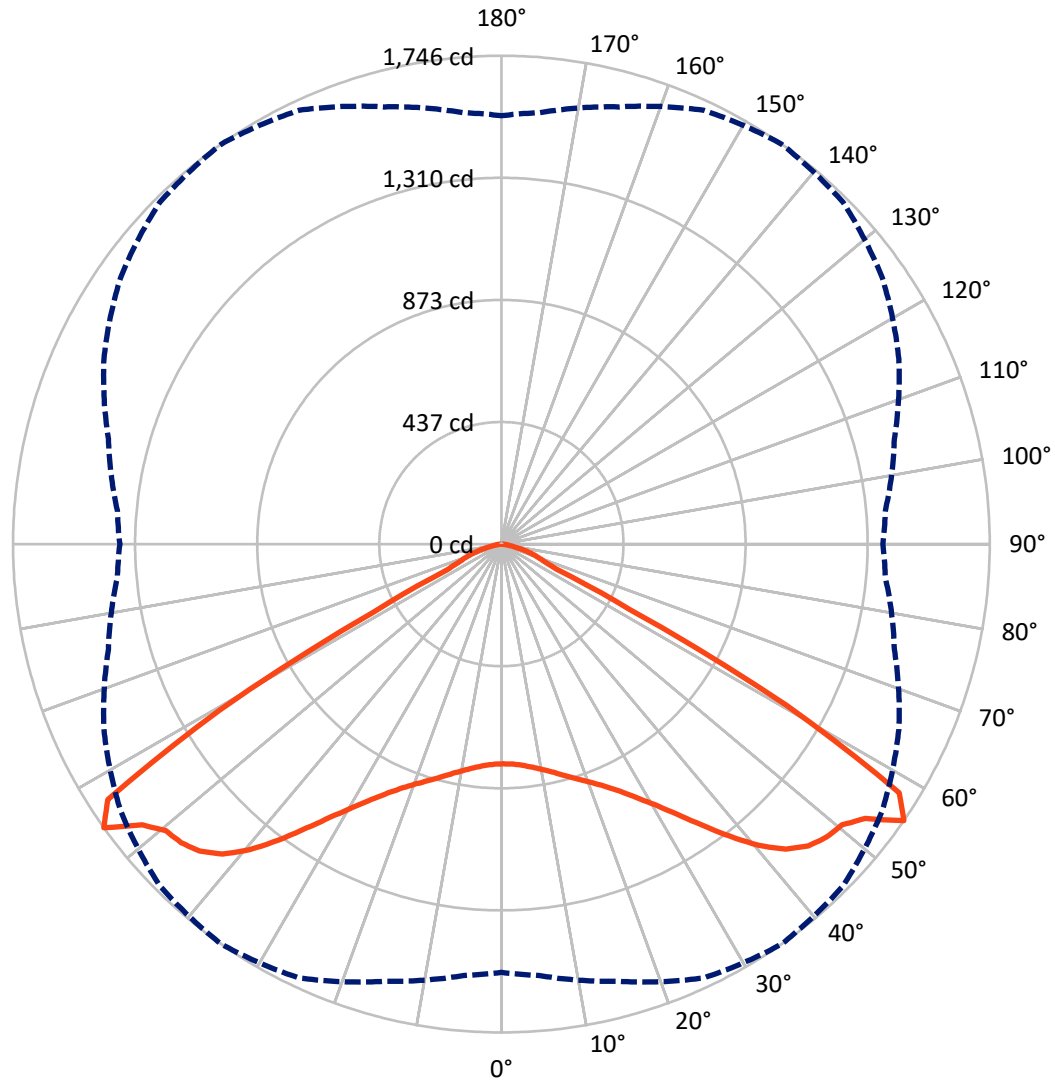

— Vertical Plane Through 35-Deg Lateral - - - Horizontal Cone Through 55-Deg Vertical

REPORT NUMBER: P630537

CATALOG NUMBER: GWS-SA1D-830-U-5NQ-W-GRSWH

FLUX DISTRIBUTION:

| | | Downward | Upward | Total |
|--------------------|-----------|----------|--------|--------|
| House Side | Lumens | 2183.5 | 0.0 | 2183.5 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Street Side | Lumens | 2183.5 | 0.0 | 2183.5 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Total | Lumens | 4366.9 | 0.0 | 4366.9 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 76.6 | 1.8 |
| 10°-20° | 244.0 | 5.6 |
| 20°-30° | 451.5 | 10.3 |
| 30°-40° | 755.3 | 17.3 |
| 40°-50° | 1151.0 | 26.4 |
| 50°-60° | 1289.3 | 29.5 |
| 60°-70° | 305.1 | 7.0 |
| 70°-80° | 82.2 | 1.9 |
| 80°-90° | 11.8 | 0.3 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 4366.9 | 100.0 |
| 0°-180° | 4366.9 | 100.0 |

Coefficient of Utilization



REPORT NUMBER: P630537


CATALOG NUMBER: GWS-SA1D-830-U-5NQ-W-GRSWH

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | Lumens | % Fixture | Zone Rating/Lumen Limit | | |
|----------------|--------|-----------|-------------------------|------|--------|
| | | | B | U | G |
| FL (0°-30°) | 386.1 | 8.8 | | | |
| FM (30°-60°) | 1597.8 | 36.6 | | | |
| FH (60°-80°) | 193.7 | 4.4 | | | G0/660 |
| FVH (80°-90°) | 5.9 | 0.1 | | | G0/10 |
| BL (0°-30°) | 386.1 | 8.8 | B1/500 | | |
| BM (30°-60°) | 1597.8 | 36.6 | B2/2500 | | |
| BH (60°-80°) | 193.7 | 4.4 | B1/500 | | G0/660 |
| BVH (80°-90°) | 5.9 | 0.1 | | | G0/10 |
| UL (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH (100°-180°) | 0.0 | 0.0 | | U0/0 | |

BUG Rating: B2-U0-G0

Type V Short

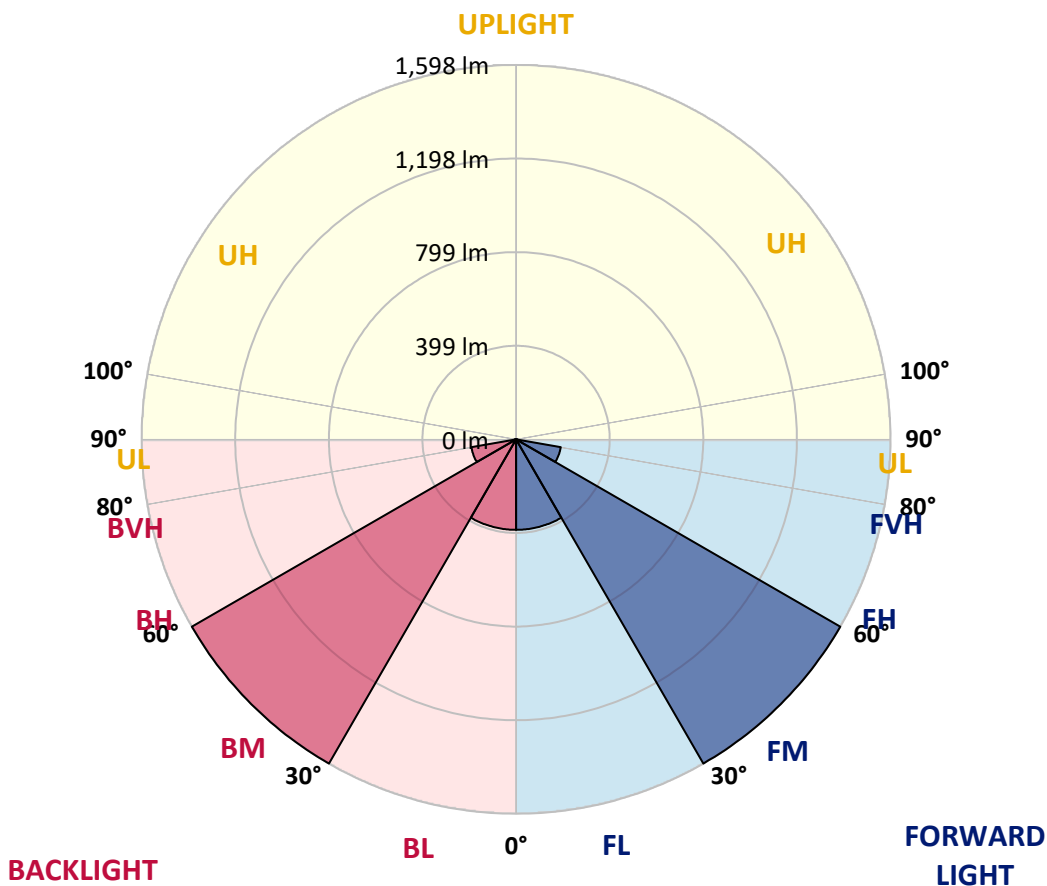



REPORT NUMBER: P630537

CATALOG NUMBER: GWS-SA1D-830-U-5NQ-W-GRSWH

CANDELA DISTRIBUTION (FULL):

| | 0° | 5° | 15° | 25° | 35° | 45° | 55° | 65° | 75° | 85° | 90° |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 785.6 | 785.6 | 785.6 | 785.6 | 785.6 | 785.6 | 785.6 | 785.6 | 785.6 | 785.6 | 785.6 |
| 2.5° | 783.9 | 783.9 | 785.3 | 787.0 | 787.3 | 790.8 | 790.1 | 788.7 | 788.0 | 786.7 | 789.8 |
| 5° | 792.5 | 792.9 | 793.9 | 794.9 | 794.3 | 797.0 | 796.0 | 794.3 | 793.2 | 791.5 | 794.6 |
| 7.5° | 803.9 | 803.9 | 805.0 | 806.3 | 805.6 | 809.8 | 807.7 | 805.3 | 803.6 | 801.5 | 804.3 |
| 10° | 814.3 | 815.0 | 816.0 | 818.8 | 820.1 | 824.6 | 823.3 | 819.8 | 817.0 | 814.6 | 817.7 |
| 12.5° | 829.8 | 830.5 | 831.5 | 835.3 | 837.8 | 842.3 | 840.2 | 835.3 | 831.2 | 827.7 | 831.2 |
| 15° | 849.8 | 849.2 | 851.9 | 856.8 | 859.9 | 864.0 | 861.6 | 853.3 | 847.8 | 843.3 | 846.7 |
| 17.5° | 870.2 | 869.9 | 872.6 | 878.9 | 883.3 | 888.9 | 884.7 | 875.1 | 869.2 | 863.7 | 867.1 |
| 20° | 892.3 | 893.4 | 896.1 | 902.0 | 908.6 | 915.8 | 912.4 | 902.0 | 895.4 | 889.2 | 892.0 |
| 22.5° | 919.6 | 919.9 | 923.1 | 930.7 | 939.3 | 946.2 | 944.1 | 931.3 | 923.1 | 916.5 | 919.9 |
| 25° | 952.4 | 952.1 | 956.2 | 965.2 | 977.3 | 984.2 | 979.7 | 965.5 | 956.6 | 949.0 | 951.7 |
| 27.5° | 990.1 | 989.7 | 995.9 | 1007.7 | 1024.9 | 1034.6 | 1025.3 | 1007.7 | 995.2 | 984.5 | 986.9 |
| 30° | 1037.4 | 1036.3 | 1043.2 | 1059.1 | 1081.6 | 1097.8 | 1084.0 | 1059.5 | 1043.2 | 1031.8 | 1034.3 |
| 32.5° | 1089.8 | 1091.2 | 1099.9 | 1121.3 | 1149.6 | 1170.7 | 1149.9 | 1122.7 | 1100.9 | 1084.3 | 1087.1 |
| 35° | 1147.5 | 1147.5 | 1165.1 | 1191.7 | 1232.1 | 1260.1 | 1228.0 | 1188.6 | 1159.6 | 1136.8 | 1137.5 |
| 37.5° | 1211.7 | 1212.4 | 1235.6 | 1272.2 | 1325.0 | 1357.8 | 1314.3 | 1265.6 | 1230.4 | 1205.9 | 1204.5 |
| 40° | 1290.1 | 1292.2 | 1316.0 | 1356.8 | 1416.2 | 1446.2 | 1399.6 | 1352.0 | 1316.0 | 1287.0 | 1284.3 |
| 42.5° | 1378.5 | 1379.2 | 1404.4 | 1441.0 | 1491.1 | 1509.1 | 1472.5 | 1433.4 | 1404.1 | 1377.9 | 1375.1 |
| 45° | 1462.8 | 1461.1 | 1482.8 | 1510.1 | 1539.1 | 1540.8 | 1520.5 | 1504.6 | 1479.0 | 1456.6 | 1452.4 |
| 47.5° | 1528.4 | 1527.0 | 1546.7 | 1561.6 | 1565.0 | 1548.1 | 1554.7 | 1557.1 | 1527.4 | 1497.0 | 1489.0 |
| 50° | 1568.5 | 1571.2 | 1589.9 | 1598.2 | 1577.8 | 1550.2 | 1575.0 | 1568.8 | 1526.3 | 1486.6 | 1473.9 |
| 52.5° | 1592.6 | 1596.8 | 1629.2 | 1650.3 | 1629.2 | 1603.0 | 1606.5 | 1569.9 | 1508.7 | 1456.2 | 1439.7 |
| 55° | 1531.5 | 1548.1 | 1618.2 | 1711.4 | 1746.0 | 1727.7 | 1662.1 | 1567.8 | 1454.5 | 1378.2 | 1364.0 |
| 57.5° | 1135.1 | 1161.3 | 1265.3 | 1467.3 | 1677.2 | 1743.9 | 1552.2 | 1314.3 | 1142.7 | 1044.6 | 1036.3 |
| 60° | 579.5 | 608.8 | 692.0 | 899.6 | 1169.6 | 1263.5 | 1081.2 | 841.6 | 668.9 | 589.5 | 580.5 |
| 62.5° | 236.5 | 241.4 | 268.7 | 348.8 | 517.0 | 596.4 | 523.9 | 367.8 | 276.3 | 254.5 | 254.9 |
| 65° | 186.1 | 187.2 | 185.8 | 190.6 | 216.5 | 240.3 | 222.0 | 195.1 | 190.3 | 192.7 | 191.0 |
| 67.5° | 162.3 | 162.6 | 161.6 | 161.6 | 162.6 | 161.6 | 163.7 | 164.7 | 165.4 | 168.2 | 166.4 |
| 70° | 135.7 | 136.1 | 136.1 | 136.7 | 136.4 | 134.7 | 137.8 | 139.2 | 139.5 | 141.2 | 140.2 |
| 72.5° | 105.0 | 106.0 | 106.7 | 107.1 | 106.7 | 105.7 | 107.4 | 109.8 | 109.5 | 111.2 | 109.5 |
| 75° | 71.1 | 72.5 | 73.2 | 74.6 | 74.2 | 74.2 | 76.3 | 77.4 | 76.3 | 77.7 | 76.3 |
| 77.5° | 40.4 | 41.4 | 43.5 | 44.9 | 46.3 | 47.3 | 48.7 | 49.4 | 49.0 | 49.7 | 49.0 |
| 80° | 23.5 | 23.8 | 25.6 | 26.2 | 28.0 | 29.7 | 31.1 | 31.8 | 32.1 | 32.5 | 32.1 |
| 82.5° | 13.5 | 13.8 | 14.5 | 15.2 | 16.6 | 18.0 | 19.3 | 20.4 | 20.4 | 20.7 | 20.4 |
| 85° | 6.6 | 6.6 | 6.9 | 7.3 | 7.9 | 9.0 | 10.0 | 11.1 | 11.4 | 11.4 | 11.4 |
| 87.5° | 1.0 | 1.0 | 1.4 | 1.4 | 1.7 | 2.1 | 2.8 | 3.5 | 3.8 | 3.8 | 3.8 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

MCGRAW EDISON

Report Number: SP1-2408-195-9

Test Date: 08/07/2024

Luminaire Tested: GALN-SB1A-830-U-5WQ

Data in this report applies to families of products including GALN-SB1A-830-U-5WQ.

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2408-195-9
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/07/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: MCGRAW EDISON
 Catalog Number: **GALN-SB1A-830-U-5WQ**
 Description: GALLEON AREA AND ROADWAY LUMINAIRE. (1) 80 CRI, 3000K, 350MA HIGH DENSITY LIGHTSQUARE WITH 26 LEDS AND TYPE V WIDE OPTICS

Spectral Parameters

CCT (K): 3050
 CIE u': 0.2476
 CIE v': 0.5251
 Duv: 0.0034
 CIE x: 0.4383
 CIE y: 0.4131
 CIE z: 0.1487
 Peak Wavelength (nm): 603
 Dominant Wavelength (nm): 581
 Purity: 55.55201
 Rf: 81.5
 Rg: 99.2

| | | | |
|-----------|------|------|------|
| CRI (Ra): | 81.0 | | |
| R1: | 79.6 | R9: | 7.1 |
| R2: | 85.6 | R10: | 67.0 |
| R3: | 92.0 | R11: | 82.7 |
| R4: | 82.6 | R12: | 63.2 |
| R5: | 78.9 | R13: | 80.3 |
| R6: | 81.7 | R14: | 95.0 |
| R7: | 85.2 | R15: | 71.7 |
| R8: | 62.0 | | |



Test Conditions

Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 24.2

REPORT NUMBER: SP1-2408-195-9

| Measurement and Test Equipment | | | |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2408-195-9

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-2408-195-9

Photopic Flux vs. Wavelength



Photopic Lumens: NR

| λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) |
|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|
| 360 | 0 | NR | 490 | 168 | NR | 620 | 940 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 233 | NR | 625 | 897 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 300 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 372 | NR | 635 | 790 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 430 | NR | 640 | 730 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 483 | NR | 645 | 668 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 524 | NR | 650 | 605 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 555 | NR | 655 | 545 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 581 | NR | 660 | 485 | NR | 790 | 10 | NR | 920 | 0 | NR |
| 405 | 7 | NR | 535 | 604 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 17 | NR | 540 | 623 | NR | 670 | 378 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 34 | NR | 545 | 645 | NR | 675 | 331 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 68 | NR | 550 | 667 | NR | 680 | 290 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 128 | NR | 555 | 693 | NR | 685 | 251 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 214 | NR | 560 | 719 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 339 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 507 | NR | 570 | 791 | NR | 700 | 162 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 573 | NR | 575 | 830 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 356 | NR | 580 | 873 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 217 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 168 | NR | 590 | 948 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 113 | NR | 595 | 974 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 85 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 85 | NR | 605 | 998 | NR | 735 | 55 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 94 | NR | 610 | 994 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 120 | NR | 615 | 973 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2408-195-9

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.27

| λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) |
|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|
| 360 | 0 | NR | 490 | 168 | NR | 620 | 940 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 233 | NR | 625 | 897 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 300 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 372 | NR | 635 | 790 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 430 | NR | 640 | 730 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 483 | NR | 645 | 668 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 524 | NR | 650 | 605 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 555 | NR | 655 | 545 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 581 | NR | 660 | 485 | NR | 790 | 10 | NR | 920 | 0 | NR |
| 405 | 7 | NR | 535 | 604 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 17 | NR | 540 | 623 | NR | 670 | 378 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 34 | NR | 545 | 645 | NR | 675 | 331 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 68 | NR | 550 | 667 | NR | 680 | 290 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 128 | NR | 555 | 693 | NR | 685 | 251 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 214 | NR | 560 | 719 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 339 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 507 | NR | 570 | 791 | NR | 700 | 162 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 573 | NR | 575 | 830 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 356 | NR | 580 | 873 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 217 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 168 | NR | 590 | 948 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 113 | NR | 595 | 974 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 85 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 85 | NR | 605 | 998 | NR | 735 | 55 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 94 | NR | 610 | 994 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 120 | NR | 615 | 973 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2408-195-9

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 2.32

| λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360 | 0 | NR | 490 | 168 | NR | 620 | 940 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 233 | NR | 625 | 897 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 300 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 372 | NR | 635 | 790 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 430 | NR | 640 | 730 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 483 | NR | 645 | 668 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 524 | NR | 650 | 605 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 555 | NR | 655 | 545 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 581 | NR | 660 | 485 | NR | 790 | 10 | NR | 920 | 0 | NR |
| 405 | 7 | NR | 535 | 604 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 17 | NR | 540 | 623 | NR | 670 | 378 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 34 | NR | 545 | 645 | NR | 675 | 331 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 68 | NR | 550 | 667 | NR | 680 | 290 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 128 | NR | 555 | 693 | NR | 685 | 251 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 214 | NR | 560 | 719 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 339 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 507 | NR | 570 | 791 | NR | 700 | 162 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 573 | NR | 575 | 830 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 356 | NR | 580 | 873 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 217 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 168 | NR | 590 | 948 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 113 | NR | 595 | 974 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 85 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 85 | NR | 605 | 998 | NR | 735 | 55 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 94 | NR | 610 | 994 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 120 | NR | 615 | 973 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

Summary

$R_f = 81.5$
 $R_g = 99.2$
 $CIE R_a = 81.0$
 $R_9 = 7.1$



Color Vector Graphics



Individual Sample Fidelity Index ($R_{f,i}$)

| | | | |
|------------|------------|------------|------------|
| CES01 = 86 | CES26 = 74 | CES51 = 89 | CES76 = 70 |
| CES02 = 63 | CES27 = 88 | CES52 = 92 | CES77 = 86 |
| CES03 = 31 | CES28 = 89 | CES53 = 81 | CES78 = 72 |
| CES04 = 70 | CES29 = 67 | CES54 = 87 | CES79 = 90 |
| CES05 = 50 | CES30 = 68 | CES55 = 85 | CES80 = 88 |
| CES06 = 51 | CES31 = 71 | CES56 = 78 | CES81 = 78 |
| CES07 = 42 | CES32 = 70 | CES57 = 76 | CES82 = 95 |
| CES08 = 41 | CES33 = 71 | CES58 = 78 | CES83 = 90 |
| CES09 = 29 | CES34 = 82 | CES59 = 92 | CES84 = 94 |
| CES10 = 76 | CES35 = 90 | CES60 = 95 | CES85 = 86 |
| CES11 = 59 | CES36 = 93 | CES61 = 93 | CES86 = 72 |
| CES12 = 65 | CES37 = 87 | CES62 = 83 | CES87 = 85 |
| CES13 = 43 | CES38 = 75 | CES63 = 77 | CES88 = 83 |
| CES14 = 74 | CES39 = 94 | CES64 = 83 | CES89 = 75 |
| CES15 = 71 | CES40 = 89 | CES65 = 77 | CES90 = 81 |
| CES16 = 47 | CES41 = 85 | CES66 = 80 | CES91 = 96 |
| CES17 = 50 | CES42 = 86 | CES67 = 79 | CES92 = 73 |
| CES18 = 56 | CES43 = 81 | CES68 = 84 | CES93 = 84 |
| CES19 = 72 | CES44 = 99 | CES69 = 91 | CES94 = 64 |
| CES20 = 66 | CES45 = 87 | CES70 = 78 | CES95 = 80 |
| CES21 = 87 | CES46 = 82 | CES71 = 76 | CES96 = 84 |
| CES22 = 79 | CES47 = 77 | CES72 = 92 | CES97 = 87 |
| CES23 = 92 | CES48 = 71 | CES73 = 71 | CES98 = 81 |
| CES24 = 91 | CES49 = 81 | CES74 = 93 | CES99 = 74 |
| CES25 = 72 | CES50 = 89 | CES75 = 74 | |



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)