

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P633026

Luminaire Tested: GWS-SA2D-830-U-SL2-W-HSS

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P633026
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-30)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA2D-830-U-SL2-W-HSS
Description: GALLEON WALL SLIM LUMINAIRE. (2) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE II SPILL LIGHT ELIMINATOR OPTICS WITH HOUSE SIDE SHIELD
Light Source: (32) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7352.7 lumens
Efficiency: N/A
Efficacy: 89.6 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 0.5' x H: 0')
IES Classification: Type II - Short
BUG Rating: B1 - U0 - G2


Input Watts (W): 82.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P633026
 CATALOG NUMBER: GWS-SA2D-830-U-SL2-W-HSS

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

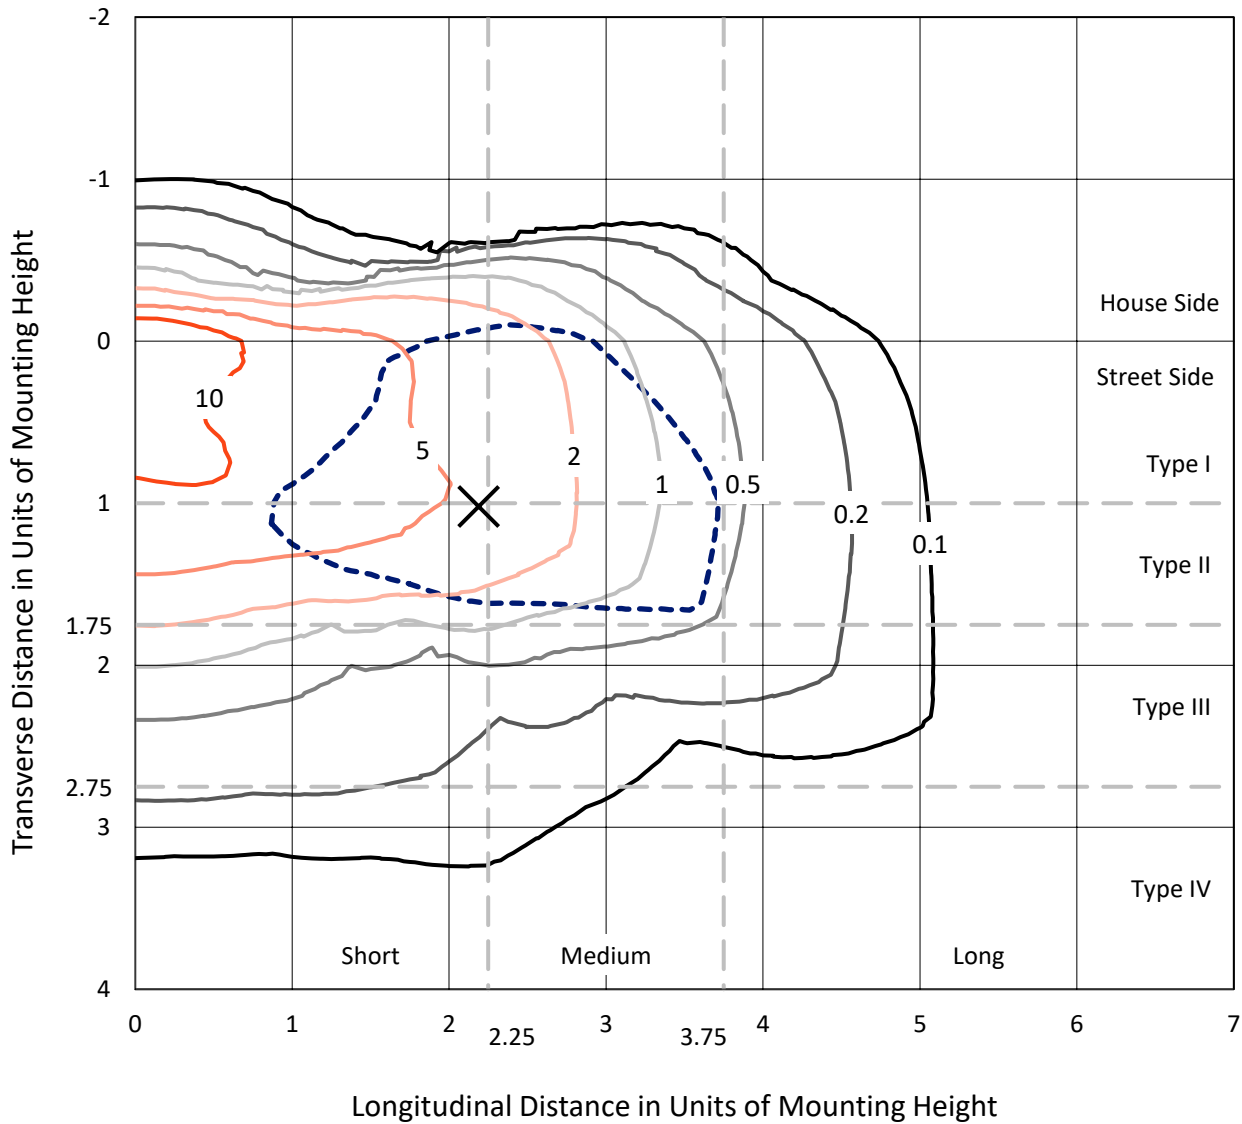

Based on 10 foot mounting height. Maximum calculated value = 17.8 fc
 Type II - Short - N/A

REPORT NUMBER: P633026
CATALOG NUMBER: GWS-SA2D-830-U-SL2-W-HSS

Luminous Intensity Polar Plot

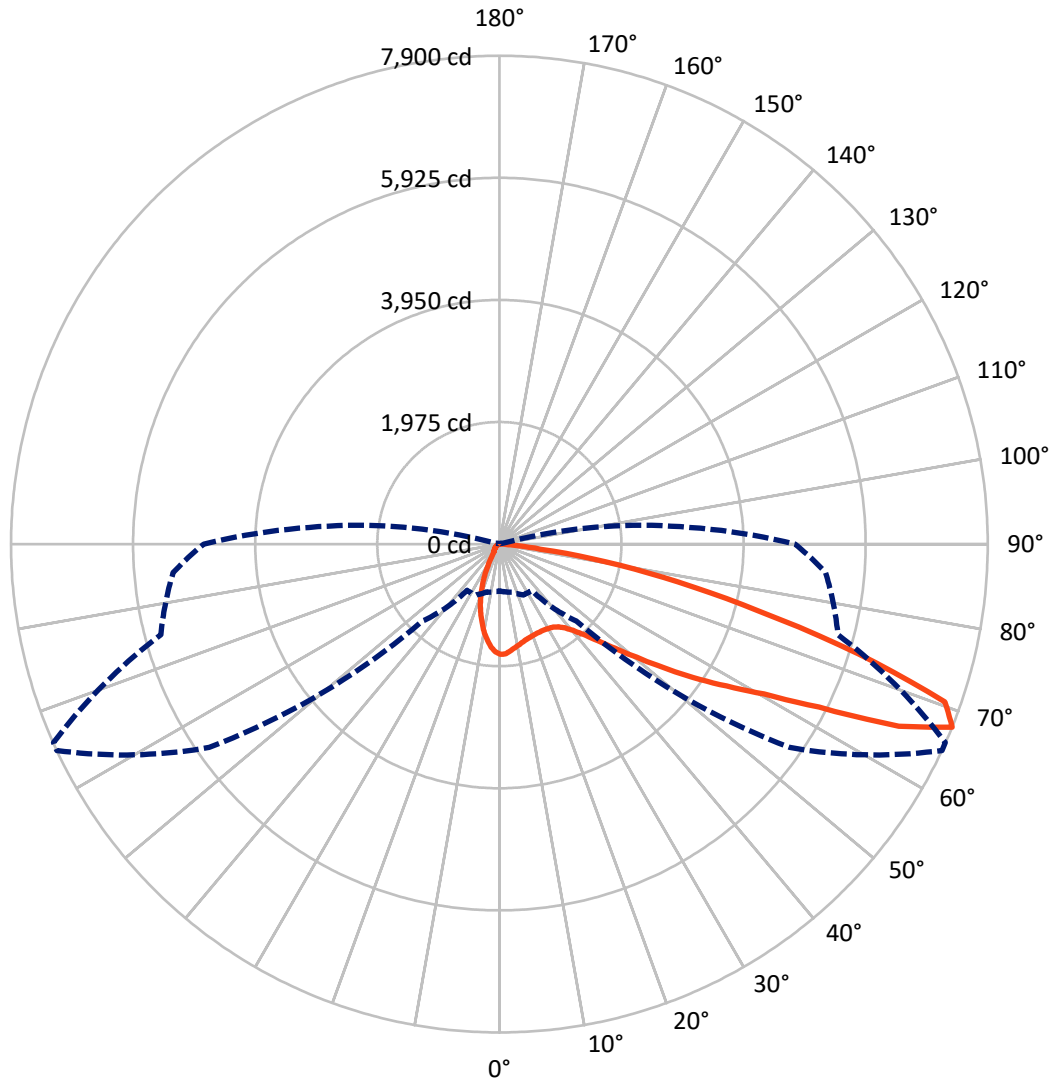

— Vertical Plane Through 65-Deg Lateral - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P633026
 CATALOG NUMBER: GWS-SA2D-830-U-SL2-W-HSS


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	918.1	0.0	918.1
	% Fixture	12.5	0.0	12.5
Street Side	Lumens	6434.6	0.0	6434.6
	% Fixture	87.5	0.0	87.5
Total	Lumens	7352.7	0.0	7352.7
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.1	2.0
10°-20°	332.9	4.5
20°-30°	475.8	6.5
30°-40°	692.2	9.4
40°-50°	1084.0	14.7
50°-60°	1691.1	23.0
60°-70°	1857.6	25.3
70°-80°	988.6	13.4
80°-90°	82.3	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	7352.7	100.0
0°-180°	7352.7	100.0

Coefficient of Utilization

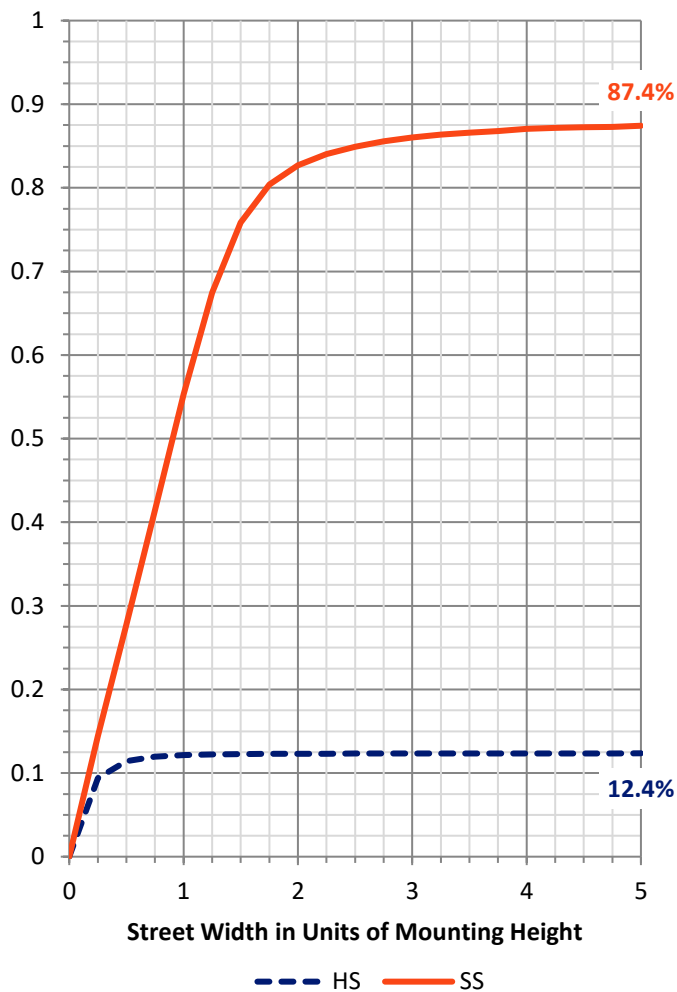


REPORT NUMBER: P633026
 CATALOG NUMBER: GWS-SA2D-830-U-SL2-W-HSS

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	661.7	9.0			
FM (30°-60°)	3129.2	42.6			
FH (60°-80°)	2565.8	34.9			G2/5000
FVH (80°-90°)	77.9	1.1			G1/100
BL (0°-30°)	295.1	4.0	B1/500		
BM (30°-60°)	338.2	4.6	B1/1000		
BH (60°-80°)	280.4	3.8	B1/500		G1/500
BVH (80°-90°)	4.4	0.1			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B1-U0-G2
 Type II Short

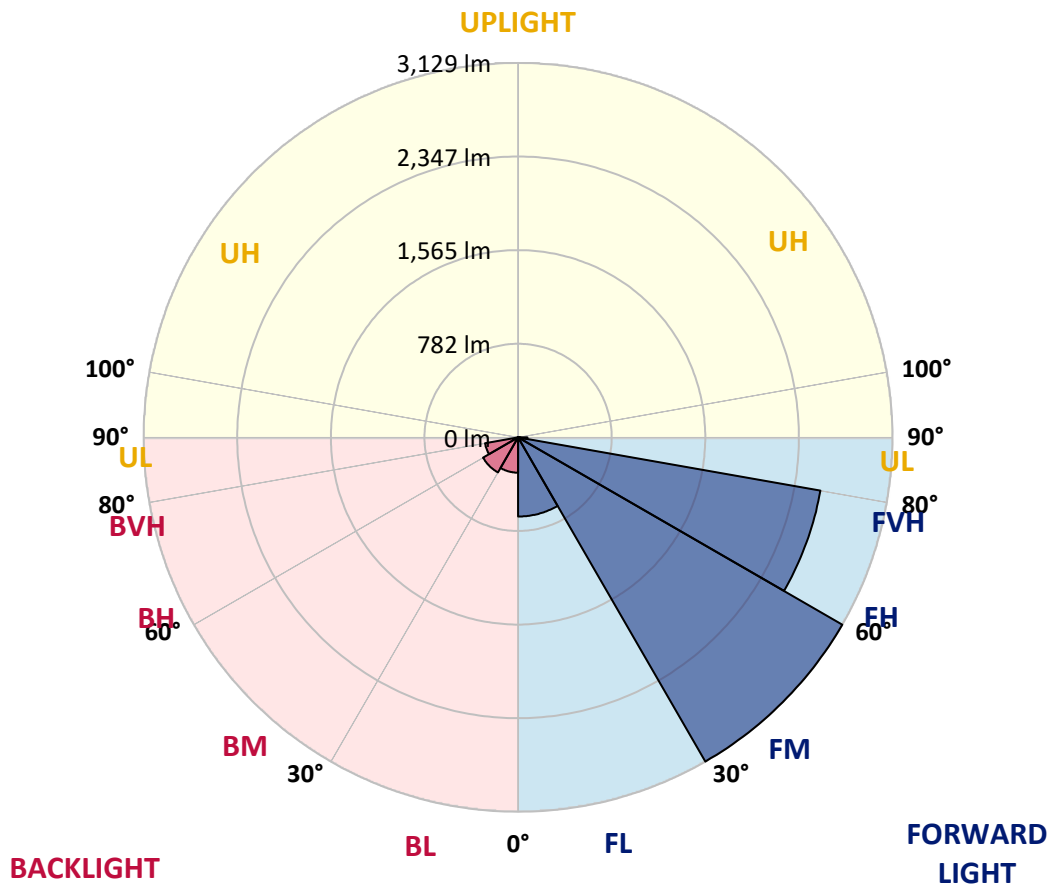



REPORT NUMBER: P633026

CATALOG NUMBER: GWS-SA2D-830-U-SL2-W-HSS

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	66°	75°	85°
0°	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3
2.5°	1721.4	1726.7	1719.4	1737.4	1740.7	1760.7	1772.0	1779.9	1779.3	1789.2	1789.2
5°	1620.4	1625.7	1621.7	1641.0	1656.3	1687.5	1713.4	1743.4	1744.7	1775.3	1786.6
7.5°	1534.6	1535.3	1535.3	1559.2	1579.1	1617.7	1656.3	1702.1	1707.5	1754.7	1784.6
10°	1464.1	1466.1	1466.8	1494.0	1516.0	1562.5	1611.7	1666.9	1672.9	1736.7	1783.3
12.5°	1415.6	1416.2	1418.9	1447.5	1471.4	1520.0	1569.8	1633.0	1641.0	1716.1	1777.3
15°	1392.3	1391.0	1392.3	1416.2	1440.2	1486.7	1537.9	1605.7	1614.4	1698.8	1777.9
17.5°	1391.0	1389.0	1387.6	1405.6	1420.9	1462.1	1514.0	1587.8	1597.1	1690.8	1785.3
20°	1410.3	1408.9	1402.3	1410.3	1413.6	1447.5	1498.7	1573.8	1583.1	1689.5	1801.2
22.5°	1460.8	1457.5	1447.5	1440.2	1422.2	1442.2	1488.0	1563.8	1574.5	1692.8	1821.8
25°	1535.9	1534.6	1522.0	1504.0	1458.1	1450.1	1488.7	1563.8	1573.8	1696.8	1843.8
27.5°	1649.0	1641.0	1625.0	1593.8	1527.9	1481.4	1502.0	1567.8	1577.8	1702.1	1861.7
30°	1764.0	1763.3	1758.0	1726.1	1628.3	1541.2	1529.9	1578.5	1587.8	1706.8	1878.3
32.5°	1883.0	1885.0	1898.3	1873.7	1766.6	1630.3	1580.5	1600.4	1607.1	1716.1	1893.0
35°	1996.0	2000.0	2035.3	2043.9	1934.9	1765.3	1662.9	1644.3	1645.0	1736.7	1912.3
37.5°	2104.4	2117.7	2174.2	2216.1	2144.3	1928.9	1781.9	1718.8	1713.4	1777.9	1941.5
40°	2227.4	2252.7	2323.8	2395.0	2372.4	2145.0	1944.2	1833.1	1821.8	1853.7	1994.0
42.5°	2363.7	2391.0	2485.4	2585.1	2595.8	2406.3	2147.0	2000.0	1980.7	1981.4	2092.4
45°	2510.0	2546.6	2656.3	2799.9	2864.4	2697.5	2397.0	2225.4	2206.1	2177.5	2250.7
47.5°	2702.2	2734.1	2839.8	3005.3	3129.0	3010.0	2724.8	2515.3	2480.1	2438.2	2496.7
50°	2867.7	2895.6	2986.7	3194.2	3451.5	3412.9	3096.4	2877.7	2843.8	2772.6	2821.2
52.5°	2904.3	2926.2	3010.0	3243.4	3698.2	3921.6	3551.9	3315.9	3291.9	3160.3	3178.9
55°	2740.1	2773.3	2848.4	3107.7	3762.7	4418.9	4143.0	3809.9	3760.0	3549.9	3583.1
57.5°	2325.2	2384.3	2454.8	2791.9	3587.8	4683.6	4968.8	4333.2	4287.9	3924.9	3925.6
60°	1704.1	1752.0	1799.2	2107.7	3172.9	4665.6	5718.1	4920.9	4838.5	4231.4	4220.1
62.5°	1239.4	1264.0	1263.3	1373.0	2178.9	4358.4	6111.8	5806.6	5614.4	4559.2	4494.7
65°	974.7	974.1	1002.7	1038.6	1216.8	3364.4	6160.3	7099.8	6892.4	4998.7	4864.4
67.5°	758.7	773.3	801.9	907.6	914.2	1760.7	5733.4	7899.7	7895.7	5669.6	5297.3
70°	585.1	605.1	645.6	799.9	844.4	985.4	4289.9	7646.3	7710.8	5969.5	4990.7
72.5°	375.7	374.3	434.2	646.3	811.2	821.2	2372.4	6073.9	6147.0	5407.0	4035.3
75°	210.1	211.4	245.3	395.6	756.0	772.6	1174.9	4331.2	4389.0	4215.5	3100.4
77.5°	82.4	85.1	115.0	208.1	498.7	690.2	698.1	2953.5	2962.1	2612.4	1901.6
80°	33.2	35.2	58.5	129.0	303.9	464.8	498.7	1740.0	1704.8	1011.3	553.2
82.5°	10.0	10.6	23.3	73.1	158.9	330.5	336.4	667.6	630.3	217.4	141.0
85°	0.7	0.7	5.3	22.6	56.5	83.1	224.1	217.4	192.8	54.5	62.5
87.5°	0.0	0.0	0.7	0.7	1.3	2.7	23.9	39.9	40.6	10.0	27.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P633026
 CATALOG NUMBER: GWS-SA2D-830-U-SL2-W-HSS

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3	1783.3
2.5°	1789.2	1765.3	1763.3	1744.7	1726.1	1702.8	1675.5	1655.6	1641.6	1617.0	1612.4
5°	1786.6	1754.7	1724.8	1671.6	1612.4	1548.6	1492.7	1440.8	1408.3	1386.3	1377.0
7.5°	1781.3	1740.7	1671.6	1571.2	1472.1	1360.4	1273.3	1193.5	1139.0	1107.1	1093.1
10°	1777.3	1722.8	1610.4	1458.1	1304.5	1150.3	1018.0	899.6	833.8	781.9	773.3
12.5°	1769.3	1696.8	1531.9	1325.8	1127.7	922.9	754.0	609.0	508.6	463.4	447.5
15°	1761.3	1669.6	1453.5	1186.2	934.8	682.2	477.4	337.8	268.6	247.3	246.0
17.5°	1760.0	1645.0	1368.4	1053.9	732.7	446.8	271.9	218.8	204.1	198.8	198.8
20°	1764.0	1624.4	1284.6	901.6	533.9	271.9	202.8	189.5	180.9	176.2	176.2
22.5°	1768.0	1603.1	1204.1	748.0	354.4	198.8	178.9	167.6	157.6	152.3	149.6
25°	1770.6	1579.8	1115.0	593.8	231.4	172.9	156.9	142.3	130.3	123.7	123.7
27.5°	1770.0	1551.9	1025.3	442.8	179.5	153.6	134.3	119.0	107.0	99.7	100.4
30°	1764.6	1521.3	932.2	309.2	156.9	134.3	115.0	99.1	87.1	81.1	80.5
32.5°	1760.7	1488.7	824.5	217.4	141.0	117.7	97.7	82.4	72.5	67.8	67.2
35°	1756.0	1456.8	722.1	165.6	127.0	101.7	82.4	69.8	61.8	57.8	57.8
37.5°	1757.3	1423.6	611.0	142.3	113.0	88.4	70.5	59.8	53.2	49.2	48.5
40°	1777.9	1403.6	502.0	129.0	100.4	76.5	61.2	51.9	45.2	41.2	40.6
42.5°	1829.1	1404.3	397.6	119.0	89.1	65.2	53.2	44.5	38.6	33.9	33.2
45°	1931.5	1432.2	305.2	108.4	77.1	56.5	45.9	37.9	31.9	27.9	27.3
47.5°	2099.1	1515.3	231.4	99.1	67.2	49.2	39.2	31.9	26.6	23.3	22.6
50°	2365.7	1665.6	182.2	87.8	56.5	42.6	33.2	26.6	21.9	18.6	18.0
52.5°	2686.2	1891.0	156.3	77.8	48.5	37.2	28.6	21.9	18.0	15.3	14.6
55°	3054.5	2160.3	144.3	67.8	41.2	31.9	23.3	18.0	14.6	12.6	11.3
57.5°	3392.3	2402.9	143.6	57.8	35.2	27.3	19.3	15.3	12.6	10.0	9.3
60°	3721.4	2605.7	135.0	47.9	30.6	22.6	16.6	12.6	10.6	8.6	8.0
62.5°	4020.0	2770.6	113.0	38.6	25.9	18.6	14.0	11.3	9.3	7.3	7.3
65°	4395.0	2980.7	86.4	31.3	21.3	15.3	12.0	10.0	8.6	6.6	6.6
67.5°	4782.6	3091.8	61.8	25.9	17.3	13.3	10.6	9.3	7.3	6.0	6.0
70°	4331.8	2612.4	44.5	21.3	14.6	11.3	9.3	8.6	7.3	6.0	5.3
72.5°	3383.0	1883.7	33.2	16.6	12.6	10.6	8.6	8.0	6.6	5.3	5.3
75°	2508.7	1098.4	25.3	13.3	10.0	8.6	8.6	8.0	6.6	5.3	4.7
77.5°	1363.7	383.0	19.3	10.6	8.0	6.6	7.3	7.3	6.0	4.7	4.0
80°	361.0	105.1	13.3	8.0	6.6	5.3	5.3	6.6	5.3	4.0	4.0
82.5°	105.1	30.6	9.3	6.6	5.3	4.7	4.7	4.7	4.0	3.3	2.7
85°	51.2	11.3	6.6	5.3	4.7	4.0	3.3	3.3	2.7	2.0	2.0
87.5°	22.6	4.7	5.3	4.7	4.7	3.3	2.7	2.0	2.0	1.3	0.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)